

Little Pond

Shoreline length: 12 km



Shore Types

Little Pond SMU includes an open coastline facing East and an estuary protected by a barrier sandspit, with a majority of wetlands, cliffs, and low plains.

% Shore types within SMU

low plain	bluff	sloped armour	cliff	wetland	vertical struct.	dunes	sandspit
23	4	0	27	33	0	0	12

Governance, Infrastructure, and Economy


The Little Pond shore falls entirely within the Rural Municipality of Annandale-Little Pond-Howe Bay.

Coastal infrastructure includes Shore Lane (Little Pond, at the beach), Ark Lane also falls inside the hazard area. There are no major coastal economic drivers identified. Local and legacy land use constraints include few 20 small lots on private roads along the coast.

Natural Assets and Heritage

The area includes the McKenzie Homestead, a historical landmark on Spry Point Road, and Sally's Beach Provincial Day Park to the south of the sandspit.

The shoreline includes critical habitat for bird species including the endangered Piping Plover and threatened Bank Swallow.

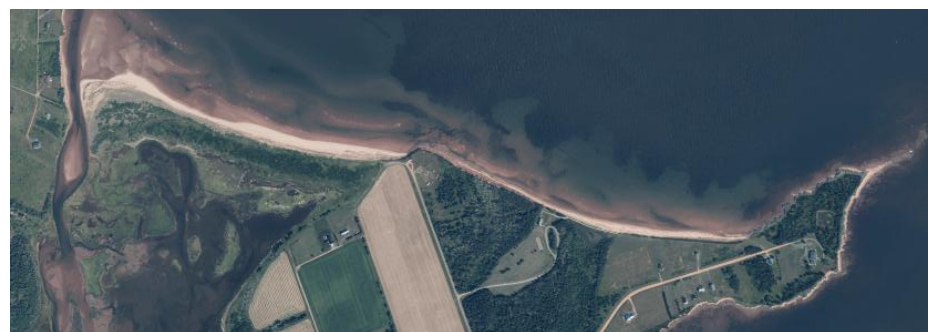

Outer shore including sandspit, Sally's Beach Provincial Day Park and Cape Spry



Sally's Beach Provincial Day Park



Eroding cliffs at Cape Spry supplying sand to downdrift beaches including Sally's Beach

Planning and Policy Framework

The municipality does not have planning and provincial rules apply. Land use and development is managed under provincial development standards, which include horizontal coastal building setbacks based on edge of feature and a calculation of erosion over time, building setbacks for dunes, and a requirement for a coastal buffer for new subdivisions.

There are no specific flood elevations identified in regulations, but coastal hazard assessments are typically conducted.

Coastal Flood and Erosion Risk

While low plains and wetland shores are vulnerable to increasing flood hazards, infrastructure risk is low. The erosion hazard is highest along the exposed east shoreline. Erosion hazard inside the estuary is limited by the sheltered exposure and barrier sandspit.

The following flood risk indicator is based on the even with 1% annual exceedance probability (100-year return) with increasing amounts of sea level rise (SLR). The erosion risk indicator is based on potential shoreline change or salt marsh migration to future time horizons.

Number of at-risk buildings [N. per km shoreline]

	Present	0.3m SLR (2050)	0.6m SLR (2080)	1.2m SLR (2130)
SMU Little Pond				
Flood risk	0	0	0	0
Erosion risk	N/A	0	1 [<1/km]	4 [<1/km]

Sediment transport - Sediment transport is highest along the exposed seaside, notably cliffs which feed Sally's Beach and the barrier spit.

Proposed SMP Strategies

It is critical to maintain sediment transport towards the sandspit protecting the bay. Given the low risk levels the proposed initial strategy is NAI until MR is required for a limited number of assets.

	Short-term	Medium-term	Long-term
Sea level rise range	0 – 0.3 m	0.3 – 0.6 m	0.6 – 1.2 m
Potential timeframe	2030 - 2050	2050 - 2080	2080 - 2130
Proposed SMU strategy	NAI	NAI	MR
Rationale	Long-term MR will reduce risk to the limited number of vulnerable assets while preserving natural shorelines, including cliffs, barrier beach and wetland habitat with increasing flood hazard.		



LEGEND

- Shoreline Management Unit
- Net Longshore Sediment Transport
- High Hazard Area
- Flood Extent - Present Day (100-year Return)
- Flood Extent - 1.2m SLR (100-year Return)
- Property Boundary
- Building > 90ft²

0 85 170 340
Metres

Coordinate System:
NAD 83 CSRS PEI Double Stereographic

NOTES:

**COASTAL EROSION
AND FLOOD HAZARD**

Shoreline Management Unit:
Little Pond

Prince Edward Island
Île-du-Prince-Édouard