


Pinette

Shoreline length: 67 km

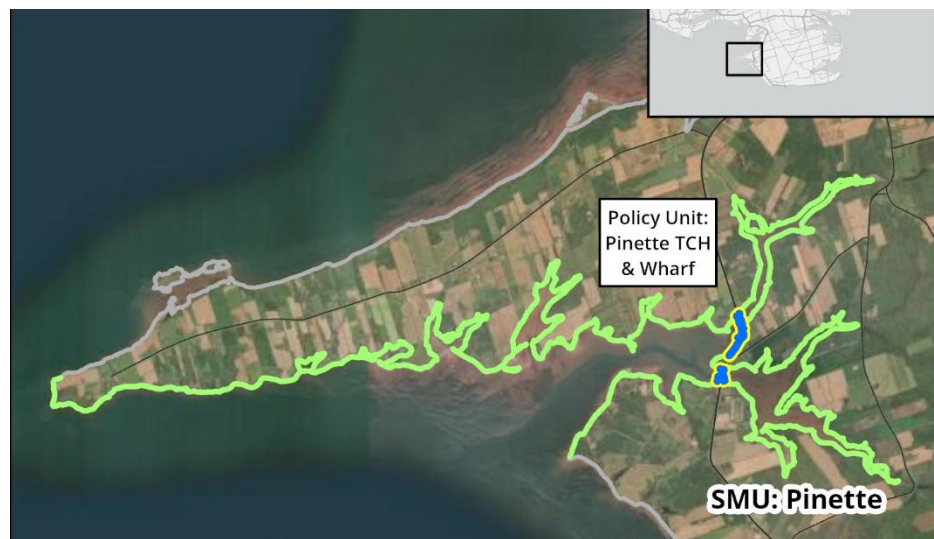

Shore Types

Pinette is a tidal estuary with a south facing peninsula located on the southeast end of PEI, with a majority of low plains and wetlands.

% Shore types within SMU

low plain	bluff	sloped armour	cliff	wetland	vertical struct.	dunes	sandspit
51	2	6	2	38	0	0	1

Governance, Infrastructure, and Economy

This SMU is almost completely located within the Rural Municipality of Belfast (94%).

Key infrastructure includes a portion of the Trans-Canada Highway and provincial roads: Camp Buchanan Road (Mount Buchanan); McCauleys

Wharf; the TCH at Mount Buchanan Creek to Pinette Provincial Park; the TCH from Silver Waters Drive to the South Branch Pinette River; Gillis Road (Eldon); and the Pinette Wharf (South Branch Pinette River). Coastal economic drivers include the Pinette Raceway and McCauleys Wharf. Local and legacy land use constraints include several small lots and unpaved roads.



Point Prim Lighthouse



Bluff along Pinette Point south shoreline



Pinette wharf



TCH bridge

Natural Assets and Heritage

The Point Prim lighthouse is located on the western end of the area. The Pinette Provincial Park which consists of a playground and beach inside the estuary.

The shoreline includes critical habitat for bird species including the threatened Bank Swallow.

Planning and Policy Framework

Provincial rules apply. Land use and development is managed under provincial development standards, which include horizontal coastal building setbacks based on edge of feature and a calculation of erosion over time, building setbacks for dunes, and a requirement for a coastal buffer for new subdivisions. There are no specific flood elevations identified in regulations, but coastal hazard assessments are typically conducted.

Coastal Flood and Erosion Risk

The area has higher infrastructure density near Pinette Road and the Trans-Canada Highway, the remaining areas have limited development. Infrastructure in this area are vulnerable to increasing flood hazards. Erosion hazard is limited due to the sheltered orientation of the area.

The following flood risk indicator is based on the even with 1% annual exceedance probability (100-year return) with increasing amounts of sea level rise (SLR). The erosion risk indicator is based on potential shoreline change or salt marsh migration to future time horizons.

Number of at-risk buildings [N. per km shoreline]

	Present	0.3m SLR (2050)	0.6m SLR (2080)	1.2m SLR (2130)
SMU Pinette				
Flood risk	10 [<1/km]	17 [<1/km]	24 [<1/km]	46 [1/km]
Erosion risk	NA	11 [<1/km]	19 [<1/km]	54 [1/km]
PU Pinette TCH and Wharf				
Flood risk	1 [1/km]	1 [1/km]	1 [1/km]	4 [3/km]
Erosion risk	NA	1 [1/km]	1 [1/km]	4 [3/km]

Sediment transport - The estimated net sediment transport rate averaged across the SMU is moderate. Sediment transport rate potential is highest along the south facing peninsula.

Proposed SMP Strategies

The primary strategy for Pinette is No Active Intervention, followed by long-term Managed Realignment for the limited number of assets at risk.

	Short-term	Medium-term	Long-term
Sea level rise range	0 – 0.3 m	0.3 – 0.6 m	0.6 – 1.2 m
Potential timeframe	2030 - 2050	2050 - 2080	2080 - 2130
Proposed SMU strategy	NAI	NAI	MR
Rationale	The local shoreline and hazard zone should remain natural, undeveloped, with long-term MR for the limited number of vulnerable assets.		
Proposed PU strategy			
Pinette TCH and Wharf	R	R	R
Rationale	Resist strategy is warranted along the TCH.		




LEGEND

- Policy Unit
- Shoreline Management Unit
- Net Longshore Sediment Transport
- High Hazard Area
- Flood Extent - Present Day (100-year Return)
- Flood Extent - 1.2m SLR (100-year Return)
- Property Boundary
- Building > 90ft²

0 240 480 960
Metres

Coordinate System:
NAD 83 CSRS PEI Double Stereographic

NOTES:

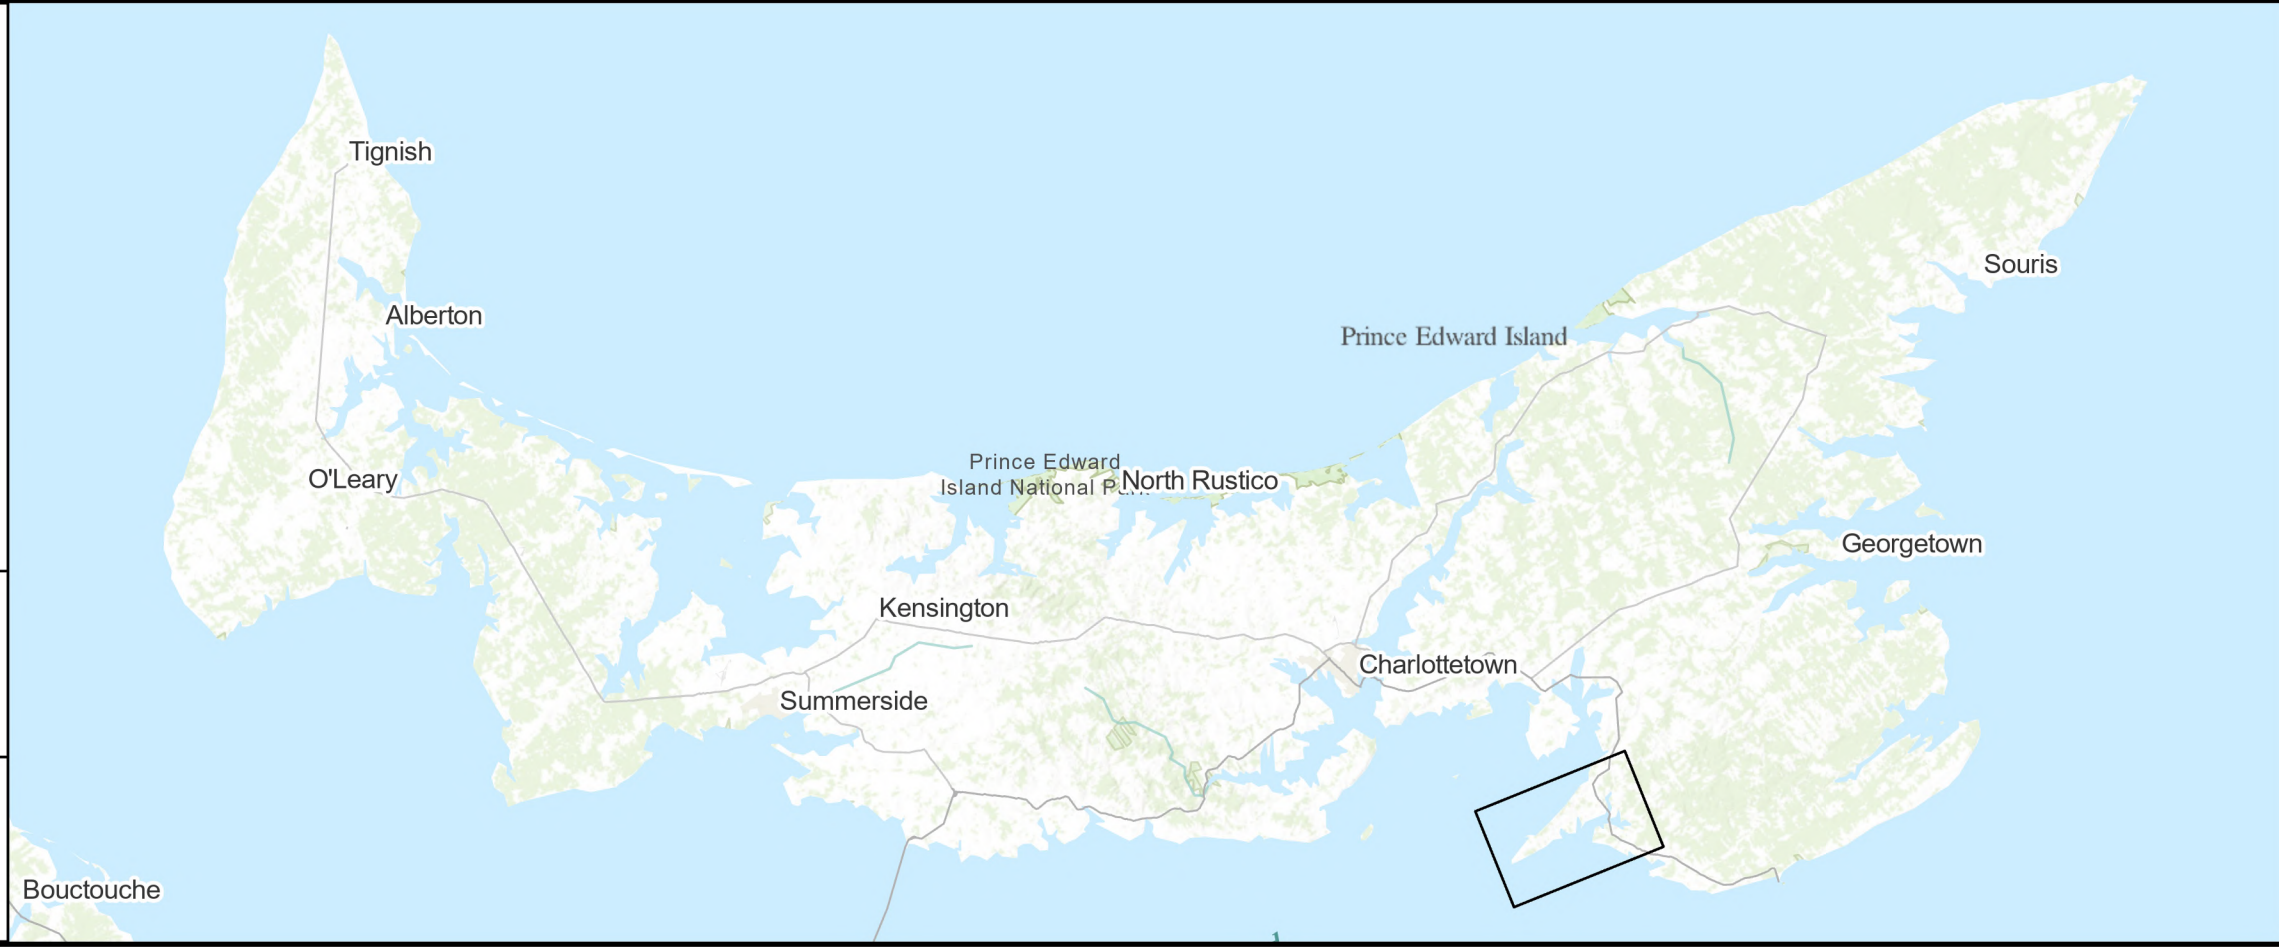

**COASTAL EROSION
AND FLOOD HAZARD**

**Shoreline Management Unit:
Pinette**

Prince Edward Island
Île-du-Prince-Édouard

CBCL