


Distribution of the field measurements, by instrument and local climate zone (80 sites)

Same site, same minute. Each marker is one site; marker shape gives the local climate zone and colour gives the instrument. Black line = median, band = interquartile range. View factors re-derived on 2026-09-14 (fisheye stitched, tilted cube-map; 79 sites — one pose failure excluded)

Air temperature (°C)

Weather meter


median 35.0 °C · 32.0–38.7

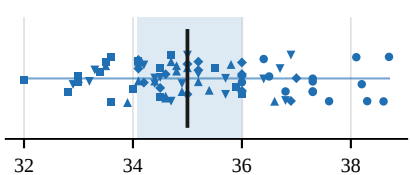

Relative humidity (%)

Weather meter


median 47.6 % · 40.6–62.0

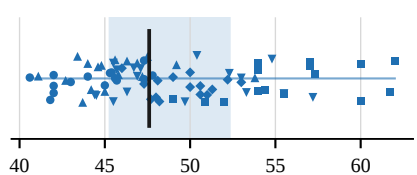

Wind speed (m/s)

Weather meter


median 0.50 m/s · 0.00–2.20

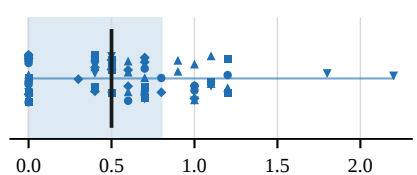

Globe temperature (°C)

Globe thermometer


median 42.1 °C · 34.2–47.1

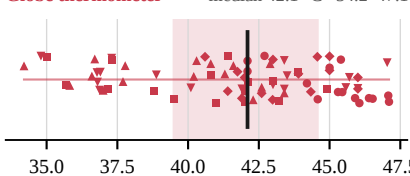

Mean radiant temp., globe-derived (°C)

Globe thermometer


median 54.0 °C · 37.2–77.3

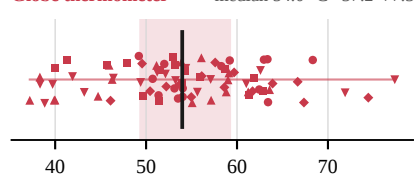

Physiological equivalent temperature (°C)

Globe thermometer


median 47.1 °C · 35.9–53.8

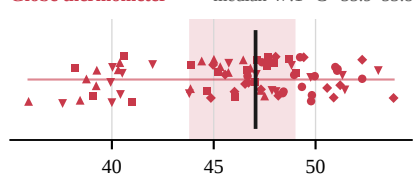

Sky view factor

360° camera


median 0.62 · 0.01–0.90 · n = 79

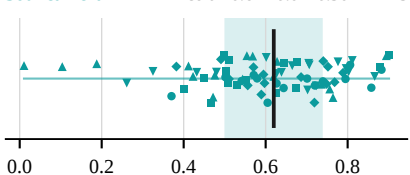

Tree view factor

360° camera


median 0.01 · 0.00–0.28 · n = 79

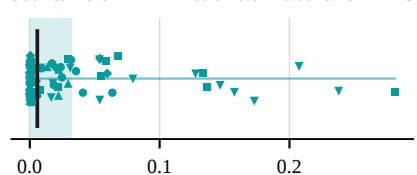

Pavement surface temperature (°C)

Thermal camera

median 53.2 °C · 35.3–66.4

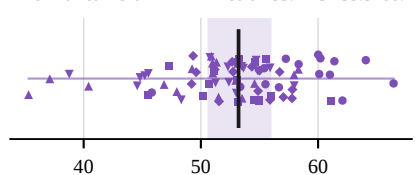

● LCZ 1 · Buam 1 ■ LCZ 2 · Bosu ▲ LCZ 3 · Seo 2 ◆ LCZ 4 · Yongho 1 ▼ LCZ 5 · Myeongjang

Globe temperature is back-calculated from the globe-derived T_{mrt} (ISO 7726, Ø0.05 m, ϵ 0.95). Tree view factor: median 0.01; 20 of the 79 sites are exactly 0 and 37 round to 0.00 — the sites were chosen without street trees. Pavement temperature: 90th percentile of sunlit pavement; thermal-camera clock offset (+35 min) verified, pairing unchanged.