



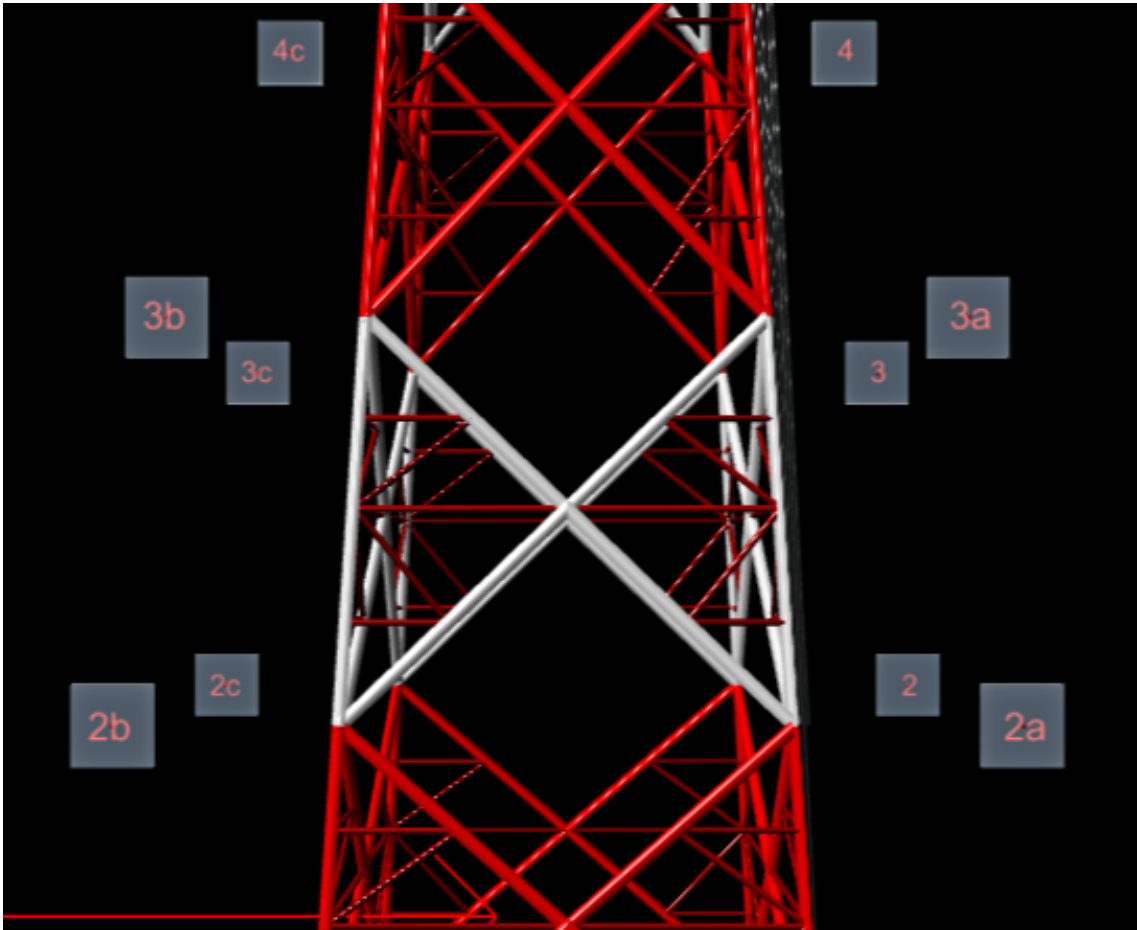

Site Number: 156380
Location: CS_Urubamba
Code: ANSI/TIA-222-H
Risk Category: II
Exposure : C
Topo : Method 2 Flat



© 2025 by ATC IP LLC.All rights reserved.

Support Forces Summary

Load Case	Radius (m)	Elevation (m)	Azimuth (deg)	Node	FX (ton)	FY (ton)	FZ (ton)	(-) = Uplift (+) = Down
1.0D + 1.0W Service 90 deg	4.31	00.00	315	1c	-1.16	-13.02	0.76	
	4.31	00.00	225	1b	-1.16	-13.02	-0.76	
	4.31	00.00	135	1a	-1.65	22.26	1.22	
	4.31	00.00	45	1	-1.65	22.26	-1.22	
1.0D + 1.0W Service 45 deg	4.31	00.00	315	1c	-0.04	4.97	-0.60	
	4.31	00.00	225	1b	-1.62	-22.54	-1.63	
	4.31	00.00	135	1a	-0.60	4.97	-0.04	
	4.31	00.00	45	1	-2.01	31.06	-2.01	
1.0D + 1.0W Service Normal	4.31	00.00	315	1c	1.22	22.25	-1.65	
	4.31	00.00	225	1b	-0.75	-13.02	-1.16	
	4.31	00.00	135	1a	0.75	-13.02	-1.16	
	4.31	00.00	45	1	-1.22	22.25	-1.65	
0.9D + 1.0W 90 deg	4.31	00.00	315	1c	-2.19	-26.00	1.52	
	4.31	00.00	225	1b	-2.19	-26.00	-1.52	
	4.31	00.00	135	1a	-2.63	34.32	1.85	
	4.31	00.00	45	1	-2.63	34.32	-1.85	
0.9D + 1.0W 45 deg	4.31	00.00	315	1c	-0.24	5.20	-0.87	
	4.31	00.00	225	1b	-3.06	-42.77	-3.06	
	4.31	00.00	135	1a	-0.87	5.20	-0.23	
	4.31	00.00	45	1	-3.18	49.00	-3.18	
0.9D + 1.0W Normal	4.31	00.00	315	1c	1.85	34.32	-2.63	
	4.31	00.00	225	1b	-1.52	-26.00	-2.19	
	4.31	00.00	135	1a	1.52	-26.00	-2.19	
	4.31	00.00	45	1	-1.85	34.32	-2.63	
1.2D + 1.0W 90 deg	4.31	00.00	315	1c	-2.11	-24.68	1.44	
	4.31	00.00	225	1b	-2.11	-24.68	-1.44	
	4.31	00.00	135	1a	-2.70	35.76	1.93	
	4.31	00.00	45	1	-2.70	35.76	-1.93	
1.2D + 1.0W 45 deg	4.31	00.00	315	1c	-0.16	6.59	-0.95	
	4.31	00.00	225	1b	-2.98	-41.49	-2.98	
	4.31	00.00	135	1a	-0.95	6.59	-0.16	
	4.31	00.00	45	1	-3.25	50.47	-3.25	
1.2D + 1.0W Normal	4.31	00.00	315	1c	1.92	35.76	-2.70	
	4.31	00.00	225	1b	-1.44	-24.68	-2.11	
	4.31	00.00	135	1a	1.44	-24.68	-2.11	
	4.31	00.00	45	1	-1.92	35.76	-2.70	

Max Uplift:	42.77 (ton)	Moment:	396.66 (ton-m)	1.2D + 1.0W 45 deg
Max Down:	50.47 (ton)	Total Down:	22.17 (ton)	
Max Shear:	4.60 (ton)	Total Shear:	10.38 (ton)	

Maximum Reactions Summary

	Base	DL + WL	DL + WL + IL
Vertical	50.47	22.17	0.00
Horizontal	4.60	10.38	0.00
Moment (kip-ft)		396.66	0.00