SC9863A audio test report V1.0

2019年5月

ial for longcheer

WWW.UNISOC.COM
紫 光 展 锐 科 技

测试概述

项目名称：SC9863A

硬件版本：SC9863_1_IRD_A_V1.0.0

软件版本：

内容概述

	Test case	Remark
14002 Multimedia Test	14002001 Handsfree Music	
	14002024 Headset Class AB Music	
	14002017 Pop Noise	
14003 Voice Call	14003001 Handset Voice Call NB	
	14003002 Handfree Voice Call NB	
	14003018 Handset VOLTE_WB	
	14003019 Handfree_VOLTE_WB	

Unisoc Confidential For longcheer

测试结果

14002001 Handsfree Music

Test Item	Spec	Result
Output level (Max level)	>1.8V(rms)	2.14V
SNR@Max level	<-83dB	-101.2dB
THD+N@Max level	<1%(-40dB)	-68.3dB
Noise@Max level	<-45uV	18.49uV
Dynamic Range	NA	-90.9dB

Unisoc Confidential For longcheer

测试结果

14002024 Headset Class AB Music

Test Item	Spec	Result
Output level(Max)_L	400±50mVrms	419.2mV
Output level(Max)_R	400±50mVrms	423.8mV
SNR@Max_L	≤-83dB	-97.3dB
SNR@Max_R	≤-83dB	-97.3dB
THD+N@1KHz_L	≤-46dB	-56.8dB
THD+N@1KHz_R	≤-46dB	-57.9dB
Noise@Max_L	≤12uV	5.11uV
Noise@Max_R	≤12uV	5.11uV
Cross Talk@1Khz	≤-35dB	-50.1dB

Unisoc Confidential For Longcheer

测试结果

14002017 Pop Noise

Test Item	Spec	Result
Headset turn on Music player	< 0.3mV	0.1mV
Headset turn off Music player	< 0.3mV	0.15mV
Handsfree turn on Music player	< 3mV	0.9mV
Handsfree turn off Music player	< 3mV	0.3mV
Plug in headphone	< 3mV	0.2mV
Plug out headphone	< 3mV	1.75mV

Unisoc Confidential For Internal Use Only

测试结果

紫光展锐 UNISOC

14003001 Handset Voice Call NB

Test Item	Spec	Result
RLR@Max vol	-3~-10dB	-5.49
RLR@nom vol	2 ± 3dB	2.5
SLR	8 ± 3dB	9.35
RFR@Nom vol	In mark	Pass
SFR	In mark	Pass
Side tone	≥ 13dB	21.47
Receiving distortion @Max vol	In mask	Pass
Sending distortion	In mask	Pass
Receiving Idle channel noise@Max Vol	≤ -54 dBPa(A)	-70.84
Receiving Idle channel noise@Nom Vol	≤ -57 dBPa(A)	-71.63
Sending Idle channel noise	≤ -64 dBm0(P)	-76.87
Receiving TMOS @Max Volume	≥3.0	3.59
Sending TMOS	≥3.0	3.96
TCL(Echo Loss)@Max	≥55	59.9
TCL(Echo Loss)@Nom	≥55	59.82

Unisoc Confidential For longcheer

测试结果

紫光展锐 UNISOC

14003002 Handfree Voice Call NB

Test Item	Spec	Result
RLR@Max vol	2~16dB	10.63
SLR	13±4dB	14.37
Sending distortion	In mask	Pass
Receiving Idle channel noise@Max Vol	≤ -54 dBPa(A)	-73.77
Receiving Idle channel noise@Nom Vol	≤ -57 dBPa(A)	-73.34
Sending Idle channel noise	≤ -64 dBm0(P)	-70.17
Receiving TMOS @Max Volume	≥1.8	2.24
Sending TMOS	≥3	3.71
TCL(Echo Loss)@Max	≥46	48.26

Unisoc Confidential to Longcheer

测试结果

紫光展锐 UNISOC

14003018 Handset VOLTE_WB

Test Item	Spec	Result
RLR@Max vol	-3~-10dB	-7.05
RLR@nom vol	2 ± 3dB	0.64
SLR	8 ± 3dB	7.62
RFR@Nom vol	In mark	Pass
SFR	In mark	Pass
Side tone	≥ 13dB	18.12
Receiving distortion @Max vol	In mask	Pass
Sending distortion	In mask	Pass
Receiving Idle channel noise@Max Vol	≤ -54 dBPa(A)	-71.37
Receiving Idle channel noise@Nom Vol	≤ -57 dBPa(A)	-73.98
Sending Idle channel noise	≤ -64 dBm0(P)	-71.46
Receiving TMOS @Max Volume	≥3.0	3.5
Sending TMOS	≥3.0	4.1
TCL(Echo Loss)@Max	≥55	57.57
TCL(Echo Loss)@Nom	≥55	57.2

Unisoc Confidential For longcheer

测试结果

14003019 Handfree_VOLTE_WB

Test Item	Spec	Result
RLR@Max vol	2~16dB	12.64
SLR	13±4dB	13.51
Sending distortion	In mask	Pass
Receiving Idle channel noise@Max Vol	≤ -54 dBPa(A)	-72.94
Receiving Idle channel noise@Nom Vol	≤ -57 dBPa(A)	-72.94
Sending Idle channel noise	≤ -64 dBm0(P)	-77.52
Receiving TMOS @Max Volume	≥1.8	2.39
Sending TMOS	≥3	3.82
TCL(Echo Loss)@Max	≥46	62.04

Unisoc Confidential For longcheer

版本历史

版本	日期	备注
V1.0	2019.05.09	发布

Unisoc Confidential For longcheer

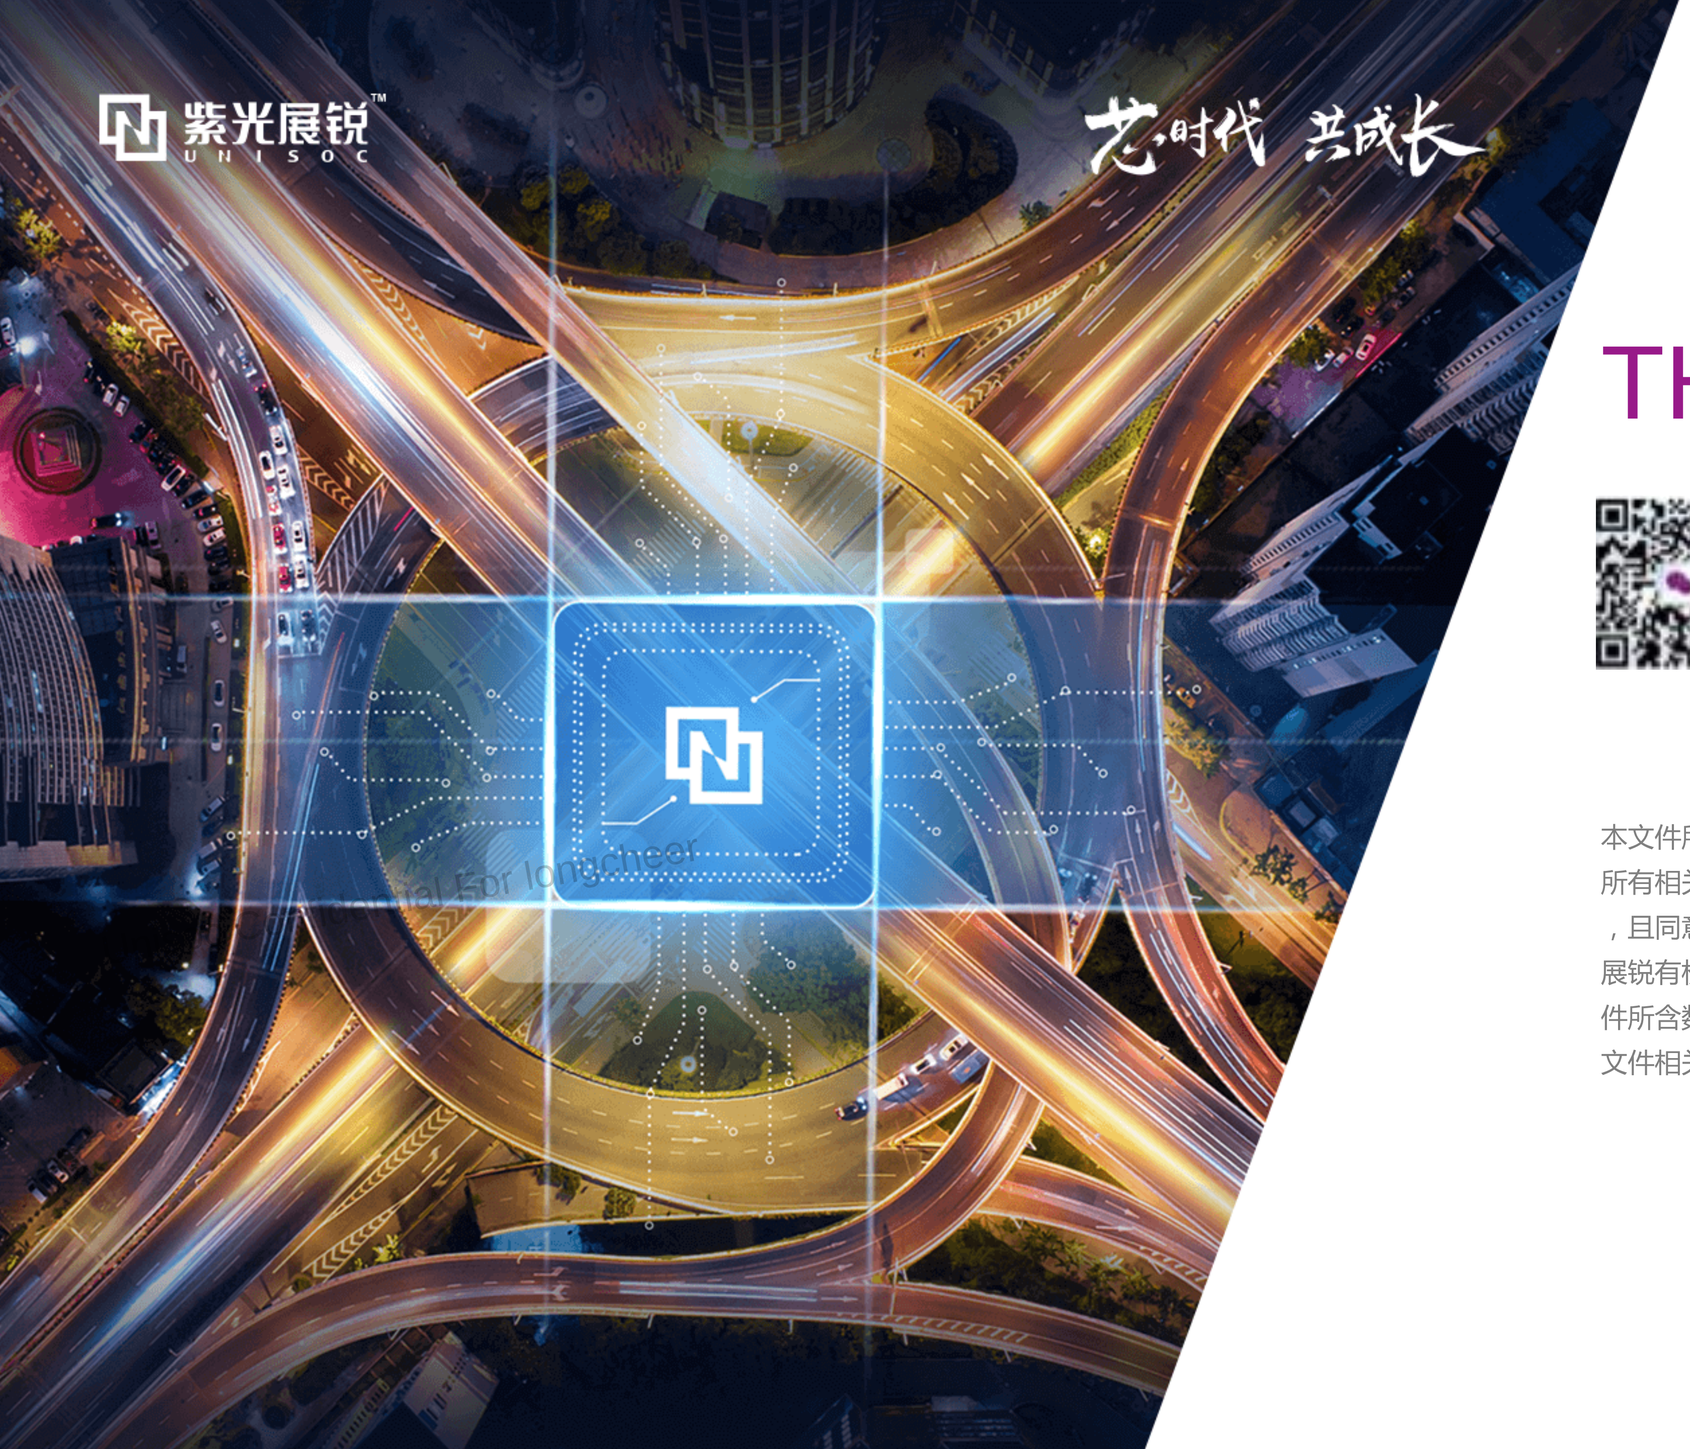

THANKS

本文件所含数据和信息都属于紫光展锐机密及紫光展锐财产，紫光展锐保留所有相关权利。当您接受这份文件时，即表示您同意此份文件内含机密信息，且同意在未获得紫光展锐同意前，不使用或复制、整个或部分文件。紫光展锐有权在未经事先通知的情况下，对本文件做任何修改。紫光展锐对本文件所含数据和信息不做任何保证，在任何情况下，紫光展锐均不负责任何与文件相关的直接或间接的、任何伤害或损失。

WWW.UNISOC.COM
紫 光 展 锐 科 技