


HEADBOARD — SHOP DRAWINGS · OVERALL ENVELOPE

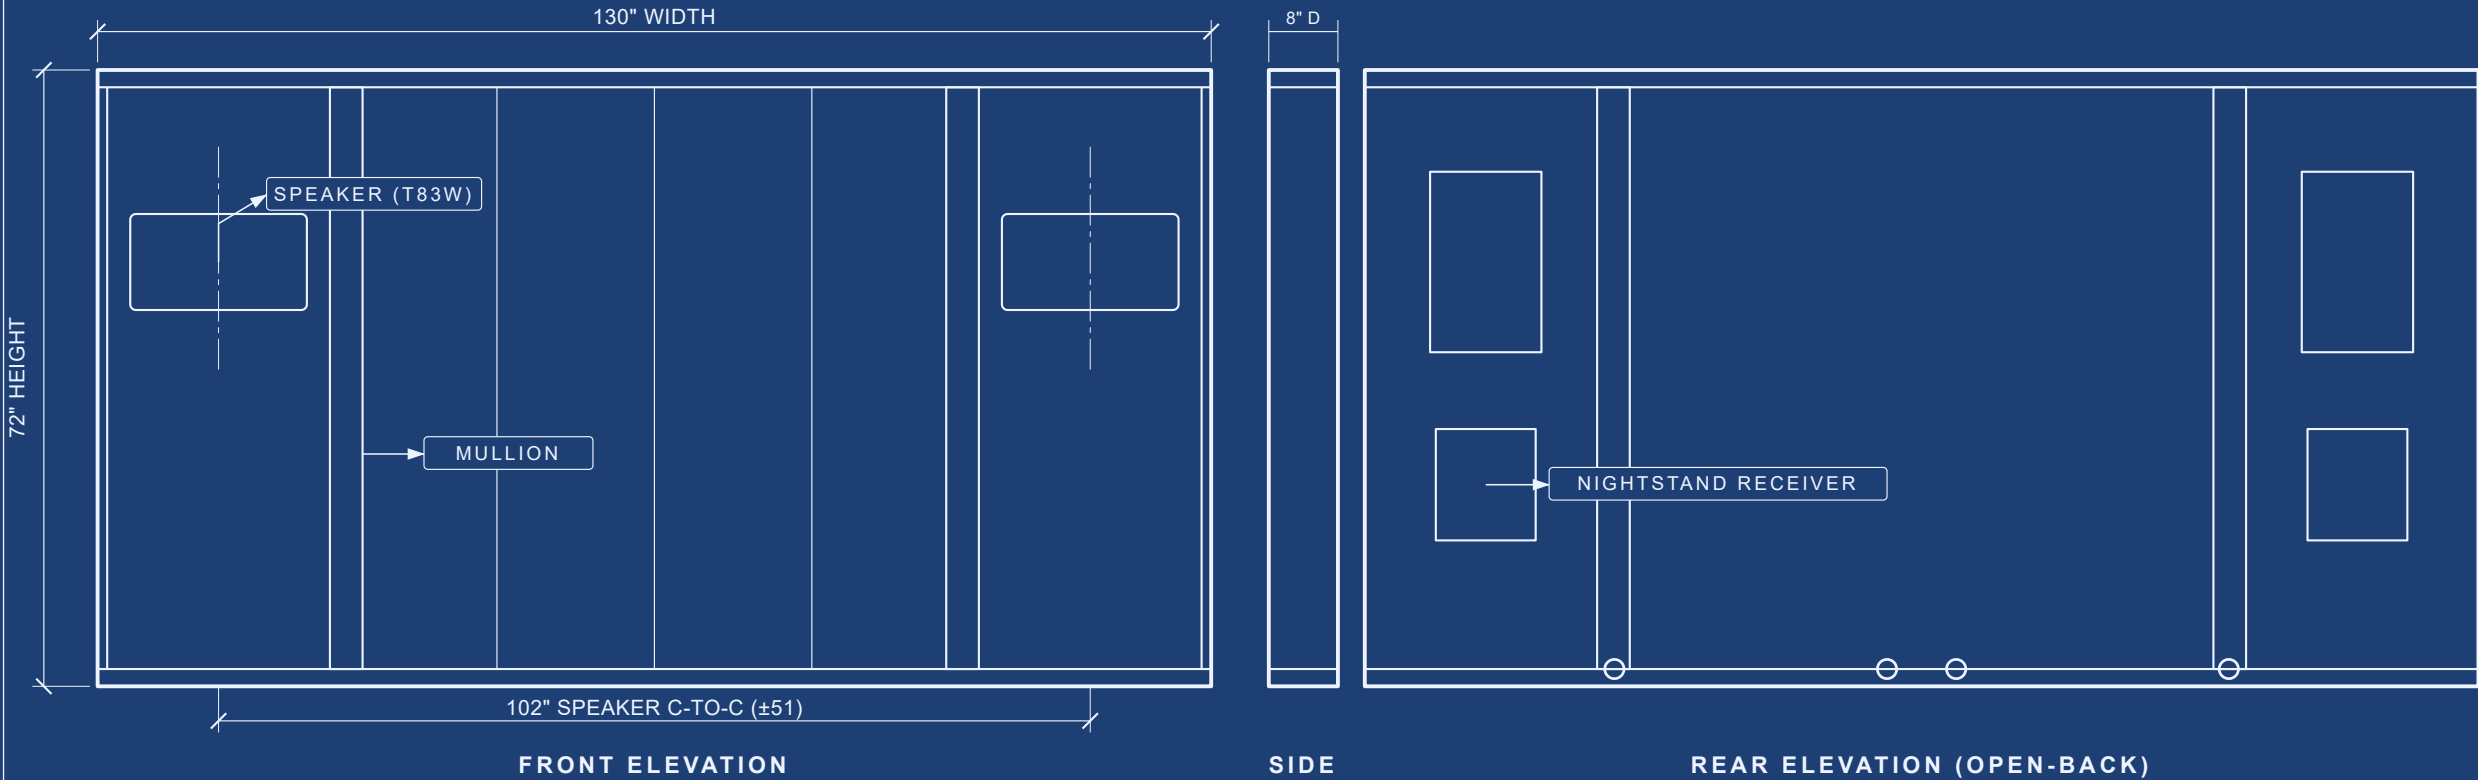

SHEETS IN THIS SET

- 1 OVERALL ENVELOPE (this sheet)
- 2 PART DRAWINGS + CUT LIST
- 3 SECTION DETAILS
- 4 CRITICAL INTERFACES
- 5 HARDWARE SCHEDULE

GENERAL NOTES

- All dimensions in inches ("). AFF = above finished floor. Figured dimensions govern — DO NOT scale.
- Headboard overall 130 W × 72 H × 8 D. Open-back rail-and-stile frame; six 1" front panels.
- Mullions at ±36; bolts to the base at ±36 + ±4. Speakers / receivers / USB-C centered at ±51.
- Joinery method + grain at builder's discretion. Parts (sheet 2) NOT to a single scale — the cut list governs.
- Speakers mount horizontal (owner D-080): AMT/mid pod inboard (toward bed center), 8" woofer outboard, mirror-imaged L/R. Cutout in a solid course (sheet 2).

GRAPHIC SCALE (FEET) · ELEVATIONS s = 4.46 px/in



PROJECT HEIRLOOM BED	
DRAWING Headboard — Shop Drawings	DRAWING NO. Headboard-Shop_Blueprint
REV 1.5	SHEET 1 OF 5

PART DRAWINGS & CUT LIST


1 TOP CAP
2" THK · ×1



2 BOTTOM RAIL
2" THK · ×1




3 SIDE STILE
2" W · ×2



4 MULLION
4" W · ×2 (at ±36)



5 PANEL — OUTER
1" THK · ×2

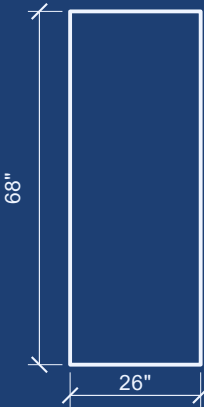

6 PANEL — CENTER
1" THK · ×4



SPEAKER BOARD — SOLID COURSE The horizontal speaker cutout (spans AFF ~44–55) must fall inside ONE solid glue-up course — NO board seam crossing it.
Recommended coursing: horizontal glue-up seams at AFF 36 and 58 → the speaker board IS the 36–58 course (~22" tall, grain horizontal, ≤20–22").


CUT LIST

#	PART	QTY	THK	WIDTH	LENGTH	NOTES
1	Top cap	1	2"	8"	130"	LED channels routed — see TopCap-LED
2	Bottom rail	1	2"	8"	130"	full-width bottom frame member
3	Side stile	2	1"	8"	68"	captured between rails; 1" face — slimmed for equal speaker reveal (D-080)
4	Mullion	2	4"	8"	68"	at x = ±36; W-relief at top for the LED channels
5	Front panel — outer	2	1"	26"	68"	stile-to-mullion bay; fit to the frame opening
6	Front panel — center	4	1"	~17"	68"	between the mullions; four equal; fit to opening
6a	Speaker board (in panel #6)	2	1"	~17"	~22"	SOLID glue-up course ≤20–22" tall (grain horiz.); NO board seam crossing the cutout

PROJECT HERBLOOM BED	
DRAWING Headboard — Shop Drawings	DRAWING NO. Headboard-Shop_Blueprint
REV 1.5	SHEET 2 OF 5

SECTION DETAILS


SECTION A-A

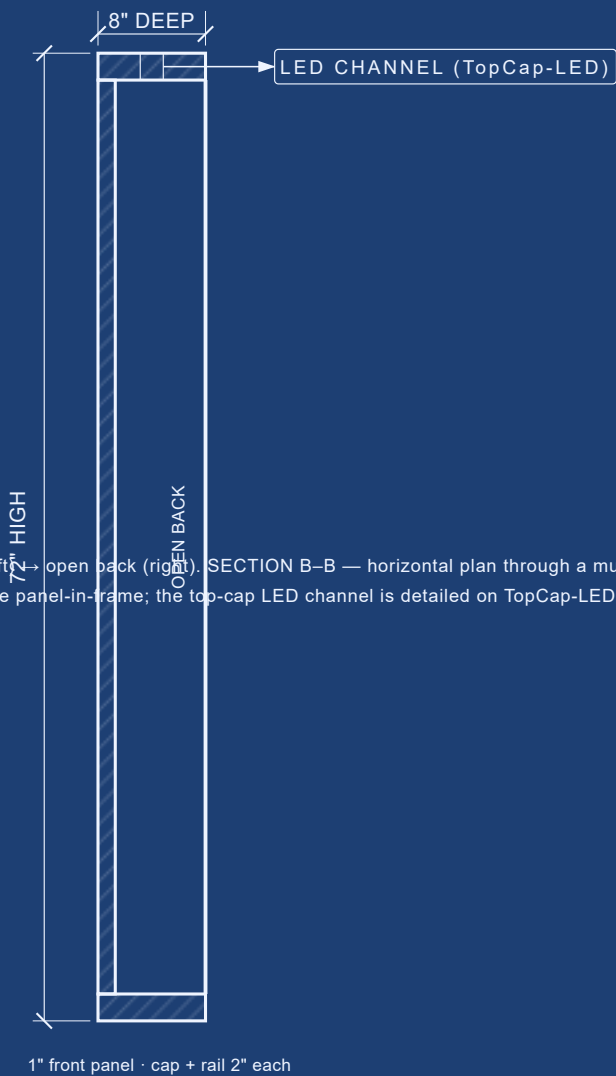

SECTION A-A — vertical, front (left) → open back (right). SECTION B-B — horizontal plan through a mullion.
Sections show the depth build + the panel-in-frame; the top-cap LED channel is detailed on TopCap-LED. Joint method + grain at builder's discretion. Not to a single scale.

SECTION B-B


PLAN THROUGH A MULLION · OPEN BACK AT TOP

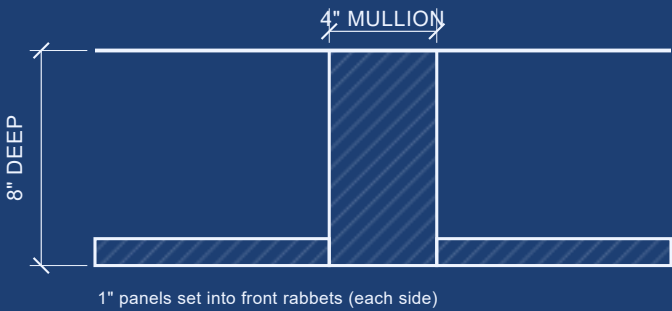

PROJECT HEIRLOOM BED		
DRAWING Headboard — Shop Drawings		DRAWING NO. Headboard-Shop_Blueprint
REV	1.5	SHEET 3 OF 5

CRITICAL INTERFACES

HEADBOARD REAR (OPEN-BACK) · base bolts · nightstand receivers · speakers · USB-C

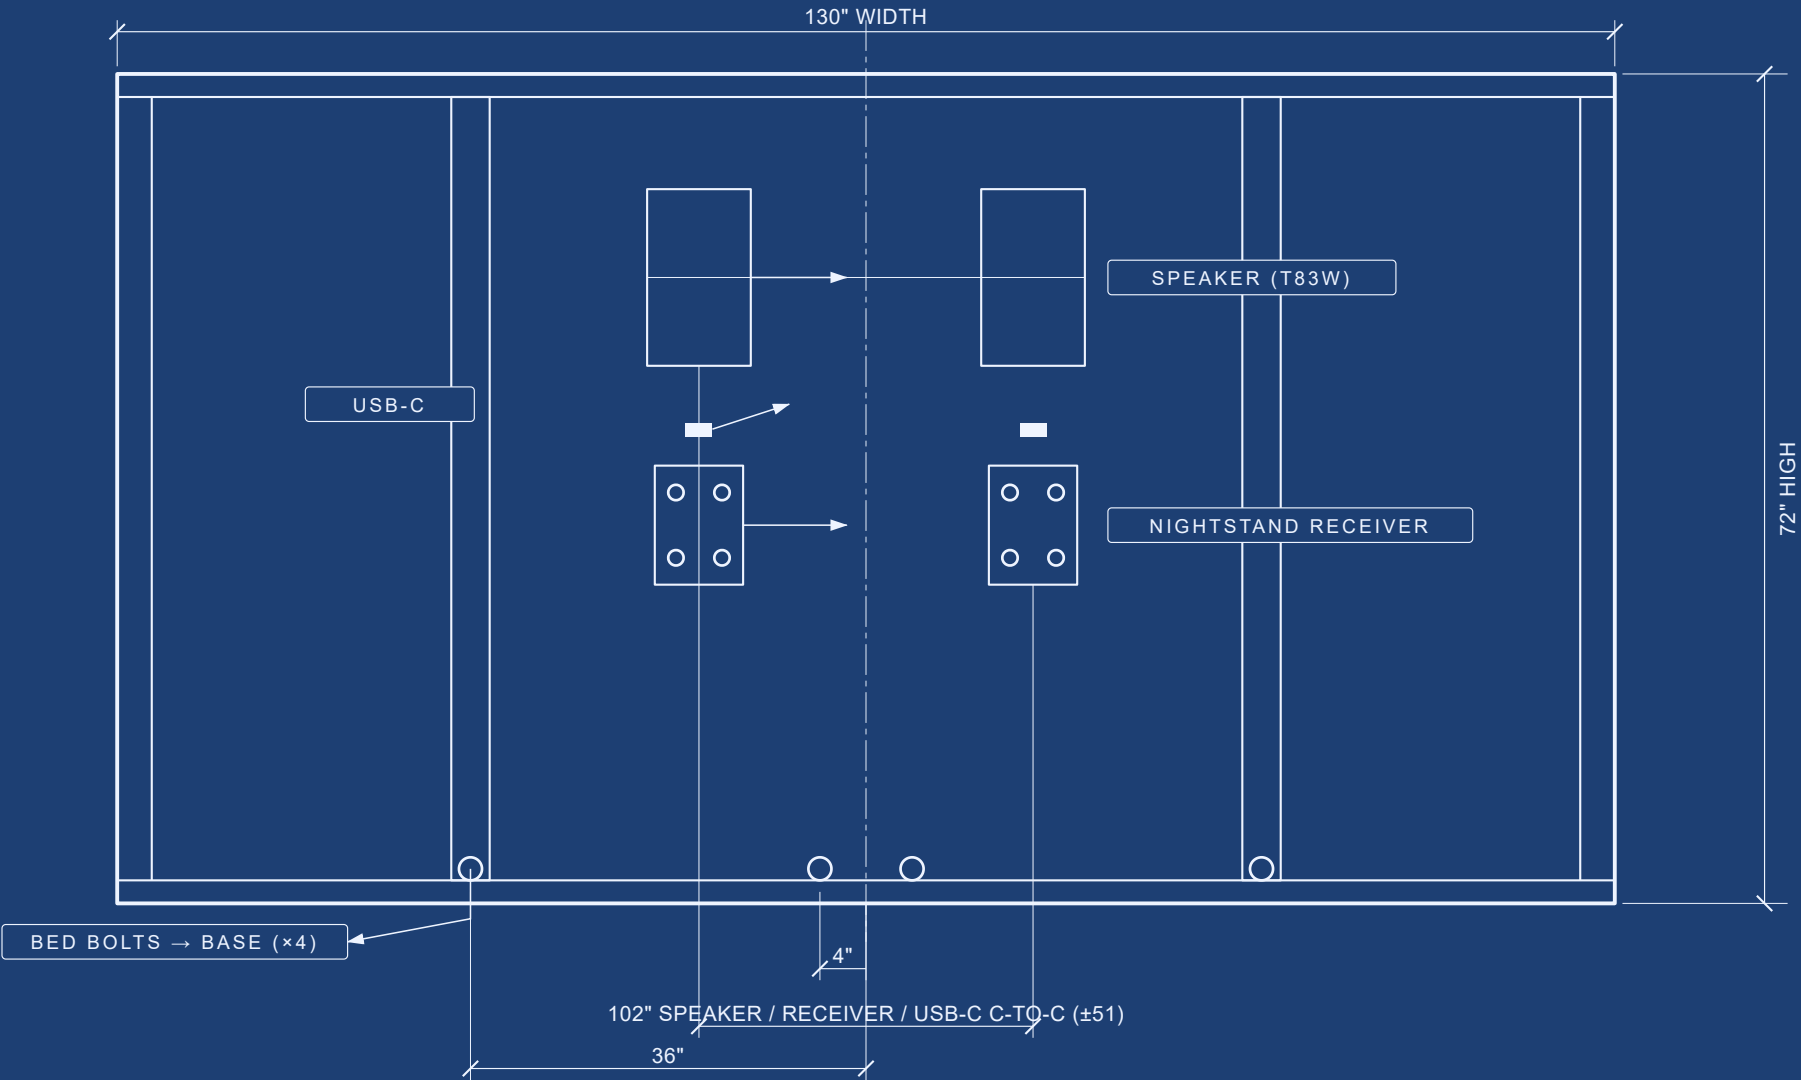


Open-back rail-and-stile frame. Mullions bolt to the base with 4 bed bolts at $x = \pm 36 \pm 4$ (through the bottom rail).
Speakers, nightstand receivers, and USB-C ports all center at ± 51 . Bolt + receiver hardware on sheet 5. Cutouts straight/flush — no toe-in.
Speaker cutout is HORIZONTAL (landscape 20.71×11.26 , AFF ~44–55). Speakers mount horizontal (owner D-080): AMT/mid pod inboard (toward bed center), 8" woofer outboard, mirror-imaged L/R.
Supports: speaker board centered over the nightstand (± 51), EQUAL ~2.6" reveal BOTH sides — outer side stile slims to 1" (from 2"), outer panel becomes 26", so the cutout reads balanced (Lee finalizes the slim outer frame, D-080). The ± 36 mullions / bolt lines do not move. Clear solid-ash band, cutout top → LED cap zone bottom (70 AFF) ≈ 15 ".

PROJECT HEIRLOOM BED	
DRAWING Headboard — Shop Drawings	DRAWING NO. Headboard-Shop_Blueprint
REV 1.5	SHEET 4 OF 5

HARDWARE SCHEDULE

#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Bed bolt	4	3/8"-16 steel, hex head; length to suit	Bottom rail → base · x = ±36 + ±4
2	Cross-dowel (barrel nut)	4	3/8"-16 steel	In the base; receives each bed bolt
3	Nightstand receiver bolt	8	Captive square-nut + machine bolt	Nightstand → rear receiver (4 per side)
4	USB-C insert	4	Owner-supplied 4-port, locking	Headboard face · ±51 · ~30" AFF — builder cuts the opening
5	In-wall speaker	2	Owner-supplied in-wall	Cutout ±51 · 20.71 × 11.26 (horizontal) — straight/flush, AMT-mid inboard; builder cuts

DETAIL — BED-BOLT CONNECTION (HEADBOARD → BASE)

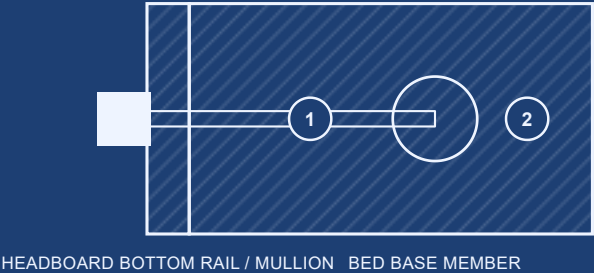

- 13/8" bed bolt — steel, hex head (×4 at ±36 / ±4)
- 2Cross-dowel / barrel nut — set in the base (×4)

Case joinery + grain at builder's discretion. USB-C inserts + in-wall speakers are owner-installed — the builder provides the cutouts only.
Bed-bolt + receiver positions locate on sheet 4 (Critical Interfaces). The top-cap LED hardware is on the TopCap-LED sheet.

PROJECT HEIRLOOM BED	
DRAWING Headboard — Shop Drawings	DRAWING NO. Headboard-Shop_Blueprint
REV 1.5	SHEET 5 OF 5