
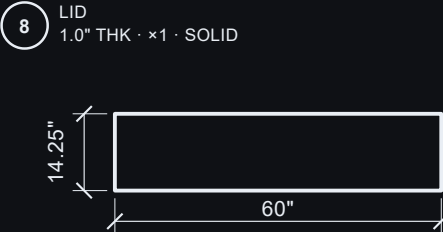
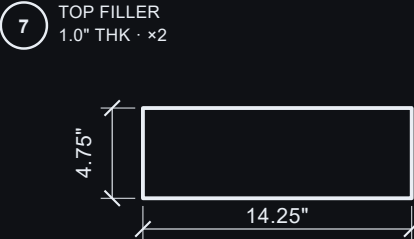
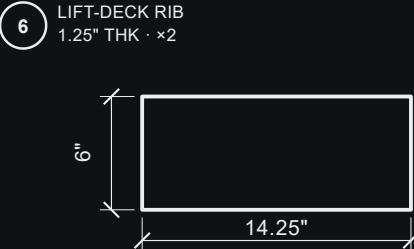
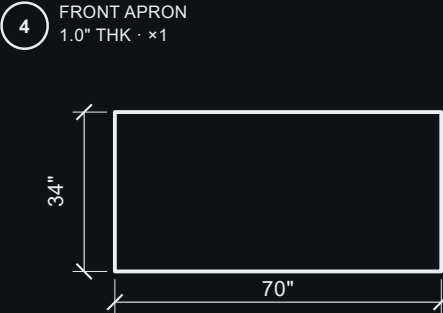
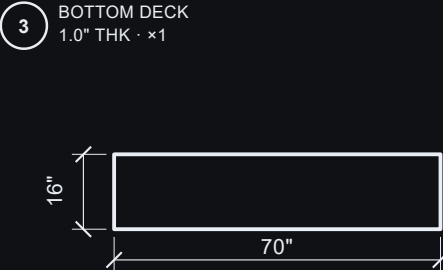
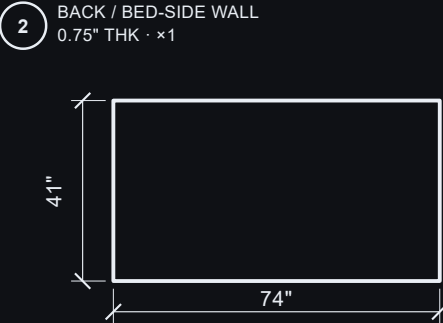


TV CABINET — PARTS + CUT LIST

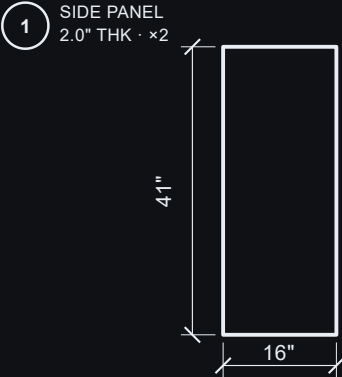



CUT LIST

#	PART	QTY	THICK	WIDTH	LENGTH	NOTES
1	SIDE PANEL	2	2.0"	16"	41"	mirror pair (L + R)
2	BACK / BED-SIDE WALL	1	0.75"	41"	74"	solid; wire pass-through at base (see sheet 4)
3	BOTTOM DECK (cubby floor)	1	1.0"	16"	70"	between the side panels
4	FRONT APRON	1	1.0"	34"	70"	closes the front above the open cubby
5	LIFT DECK (cubby ceiling)	1	1.0"	14.25"	70"	carries the field-installed lift
6	LIFT-DECK RIB	2	1.25"	6"	14.25"	±15.625" · splits three cubby bays
7	TOP FILLER	2	1.0"	4.75"	14.25"	flanks the lid slot
8	LID	1	1.0"	14.25"	60"	solid, screwed; rides the lift

FIGURED DIMS GOVERN — PARTS NOT TO A SINGLE SCALE

PROJECT HEIRLOOM BED	
DRAWING TV Cabinet	DRAWING NO. TV-Cabinet_Blueprint
REV 2.4	SHEET 2 OF 6

TV CABINET — SECTIONS

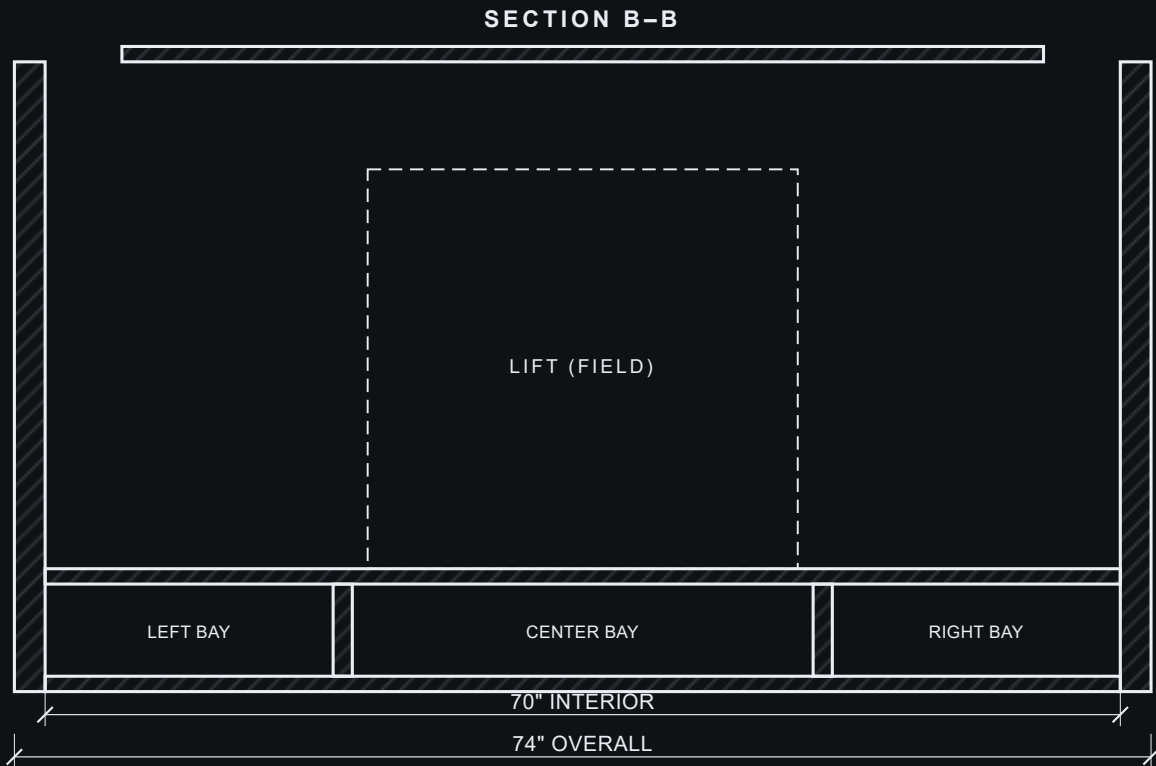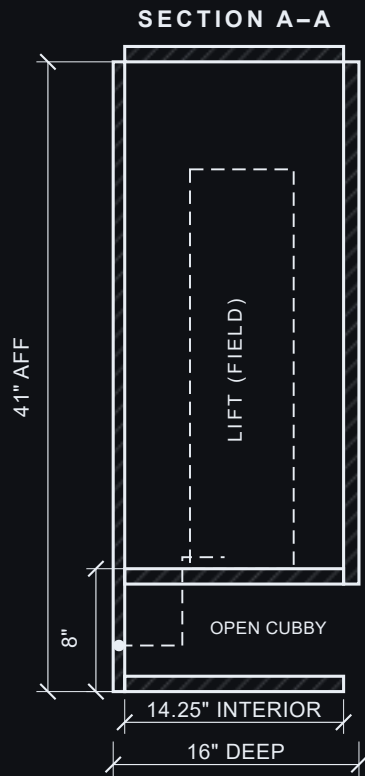

KEY DIMENSIONS

joint method + grain at fabricator's discretion


Interior depth (front to back)	14.25"	Cabinet (W × H × D)	74" × 41" × 16"
Interior width (between sides)	70"	Front apron height	34"
Open-cubby clear height	6"	Lid slot (lift opening)	60"
Lift-deck height (AFF)	8"	Rib centers (from CL)	±15.625"
Lift cavity (deck to lid)	33"	TV raised (bottom AFF)	47"



PROJECT HEIRLOOM BED	
DRAWING TV Cabinet	DRAWING NO. TV-Cabinet_Blueprint
REV 2.4	SHEET 3 OF 6


TV CABINET — CRITICAL INTERFACES

BED-SIDE FACE — BOLTS TO THE BED BASE

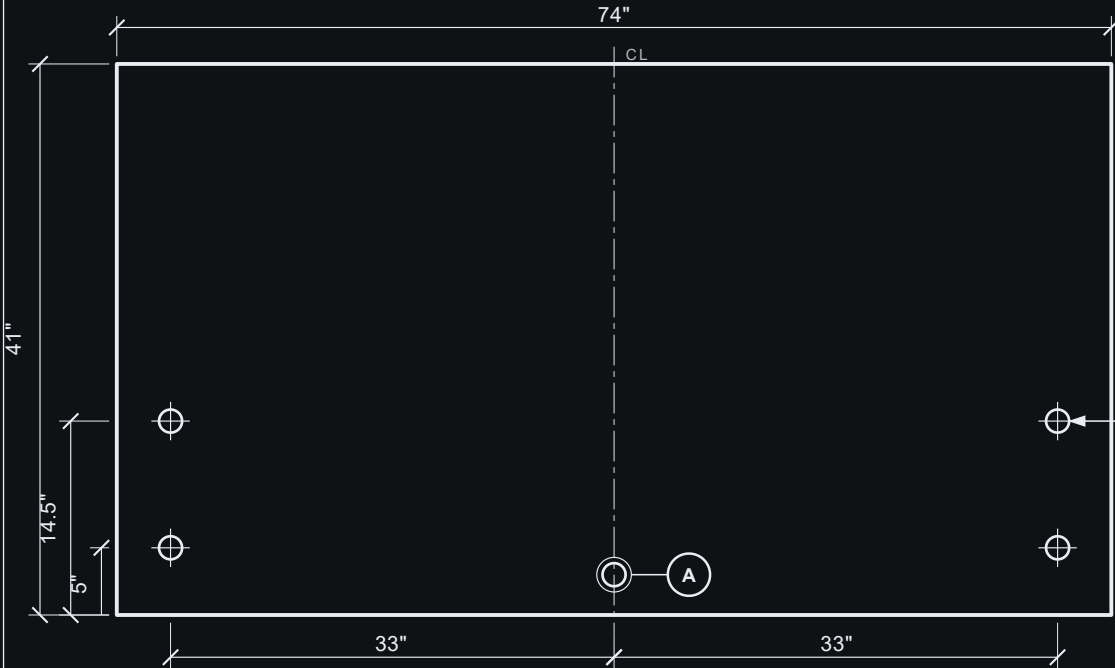

DETAIL A — WIRE PASS-THROUGH

ENLARGED · Ø¾" BORE + RUBBER GROMMET · ON CL, 3" AFF

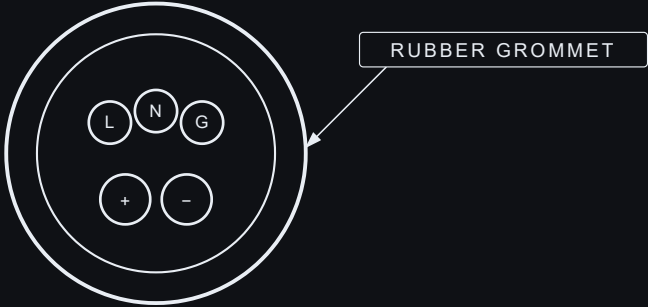

power + speaker wires (bare) through the grommet

TOP — LIFT OPENING



BED-BASE INTERFACE — KEY DIMENSIONS

Bolt columns (from CL)	±33"	Bolt size	3/8"-16 · see sheet 5
Bolt rows (AFF)	5" / 14.5"	Top opening	accepts field lift + lid
Wire grommet	Ø3/4" · on CL · 3" AFF	Grommet feed	power + speaker (bare)


FIGURED DIMS GOVERN — NOT TO A SINGLE SCALE

PROJECT HEIRLOOM BED	
DRAWING TV Cabinet	DRAWING NO. TV-Cabinet_Blueprint
REV 2.4	SHEET 4 OF 6

TV CABINET — HARDWARE SCHEDULE

#	ITEM	QTY	SPECIFICATION	LOCATION / NOTE
1	Bed bolt	4	3/8"-16 steel, hex head; length to suit base member	Bed-side face to base · ±33" · rows 5" / 14.5" AFF
2	Cross-dowel (barrel nut)	4	3/8"-16 steel · 1/2" Ø × 3/4"	Set in the bed base; receives each bed bolt
3	Rubber grommet	1	3/4" ID panel-mount · EPDM / rubber	Wire pass-through · on CL · 3" AFF (DETAIL A, sheet 4)
4	Lid fasteners	a/r	Wood screws — fabricator's choice	Lid is solid stock, screw-assembled

DETAIL — BED-BOLT CONNECTION (SECTION)

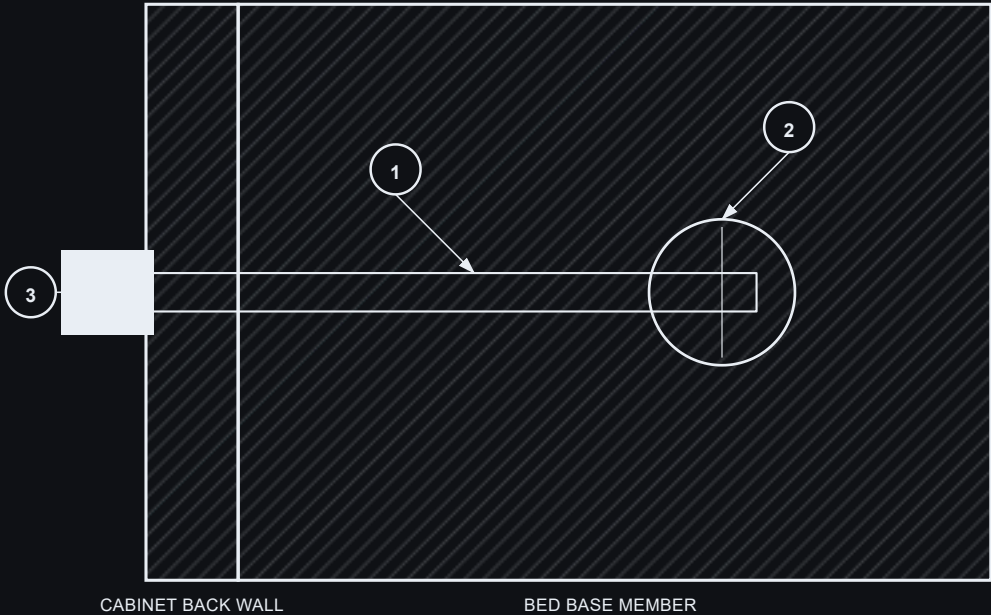

- 13/8" bed bolt — steel, hex head (×4)
- 2Cross-dowel / barrel nut — set in the base (×4)
- 3Counterbore — bolt head recessed in the back wall

NOTES

Bolt pattern ±33" · rows 5" / 14.5" AFF · sheet 4


Ø3/4" wire grommet · on CL · 3" AFF · Detail A

Case + lid joinery at fabricator · bolt length to suit

FIGURED DIMS GOVERN — NOT TO A SINGLE SCALE

PROJECT HEIRLOOM BED	
DRAWING TV Cabinet	DRAWING NO. TV-Cabinet_Blueprint
REV 2.4	SHEET 5 OF 6

TV CABINET — LIFT / TV / SOUNDBAR REFERENCE

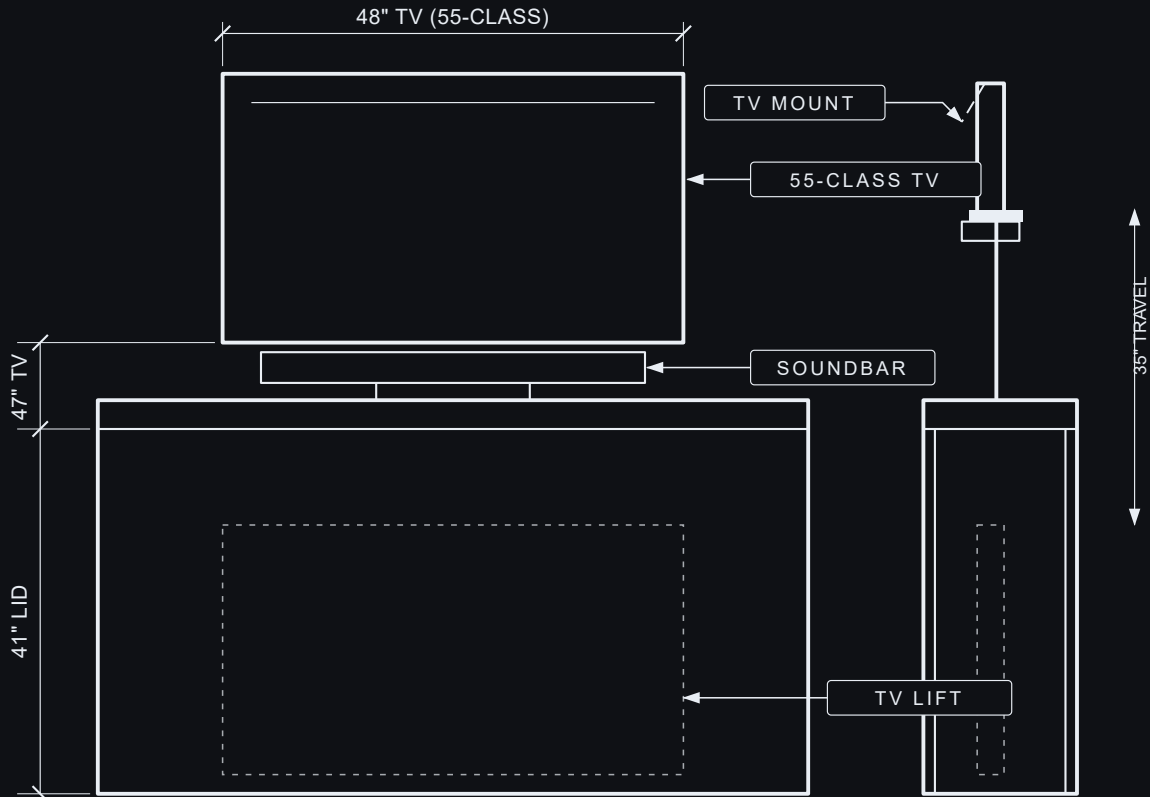


FRONT — TV RAISED

SIDE — SECTION



TOP VIEW

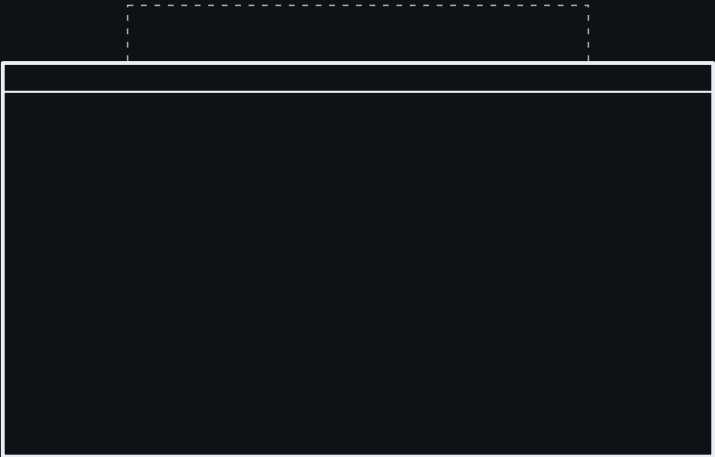

REAR

LIFT / TV — KEY DIMENSIONS

TV (raised, bottom AFF)	47"
Lift travel	35"
Lid slot	60"
TV size	55-class

REFERENCE — LIFT / TV / SOUNDBAR

Field-installed lift, TV, and soundbar · reference only
TV raised bottom 47" AFF · box dims on construction sheets



PROJECT HEIRLOOM BED	
DRAWING TV Cabinet	DRAWING NO. TV-Cabinet_Blueprint
REV 2.4	SHEET 6 OF 6