SOLAR
CATALOGUE 2026

TAKEWAY
LED

LIGHT THE WAY • POWER THE FUTURE

SMART LIGHTING
FOR A BRIGHTER
TOMORROW

- ENERGY EFFICIENT
- RELIABLE & SUSTAINABLE
- DURABLE & LONG LASTING
- LOW MAINTENANCE & COST SAVING
- SUPERIOR BRIGHTNESS

AASMA ENTERPRISES
Office No. A-203, 2nd Floor,
Chordia's Kosmos, Block A,
Plot No. E-05, Dr. Rajendra Prasad Nagar E,
Village Badanwas, Gopalpura Bypass Road,
Jaipur – 302020, Rajasthan, India.

+91 97997 00898
contact@takewayled.com
www.takewayled.com

TAKEWAY

LIGHT THE WAY • POWER THE FUTURE

About us

Takeaway LED is a trusted name in the LED and Solar lighting industry since 2009. Under Aasma Enterprises, we have been at the forefront of delivering innovative, reliable and sustainable lighting solutions for homes, industries, commercial spaces and outdoor applications. With years of experience, advanced manufacturing technology and a customer-first approach, we design and manufacture high-performance products that ensure energy efficiency, long life and superior quality. Our wide range of products is built to meet the evolving needs of our clients across India and around the world.

Our mission is simple – Light the Way, Power the Future.
We are committed to creating a brighter, greener and smarter tomorrow through cutting-edge LED and Solar lighting solutions.

AASMA ENTERPRISES
Office No. A-203, 2nd Floor,Chordia's Kosmos,
Block A,Plot No. E-05, Dr. Rajendra Prasad Nagar E,
Village Badanwas, Gopalpura Bypass Road,
Jaipur – 302020, Rajasthan, India

Phone: +91 97997 00898
Email: contact@takeawayled.com
Website: www.takeawayled.com

OUR PRODUCTS RANGE

ESS SOLAR INVERTER

4-5

SOLAR PANEL



6-7

SOLAR CCTV



8

SOLAR CCTV LIGHTS

9-11

SOLAR STREET LIGHTS

12-26

SOLAR HIBAY LIGHTS

27

SOLAR FLOOD LIGHTS



28-30

SOLAR LAMP POST LIGHTS



31

PORTABLE SOLAR CAMPING LIGHTS

32-33

SOLAR GARDEN LIGHTS

34-46

Portable Ess
Solar Inverter

ABS
BODY

MODEL	SOLAR INVERTER 600W ABS-600W-576WH	SOLAR INVERTER 1200W ABS-1200W-1152WH
POWER	600W	1200W
BATTERY CAPACITY	LiFePo4 Battery 576Wh	LiFePo4 Lithium Battery 1152Wh
INPUT	1. SC 12V-24V/1-5A AC adapter 2. Car charging 3. 18V Solar Panel 1-5A (MAX 2 PCS)	1. XT60 22V/20A Charger 2. SC 12V-24V/1-5A AC adapter 3. Car charging 4. 18V Solar Panel 1-10A (MAX 2 PCS)
OUTPUT	1. AC 220V, 50Hz (1 SOCKET) Sine Wave 2. DC Cigarette lighter 12W 10A 3. DC Connector (2 Output) 12V 10A 4. USB A Type (2 Ports) 5. USB C Type (2 Ports) 6. 5W LED Light, 2 Step Dimming & Flash 7. Wireless charging: 15W	1. AC 220V, 50Hz (3 SOCKET) Sine Wave 2. DC Cigarette lighter 12W 10A 3. DC Connector (2 Output) 12V 10A 4. USB A Type (2 Ports) 5. USB C Type (2 Ports) 6. 5W LED Light, 2 Step Dimming & Flash 7. Wireless charging: 15W
BODY TYPE	FLAME RETARDENT ABS	FLAME RETARDENT ABS
SIZE(MM)	270*210*230mm	280*245*250mm

Portable ESS
Solar Inverter

METAL
BODY

MODEL	SOLAR INVERTER 200W MB-200W-192WH
POWER	200W
BATTERY CAPACITY	LiFePo4 Battery 192Wh
INPUT	1. SC 12V-24V/1-5A AC adapter 2. CAR CHARGING 3. 18V SOLAR PANEL 1-10A (MAX 2 PCS)
OUTPUT	1. AC220V 50Hz (1SOCKET) SINE WAVE 2. DC CIGARRETE LIGHTER 12V 10A 3. USB A TYPE (2 PORTS) 4. 5W LED LIGHT, 2 STEP DIMMING AND FLASH
BODY TYPE	METAL BODY
SIZE(MM)	250*150*180*

METAL
BODY

MODEL	SOLAR INVERTER 300W MB-300W-384WH
POWER	300W
BATTERY CAPACITY	LiFePo4 Battery 384Wh
INPUT	1. SC 12V-24V/1-5A AC adapter 2. CAR CHARGING 3. 18V SOLAR PANEL 1-10A (MAX 2 PCS)
OUTPUT	1. AC220V 50Hz (1SOCKET) SINE WAVE 2. DC CIGARRETE LIGHTER 12V 10A 3. USB A TYPE (2 PORTS) 4. 5W LED LIGHT, 2 STEP DIMMING AND FLASH
BODY TYPE	METAL BODY
SIZE(MM)	250*150*180*

METAL
BODY

MODEL	SOLAR INVERTER 600W MB-600W-640WH
POWER	600W
BATTERY CAPACITY	LiFePo4 Battery 640Wh
INPUT	1. SC 12V-24V/1-5A AC adapter 2. CAR CHARGING 3. 18V SOLAR PANEL 1-10A (MAX 2 PCS)
OUTPUT	1. AC220V 50Hz (2 SOCKET) SINE WAVE 2. DC CIGARRETE LIGHTER 12V 10A 3. DC CONNECTOR (4 OUTPUT) 12V 10A 4. USB A TYPE (2 PORTS) 5. USB C TYPE (2 PORTS) 6. 5W LED LIGHT, 2 STEP DIMMING & FLASH
BODY TYPE	METAL BODY
SIZE(MM)	320*190*200*

Solar Panel

Model	PV1240	PV1250	PV1275	PV12165
Peak Power P_{Max} (WP)	40	50	75	165
Rated Voltage V_{mpp} (V)	18.40	18.50	18.60	18.79
Maximum Current I (A)	2.22	2.77	4.16	9.16
Open Circuit Voltage V_{oc} (V)	19.20	19.70	20.50	21
Short Circuit Voltage I_{sc} (A)	2.60	3.40	4.70	11.40
Module Efficiency (%)	23	23	23	23
Length (mm)	290	360	510	1070
Width (mm)	765	765	765	765
Height (mm)	25	25	30	30
Weight (kg)	4.5	5.2	7.6	12.5
Junction Box	IP-65, 2 By Pass Diodes			
Application Class	Class-A (Safety Class II)			
Superstrate	3.2mm High Transmission Low Iron Tempered Glass			
Cells	36 Cells, Mono			
Cell Encapsulant	EVA			
Back Sheet	PET			
Frame	Anodized AL Alloy			
Mechanical Load Test	5400 PA			

Solar

Solar Mobile Charger

MODEL	SMC-15W
SOLAR PANEL	9V 15W MONO
MAX. VOLT.	9V / 5V
MAX. CURRENT	1.66A / 2.5A
MATERIAL	ABS / PC
IP RATING	IP65
OUTPUT	TYPE A USB x 3, TYPE C USB
ACCESSORIES	MULTI CHARGING CABLE
APPLICATIONS	USB LIGHTS, SPEAKER, MOBILE CHARGING, POWER BANK, DC FAN ETC.

Mobile Charger

SOLAR RECHARGEABLE FAN

SOLAR RECHARGEABLE

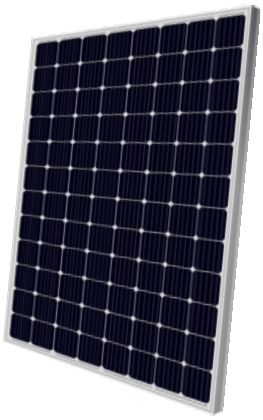

	SOLAR PEDESTAL FAN
MODEL	SOLAR-FAN-FS578-WH
SOLAR PANEL	9V 12W
LED LIGHT	NIGHT LIGHT (LOW LIGHT OR STRONG LIGHT)
WORKING MODE	3 SPEED, MULTI FUNCTION BUTTOM
BATTERY	7.4V 5.2Ah LITHIUM BATTERY
CHARGING TIME	4-5 HRS
WORKING TIME	6 HRS
CHARGER	9V 2A
FAN SIZE	16 INCHES , HEIGHT 1200MM
REMOTE	YES
QTY PER CTN	1 PCS

LED
Solar CCTV Camera

TAKEWAY SOLAR CCTV DUAL CAMERA 4G
MODEL NO. SOLAR-XG06-4G-DUAL
FHD IR 5MP + 5MP Dual Camera
4G Enabled
Solar Panel 5V 7W
3.7V 8000mAh Lithium-ion Battery
5-7 Days Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
Remote Monitoring with Audio Video Recording
2 Way Intercom
360 Degree Rotation View
IP66 Rating
12PCS PER CTN

TAKEWAY SOLAR CCTV SINGLE CAMERA 4G
MODEL NO. SOLAR-XG06-4G
FHD IR 5MP Camera
4G Enabled
Solar Panel 5V 7W
3.7V 8000mAh Lithium-ion Battery
5-7 Days Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
Remote Monitoring with Audio Video Recording
2 Way Intercom
360 Degree Rotation View
IP66 Rating
12PCS PER CTN

LED
Solar CCTV Flood Light

SOLAR CCTV 5 REAL WITH ZOOM CAMERA 4G OR WIFI
MODEL NO. SOLAR-CCTV-T84-5REAL-4G / SOLAR-CCTV-T84-5REAL-WIFI
FHD IR 5MP
4G Enabled OR WIFI
Solar Panel 5V 7W
3.7V 8000mAh Lithium-ion Battery
5-7 Days Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
Remote Monitoring with Audio Video Recording
2 Way Intercom
360 Degree Rotation View
IP66 Rating
12PCS PER CTN

TAKEWAY SOLAR CCTV 3 REAL 4G OR WIFI
MODEL NO. SOLAR CCTV-T64-3REAL-4G / SOLAR-CCTV-T64-3REAL-WIFI
FHD IR 5MP
4G Enabled OR WIFI
Solar Panel 5V 7W
3.7V 8000mAh Lithium-ion Battery
5-7 Days Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
Remote Monitoring with Audio Video Recording
2 Way Intercom
360 Degree Rotation View
IP66 Rating
12PCS PER CTN

LED
Solar CCTV Flood Light

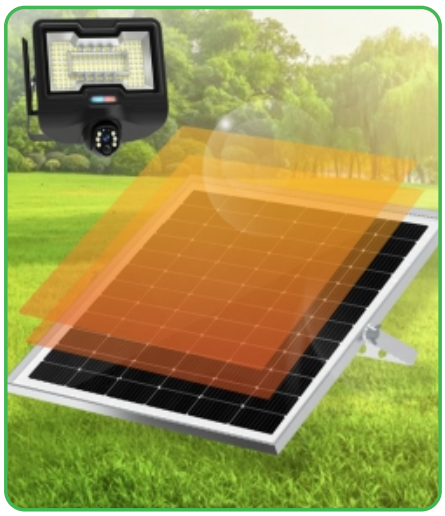

WITH REMOTE

	30W SOLAR FLOOD WITH CCTV
MODEL	SOLAR-FL-CCTV-30
LED	58 LED 5054
LED POWER	150W
SOLAR PANEL	5V 30W MONO
BATTERY	3.2V 25AH LiFePo4
CHARGING TIME	5-7 HOURS
LIGHTING TIME	1 NIGHT
LIGHT COLOR	COOL WHITE
INSTALL HEIGHT	3-6M
SIZE(mm)	350x320x150
QTY/CTN	5 PCS.

CAMERA SPECIFICATIONS
FHD IR 5MP Camera
4G Enabled
5-7 Days Camera Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
360 Degree Rotation View
2 Way Intercom
IP66 Rating
Remote Monitoring with Audio Video Recording

REMOTE:

- **Auto**: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours
- **On/Off**: Light on and off(no working for light Sensor)
- **3H**: Set up for 3 hours lighting up, after 3 hours light off
- **5H**: Set up for 5 hours lighting up, after 5 hours light off
- **8H**: Set up for 8 hours lighting up, after 8 hours light off
- **Half light**: Set up for 50% lighting up
- **Full light**: Set up for 100% lighting up

LED
Solar CCTV Street Light

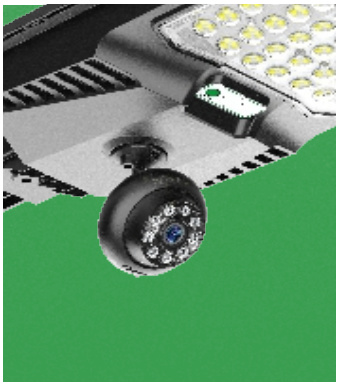

WITH REMOTE

MODEL	SOLAR-SL-CCTV-15-1LENS-4G NO PTZ
LED	201 LED
LED POWER	90W
SOLAR PANEL	5V 16W
BATTERY	3.2V 12AH
CHARGING TIME	5-6 HOURS
LIGHTING TIME	1 NIGHT
LIGHT COLOR	COOL WHITE
POLE DIA	50mm
INSTALL HEIGHT	4-6M
SIZE(mm)	600x215x145
SENSOR	100% BRIGHTNESS ON MOVEMENT 50% BRIGHTNESS IF NO MOVEMENT
REMOTE	2H/3H/4H: FULL BRIGHTNESS AND THEN OFF AFTER 2H/3H/4H 2H+/3H+: FULL BRIGHTNESS AND THEN SENSOR MODE AFTER 2H/3H/4H
QTY/CTN	12 PCS.

CAMERA SPECIFICATIONS
FHD IR 5MP Camera
4G Enabled
5-7 Days Camera Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
360 Degree Rotation View
2 Way Intercom
IP66 Rating
Remote Monitoring with Audio Video Recording

LED
Solar CCTV Street Light

WITH REMOTE

MODEL	SOLAR-SL-CCTV-20-1LENS
LED	180 LED
LED POWER	90W
SOLAR PANEL	5V 24W
BATTERY	3.2V 20AH
CHARGING TIME	5-6 HOURS
LIGHTING TIME	1 NIGHT
LIGHT COLOR	COOL WHITE
POLE DIA	50mm
INSTALL HEIGHT	4-6M
SIZE(mm)	600x250x180
SENSOR	100% BRIGHTNESS ON MOVEMENT 50% BRIGHTNESS IF NO MOVEMENT
REMOTE	2H/3H/4H: FULL BRIGHTNESS AND THEN OFF AFTER 2H/3H/4H 2H+/3H+: FULL BRIGHTNESS AND THEN SENSOR MODE AFTER 2H/3H/4H
QTY/CTN	5 PCS.

CAMERA SPECIFICATIONS
FHD IR 5MP Camera
4G Enabled
5-7 Days Camera Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
360 Degree Rotation View
2 Way Intercom
IP66 Rating
Remote Monitoring with Audio Video Recording

LED
Solar CCTV Street Light

WITH REMOTE

MODEL	SOLAR-SL-CCTV-20-4LENS
LED	180 LED
LED POWER	90W
SOLAR PANEL	5V 24W
BATTERY	3.2V 20AH
CHARGING TIME	5-6 HOURS
LIGHTING TIME	1 NIGHT
LIGHT COLOR	COOL WHITE
POLE DIA	50mm
INSTALL HEIGHT	4-6M
SIZE(mm)	600x250x180
SENSOR	100% BRIGHTNESS ON MOVEMENT 50% BRIGHTNESS IF NO MOVEMENT
REMOTE	2H/3H/4H: FULL BRIGHTNESS AND THEN OFF AFTER 2H/3H/4H 2H+/3H+: FULL BRIGHTNESS AND THEN SENSOR MODE AFTER 2H/3H/4H
QTY/CTN	5 PCS.

CAMERA SPECIFICATIONS
FHD IR 5MP Camera x 4 (Total 15MP)
4G Enabled
5-7 Days Camera Backup
Night Vision
Human Detection Recording
Upto 256GB SD Card Supported
APP V380 Pro
360 Degree Rotation View
2 Way Intercom
IP66 Rating
Remote Monitoring with Audio Video Recording

LED

Solar All in One Street Lights

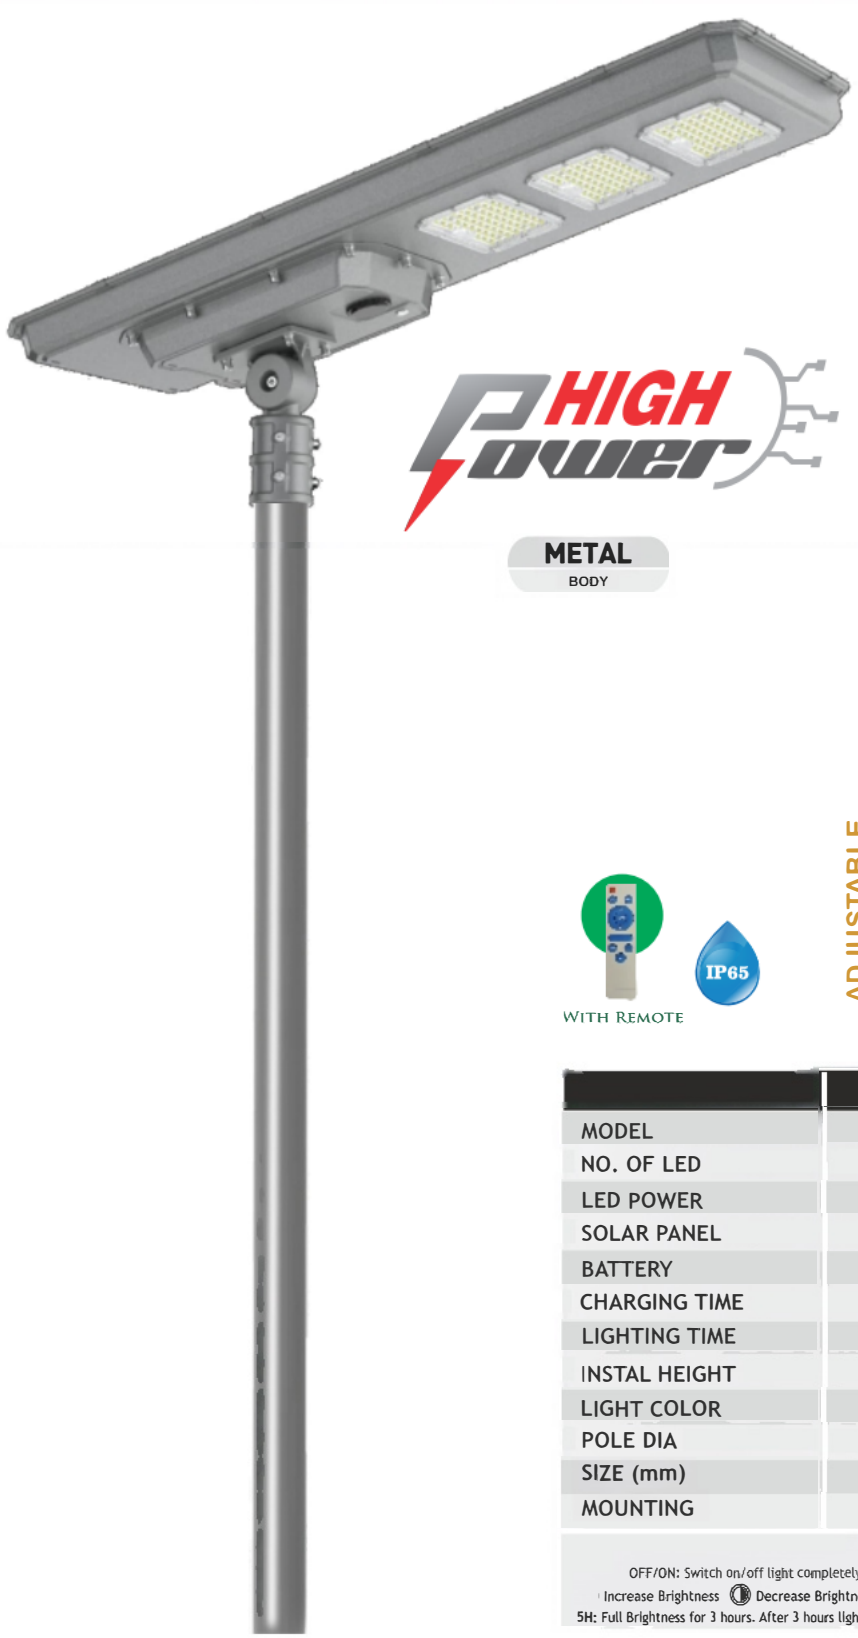

HIGH Power

METAL BODY

ADJUSTABLE BRACKET

WITH REMOTE

IP65

	80W ALL IN ONE METAL BODY
MODEL	TAKEWAY-METAL80
NO. OF LED	180 LED 5054
LED POWER	500W
SOLAR PANEL	5V 85W MONO
BATTERY	3.2V 80Ah LiFePo4
CHARGING TIME	7-8 Hrs
LIGHTING TIME	18-24 Hrs
INSTAL HEIGHT	8-12M
LIGHT COLOR	COOL WHITE
POLE DIA	70MM
SIZE (mm)	1110*400*195
MOUNTING	ADJUSTABLE ANGLE

REMOTE:

OFF/ON: Switch on/off light completely. AUTO: Auto mode working. Dawn to Dusk working.

Increase Brightness Decrease Brightness 3H: Full Brightness for 2 hours. After 2 hours light is off.

5H: Full Brightness for 3 hours. After 3 hours light is off. 8H: Ful Brightness for 4 hours. After 4 hours light is off.

LED

Solar All in One Street Lights

80W ALL IN ONE METAL BODY	100W ALL IN ONE METAL BODY	120W ALL IN ONE METAL BODY
SL-INT-METAL80	SL-INT-METAL100	SL-INT-METAL120
180 LED 5054	240 LED 5054	300 LED 5054
500W	650W	800W
5V 85W MONO	5V 100W MONO	5V 120W MONO
3.2V 80Ah LiFePo4	3.2V 100Ah LiFePo4	3.2V 120Ah LiFePo4
7-8 Hrs	7-8 Hrs	7-8 Hrs
18-24 Hrs	18-24 Hrs	18-24 Hrs
8-12M	8-14M	10-15M
COOL WHITE	COOL WHITE	COOL WHITE
70MM	70MM	70MM
1110*400*195	1310*400*195	1600*400*195
ADJUSTABLE ANGLE	ADJUSTABLE ANGLE	ADJUSTABLE ANGLE

REMOTE:

OFF/ON: Switch on/off light completely. **AUTO:** Auto mode working. Dawn to Dusk working.

Increase Brightness Decrease Brightness **3H:** Full Brightness for 2 hours. After 2 hours light is off.

5H: Full Brightness for 3 hours. After 3 hours light is off. **8H:** Full Brightness for 4 hours. After 4 hours light is off.

LED

Solar All in One Street Lights

	SOLAR STREET LIGHT 60W-6 LENS	SOLAR STREET LIGHT 80W-8 LENS
MODEL	TAKEWAY-HP60	TAKEWAY-HP80
LED	324 Pcs 1W	432 Pcs 1W
LED POWER	350W	450W
PANEL	5V 65W MONO	5V 85W MONO
BATTERY	3.2V 60Ah LiFePo4	3.2V 80Ah LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	18-24HRS	18-24HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
POLE DIA	70MM	70MM
INSTALL HEIGHT	8-12M	10-15M
SIZE	685 x 445 x 68	905 x 445 x 68
QTY PER CTN	1 PC	1 PC

REMOTE:

OFF/ON Switch on/of ligh completel AUTO: Auto mod working. Dawn to Dusk working. O Increase Bri jhti es: lecrease rightness
3H: Full Brightness for 2 hours. After 2 hours light is off. 5H: Full Brightness for 3 hours. After 3 hours light is off. 8H: Ful Brightness for 4 hours. After 4 hours light is off.

LED

Solar Semi-Intergrated Lights



WITH REMOTE

	SOLAR STREET LIGHT 12W	SOLAR STREET LIGHT 20W	SOLAR STREET LIGHT 30W
MODEL	TAKEWAY-SEMI-12R	TAKEWAY-SEMI-20R	TAKEWAY-SEMI-30R
LED	358 Pcs 2835	254 Pcs 5730	430 Pcs 5730
LED POWER	120W	180W	250W
PANEL	5V 14W MONO	5V 26W MONO	5V 39W MONO
BATTERY	3.2V 12Ah LiFePo4	3.2V 20Ah LiFePo4	3.2V 30Ah LiFePo4
CHARGING TIME	6-8HRS	6-8HRS	6-8HRS
LIGHTING TIME	12HRS	12HRS	12HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE	COOL WHITE
POLE DIA	60mm	60mm	60mm
INSTALL HEIGHT	3M	4-5M	4-6M
SIZE	385 x 135 x 55	495 x 210 x 65	495 x 210 x 65
WALL BRACKET	INCLUDED	INCLUDED	INCLUDED
QTY PER CTN	1 PC	1 PC	1 PC

REMOTE:

• Auto: 100% ligh ing up at the first 20mins, 70% for 4.5hrs and 30% for emaining hours • On/Off: Light on and off(n working for light Sensor) 3H: Set up for 3 hours fighting up, after 3 hours light off 5H: Set up for 5 hours lighting up, after 5 hours light off 8H: Set up for 8 hours fighting up, after 8 hours light off • Half light: Set up for 50% lighting up • Ful light Set up for 100% fighting up

WITH REMOTE

	SOLAR STREET LIGHT 30W LENS TYPE	SOLAR STREET LIGHT 50W
MODEL	TAKEWAY-SEMI-30R-LENS	TAKEWAY-SEMI-50R
LED	60 Pcs 5054	766 Pcs 5730
LED POWER	250W	350W
PANEL	5V 30W MONO	5V 50W MONO
BATTERY	3.2V 30Ah LiFePo4	3.2V 50Ah LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	12HRS	12HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
POLE DIA	60mm	60mm
INSTALL HEIGHT	4-6M	5-7M
SIZE	495 x 210 x 65	495 x 210 x 65
WALL BRACKET	INCLUDED	INCLUDED
QTY PER CTN	1 PC	1 PC

REMOTE:

• Auto: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours • On/Off: Light on and off(no working for light Sensor) • 3H: Set up for 3 hours lighting up, after 3 hours light off • 5H Set up for 5 hours lighting up, after 5 hours light off • 8H: Set up for 8 hours lighting up after 3 hours light off Half light Set up for 50% lighting up Full light: Set up for 100% lighting up

LED

Solar All in One Street Lights

APPLE
MODEL

	SOLAR STREET LIGHT 40W-APPLE	SOLAR STREET LIGHT 50W-APPLE
MODEL	SLSOLARINT-APPLE40	SLSOLARINT-APPLE50
LED	576 Pcs 0.5W	864 Pcs 0.5W
LED POWER	300W	450W
PANEL	5V 40W MONO	5V 50W MONO
BATTERY	3.2V 42Ah LiFePo4	3.2V 56Ah LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	18-24HRS	18-24HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
POLE DIA	N/A	N/A
INSTALL HEIGHT	5-7M	7-10M
SIZE	510 x 390 x 45	610 x 390 x 45
QTY PER CTN	4 PCS	4 PCS

SENSOR:

• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement

REMOTE:

OFF/ON: Switch on/off light completely. Dawn to Dusk also off. Motion sensor off. Dawn to Dusk working. Auto mode working with motion sensor. Dawn to Dusk working.
2H: Full Brightness for 2 hours. After 2 hours light is off. **3H:** Full Brightness for 3 hours. After 3 hours light is off. **4H:** Full Brightness for 4 hours. After 4 hours light is off.
2H+ Full Brightness for 2 hours. After 2 hours Turn On Radar Sensor Mode. **3H+** Full Brightness for 3 hours. After 3 hours Turn On Radar Sensor Mode

LED

Solar All in One Street Lights

	SOLAR STREET LIGHT 35W-KING	SOLAR STREET LIGHT 45W-KING
MODEL	SLSOLARINT-KING35	SLSOLARINT-KING45
LED	610 Pcs 0.5W	732 Pcs 0.5W
LED POWER	300W	350W
PANEL	5V 25W MONO	5V 30W MONO
BATTERY	3.2V 25Ah LiFePo4	3.2V 30Ah LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	12-16HRS	12-16HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
POLE DIA	55mm	55mm
INSTALL HEIGHT	4-6M	6-8M
SIZE	650 x 385 x 86	730 x 385 x 86
QTY PER CTN	3 PCS	2 PCS

SENSOR:

• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement

REMOTE:

OFF/ON: Switch on/off light completely. Dawn to Dusk also off. **AUTO:** Motion sensor off. Dawn to Dusk working. **RADAR:** Auto mode working with motion sensor. Dawn to Dusk working. **3H:** Full Brightness for 3 hours. After 3 hours light is off. **5H:** Full Brightness for 5 hours. After 5 hours light is off. **4+4H:** Full Brightness for 4 hours. After 4 hours induction mode for 4hrs. **4+6H:** Full Brightness for 4 hours. After 4 hours induction mode for 6hrs. **4+8H:** Full Brightness for 4 hours. After 4 hours induction mode for 8hrs.

LED

Solar All in One Street Lights

AERO PLUS
MODEL

With Remote

IP65

	25W AERO PLUS	30W AERO PLUS	35W AERO PLUS
MODEL	SL-AEROPLUS-25	SL-AEROPLUS-30	SL-AEROPLUS-35
NO. OF LED	576 LED 5730	864 LED 5730	1152 LED 5730
LED POWER	200W	250W	300W
SOLAR PANEL	5V 23W MONO	5V 29W MONO	5V 34W MONO
BATTERY	3.2V 20Ah LiFePo4	3.2V 25Ah LiFePo4	3.2V 30Ah LiFePo4
CHARGING TIME	7-8 Hrs	7-8 Hrs	7-8 Hrs
LIGHTING TIME	2 Nights	2 Nights	2 Nights
INSTAL HEIGHT	4-5M	4-6M	5-6M
LIGHT COLOR	COOL WHITE	COOL WHITE	COOL WHITE
POLE DIA	45mm	45mm	45mm
SIZE (mm)	340*428*72	340*548*72	340*648*72
QTY PER CTN	5 PCS	5 PCS	3 PCS
SENSOR	• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement		
REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ALWAYS:** Motion sensor off. Dawn to Dusk working. **INDUCTION:** Auto mode working with motion sensor. Dawn to Dusk working. **2H:** Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **4H:** Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. **6H:** Motion sensor off for 6 hours. After 6 hours induction mode. Dawn to Dusk working.		

LED

Solar All in One Street Lights

AERO
MODEL

WITH REMOTE

	25W AERO DESIGN	30W AERO DESIGN	35W AERO DESIGN
MODEL	SL-AERO-INT-25	SL-AERO-INT-30	SL-AERO-INT-35
LED	480 LED 5730 EPISTAR	640 LED 5730 EPISTAR	800 LED 5730 EPISTAR
LED POWER	200W	250W	300W
SOLAR PANEL	5V 23W MONO	5V 29W MONO	5V 34W MONO
BATTERY	3.2V 20A LiFePo4	3.2V 25A LiFePo4	3.2V 30A LiFePo4
CHARGING TIME	7-8 Hrs	7-8 Hrs	7-8 Hrs
LIGHTING TIME*	2 Nights	2 Nights	2 Nights
LIGHT COLOUR	COOL WHITE	COOL WHITE	COOL WHITE
POLE DIA	45mm	45mm	45mm
INSTALL HEIGHT	4-6M	5-7M	6-8M
SIZE (mm)	450x342x70	600x342x70	680x342x70
QTY PER CTN	5 PCS	5 PCS	3 PCS
SENSOR	• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement		
REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ALWAYS:** Motion sensor off. Dawn to Dusk working. **INDUCTION:** Auto mode working with motion sensor. Dawn to Dusk working. **2H:** Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **4H:** Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. **6H:** Motion sensor off for 6 hours. After 6 hours induction mode. Dawn to Dusk working.		

LED

Solar All in One Street Lights

LENS
MODEL

WITH REMOTE

IP65

	SOLAR STREET LIGHT 25W-2 LENS	SOLAR STREET LIGHT 35W-3 LENS
MODEL	SLSOLARINT-2LENS-25R	SLSOLARINT-3LENS-35R
LED	108 Pcs 2W	162 Pcs 2W
LED POWER	200W	250W
PANEL	5V 26W MONO	5V 36W MONO
BATTERY	3.2V 20Ah LiFePo4	3.2V 30Ah LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	12-16HRS	12-16HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
POLE DIA	55mm	55mm
INSTALL HEIGHT	5-7M	7-10M
SIZE	560 x 340 x 60	710 x 355 x 70
QTY PER CTN	5 PCS	3 PCS

SENSOR:

• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement

REMOTE:

OFF/ON: Switch on/off light completely. Dawn to Dusk also off. **AUTO:** Motion sensor off. Dawn to Dusk working. **RADAR:** Auto mode working with motion sensor. Dawn to Dusk working.
2H: Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **3H:** Motion sensor off for 3 hours. After 3 hours induction mode. Dawn to Dusk working.
4H: Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. **HALF LIGHT:** Set up for 50% lighting up **FULL LIGHT**: Set up for 100% lighting up

LED

Solar All in One Street Lights

	25W 9 LENS SPACE MODEL	35W 12 LENS SPACE MODEL
MODEL	SL-INT-SPACE25	SL-INT-SPACE35
NO. OF LED	54 LED 5054	72 LED 5054
LED POWER	300W	400W
SOLAR PANEL	5V 23W MONO	5V 30W MONO
BATTERY	3.2V 24Ah LiFePo4	3.2V 30Ah LiFePo4
CHARGING TIME	5-7 Hrs	5-7 Hrs
LIGHTING TIME	12 Hrs	12 Hrs
INSTAL HEIGHT	4-5M	5-7M
LIGHT COLOR	COOL WHITE	COOL WHITE
POLE DIA	40-50mm	40-50mm
SIZE (mm)	707*266*60	830*266*60
QTY PER CTN	5PCS	5PCS

SENSOR:

• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 20% brightness if no movement for 30 sec • Keep on 20% brightness if no movement

REMOTE:

OFF/ON: Switch on/off light completely. Dawn to Dusk also off. **AUTO:** Motion sensor off. Dawn to Dusk working. **RADAR:** Auto mode working with motion sensor. Dawn to Dusk working.
2H: Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **3H:** Motion sensor off for 3 hours. After 3 hours induction mode. Dawn to Dusk working.
4H: Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. Increase Brightness. Decrease Brightness. Motion Sensor Mode.

LED

Solar All in One Street Lights

	10W SOLAR STREET ADJ PANEL	15W SOLAR STREET ADJ PANEL
MODEL	SL-INT-ADJ-10	SL-INT-ADJ-15
NO. OF LED	60 LED 180-200LM/W	120 LED 180-200LM/W
LED POWER	50W	100W
SOLAR PANEL	5V 6W MONO	5V 10W MONO
BATTERY	3.2V 5Ah LiFePo4	3.2V 10Ah LiFePo4
CHARGING TIME	5-7 Hrs	5-7 Hrs
LIGHTING TIME	12 Hrs	12 Hrs
INSTAL HEIGHT	3-4M	4-5M
LIGHT COLOR	COOL WHITE	COOL WHITE
POLE DIA	40mm	40mm
SIZE (mm)	330*165*60	400*195*68
WALL MOUNT	YES	YES
QTY PER CTN	10 PCS	10 PCS

REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ALWAYS:** Motion sensor off. Dawn to Dusk working. **INDUCTION:** Auto mode working with motion sensor. Dawn to Dusk working. **2H:** Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **4H:** Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. **6H:** Motion sensor off for 6 hours. After 6 hours induction mode. Dawn to Dusk working.

✱ Lighting Time calculated is with sensor in Ideal Condition

LED
Solar All in One Street Lights

STAR
MODEL

WITH REMOTE

	5W 1 WINDOW	10W 2 WINDOW	15W 3 WINDOW
MODEL	SLSOLARINT05R-STAR	SLSOLARINT10R-STAR	SLSOLARINT15R-STAR
LED	192 LED 2835 EPISTAR	384 LED 2835 EPISTAR	576 LED 2835 EPISTAR
LED POWER	40W	80W	120W
SOLAR PANEL	5V 9W MONO	5V 12W MONO	5V 15W MONO
BATTERY	3.2V 5A LiFePo4	3.2V 10A LiFePo4	3.2V 15A LiFePo4
CHARGING TIME	7-8 Hrs	7-8 Hrs	7-8 Hrs
LIGHTING TIME*	1 Night	1 Night	1 Night
LIGHT COLOUR	COOL WHITE	COOL WHITE	COOL WHITE
POLE DIA	50mm	50mm	50mm
INSTALL HEIGHT	3M	3-4M	3-5M
SIZE (mm)	345x230x63	425x230x63	500x230x63
QTY PER CTN	10 PCS	10 PCS	5 PCS
SENSOR	• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement		
REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ALWAYS:** Motion sensor off. Dawn to Dusk working. **INDUCTION:** Auto mode working with motion sensor. Dawn to Dusk working. **2H:** Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **4H:** Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. **6H:** Motion sensor off for 6 hours. After 6 hours induction mode. Dawn to Dusk working.		

✱ Lighting Time calculated is with sensor in Ideal Condition

LED
Solar All in One Street Lights

Double Body

WITH REMOTE

	5W 1 WINDOW	10W 2 WINDOW	15W 3 WINDOW	20W 4 WINDOW	25W 6 WINDOW
MODEL	SLSOLARINT05R	SLSOLARINT10R	SLSOLARINT15R	SLSOLARINT20R	SLSOLARINT25R6W
LED	80 LED 5730 EPISTAR	160 LED 5730 EPISTAR	240 LED 5730 EPISTAR	320 LED 5730 EPISTAR	480 LED 5730 EPISTAR
LED POWER	30W	60W	90W	120W	180W
SOLAR PANEL	5V 5W MONO	5V 9W MONO	5V 12W MONO	5V 16W MONO	5V 23W MONO
BATTERY	3.2V 5A LiFePo4	3.2V 10A LiFePo4	3.2V 15A LiFePo4	3.2V 20A LiFePo4	3.2V 25A LiFePo4
CHARGING TIME	7-8 Hrs	7-8 Hrs	7-8 Hrs	7-8 Hrs	7-8 Hrs
LIGHTING TIME*	1 Night	1 Night	1 Night	2 Nights	2 Nights
LIGHT COLOUR	COOL WHITE	COOL WHITE	COOL WHITE	COOL WHITE	COOL WHITE
POLE DIA	40mm	50mm	50mm	50mm	50mm
INSTALL HEIGHT	3M	3-4M	3-5M	3-5M	4-6M
QTY PER CTN	10 PCS	10 PCS	5 PCS	5 PCS	3 PCS
SIZE (mm)	300x210x60	395x205x60	500x235x65	635x255x70	820x245x75

SENSOR	• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement
REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ALWAYS:** Motion sensor off. Dawn to Dusk working. **INDUCTION:** Auto mode working with motion sensor. Dawn to Dusk working. **2H:** Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **4H:** Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. **6H:** Motion sensor off for 6 hours. After 6 hours induction mode. Dawn to Dusk working.

✱ Lighting Time calculated is with sensor in Ideal Condition

LED
Solar All in One Street Lights

Single Body

WITH REMOTE

	5W 1 WINDOW	10W 2 WINDOW	15W 3 WINDOW	20W 4 WINDOW
MODEL	SLSOLARINT05R-SB	SLSOLARINT10R-SB	SLSOLARINT15R-SB	SLSOLARINT20R-SB
LED	80 LED 5730 EPISTAR	160 LED 5730 EPISTAR	240 LED 5730 EPISTAR	320 LED 5730 EPISTAR
LED POWER	30W	60W	90W	120W
SOLAR PANEL	5V 7W MONO	5V 9W MONO	5V 15W MONO	5V 18W MONO
BATTERY	3.2V 5A LiFePo4	3.2V 5A LiFePo4	3.2V 10A LiFePo4	3.2V 15A LiFePo4
CHARGING TIME	7-8 Hrs	7-8 Hrs	7-8 Hrs	7-8 Hrs
LIGHTING TIME*	1 Night	1 Night	1 Night	1 Night
LIGHT COLOUR	COOL WHITE	COOL WHITE	COOL WHITE	COOL WHITE
POLE DIA	40mm	50mm	50mm	50mm
INSTALL HEIGHT	3M	3-4M	3-5M	3-5M
SIZE (mm)	370x205x60	475x205x60	590x205x60	720x205x60
QTY PER CTN	10 PCS	10 PCS	5 PCS	5 PCS
SENSOR	• Optically 10% brightness at the first beginning • Radar sensor 100% brightness • 15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement			
REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ALWAYS:** Motion sensor off. Dawn to Dusk working. **INDUCTION:** Auto mode working with motion sensor. Dawn to Dusk working. **2H:** Motion sensor off for 2 hours. After 2 hours induction mode. Dawn to Dusk working. **4H:** Motion sensor off for 4 hours. After 4 hours induction mode. Dawn to Dusk working. **6H:** Motion sensor off for 6 hours. After 6 hours induction mode. Dawn to Dusk working.			

✱ Lighting Time calculated is with sensor in Ideal Condition

Solar All in One Street Lights

Mini Street Light

	2W MINI NEW	3W MINI NEW	6W MINI NEW	9W MINI NEW
MODEL	SOLAR-NEW-MINI02	SOLAR-NEW-MINI03	SOLAR-NEW-MINI06	SOLAR-NEW-MINI06
NO. OF LED	72 LED 5730	88 LED 5730	176 LED 5730	264 LED 5730
LED POWER	10W	20W	40W	60W
SOLAR PANEL	5V 3W	5V 3W	5V 5W	5V 7W
BATTERY	3.7V 1.8Ah	3.7V 1200mAh	3.7V 2000mAh	3.2V 3000mAh
CHARGING TIME	5-7 Hrs	5-7 Hrs	5-7 Hrs	5-7 Hrs
LIGHTING TIME	10 Hrs	10 Hrs	10 Hrs	10 Hrs
INSTAL HEIGHT	2-3M	2-3M	2-3M	2-3M
LIGHT COLOR	COOL WHITE	COOL WHITE	COOL WHITE	COOL WHITE
SIZE (mm)	227*133*25	203*133*35	320*133*35	414*133*35
WALL BRACKET	INCLUDED	INCLUDED	INCLUDED	INCLUDED
QTY PER CTN	40 PCS	40 PCS	40 PCS	40 PCS

IP65

Mini Street Light

	3W MINI SOLAR STREET LIGHT	6W MINI SOLAR STREET LIGHT	9W MINI SOLAR STREET LIGHT
MODEL	SLSOLAR-MINI03	SLSOLAR-MINI06	SLSOLAR-MINI09
LED	54 LED EPISTAR	108 LED EPISTAR	162 LED EPISTAR
LED POWER	20W	40W	60W
SOLAR PANEL	5V 3W	5V 6W	5V 9W
BATTERY	3.2V 2.5Ah LiFePo4	3.2V 3.5Ah LiFePo4	3.2V 5Ah LiFePo4
CHARGING TIME	5-7 Hrs	5-7 Hrs	5-7 Hrs
LIGHTING TIME*	10 Hrs	10 Hrs	10 Hrs
LIGHT COLOUR	COOL WHITE	COOL WHITE	COOL WHITE
INSTALL HEIGHT	2M	2-3M	3M
SIZE (mm)	250 x 144 x 48	320 x 183 x 48	425 x 183 x 50
WALL BRACKET	INCLUDED	INCLUDED	INCLUDED
QTY PER CTN	24 PCS	10 PCS	10 PCS

✱ Lighting Time calculated is with sensor in Ideal Condition

LED
Solar HighBay Lighhts

WITH REMOTE

	SOLAR HIGH BAY LIGHT 35W
MODEL	SOLAR-HIGHBAY-35R
LED	60 Pcs 5054
LED POWER	120W
PANEL	5V 35W MONO
BATTERY	3.2V 30Ah LiFePo4
CHARGING TIME	6-8HRS
LIGHTING TIME	12-16HRS
LIGHT COLOUR	COOL WHITE
SIZE	290MM DIA
QTY PER CTN	10 PCS

REMOTE:

OFF/ON: Switch on/off light completely. **AUTO:** Auto mode working. Dawn to Dusk working. ◯ Full Brightness ◑ Half Brightness
3H: Full Brightness for 2 hours. After 2 hours light is off. **5H:** Full Brightness for 3 hours. After 3 hours light is off. **8H:** Full Brightness for 4 hours. After 4 hours light is off.

LED
Solar Flood Lights

LENS
Model

IP65

WITH REMOTE

	SOLAR FLOOD LIGHT 20W	SOLAR FLOOD LIGHT 30W
MODEL	FLSOLAR-LENS20	FLSOLAR-LENS30
LED	280Pcs 2835	400Pcs 2835
LED POWER	140W	200W
PANEL	5V 20W POLY	5V 30W POLY
BATTERY	3.2V 20Ah LiFePo4	3.2V 25A LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	12-14HRS	12-14HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
SIZE	270 x 195 x 60	328 x 255 x 60
QTY PER CTN	10 PCS	10 PCS

REMOTE:

• **Auto**: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours • **On/Off**: Light on and off(no working for light Sensor)
• **3H**: Set up for 3 hours lighting up, after 3 hours light off • **5H**: Set up for 5 hours lighting up, after 5 hours light off
• **8H**: Set up for 8 hours lighting up, after 8 hours light off • **Half light**: Set up for 50% lighting up • **Full light**: Set up for 100% lighting up

LED
Solar Flood Lights

IP65

WITH REMOTE

CITY LIGHT

SKY LIGHT

	SOLAR FLOOD LIGHT 20W	SOLAR FLOOD LIGHT 30W
MODEL	FLSOLAR-CITY20	FLSOLAR-SKY30
LED	332Pcs 5730	416Pcs 5730
LED POWER	160W	210W
PANEL	5V 20W POLY	5V 30W POLY
BATTERY	3.2V 20Ah LiFePo4	3.2V 25A LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	12-16HRS	12-16HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
SIZE	260 x 330 x 80	288 x 365 x 80
QTY PER CTN	10 PCS	10 PCS

REMOTE:

• **Auto**: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours • **On/Off**: Light on and off(no working for light Sensor)
• **3H**: Set up for 3 hours lighting up, after 3 hours light off • **5H**: Set up for 5 hours lighting up, after 5 hours light off
• **8H**: Set up for 8 hours lighting up, after 8 hours light off • **Half light**: Set up for 50% lighting up • **Full light**: Set up for 100% lighting up

Traditional
Style

IP65

WITH REMOTE

	SOLAR FLOOD LIGHT 10W	SOLAR FLOOD LIGHT 20W
MODEL	FLSOLARINT10	FLSOLARINT20
LED POWER	100W	160W
PANEL	5V 10W POLY	5V 20W POLY
BATTERY	3.2V 5A LiFePo4	3.2V 20A LiFePo4
CHARGING TIME	6-8HRS	6-8HRS
LIGHTING TIME	12HRS	12HRS
LIGHT COLOUR	COOL WHITE	COOL WHITE
SIZE	190 x168 x 58	320 x 250 x 80
QTY PER CTN	10 PCS	5 PCS

REMOTE:

• **Auto**: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours • **On/Off**: Light on and off(no working for light Sensor)
• **3H**: Set up for 3 hours lighting up, after 3 hours light off • **5H**: Set up for 5 hours lighting up, after 5 hours light off
• **8H**: Set up for 8 hours lighting up, after 8 hours light off • **Half light**: Set up for 50% lighting up • **Full light**: Set up for 100% lighting up

LED
Solar Flood Lights

Solar Powered

Adjustable Panel

Auto On/Off

IP65 Waterproof

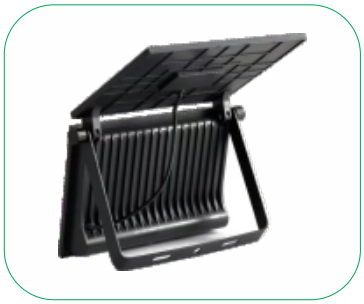



	10W FOLADABLE SOLAR FLOOD	15W FOLADABLE SOLAR FLOOD
MODEL	FLSOLAR-FOLD10	FLSOLAR-FOLD15
NO. OF LED	74 LED 2835(44 CW + 30 WW)	106 LED 2835(64 CW + 42 WW)
LED POWER	100W	150W
SOLAR PANEL	5V 2W MONO	5V 3W MONO
BATTERY	3.7V 1200mAh	3.7V 1800mAh
CHARGING TIME	5-7 Hrs	5-7 Hrs
LIGHTING TIME	7-10 Hrs	7-10 Hrs
LIGHT COLOR	CW/WW/NW	CW/WW/NW
SIZE (mm)	120*85*38	155*105*38
QTY PER CTN	60PCS	60PCS

✱ Lighting Time calculated is with sensor in Ideal Condition

LED

Solar UFO Garden Post Light

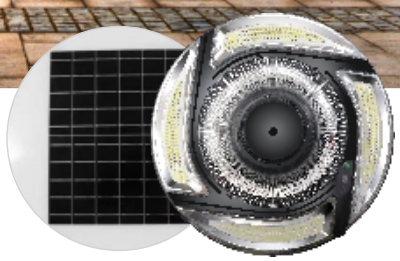

	15W UFO GARDEN LIGHT	15W UFO GARDEN LIGHT-RGB
MODEL	GARDENSOLAR15R	GARDENSOLAR15R-RGB
LED	240/324 LED 5730 EPISTAR	824 LED 5730 EPISTAR
LED POWER	120W	160W
SOLAR PANEL	5V 15W	5V 15W
BATTERY	3.2V 15Ah LiFePo4	3.2V 12Ah LiFePo4
CHARGING TIME	7-8 Hrs	7-8 Hrs
LIGHTING TIME*	2-3 Night	2 Night
LIGHT COLOUR	Cool White / 3 in 1	Cool White, RGB
POLE DIA (mm)	76mm	76mm
SIZE (mm)	420 x 420x 125	420 x 420x 110
QTY PER CTN	5 PCS	5 PCS
SENSOR	• Optically 10% brightness at the first beginning • Radar sensor 100% brightness •15% brightness if no movement for 30 sec • Keep on 15% brightness if no movement	

✱ Lighting Time calculated is with sensor in Ideal Condition

LED

Solar All In One Emergency/camping Light

IP65

	30W CAMP LIGHT	50W CAMP LIGHT	100W CAMP LIGHT
MODEL	EMSOLARFL30	EMSOLARFL50	EMSOLARFL100
NO. OF LED	2835 360Pc	5730 110Pc	5730 180Pc
LED POWER	30W	50W	100W
BATTERY	LiFePo4 3.2V 12Ah	LiFePo4 3.2V 10Ah	LiFePo4 3.2V 15Ah
SOLAR PANEL	5V 3W	5V 7W	5V 10W
LIGHT MODES	Cw/Ww/Nw/Torch/ Warning Light	4 Modes High/Medium/ Low/Warning Light	4 Modes High/Medium/ Low/Warning Light
CHARGING	2 Modes Solar/USB	2 Modes Solar/USB	2 Modes Solar/USB
FUNCTION	USB Output Works as Power Bank	USB Output Works as Power Bank	USB Output Works as Power Bank
BACKUP TIME *	8-12 Hrs.	8-12 Hrs.	8-12 Hrs.
SIZE	200x250x150	270x300x260	310x350x300
QTY PER CTN	30 PCS	5 PCS	5 PCS

* Backup Time calculated will vary according to lighting modes

LED

Solar All In One Emergency/camping Light





IP65

	100W CAMP 4 REFLECTOR	100W CAMP 6 REFLECTOR	100W CAMP 4 REF. WITH FAN
MODEL	EM-4REF-CP100-3IN1	EM-6REF-CP100	EM-4REF-CP100-3IN1-FAN
NO. OF LED	288PCS 5730	200PCS 5730 + COB	288PCS 5730
LED POWER	100W	100W	100W
SOLAR PANEL	5V 3W	5V 3W	5V 3W
BATTERY	3.7V 4800mAh	3.7V 7500mAh	3.7V 8000mAh
LIGHT COLOR	CW/NW/WW/WARNING	CW/WARNING FLASH	CW/NW/WW/WARNING
CHARGING	SOLAR PANEL/TYPE C USB	SOLAR PANEL/TYPE C USB	SOLAR PANEL/TYPE C USB
BACKUP TIME	8-12 Hrs	8-12 Hrs	8-12 Hrs
SIZE (mm)	215*175*55	215*175*55	215*175*55
FUNCTIONS	SINGLE PRESS TO CHANGE CCT. LONG PRESS FOR DIMMING	SINGLE PRESS TO CHANGE MODE. LONG PRESS FOR DIMMING	PRESS TO CHANGE CCT. LONG PRESS FOR DIMMING. 3 SPEED FAN
QTY PER CTN	30 PCS	30 PCS	20 PCS

* Backup Time calculated will vary according to lighting modes

LED
Solar Bollard Light

3 in 1 COLOUR

RGB

IP65

	SOLAR BOLLARD BIG DIAMOND MODEL	SOLAR BOLLARD MINI DIAMOND MODEL
MODEL	SOLAR-BOLLARD-BIG-3IN1+RGB	SOLAR-BOLLARD-MINI-3IN1+RGB
LED	10W SMD	5W SMD
SOLAR PANEL	5V 3W MONO	5V 2W MONO
BATTERY	3.7V 2200mAh	3.7V 2200mAh
CHARGING TIME	6-8 Hrs	6-8 Hrs
LIGHTING TIME	8-12 Hrs	8-12 Hrs
LIGHT COLOR	3 IN 1 + RGB	3 IN 1 + RGB
IP RATING	Ip65	Ip65
SIZE (mm)	185*185*750	161*161*850
WORKING MODE	REMOTE FUNCTIONS	REMOTE FUNCTIONS
INSTALLATION TYPE	FLOOR MOUNT	FLOOR MOUNT
QTY PER CTN	6PCS	16PCS

REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ON:** Light Always On **AUTO :** Auto mode working. Dawn to Dusk working. **2H:** Light Off After 2 hours. Dawn to Dusk working. **4H:** Light Off After 4 hours. Dawn to Dusk working. **6H:** Light Off After 6 hours. Dawn to Dusk working. **8H:** Light Off After 8 hours. Dawn to Dusk working. **Y** Light Change to Warm White. **W:** Light Change to Cool White. **W/Y:** Light Change to Natural White. **—** : Decrease Brightness . **+** : Increase Brightness .

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Bollard Light

MODEL
SECRET

MODEL
CUBE

IP65

	SOLAR BOLLARD LIGHT SECRET MODEL	SOLAR BOLLARD LIGHT CUBE MODEL
MODEL	SOLAR-BOLLARD-SECRET-WW	SOLAR-BOLLARD-CUBE-WW
LED	TUNGSTEN STYLE	TUNGSTEN STYLE
SOLAR PANEL	5V 2W MONO	5V 3W MONO
BATTERY	3.7V 2000mAh	3.7V 2000mAh
CHARGING TIME	6-8 Hrs	6-8 Hrs
LIGHTING TIME	8-12 Hrs	8-12 Hrs
LIGHT COLOR	WARM WHITE	WARM WHITE
IP RATING	Ip65	Ip65
SIZE (mm)	164*164*890	164*164*860
WORKING MODE	FULL BRIGHT/HALF BRIGHT	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	FLOOR MOUNT	FLOOR MOUNT
QTY PER CTN	16PCS	16PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Gate / Pillar Light

3 in 1 COLOUR

RGB

IP65

	SOLAR GATE BIG DIAMOND MODEL	SOLAR GATE MINI DIAMOND MODEL
MODEL	SOLAR-GATE-BIG-3IN1+RGB	SOLAR-GATE-MINI-3IN1+RGB
LED	10W SMD	5W SMD
SOLAR PANEL	5V 3W MONO	5V 2W MONO
BATTERY	3.7V 2200mAh	3.7V 2200mAh
CHARGING TIME	6-8 Hrs	6-8 Hrs
LIGHTING TIME	8-12 Hrs	8-12 Hrs
LIGHT COLOR	3 IN 1 + RGB	3 IN 1 + RGB
IP RATING	Ip65	Ip65
SIZE (mm)	185*185*260	161*161*210
WORKING MODE	REMOTE FUNCTIONS	REMOTE FUNCTIONS
INSTALLATION TYPE	PILLAR/GATE	PILLAR/GATE
QTY PER CTN	8PCS	20PCS

REMOTE	**OFF:** Switch off light completely. Dawn to Dusk also off. **ON:** Light Always On **AUTO :** Auto mode working. Dawn to Dusk working. **2H:** Light Off After 2 hours. Dawn to Dusk working. **4H:** Light Off After 4 hours. Dawn to Dusk working. **6H:** Light Off After 6 hours. Dawn to Dusk working. **8H:** Light Off After 8 hours. Dawn to Dusk working. **Y** Light Change to Warm White. **W:** Light Change to Cool White. **W/Y:** Light Change to Natural White. **—** : Decrease Brightness . **+** : Increase Brightness .

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Bollard Light

MODEL
SECRET

MODEL
CUBE

IP65

	SOLAR BOLLARD LIGHT SECRET MODEL	SOLAR BOLLARD LIGHT CUBE MODEL
MODEL	SOLAR-BOLLARD-SECRET-WW	SOLAR-BOLLARD-CUBE-WW
LED	TUNGSTEN STYLE	TUNGSTEN STYLE
SOLAR PANEL	5V 2W MONO	5V 3W MONO
BATTERY	3.7V 2000mAh	3.7V 2000mAh
CHARGING TIME	6-8 Hrs	6-8 Hrs
LIGHTING TIME	8-12 Hrs	8-12 Hrs
LIGHT COLOR	WARM WHITE	WARM WHITE
IP RATING	Ip65	Ip65
SIZE (mm)	164*164*890	164*164*860
WORKING MODE	FULL BRIGHT/HALF BRIGHT	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	FLOOR MOUNT	FLOOR MOUNT
QTY PER CTN	16PCS	16PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED

Solar Gate / Pillar Light

IP65

	SOLAR GATE SECRET MODE	SOLAR GATE CUBE MODEL
MODEL	SOLAR-GATE-SECRET-WW	SOLAR-GATE-CUBE-WW
LED	TUNGSTEN STYLE	TUNGSTEN STYLE
SOLAR PANEL	5V 2W MONO	5V 3W MONO
BATTERY	3.7V 2000mAh	3.7V 2000mAh
CHARGING TIME	6-8 Hrs	6-8 Hrs
LIGHTING TIME	8-12 Hrs	8-12 Hrs
LIGHT COLOR	WARM WHITE	WARM WHITE
IP RATING	Ip65	Ip65
SIZE (mm)	164*164*335	164*164*330
WORKING MODE	FULL BRIGHT/HALF BRIGHT	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	PILLAR/GATE	PILLAR/GATE
QTY PER CTN	18PCS	18PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED

Solar Wall / Lawn Light

IP65

	SOLAR LAWN LIGHT SHADOW MODEL
MODEL	SOLAR-LAWN-SHADOW-WW
LED	TUNGSTEN STYLE
SOLAR PANEL	5V 2W MONO
BATTERY	3.7V 1500mAh
CHARGING TIME	6-8 Hrs
LIGHTING TIME	8-12 Hrs
LIGHT COLOR	WARM WHITE
IP RATING	Ip65
SIZE (mm)	110*265*650
WORKING MODE	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	FLOOR MOUNT
QTY PER CTN	20PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

IP65

	SOLAR WALL SHADOW MODEL
MODEL	SOLAR-WALL-SHADOW-WW
LED	TUNGSTEN STYLE
SOLAR PANEL	5V 2W MONO
BATTERY	3.7V 1500mAh
CHARGING TIME	6-8 Hrs
LIGHTING TIME	8-12 Hrs
LIGHT COLOR	WARM WHITE
IP RATING	Ip65
SIZE (mm)	200*182*165
WORKING MODE	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	WALL
QTY PER CTN	30PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Lawn Light

SOLAR LAWN LIGHT 5W 2 WAY MULTIUSE	
MODEL : SOLAR-LAWN-2WAY-WW	
SOLAR PANEL : 5V 2W MONO	**BATTERY** : 3.7V 1800mAh
CHARGING TIME : 6-8Hours	**LED** : COB TYPE
LIGHTING TIME : 8-12Hours*	**SIZE** : 85x225x700MM
IP RATING : IP65	**CCT** : WARM WHITE
WORKING MODE : FULL BRIGHT / HALF BRIGHT	
INSTALLATION TYPE : FIXED, SPIKE	
HEIGHT EXPANDABLE UPTO 700MM	
QTY PER CTN: 30 PCS.	

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

SOLAR LAWN LIGHT 5W MULTIUSE	
MODEL : SOLAR-LAWN-MULTI-WW	
SOLAR PANEL : 5V 2W MONO	**BATTERY** : 3.7V 1800mAh
CHARGING TIME : 6-8Hours	**LED** : 90 LED
LIGHTING TIME : 8-12Hours*	**SIZE** : 65x190x700MM
IP RATING : IP65	**CCT** : WARM WHITE
WORKING MODE : FULL BRIGHT / HALF BRIGHT	
INSTALLATION TYPE : FIXED, SPIKE	
HEIGHT EXPANDABLE UPTO 700MM	
QTY PER CTN: 30 PCS.	

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Flame Light

SOLAR FLAME LIGHT ELITE

MODEL : SOLARFLAME-ELITE	IP65
SOLAR PANEL : 2V 1W MONO	**BATTERY** : 1.2V 800mAh
CHARGING TIME : 6-8Hours	**LED** : 3030 12Pcs.
LIGHTING TIME : 8-12Hours*	**SIZE** : 75x645MM
WORKING MODE : Flame Effect	
QTY PER CTN: 60 PCS.	

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

SOLAR FLAME LIGHT ELITE PLUS

MODEL : SOLARFLAME-ELITEPLUS	IP65
SOLAR PANEL : 2V 1W MONO	**BATTERY** : 1.2V 1200mAh
CHARGING TIME : 6-8Hours	**LED** : 3030 12Pcs.
LIGHTING TIME : 8-12Hours*	**SIZE** : 80x645MM
WORKING MODE : Flame Effect	
QTY PER CTN: 60 PCS.	

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

SOLAR FLAME LIGHT

MODEL : SOLARFLAME	IP65
SOLAR PANEL : 5V 1W	**BATTERY** : 3.7V 1500mAh
CHARGING TIME : 6-8Hours	**LED** : 2835 96Pcs.
LIGHTING TIME : 8-10Hours*	**SIZE** : 130x780MM
WORKING MODE : Flame / Breathe / Constant	
QTY PER CTN: 20 PCS.	

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Wall Washer Light

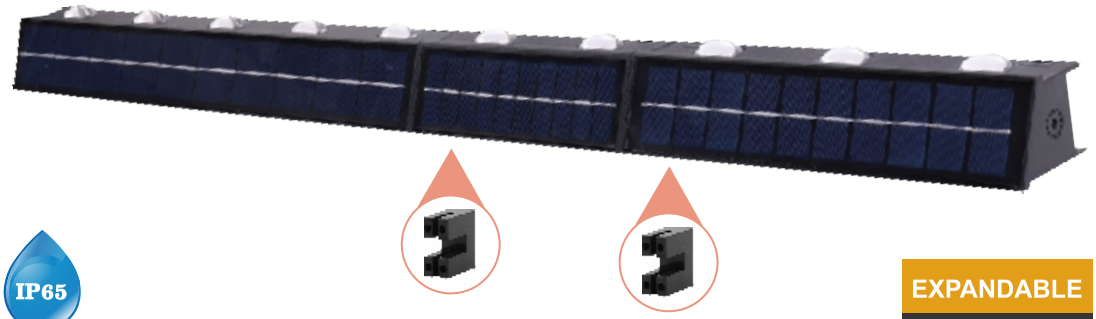

IP65

Snap-on connection

EXPANDABLE
ADJUSTABLE

SOLAR WALL WASHER	
MODEL : SOLAR-WALLWASHER-4LED/UP-WW	
SOLAR PANEL : 5V 2W MONO	**BATTERY** : 3.7V 1500mAh
CHARGING TIME : 6-8Hours	**LED** : 4 LED
LIGHTING TIME : 8-12Hours*	**SIZE** : 370x53x53MM
IP RATING : IP65	**CCT** : WARM WHITE
WORKING MODE : Flame / Flickering / Constant	
180 DEGREE ADJUSTABLE, SEAMLESS EXPANDABLE	
QTY PER CTN: 40 PCS.	

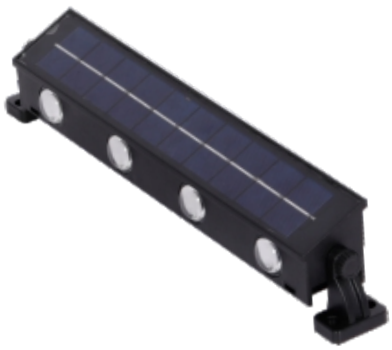

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Wall Light

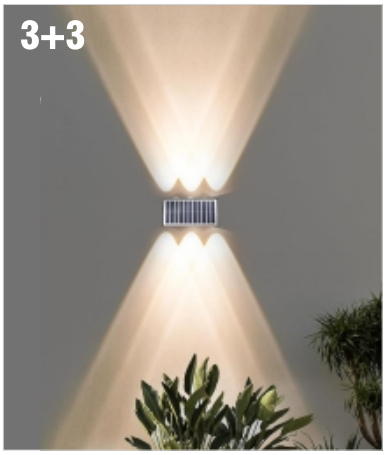

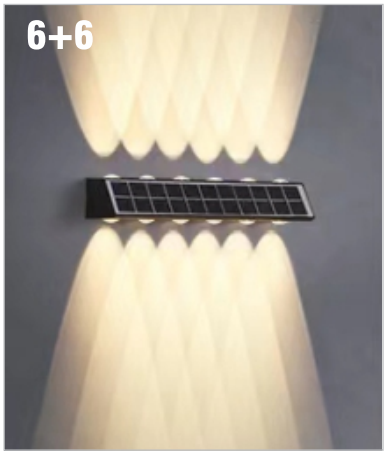

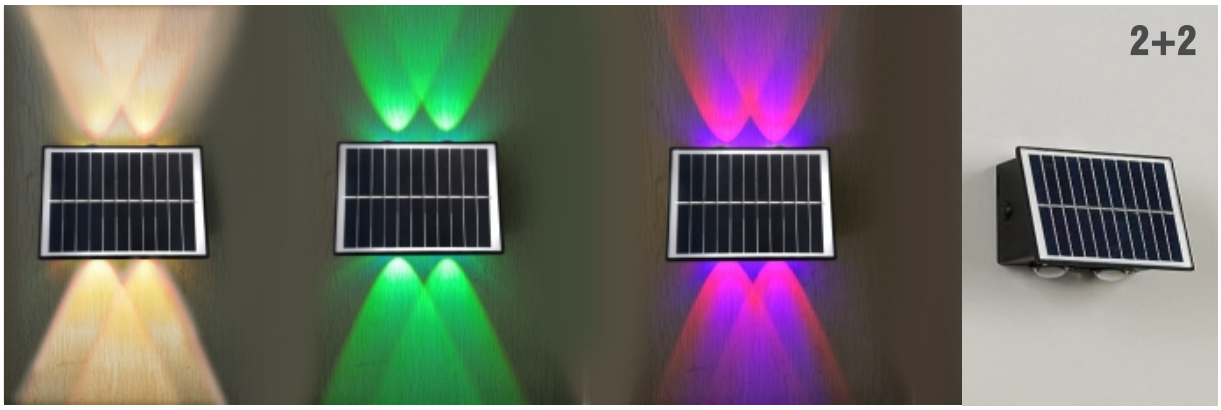

Model No.	Panel	Battery	Charging Time	Lighting Time*	Size(mm)	CCT	Function	QTY/CTN
SOLAR-WL-202	5V 1.5W	3.7V 1500mAh	6-8Hrs	8-12Hrs	120x93x70	WW	Long Press for On/Off	100PCS.
SOLAR-WL-202-RGB	5V 1.5W	3.7V 1500mAh	6-8Hrs	8-12Hrs	120x93x70	RGB	Colour Changing Fading, Flashing Stop at Any Colour	100PCS.
SOLAR-WL-303	5V 2W	3.7V 1500mAh	6-8Hrs	8-12Hrs	140x93x70	WW	Long Press for On/Off	50PCS.
SOLAR-WL-303-RGB	5V 2W	3.7V 1500mAh	6-8Hrs	8-12Hrs	140x93x70	RGB	Colour Changing Fading, Flashing Stop at Any Colour	50PCS.
SOLAR-WL-606	5V 3W	3.7V 2400mAh	6-8Hrs	8-12Hrs	325x93x70	WW	Long Press for On/Off	50PCS.
SOLAR-WL-606-RGB	5V 3W	3.7V 2400mAh	6-8Hrs	8-12Hrs	325x93x70	RGB	Colour Changing Fading, Flashing Stop at Any Colour	50PCS.
SOLAR-WL-6WAY	5V 2W	3.7V 1500mAh	6-8Hrs	8-12Hrs	135x135x65	WW	Long Press for On/Off	40PCS.
SOLAR-WL-6WAY-RGB	5V 2W	3.7V 1500mAh	6-8Hrs	8-12Hrs	135x135x65	RGB	Colour Changing Fading, Flashing Stop at Any Colour	40PCS.

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED

Solar Spike Light

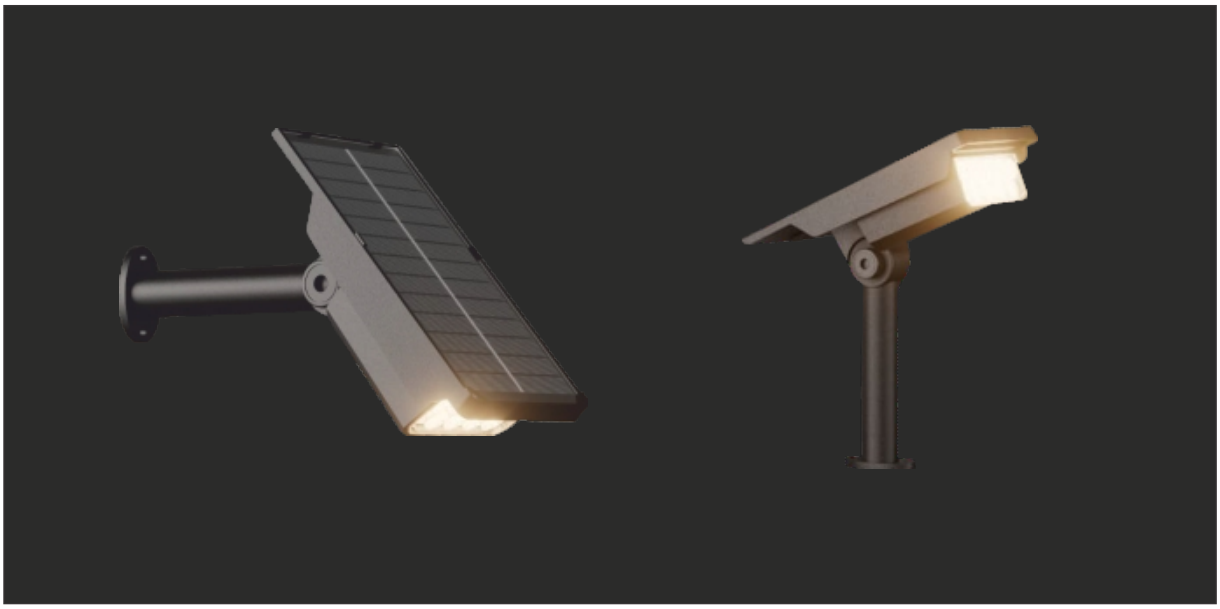

	SOLAR SPIKE LENS MODEL
MODEL	SOLAR-SPIKE-LENS-RGB
LED	18 LED 2835
SOLAR PANEL	5V 2W MONO
BATTERY	3.7V 1200mAh
CHARGING TIME	6-8 Hrs
LIGHTING TIME	8-12 Hrs
LIGHT COLOR	RGB
IP RATING	IP65
SIZE (mm)	290*95*340
WORKING MODE	COLOR CHANGING/CONSTANT/BREATING MODE
INSTALLATION TYPE	SPIKE/WALL/GROUND
QTY PER CTN	50PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

	SOLAR SPIKE LENS MODEL
MODEL	SOLAR-SPIKE-LENS-WW
LED	18 LED 2835
SOLAR PANEL	5V 2W MONO
BATTERY	3.7V 1200mAh
CHARGING TIME	6-8 Hrs
LIGHTING TIME	8-12 Hrs
LIGHT COLOR	WARM WHITE
IP RATING	IP65
SIZE (mm)	290*95*340
WORKING MODE	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	SPIKE/WALL/GROUND
QTY PER CTN	50PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

	SOLAR SPIKE SQUARE MODEL
MODEL	SOLAR-SPIKE-SQUARE-WW
LED	9 LED 2835
SOLAR PANEL	5V 2W MONO
BATTERY	3.7V 1200mAh
CHARGING TIME	6-8 Hrs
LIGHTING TIME	8-12 Hrs
LIGHT COLOR	WARM WHITE
IP RATING	Ip65
SIZE (mm)	258*140*84
WORKING MODE	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	SPIKE/WALL/GROUND
QTY PER CTN	100PCS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

LED
Solar Spike Light

IP65

Solar Spike Light

	SOLAR SPIKE UMBRELLA MODEL
MODEL	SOLAR-SPIKE-UMBRELLA-WW
LED	2W LED * 6PCS
SOLAR PANEL	5V 2W MONO
BATTERY	3.7V 1200mAh
CHARGING TIME	6-8 Hrs
LIGHTING TIME	8-12 Hrs
LIGHT COLOR	WARM WHITE
IP RATING	Ip65
SIZE (mm)	150*150*650
WORKING MODE	CONTINUOS / FLASH / BREATHING
INSTALLATION TYPE	SPIKE
QTY PER CTN	15 SETS

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING

	SOLAR SPIKE CRYSTAL MODEL
MODEL	SOLAR-SPIKE-CRYSTAL-WW
LED	30 LED 2835
SOLAR PANEL	5V 1W MONO
BATTERY	3.7V 1200mAh
CHARGING TIME	6-8 Hrs
LIGHTING TIME	8-12 Hrs
LIGHT COLOR	WARM WHITE
IP RATING	Ip65
SIZE (mm)	125*125*360
WORKING MODE	FULL BRIGHT/HALF BRIGHT
INSTALLATION TYPE	SPIKE
QTY PER CTN	50 PCS

IP65

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING