Sink - Depressions or sunken areas in sections of the parts

Possible Causes	Actions
1. Low injection rate	1. Increase speed. Injection time should be significantly reduced.
2. Inadequate design of the mold and/or part	2. Redesign part (uniform wall thicknesses are required).
3. Low melt temperature	3. Increase melt temperature with a suitable temperature profile.
4. Gas trapped in the mold	4. Vent the mold properly.
5. Low hold pressure	5. Increase hold pressure.
6. Excessive mold temperature causes shrinkage	6. Lower the temperature of the mold.
7. Low hold time	7. Increase hold time.
8. Low mold temperature causing premature gate freezes	8. Increase the temperature of the mold.

The parts stick to the cavity

Possible Causes	Actions
1. Scratched cavity	1. Polish in the direction of demolding.
2. Static	2. Demagnetize the cavity.
3. High hold pressure	3. Decrease the hold pressure.
4. Short cooling time	4. Increase cooling time.
5. Shrinking in the wrong direction	5. Set the temperature of the core so it is higher than the cavity temperature.
6. Insufficient draft and/or detachment angle	6. Consider changes in part and/or mold design.

The parts stick to the core

Possible Causes	Actions
1. High hold pressure	1. Decrease the hold pressure.
2. High core temperature	2. Adjust the mold temperatures.
3. High melt temperature	3. Lower the melt temperature with a suitable temperature profile.
4. Insufficient draft and/or detachment angle	4. Consider changes in part and/or mold design.
5. Static	5. Demagnetize the cavity.

II - Universal Mold Data

Remember that these parameters are for the mold and the plastic. To be used they must be transferred or converted into injection machine parameters.

1. Mold name and number.
2. Name and type of material.
3. Filling time to get a fill of about 95%.
4. Weight of the parts at the time of transfer, with the hold turned off.
5. Plastic pressure at the time of transfer.
6. Total cycle time.
7. Hold time.
8. Hold pressure.
9. Total weight or total injection volume.
10. Cooling time.
11. Mold temperatures.
12. Flow and water to the mold.
13. Water temperatures entering the mold.
14. Water temperatures exiting the mold.
15. Water pressures entering the mold.
16. Water pressures exiting the mold.
17. Melt temperature entering the mold.
18. Time it takes to open the mold and eject the parts.
19. Time to completely close the mold.
20. Recovery volume.

III - General Procedures for *Universal Molding^{TM}*

I. Sizing and Initial Data
1. Determine the clamping force ☐ _____
2. Determine the required injection volume ☐ _____
3. Select an approximated total cycle ☐ _____
4. Determine the approximated resin consumption per hour ☐ _____
5. Resin brand and type ☐ _____
6. Colorant brand and type ☐ _____
7. Colorant % ☐_____
8. Regrind %☐_____

II. Auxiliary Equipment
1. Water temperature control unit
   Determine the water flow to the mold ☐ _____
   Select an initial water temperature ☐ _____
2. Dryer
   Size the hopper dryer volume ☐ _____
   Size the dry air flow ☐ _____
   Drying temperature ☐ _____
3. Colorant additive
   % colorant required ☐ _____
   Determine the consumption of colorant/hour ☐ _____
4. Regrind additive
   % regrind required ☐ _____
   Determine the consumption of regrind/hour ☐ _____

III. Mold and Machine Sizing
1. Horizontal distance ☐ _____ < _____ between bars
2. Vertical distance ☐ _____ < _____ between bars
3. Closed distance ☐ _____ > _____ minimum opening
4. Open distance ☐ _____ < _____ maximum opening
5. Ejector pattern ☐ _____ = _____

IV. Injection Molding Machine Sizing
1. Injection unit
   Determine % of Utilization, $U_\%$ ☐ _____
   Determine the transfer position ☐ _____

Determine the corresponding temperature profile ☐

_____/_____/_____/_____

Determine the backpressure. Ex: 750 psi plastic (machine = plastic/R_i)

Determine the approximated plasticizing position ☐ _____

2. Nozzle tip

Length ☐ _____

Hole diameter ☐ _____

Contact radius ☐ _____

3. Sprue bushing

Hole diameter ☐ _____

Contact radius ☐ _____

V. Initial process setup

1. Start and set the auxiliary equipment parameters

   Dryer

   Water temperature controller

   Additive feeder

   Hot runner temperature control

2. Injection unit

   Start and set the barrel temperature zones

   Set the backpressure

   Set the recovery speed

   Set the approximated recovery position

   Set the extended cooling time

3. Press setup

   Set mold opening positions and speeds

   Set the mold protection

   Set the movements of the ejectors

   Set the movements of the cores, if applicable

VI. Determination of Machine Parameters

(once the auxiliary equipment is ready and temperatures have been reached)

1. Fill

   Determine the injection pressure limit ☐ _____

   Determine the ideal injection time ☐ _____

   Readjust the injection volume to about 95%

   Note the final recovery position ☐ _____

   Perform the flow balance lab

2. Hold
   Determine the hold pressure ☐ _____
   Determine the hold time ☐ _____
3. Cooling
   Determine the water temperature of the mold ☐ _____
   Fixed/Moving ☐ _____/_____
   Determine the cooling time ☐ _____
4. Recovery
   Adjust the recovery speed according to the new cooling time
   Note the recovery time ☐ _____
5. Recalculate the auxiliary equipment according to the new cycle time

VII. Convert to Universal Parameters

Auxiliary Equipment

1. *Water temperature control (gpm/lpm) to mold* ☐_____
   Water temperatures to mold Fixed/Movable ☐ _____/_____
2. *Dryer*
   Hopper volume ☐ _____
   Dry air flow ☐ _____
   Drying temperature ☐ _____
3. *Additive feeder, % of colorant* ☐ _____
   Color consumption per hour ☐ _____
4. *Regrind ratio, %* ☐ _____
   Regrind consumption per hour ☐ _____

Mold Data

1. *Horizontal distance* ☐ _____
2. *Vertical distance* ☐ _____
3. *Closed mold height* ☐ _____
4. *Open mold height* ☐ _____
5. *Ejector pattern* ☐ _____
6. *Material* ☐ _____
7. *Color additive* ☐ _____

Injection Molding Machine – (m) machine / (u) Universal

1. *Clamping force* ☐ _____
2. *Total cycle time* ☐ _____
3. *Material consumption per hour* ☐ _____

279

4. *Press platens*
   Horizontal distance between tie bars ☐ _____
   Vertical distance between tie bars ☐ _____
   Verify the ejectors pattern ☐ _____
   Maximum opening ☐ _____
   Minimum opening ☐ _____
5. *Press setup*
   Mold opening position ☐ _____
   Mold opening and closing time ☐ _____
6. *Injection*
   % of barrel utilization ☐ _____
   Injection pressure limit ☐ *(m)*_____ *(u)*_____
   Ideal injection velocity ☐ *(m)*_____ *(u)*_____
   Transfer position ☐ *(m)*_____ *(u)*_____
   Recovery position ☐ *(m)*_____ *(u)*_____
   Temperature profile ☐ _____/_____/_____/_____
7. *Hold*
   Hold pressure ☐ *(m)*_____ *(u)*_____
   Hold time ☐ _____
8. *Cooling*
   Water temperature of the mold Fixed/Movable ☐ _____/_____
   Cooling time ☐ _____
9. *Recovery*
   Recovery speed ☐ _____
   Recovery time ☐ _____
   Backpressure ☐ *(m)*_____ *(u)*_____

IV – English terms in Spanish

auger	tornillo sin fin
backpressure	contrapresión
barrel	barril
barrier screw	tornillo con barrera
blower	bomba
boost to hold	de inyección a empaque
cavity	cavidad
check ring	anilla
chiller	equipo de refrigeración
cold slugs	pedazos fríos
cores	noyos
cushion	colchón
dew point	temperatura de condensación/ temperatura de rocío
discharge factor	densidad de plastificación
drying hopper	tolva de secado
eject-on-the-fly	expulsión mientras el molde abre
ejector pins	botadores
ejector plates	platos de expulsión
fill time	tiempo de inyección
flash	rebaba
gate	bebedero
gate freeze	endurecimiento de bebederos
hold	empaque
hold pressure	presión de empaque
hold time	tiempo de empaque
hot runner	colada caliente
hot drop/hot tip	punta caliente
injection rate	flujo de llenado
injection screw	tornillo de inyección
injection speed	velocidad de llenado
jetting	chorreo
manifold	distribuidor
melt flow	flujo del fundido
melt flow number	índice de fluidez

melt pressure	presión del fundido
melt temperature	temperatura del fundido
mold protect	protección del cierre del molde
molecular weight	peso molecular
nozzle	boquilla
nozzle tip	punta de la boquilla
pack and hold	empaque y sostén
packing pressure	presión de empaque
packing time	tiempo de empaque
parting line	partición del molde
pellet	gránulo
plastic residence time	tiempo de residencia
plasticizing/recovery	plastificación
robot	brazo mecánico
runners	coladas
shear rate	cambio cortante/ velocidad cambiante
shear stress	esfuerzo cortante
shear thinning	licuar por fricción
shot size	volumen de llenado/volumen de la unidad de inyección
sprue	palo
sprue bushing	casquillo
stack mold	molde doble
stress	esfuerzo
suck-back	rechupe
tie bars	máquina con barras
tiebarless	máquina sin barras
transfer point	posición de transferencia
transfer pressure	presión de transferencia
valve gate	válvulas de bebederos
vents	ventosas

V - Spanish terms in English

anilla	check ring
barril	barrel
bebedero	gate
bomba	blower
boquilla	nozzle
botadores	ejector pins
brazo mecánico	robot
cambio cortante/ velocidad cambiante	shear rate
casquillo	sprue bushing
cavidad	cavity
chorreo	jetting
colada caliente	hot runner
coladas	runners
colchón	cushion
contrapresión	backpressure
de inyección a empaque	boost to hold
densidad de plastificación	discharge factor
distribuidor	manifold
empaque	hold
empaque y sostén	pack and hold
endurecimiento de bebederos	gate freeze
equipo de refrigeración	chiller
esfuerzo	stress
esfuerzo cortante	shear stress
expulsión mientras el molde abre	eject-on-the-fly
flujo de llenado	injection rate
flujo del fundido	melt flow
gránulo	pellet
índice de fluidez	melt flow number
licuar por fricción	shear thinning
máquina con barras	tie bars
máquina sin barras	tiebarless
molde doble	stack mold
noyos	cores

palo	sprue
partición del molde	parting line
pedazos fríos	cold slugs
peso molecular	molecular weight
plastificación	plasticizing/recovery
platos de expulsión	ejector plates
posición de transferencia	transfer point
presión de empaque	hold pressure
presión de empaque	packing pressure
presión de transferencia	transfer pressure
presión del fundido	melt pressure
protección del cierre del molde	mold protect
punta caliente	hot drop/hot tip
punta de la boquilla	nozzle tip
rebaba	flash
rechupe	suck-back
temperatura de condensación/ temperatura de rocío	dew point
temperatura del fundido	melt temperature
tiempo de empaque	hold time
tiempo de empaque	packing time
tiempo de inyección	fill time
tiempo de residencia	plastic residence time
tolva de secado	drying hopper
tornillo con barrera	barrier screw
tornillo de inyección	injection screw
tornillo sin fin	auger
válvulas de bebederos	valve gate
velocidad de llenado	injection speed
ventosas	vents
volumen de llenado/volumen de la unidad de inyección	shot size

VI - Operational Costs

2010 Machine operating cost per hour, with operator and profit margin (North American molders)										
North America Tonnage Range	<50	50-99	100-299	300-499	500-749	750-999	1000-1499	1500-1999	2000-2999	3000+
Average (US$/hr)	$33.31	$35.24	$41.92|	$52.13	$68.14	$83.22	$110.28	$119.95	$181.68	$230.00
Average (US$/sec.)	$0.009	$0.010	$0.012	$0.014	$0.019	$0.023	$0.031	$0.033	$0.050	$0.064

Note: - this is a reference; consult your finance department for more exact values.

- assume that a profit margin of 10 to 15% is included.

(Use only to estimate productivity gains, in US$)

Note: The cost could be divided into three types, Basic, Optional, and Special.

Basic	Optional	Special
Depreciation	Robot	Class 8 Clean Room
Building	TCU	Inspection or QC
Interest	Packing equipment	Engineering assistance
Maintenance	Special injector; LIM, two colors, high speed, ...	Tooling support
Electricity	Crane	Material testing
Water	Quick mold change	Packaging and labeling equipment
Miscellaneous	Special screw	Special product handling
Labor	Additive Feeder	Mold storage
Marginal benefits		Mold maintenance
Inspection and QC		
Material		
Waste		
Secondary services		
Mold		
Overhead		
Earnings		

Bibliography

A. Brent Strong, 2000, "Plastics Materials and Processing", ISBN: 0-13-021626-7
Application Engineering, 1981, "Application Manual Water Group Products"
Douglas C. Montgomery, 2001, "Design and Analysis of Experiment", Arizona State University, ISBN 0-471-31649-0
Georg Menges and Paul Moren, 1993, "How to Make Injection Molds", Society of Plastics Engineers, ISBN 3-446-16305-0
Hansjurgen Saechtling, 1992, "Saechtling International Plastic Handbook", Society of Plastics Engineers, ISBN 3-46-14924-4
Jay Carender, 1997, "Injection Molding Reference Guide", Advance Process Engineering
John Bozzelli, Jan 1998, "Process Optimization and Setup-card Data Requirements", Cycleset
John Bozzelli, Jan. 1997, "How to Set First-Stage Pressure", Plastics World

Lawrence E. Nielsen and Robert F. Landel, 1994, "Mechanical Properties of Polymers and Composites", ISBN 0-8247-8964-4

Peter Kennedy, 1995 "Flow Analysis of Injection Molds", ISBN:1-56990-181-3

R. J. Young and P. A. Lovell, 1991, "Intruction to Polymers", ISBN: 0-412-30640-9

Shiro Matsuoka, 1992, "Relaxation Phenomena in Polymers", Society of Plastics Engineers

Thermoplastic Troubleshooting Guide, 2000, Ashland Distribution Company

Thomas Pyzdek and Roger W. Berger, 1992, "Quality Engineering Handbook", ISBN: 0-8247-8132-5

Tony Whealan and John Goff, 1994, "The Dynisco Injection Molders Hand Book", Dynisco Instruments

ULF W. Gedde, 1995, "Polymer Physics", ISBN 0-412-62640-3

Answers

II. Injection Process Parameters
1) b. **2)** b. **3)** c. **4)** b, c. **5)** a. **6)** b. **7)** b, d. **8)** a, d. **9)** a. **10)** b. **11)** c, d. **12)** b, c, d. **13)** a. **14)** b. **15)** b. **16)** b. **17)** a. **18)** b, c, d.

III. Process Graphs
1) b. **2)** b. **(3)** c. **4)** b. **5)** c. **6)** a. **7)** c. **8)** c. **9)** b.
10)

d) limited pressure

a) zero cushion

c)premature transfer

b) programmed speed was not reached

IV. Plastic Morphology
1) b. **2)** c. **(3)** c. **4)** a. **5)** c. **6)** c. **7)** c.

V. Auxiliary Equipment
1) b. **2)** c. **3)** a, c, e. **4)** b. **5)** a. **6)** b. **7)** c. **8)** b. **9)** b. **10)** a. **11)** a.
12) b. **13)** b. **14)** a.

15)

Blending and Material Handling
1) b. **2)** a.

Water Temperature Control to the Mold
1) b. **2)** b. **3)** c. **4)** a. **5)** b. **6)** a. **7)** a.

VI. Molding from the Desk
1) b. **2a)** b. **2b)** a. **2c)** a. **3)** d.

Injection Unit Sizing
1) b. **2)** a. **3)** a. **4)** a. **5)** a. **6)** c. **7)** a. **8)** d.
9a) Area = 19.4in x 8.9in = **173in²**

9b)
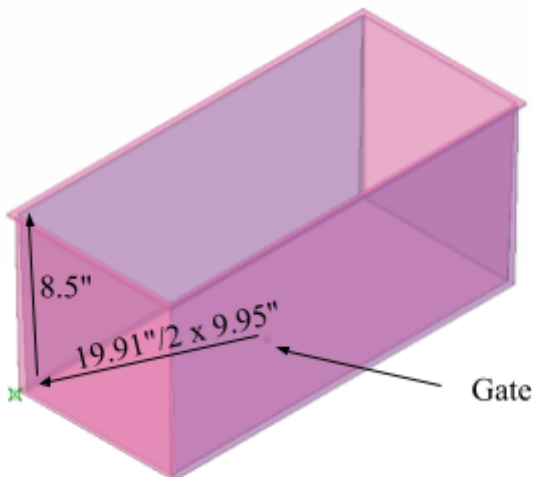
Farthest flow path = 8.5" + 9.95" = **18.45"**
Thinnest wall on the path = **0.08"**
Thin Wall - 18.45"/0.08" = **230**
PF = 230 > 200; the force factor would be **2.5 ton/in²**

9c) Required clamping force = 173in² x 2.5 ton/in²
$\qquad\qquad$ = **433 US tons of force** (1 ton = 2000 lb)

9d) Consumption = 1100/50s x 3600s/1h x 1 lb/454 gr = **174 lb/hr**

9e) Required volume = 1100gr/0.92gr/cc = **1196 cc**

9f) %U = (1196cc/2480cc)*100% = **48%**

9g) $ton_{cooling}$ = 174 lb/hr / 50 lb/hr/ton = **3.5 $ton_{cooling}$**

9h) gpm = 3.5 $ton_{cooling}$ x 24 / 3°F = **28gpm**

9i) U% = 48% and is between 35% and 65%.
$\qquad$ The transfer would be between 12mm and 25mm.
$\qquad$ Transfer = 25mm – 13mm (0.48-0.65)/0.3 = **17.6mm = 0.69in**

9j) Recovery position = 1.27W/ δD² + Transfer
$\qquad$ =1.27*1100gr/[0.92gr/cc*(9cm)²] + 1.76cm = **20.51cm = 8.07in**

9k) Start with **700 psi** (**47 bars**) plastic pressure.

9l) 5% of fill = 0.05*8.07in = **0.4 in**

9m) From the Material Data sheet = **410°F**

9n) From a data sheet of a generic PS:

Injection	Nominal Value	Unit
Rear Temperature	424 to 480	°F
Middle Temperature	424 to 480	°F
Front Temperature	390 to 415	°F
Nozzle Temperature	415 to 469	°F
Mold Temperature	60 to 150	°F

Since the %U is almost 50%, use the average.

Feed zone = Compression zone = Metering zone = **452°F**

Nozzle = (415°F + 469°F)/2 = **442°F**

9o)

$U_\%$	T_r (# ciclos)
1%	140
2%	70
3%	47
4%	35
5%	28
6%	24
7%	20
8%	18
9%	16
10%	14
11%	13
12%	12
13%	11
14% - 15%	10
16% - 17%	9
18% - 19%	8
20% - 23%	7
24% - 27%	6
28% - 34%	5
35% - 46%	4
47% - 69%	3
>70%	2

Residence time (cycles) = **3 cycles**

Residence time(s) = 3 cycles x 50s/cycles = **150 seconds**

9p) Consumption = 174 lb/hr

Drying hopper volume = 174 lb/hr x 2 hours / 35 lb/ft^3

= **9.94 ft^3 = 281.5 liters**

9q) Dry air flow = 174lb/hr x 0.75 cfm/(lb/hr) = **130.5 cfm**

VII. Machine Rheology

1) b. **2**) c. **3**) c. **4**) b. **5**) c. **6**) a. **7**) a.

VIII. Determination of Injection Speed

1) a. **2**) b. **3**) b. **4**) (a) a. **5**) b. **6**) a, c. **7**) b. **8**) b, c. **9**) c. **10**) d.

IX. Verifying Fill Balance
1) c. **2)** b. **3)** a. **4)** a. **5)** d. **6)** b. **7)** a. **8)** b.

X. Determination of Hold Stage Parameters
1) a. **2)** b. **3)** b. **4)** c. **5)** a. **6)** a, c. **7)** b.

XI. Determination of Cooling Stage Parameters
1) b. **2)** b. **3)** d. **4)** a. **5)** a. **6)** a. **7)** d. **8)** b.
9)

$$\underline{\overline{D}_C} + \beta_0 \underline{T_M} + \underline{\beta_1 t} + \underline{\beta_2 T_F} + \underline{\beta_3 T_M t + \beta_4 T_M T_F + \beta_5 t T_F + \beta_6 T_M T_F t}$$

$$(1) \quad (5) \quad (2) \quad (4) \qquad\qquad (3)$$

Index

Expert Opinions

"Universal Molding^{TM} is, in the Dominican Republic, an essential platform for the development of Dominican molders and the local industry has increasingly benefited by applying this knowledge to the improvement of its processes."

Miguel Calcaño, Plastics Consultant
HDI Inc., Dominican Republic

"One of Wallyco's greatest pleasures was always the research and professional development of young Puerto Ricans. If I'm not mistaken, it was in 2000 that we provided resin and machine time to Dr. Ivan Baiges' students; among those I remember Roberto Pastor. Days of more questions than answers, which laid the foundation for corroborating or denying stories of molders and understanding the science behind the technique. Yes science, not magic, black box, or dark art. Once the technique was verified, thanks to the help of people such as Drs. Gregorio Velez and Ivan, it was reduced to its minimum essence, and a verified process of the best practices was developed. It is written at the level of the user, the person who must improve the process without formal education. There have been many changes from 2000 to this day, which will continue as *Universal Molding^{TM}* still has much to discover and teach. It is a great pride for me to have been involved in its beginnings, to have used its processes and to have trained as an instructor, and I wish Hector and *Universal Molding^{TM}* to continue to help the plastics industry and all those young Puerto Ricans who want to better themselves and their homeland with their performance."

J. Wally Cruz, Engineer and Plastics Engineer Specialist

"Universal Molding^{TM} is an excellent tool, not only for understanding the process of injection molding, but also for understanding the behavior of different types of plastics, in a simple way but always with a scientific basis. As an *MU^{TM}* student without any experience in the world of plastics, I was able to understand the groundwork and foundations of injection molding. Then, as an instructor, I could see how *MU^{TM}* helped so many people and industries optimize their molding processes with amazing results, not only in quality but also in economy."

Laureano J. Rodríguez, Sr. Account Manager
West Contract Manufacturing

"At the beginning of the 2000s, I was part of the revolution that was barely beginning in Costa Rica about how to scientifically establish a process during my time at Abbott Laboratories, which later became Hospira, and is known today as ICU Medical. It was there that the first *MU^TM* exercise was done outside Puerto Rico, entirely in Spanish and, for the first time in Costa Rica, it showed a better way to obtain objective evidence about from where the validated parameters came in the injection molding process, making *MU^TM* the pioneer of this revolution in CR. After that, the course was opened to other companies in the industry in Costa Rica, and it has been taught year after year to the present day. Subsequently, from 2008 to 2014 I had the privilege and pleasure as a member of HDI, Inc. to participate in seminars and conferences alongside Héctor Dilán as a presenter."

Harold Gamboa Calderón, Sr. Account Manager - Distribution
PolyOne Corporation (Central America and Andean Region)

"I learned about *Universal Molding^TM* when I was just starting my professional career. Thanks to Héctor and the *Universal Molding^TM,* my learning curve in the field of injection molding was exponential. This gave me the necessary tools to apply science during the development of different molding processes and was my foundation for the future of my career in plastics engineering.

During those first steps with *Universal Molding^TM*, together with Héctor, we managed to develop Rheology by Power, which moved away from rheology by viscosity, but at the same time obtained specific results in less time. Rheology by Power helps us greatly optimize the injection stage in a simple, short, and accurate way.

Now, after about 15 years working in the injection molding industry, I can say that *Universal Molding^TM* is the basis and the most useful learning tool for anyone working in this area.

Héctor, thank you for the confidence and opportunity to work with you when I was just getting started in the industry."

Billy Torres, Technical Services Manager
Microsystems UK

299