

Reg no: 192011478

Name no: c. Ramakrishna

Aim:

Traffic simulation of Data link layer using Packet Tracer.

Tools Required:

1. End device- They are the devices through which we can pass message from one device to another and they are interconnected.
2. Switch/Hub- Interface Between two devices.
3. Cable - Used to connect two devices.
4. Server – Manages the end devices.

Procedure:

STEP 1: Click on end devices, select generic Pc's drag and drop it on the window. Click on SWITCH drag and drop it on the window.


STEP 2: Select the straight through cable and connect all end device to switch. Assign the IP address for all end devices. (Double click the end device Select → desktop → IP configuration static)

STEP 3: Now set the IP address to Host A (192.168.1.1) in static mode. Similarly set IP address for Host B (192.168.1.2) and Host C (192.168.1.3) and other Hosts and server.

STEP 4: To view the IP address, give ipconfig command in command prompt. Using ping command, we can establish communication between two host devices.

STEP 5: Now display the packet transmission in simulation mode.

Data Link Layer

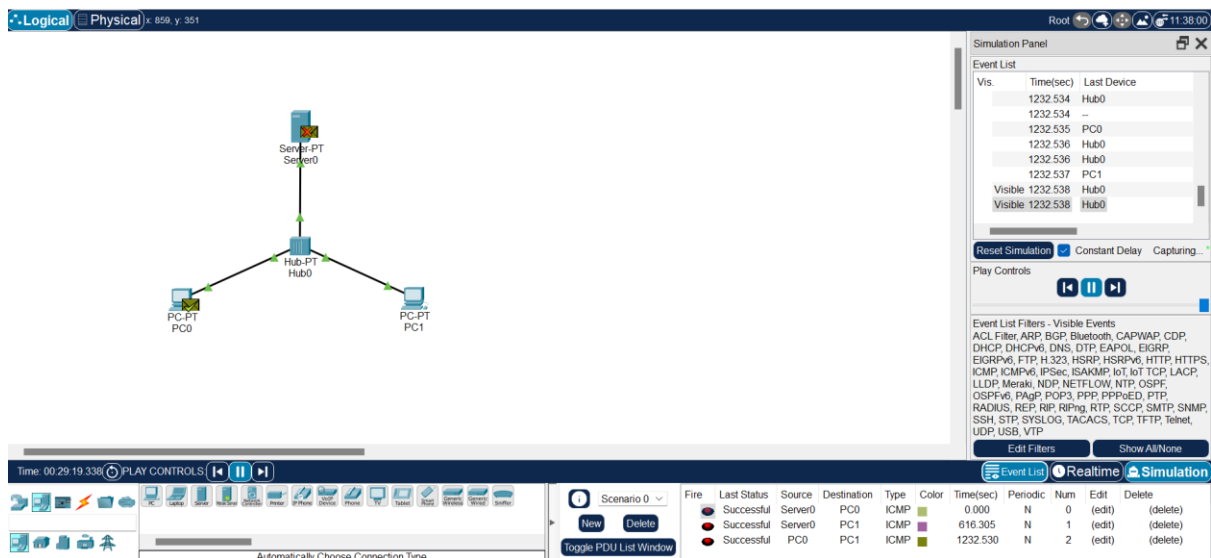

Result:

Traffic simulation of Data link layer using Packet Tracer has been done successfully.