

A Brief Derivation for Spatial DFT Extraction from Langmuir Probe Currents

Christopher R. Martin
Associate Professor of Mechanical Engineering
Penn State Altoona

February 6, 2023

1 Derivation

The probe wire has radius, R , and rotates about a center on the x -axis a distance, d , from the origin. At each sample, the probe will have an angle, θ , will enter the domain at radius, R_0 , and terminates at a radius, R_1 . The current measured by the probe, I , is an integral of the current per unit wire length, $\bar{I}(r)$,

$$I = \int_{R_0}^{R_1} \bar{I}(r) dr. \quad (1)$$

These dimensions are shown in Figure 1. When the tip of the wire lies inside the domain, $R_1 = R$.

In the previous work, \bar{I} , was calculated as a grid of discrete nodes, and its values along the probe length. This approach is flexible and intuitive, but inverting this integral for an arbitrary wire location requires a relatively expensive interpolation through each grid square the wire occupies.

In the present work, we adopt a spatial Fourier series, which provides a far more numerically elegant formulation.

1.1 Fourier series

The Fourier series for \bar{I} is constructed in x, y coordinates

$$\bar{I}(x, y) = \text{Re} \sum_{m=0}^{N_x} \sum_{n=0}^{N_y} c_{m,n} \exp \left(2\pi j \left(\frac{mx}{L_x} + \frac{ny}{L_y} \right) \right). \quad (2)$$

Because $c_{m,n}$ is complex (except for $c_{0,0}$), this formulation has $2(N_x + 1)(N_y + 1) - 1$ independent coefficients, and represents a function with periodicity L_x on x and L_y on y . It is continuous, but can only resolve features on the scale L_x/N_x and L_y/N_y . In this way, it has an effective resolution determined by the N values, not entirely unlike a grid resolution.

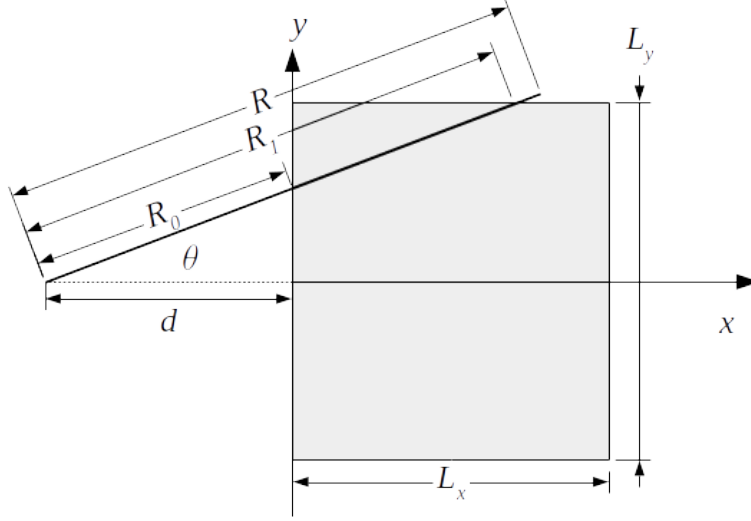


Figure 1: Dimensions and coordinate system for the domain

1.2 Evaluating the integral

The integral of \bar{I} requires an x, y parametric formulation of the wire's path. In this derivation, a number of trigonometric functions will be required, so for compactness of notation,

$$s_\theta \equiv \sin(\theta) \quad (3)$$

$$c_\theta \equiv \cos(\theta) \quad (4)$$

If r is the distance along the wire from the disc center, the corresponding location in (x, y) is

$$x = rc_\theta - d \quad (5)$$

$$y = rs_\theta. \quad (6)$$

The radius at which the wire crosses into the domain, R_0 , the radius at which the wire either terminates or leaves the domain, R_1 , and the wire length in the domain, ΔR , are

$$R_0 = \frac{d}{c_\theta} \quad (7)$$

$$R_1 = \min \left(R, \frac{d + L_x}{c_\theta}, \left\lceil \frac{L_y}{2s_\theta} \right\rceil \right) \quad (8)$$

The integral is a sum of surface currents along the wire's length at moment in time, so the disc position parameters, d and θ , are constant. For compactness

of notation, it will become convenient to express the trigonometric functions on θ as constants, c_θ and s_θ .

A single term of the Fourier series appears

$$\begin{aligned} c_{m,n} \exp \left(2\pi j \left(\frac{m(rc_\theta - d)}{L_x} + \frac{nrs_\theta}{L_y} \right) \right) \\ = c_{m,n} \exp \left(-2\pi j \frac{md}{L_x} \right) \exp \left(2\pi j \left(\frac{mc_\theta}{L_x} + \frac{ns_\theta}{L_y} \right) r \right) \\ = c_{m,n} \exp \left(-2\pi j \frac{md}{L_x} \right) \exp (2\pi j k r) \end{aligned}$$

The *wavenumber*, k , is the frequency (in units 1/length) along the wire's path. It's definition is

$$k = \frac{mc_\theta}{L_x} + \frac{ns_\theta}{L_y}. \quad (9)$$

For an integral over r , all but the last portion of the term above is constant, so it is convenient to define a new parameter, γ , which represents the value of this term integrated over r :

$$\begin{aligned} \gamma_{m,n}(d, \theta) &= \int_{R_0}^{R_1} \exp(2\pi j k r) dr \\ &= \begin{cases} R_1 - R_0 & m = n = 0 \\ \frac{1}{2\pi j k} [\exp(2\pi j k r)]_{R_0}^{R_1} & \text{otherwise} \end{cases} \quad (10) \end{aligned}$$

This yields an expression for the total wire current

$$I(d, \theta) = \text{Re} \sum_{m=0}^{N_x} \exp \left(-2\pi j \frac{md}{L_x} \right) \sum_{n=0}^{N_y} c_{m,n} \gamma_{m,n} \quad (11)$$

1.3 Offset current

Every experiment begins by zeroing the current signal to the nearest practical precision, but no real signal will ever be perfectly zero to numerical precision. Normally, this would not be especially problematic, but the derivation above provides no representation of current sources outside of the domain. To prevent the kinds of bizarre numerical phenomena that can occur when models awkwardly attempt to match behaviors beyond their capability, it is prudent to add a global offset parameter, I_0 ,

$$I(d, \theta) = I_0 + \text{Re} \sum_{m=0}^{N_x} \exp \left(-2\pi j \frac{md}{L_x} \right) \sum_{n=0}^{N_y} c_{m,n} \gamma_{m,n}. \quad (12)$$

2 Inversion

Fourier transforms classically take advantage of the orthogonality of the sinusoidal basis functions, so the original signal only needs to be integrated against each basis function over the entire domain to calculate the magnitude and phase of that component. Because no single wire position spans the entire domain, this approach is not tenable.

Instead, we benefit from the fact that the unknown parameters are linear coefficients. If they were to be serialized in a vector, \vec{x} , the problem lends itself to a simple least-squared approach. Because they are complex each instance of $c_{m,n}$ actually represents two unknown coefficients,

$$c_{m,n} = a_{m,n} + jb_{m,n}. \quad (13)$$

The scheme used to organize the coefficients in \vec{x} is not especially important, but it might be something along the lines of

$$\vec{x} = \{a_{0,0}, I_0, a_{1,0}, b_{1,0}, a_{2,0}, b_{2,0}, \dots\}^T. \quad (14)$$

Note that $b_{0,0}$ has been replaced by the offset current, I_0 . When $m = n = 0$, the expression is purely real, so $b_{0,0}$ is ignored by this formulation - the solution is independent of its selection. So, with the addition of I_0 , there are $2(N_x + 1)(N_y + 1)$ coefficients to be calculated.

When the terms of (13) are embedded into a second vector, $\vec{\Lambda}$, the equation may be rewritten

$$I(d, \theta) = \vec{\Lambda}(d, \theta) \cdot \vec{x}. \quad (15)$$

Here, $\vec{\Lambda}$, is a vector that models the contribution of each coefficient to the current of a wire in location (d, θ) .

For a given wire position, (d_i, θ_i) , there will be a measured current, I_i . For a given coefficient set, there will be an error,

$$e_i = I_i - \vec{\Lambda}(d_i, \theta_i) \cdot \vec{x}. \quad (16)$$

In a least squares approach, we differentiate the sum of the squares of errors for each of the data points. For compactness of notation, it will be convenient to abbreviate $\vec{\Lambda}_i = \vec{\Lambda}(d_i, \theta_i)$ moving forward.

$$\vec{0} = \nabla \sum e_i^2 = \sum 2(I_i - \vec{\Lambda}_i \cdot \vec{x})(-\vec{\Lambda}_i) \quad (17)$$

Solving for \vec{x} ,

$$\vec{x} = \left(\sum \vec{\Lambda}_i \vec{\Lambda}_i^T \right)^{-1} \sum I_i \vec{\Lambda}_i \quad (18)$$

The multiplication of Λ with its transpose forms a symmetrical matrix. The summation accumulate over the body of data collected to form a matrix that must be inverted.