



# **NVIDIA CUDA Compiler Driver**

*Release 12.6*

**NVIDIA Corporation**

**Sep 24, 2024**



# Contents

<b>1 Overview</b>	<b>3</b>
1.1 CUDA Programming Model	3
1.2 CUDA Sources	3
1.3 Purpose of NVCC	4
<b>2 Supported Host Compilers</b>	<b>5</b>
<b>3 Compilation Phases</b>	<b>7</b>
3.1 NVCC Identification Macro	7
3.2 NVCC Phases	8
3.3 Supported Input File Suffixes	8
3.4 Supported Phases	9
<b>4 The CUDA Compilation Trajectory</b>	<b>13</b>
<b>5 NVCC Command Options</b>	<b>15</b>
5.1 Command Option Types and Notation	15
5.2 Command Option Description	16
5.2.1 File and Path Specifications	16
5.2.1.1 --output-file file (-o)	16
5.2.1.2 --objdir-as-tempdir (-objtemp)	16
5.2.1.3 --pre-include file,... (-include)	16
5.2.1.4 --library library,... (-l)	16
5.2.1.5 --define-macro def,... (-D)	16
5.2.1.6 --undefine-macro def,... (-U)	17
5.2.1.7 --include-path path,... (-I)	17
5.2.1.8 --system-include path,... (-isystem)	17
5.2.1.9 --library-path path,... (-L)	17
5.2.1.10 --output-directory directory (-odir)	17
5.2.1.11 --dependency-output file (-MF)	17
5.2.1.12 --generate-dependency-targets (-MP)	17
5.2.1.13 --compiler-bindir directory (-ccbin)	18
5.2.1.14 --allow-unsupported-compiler (-allow-unsupported-compiler)	18
5.2.1.15 --archiver-binary executable (-arbin)	18
5.2.1.16 --cudart {none shared static} (-cudart)	18
5.2.1.17 --cudadevrt {none static} (-cudadevrt)	18
5.2.1.18 --libdevice-directory directory (-ldir)	19
5.2.1.19 --target-directory string (-target-dir)	19
5.2.2 Options for Specifying the Compilation Phase	19
5.2.2.1 --link (-link)	19
5.2.2.2 --lib (-lib)	19
5.2.2.3 --device-link (-dlink)	19
5.2.2.4 --device-c (-dc)	20
5.2.2.5 --device-w (-dw)	20

5.2.2.6	--cuda (-cuda)	20
5.2.2.7	--compile (-c)	20
5.2.2.8	--fatbin (-fatbin)	20
5.2.2.9	--cubin (-cubin)	21
5.2.2.10	--ptx (-ptx)	21
5.2.2.11	--preprocess (-E)	21
5.2.2.12	--generate-dependencies (-M)	21
5.2.2.13	--generate-nonsystem-dependencies (-MM)	21
5.2.2.14	--generate-dependencies-with-compile (-MD)	22
5.2.2.15	--generate-nonsystem-dependencies-with-compile (-MMD)	22
5.2.2.16	--optix-ir (-optix-ir)	22
5.2.2.17	--run (-run)	22
5.2.3	Options for Specifying Behavior of Compiler/Linker	22
5.2.3.1	--profile (-pg)	22
5.2.3.2	--debug (-g)	23
5.2.3.3	--device-debug (-G)	23
5.2.3.4	--extensible-whole-program (-ewp)	23
5.2.3.5	--no-compress (-no-compress)	23
5.2.3.6	--generate-line-info (-lineinfo)	23
5.2.3.7	--optimization-info kind,... (-opt-info)	23
5.2.3.8	--optimize level (-O)	23
5.2.3.9	--dopt kind (-dopt)	24
5.2.3.10	--dlink-time-opt (-dlto)	24
5.2.3.11	--gen-opt-lto (-gen-opt-lto)	24
5.2.3.12	--split-compile number (-split-compile)	24
5.2.3.13	--split-compile-extended number (-split-compile-extended)	24
5.2.3.14	--ftemplate-backtrace-limit limit (-ftemplate-backtrace-limit)	25
5.2.3.15	--ftemplate-depth limit (-ftemplate-depth)	25
5.2.3.16	--no-exceptions (-noeh)	25
5.2.3.17	--shared (-shared)	25
5.2.3.18	--x {c c++ cu} (-x)	25
5.2.3.19	--std {c++03 c++11 c++14 c++17 c++20} (-std)	26
5.2.3.20	--no-host-device-initializer-list (-nohdinitlist)	26
5.2.3.21	--expt-relaxed-constexpr (-expt-relaxed-constexpr)	26
5.2.3.22	--extended-lambda (-extended-lambda)	26
5.2.3.23	--expt-extended-lambda (-expt-extended-lambda)	26
5.2.3.24	--machine {64} (-m)	26
5.2.3.25	--m64 (-m64)	27
5.2.3.26	--host-linker-script {use-lcs gen-lcs} (-hls)	27
5.2.3.27	--augment-host-linker-script (-aug-hls)	27
5.2.3.28	--host-relocatable-link (-r)	28
5.2.4	Options for Passing Specific Phase Options	28
5.2.4.1	--compiler-options options,... (-Xcompiler)	28
5.2.4.2	--linker-options options,... (-Xlinker)	28
5.2.4.3	--archive-options options,... (-Xarchive)	28
5.2.4.4	--ptxas-options options,... (-Xptxas)	28
5.2.4.5	--nvlink-options options,... (-Xnvlink)	28
5.2.5	Options for Guiding the Compiler Driver	28
5.2.5.1	--forward-unknown-to-host-compiler (-forward-unknown-to-host-compiler)	28
5.2.5.2	--forward-unknown-to-host-linker (-forward-unknown-to-host-linker)	29
5.2.5.3	--forward-unknown-opts (-forward-unknown-opts)	29
5.2.5.4	--forward-slash-prefix-opts (-forward-slash-prefix-opts)	30
5.2.5.5	--dont-use-profile (-noprof)	30
5.2.5.6	--threads number (-t)	30

5.2.5.7	--dryrun (-dryrun)	30
5.2.5.8	--verbose (-v)	30
5.2.5.9	--keep (-keep)	30
5.2.5.10	--keep-dir directory (-keep-dir)	31
5.2.5.11	--save-temps (-save-temps)	31
5.2.5.12	--clean-targets (-clean)	31
5.2.5.13	--run-args arguments,... (-run-args)	31
5.2.5.14	--use-local-env (-use-local-env)	31
5.2.5.15	--input-drive-prefix prefix (-idp)	31
5.2.5.16	--dependency-drive-prefix prefix (-ddp)	31
5.2.5.17	--drive-prefix prefix (-dp)	32
5.2.5.18	--dependency-target-name target (-MT)	32
5.2.5.19	--no-align-double	32
5.2.5.20	--no-device-link (-nodlink)	32
5.2.5.21	--allow-unsupported-compiler (-allow-unsupported-compiler)	32
5.2.6	Options for Steering CUDA Compilation	32
5.2.6.1	--default-stream {legacy null per-thread} (-default-stream)	32
5.2.7	Options for Steering GPU Code Generation	33
5.2.7.1	--gpu-architecture (-arch)	33
5.2.7.2	--gpu-code code,... (-code)	33
5.2.7.3	--generate-code specification (-gencode)	34
5.2.7.4	--relocatable-device-code {true false} (-rdc)	34
5.2.7.5	--entries entry,... (-e)	34
5.2.7.6	--maxrregcount amount (-maxrregcount)	35
5.2.7.7	--use_fast_math (-use_fast_math)	35
5.2.7.8	--ftz {true false} (-ftz)	35
5.2.7.9	--prec-div {true false} (-prec-div)	35
5.2.7.10	--prec-sqrt {true false} (-prec-sqrt)	36
5.2.7.11	--fmad {true false} (-fmad)	36
5.2.7.12	--extra-device-vectorization (-extra-device-vectorization)	36
5.2.7.13	--compile-as-tools-patch (-astoolspatch)	36
5.2.7.14	--keep-device-functions (-keep-device-functions)	37
5.2.7.15	--jump-table-density percentage (-jtd)	37
5.2.8	Generic Tool Options	37
5.2.8.1	--disable-warnings (-w)	37
5.2.8.2	--source-in-ptx (-src-in-ptx)	37
5.2.8.3	--restrict (-restrict)	37
5.2.8.4	--Wno-deprecated-gpu-targets (-Wno-deprecated-gpu-targets)	37
5.2.8.5	--Wno-deprecated-declarations (-Wno-deprecated-declarations)	37
5.2.8.6	--Wreorder (-Wreorder)	38
5.2.8.7	--Wdefault-stream-launch (-Wdefault-stream-launch)	38
5.2.8.8	--Wmissing-launch-bounds (-Wmissing-launch-bounds)	38
5.2.8.9	--Wext-lambda-captures-this (-Wext-lambda-captures-this)	38
5.2.8.10	--Werror kind,... (-Werror)	38
5.2.8.11	--display-error-number (-err-no)	39
5.2.8.12	--no-display-error-number (-no-err-no)	39
5.2.8.13	--diag-error errNum,... (-diag-error)	39
5.2.8.14	--diag-suppress errNum,... (-diag-suppress)	39
5.2.8.15	--diag-warn errNum,... (-diag-warn)	39
5.2.8.16	--resource-usage (-res-usage)	39
5.2.8.17	--device-stack-protector {true false} (-device-stack-protector)	39
5.2.8.18	--help (-h)	40
5.2.8.19	--version (-V)	40
5.2.8.20	--options-file file,... (-optf)	40

5.2.8.21	--time filename (-time) . . . . .	40
5.2.8.22	--qpp-config config (-qpp-config) . . . . .	40
5.2.8.23	--list-gpu-code (-code-ls) . . . . .	40
5.2.8.24	--list-gpu-arch (-arch-ls) . . . . .	40
5.2.9	Phase Options . . . . .	41
5.2.9.1	Ptxas Options . . . . .	41
5.2.9.2	NVLINK Options . . . . .	45
5.3	NVCC Environment Variables . . . . .	48
<b>6</b>	<b>GPU Compilation</b>	<b>51</b>
6.1	GPU Generations . . . . .	51
6.2	GPU Feature List . . . . .	51
6.3	Application Compatibility . . . . .	52
6.4	Virtual Architectures . . . . .	52
6.5	Virtual Architecture Feature List . . . . .	54
6.6	Further Mechanisms . . . . .	54
6.6.1	Just-in-Time Compilation . . . . .	54
6.6.2	Fatbinaries . . . . .	56
6.7	NVCC Examples . . . . .	56
6.7.1	Base Notation . . . . .	56
6.7.2	Shorthand . . . . .	56
6.7.2.1	Shorthand 1 . . . . .	56
6.7.2.2	Shorthand 2 . . . . .	57
6.7.2.3	Shorthand 3 . . . . .	57
6.7.3	Extended Notation . . . . .	57
6.7.4	Virtual Architecture Macros . . . . .	58
<b>7</b>	<b>Using Separate Compilation in CUDA</b>	<b>59</b>
7.1	Code Changes for Separate Compilation . . . . .	59
7.2	NVCC Options for Separate Compilation . . . . .	59
7.3	Libraries . . . . .	60
7.4	Examples . . . . .	61
7.5	Optimization Of Separate Compilation . . . . .	63
7.6	Potential Separate Compilation Issues . . . . .	63
7.6.1	Object Compatibility . . . . .	63
7.6.2	JIT Linking Support . . . . .	63
7.6.3	Implicit CUDA Host Code . . . . .	64
7.6.4	Using __CUDA_ARCH__ . . . . .	64
7.6.5	Device Code in Libraries . . . . .	65
<b>8</b>	<b>Miscellaneous NVCC Usage</b>	<b>67</b>
8.1	Cross Compilation . . . . .	67
8.2	Keeping Intermediate Phase Files . . . . .	67
8.3	Cleaning Up Generated Files . . . . .	67
8.4	Printing Code Generation Statistics . . . . .	68
<b>9</b>	<b>Notices</b>	<b>69</b>
9.1	Notice . . . . .	69
9.2	OpenCL . . . . .	70
9.3	Trademarks . . . . .	70

## NVIDIA CUDA Compiler Driver NVCC

The documentation for nvcc, the CUDA compiler driver.





---

# Chapter 1. Overview

## 1.1. CUDA Programming Model

The CUDA Toolkit targets a class of applications whose control part runs as a process on a general purpose computing device, and which use one or more NVIDIA GPUs as coprocessors for accelerating *single program, multiple data* (SPMD) parallel jobs. Such jobs are self-contained, in the sense that they can be executed and completed by a batch of GPU threads entirely without intervention by the host process, thereby gaining optimal benefit from the parallel graphics hardware.

The GPU code is implemented as a collection of functions in a language that is essentially C++, but with some annotations for distinguishing them from the host code, plus annotations for distinguishing different types of data memory that exists on the GPU. Such functions may have parameters, and they can be called using a syntax that is very similar to regular C function calling, but slightly extended for being able to specify the matrix of GPU threads that must execute the called function. During its life time, the host process may dispatch many parallel GPU tasks.

For more information on the CUDA programming model, consult the [CUDA C++ Programming Guide](#).

## 1.2. CUDA Sources

Source files for CUDA applications consist of a mixture of conventional C++ host code, plus GPU device functions. The CUDA compilation trajectory separates the device functions from the host code, compiles the device functions using the proprietary NVIDIA compilers and assembler, compiles the host code using a C++ host compiler that is available, and afterwards embeds the compiled GPU functions as fatbinary images in the host object file. In the linking stage, specific CUDA runtime libraries are added for supporting remote SPMD procedure calling and for providing explicit GPU manipulation such as allocation of GPU memory buffers and host-GPU data transfer.

## 1.3. Purpose of NVCC

The compilation trajectory involves several splitting, compilation, preprocessing, and merging steps for each CUDA source file. It is the purpose of `nvcc`, the CUDA compiler driver, to hide the intricate details of CUDA compilation from developers. It accepts a range of conventional compiler options, such as for defining macros and include/library paths, and for steering the compilation process. All non-CUDA compilation steps are forwarded to a C++ host compiler that is supported by `nvcc`, and `nvcc` translates its options to appropriate host compiler command line options.

---

## Chapter 2. Supported Host Compilers

A general purpose C++ host compiler is needed by nvcc in the following situations:

- ▶ During non-CUDA phases (except the run phase), because these phases will be forwarded by nvcc to this compiler.
- ▶ During CUDA phases, for several preprocessing stages and host code compilation (see also [The CUDA Compilation Trajectory](#)).

nvcc assumes that the host compiler is installed with the standard method designed by the compiler provider. If the host compiler installation is non-standard, the user must make sure that the environment is set appropriately and use relevant nvcc compile options.

The following documents provide detailed information about supported host compilers:

- ▶ [NVIDIA CUDA Installation Guide for Linux](#)
- ▶ [NVIDIA CUDA Installation Guide for Microsoft Windows](#)

On all platforms, the default host compiler executable (gcc and g++ on Linux and cl.exe on Windows) found in the current execution search path will be used, unless specified otherwise with appropriate options (see [File and Path Specifications](#)).

Note, nvcc does not support the compilation of file paths that exceed the maximum path length limitations of the host system. To support the compilation of long file paths, please refer to the documentation for your system.



---

# Chapter 3. Compilation Phases

## 3.1. NVCC Identification Macro

nvcc predefines the following macros:

- \_\_NVCC\_\_**  
Defined when compiling C/C++/CUDA source files.
- \_\_CUDACC\_\_**  
Defined when compiling CUDA source files.
- \_\_CUDACC\_RDC\_\_**  
Defined when compiling CUDA source files in relocatable device code mode (see [NVCC Options for Separate Compilation](#)).
- \_\_CUDACC\_EWP\_\_**  
Defined when compiling CUDA source files in extensible whole program mode (see [Options for Specifying Behavior of Compiler/Linker](#)).
- \_\_CUDACC\_DEBUG\_\_**  
Defined when compiling CUDA source files in the device-debug mode (see [Options for Specifying Behavior of Compiler/Linker](#)).
- \_\_CUDACC\_RELAXED\_CONSTEXPR\_\_**  
Defined when the `--expt-relaxed-constexpr` flag is specified on the command line. Refer to the [CUDA C++ Programming Guide](#) for more details.
- \_\_CUDACC\_EXTENDED\_LAMBDA\_\_**  
Defined when the `--expt-extended-lambda` or `--extended-lambda` flag is specified on the command line. Refer to the [CUDA C++ Programming Guide](#) for more details.
- \_\_CUDACC\_VER\_MAJOR\_\_**  
Defined with the major version number of nvcc.
- \_\_CUDACC\_VER\_MINOR\_\_**  
Defined with the minor version number of nvcc.
- \_\_CUDACC\_VER\_BUILD\_\_**  
Defined with the build version number of nvcc.
- \_\_NVCC\_DIAG\_PRAGMA\_SUPPORT\_\_**  
Defined when the CUDA frontend compiler supports diagnostic control with the `nv_diag_suppress`, `nv_diag_error`, `nv_diag_warning`, `nv_diag_default`, `nv_diag_once`, and `nv_diagnostic` pragmas.

## 3.2. NVCC Phases

A compilation phase is a logical translation step that can be selected by command line options to `nvcc`. A single compilation phase can still be broken up by `nvcc` into smaller steps, but these smaller steps are just implementations of the phase: they depend on seemingly arbitrary capabilities of the internal tools that `nvcc` uses, and all of these internals may change with a new release of the CUDA Toolkit. Hence, only compilation phases are stable across releases, and although `nvcc` provides options to display the compilation steps that it executes, these are for debugging purposes only and must not be copied and used in build scripts.

`nvcc` phases are selected by a combination of command line options and input file name suffixes, and the execution of these phases may be modified by other command line options. In phase selection, the input file suffix defines the phase input, while the command line option defines the required output of the phase.

The following paragraphs list the recognized file name suffixes and the supported compilation phases. A full explanation of the `nvcc` command line options can be found in [NVCC Command Options](#).

## 3.3. Supported Input File Suffixes

The following table defines how `nvcc` interprets its input files:

Input File Suffix	Description
.cu	CUDA source file, containing host code and device functions
.c	C source file
.cc, .cxx, .cpp	C++ source file
.ptx	PTX intermediate assembly file (see <a href="#">Figure 1</a> )
.cubin	CUDA device code binary file (CUBIN) for a single GPU architecture (see <a href="#">Figure 1</a> )
.fatbin	CUDA fat binary file that may contain multiple PTX and CUBIN files (see <a href="#">Figure 1</a> )
.o, .obj	Object file
.a, .lib	Library file
.res	Resource file
.so	Shared object file

Note that `nvcc` does not make any distinction between object, library or resource files. It just passes files of these types to the linker when the linking phase is executed.

## 3.4. Supported Phases

The following table specifies the supported compilation phases, plus the option to `nvcc` that enables the execution of each phase. It also lists the default name of the output file generated by each phase, which takes effect when no explicit output file name is specified using the option `--output-file`:

Phase	nvcc Option		Default Output File Name
	Long Name	Short Name	
CUDA compilation to C/C++ source file	--cuda	-cuda	.cpp.i.i appended to source file name, as in x.cu.cpp.i.i. This output file can be compiled by the host compiler that was used by nvcc to preprocess the .cu file.
C/C++ preprocessing	--preprocess	-E	<result on standard output>
C/C++ compilation to object file	--compile	-c	Source file name with suffix replaced by o on Linux or obj on Windows
Cubin generation from CUDA source files	--cubin	-cubin	Source file name with suffix replaced by cubin
Cubin generation from PTX intermediate files.	--cubin	-cubin	Source file name with suffix replaced by cubin
PTX generation from CUDA source files	--ptx	-ptx	Source file name with suffix replaced by ptx
Fatbinary generation from source, PTX or cubin files	--fatbin	-fatbin	Source file name with suffix replaced by fatbin
Linking relocatable device code.	--device-link	-dlink	a_dlink.obj on Windows or a_dlink.o on other platforms
Cubin generation from linked relocatable device code.	--device-link	-cublink	a_cublink.cubin
Fatbinary generation from linked relocatable device code	--device-link	-fatlink	a_fatlink.fatbin
Linking an executable	<no phase option>		a.exe on Windows or a.out on other platforms
Constructing an object file archive, or library	--lib	-lib	a.lib on Windows or a.a on other platforms
make dependency generation	--generate-dependencies	-d	<result on standard output>
make dependency generation without headers in system paths.	--generate-nonsystem-dependencies	-Dn	<result on standard output>
Compile CUDA source to OptiX IR output.	--optix-ir	-optixir	Source file name with suffix replaced by optixir
Running an executable	--run	-run	

**Notes:**

- The last phase in this list is more of a convenience phase. It allows running the compiled and linked executable without having to explicitly set the library path to the CUDA dynamic libraries.



- Unless a phase option is specified, nvcc will compile and link all its input files.



---

## Chapter 4. The CUDA Compilation Trajectory

CUDA compilation works as follows: the input program is preprocessed for device compilation and is compiled to CUDA binary (cubin) and/or PTX intermediate code, which are placed in a fatbinary. The input program is preprocessed once again for host compilation and is synthesized to embed the fatbinary and transform CUDA specific C++ extensions into standard C++ constructs. Then the C++ host compiler compiles the synthesized host code with the embedded fatbinary into a host object. The exact steps that are followed to achieve this are displayed in [Figure 1](#).

The embedded fatbinary is inspected by the CUDA runtime system whenever the device code is launched by the host program to obtain an appropriate fatbinary image for the current GPU.

CUDA programs are compiled in the whole program compilation mode by default, i.e., the device code cannot reference an entity from a separate file. In the whole program compilation mode, device link steps have no effect. For more information on the separate compilation and the whole program compilation, see [Using Separate Compilation in CUDA](#).

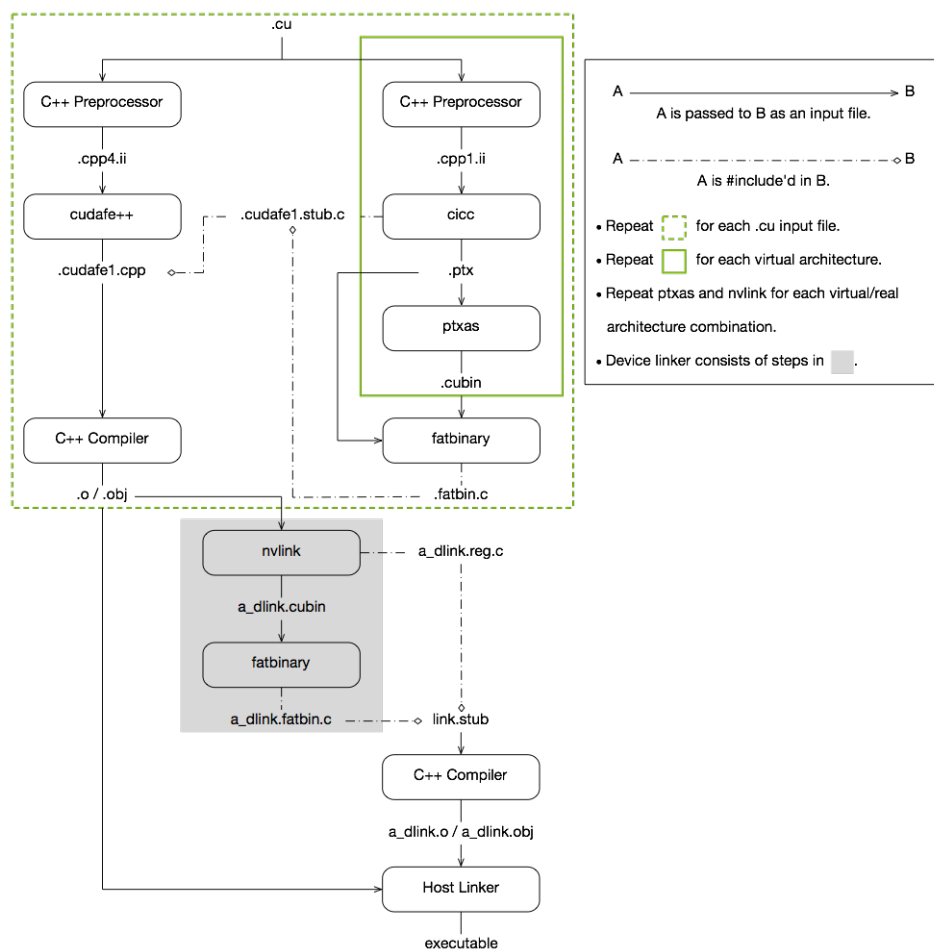


Fig. 1: CUDA Compilation Trajectory

---

# Chapter 5. NVCC Command Options

## 5.1. Command Option Types and Notation

Each `nvcc` option has a long name and a short name, which are interchangeable with each other. These two variants are distinguished by the number of hyphens that must precede the option name: long names must be preceded by two hyphens, while short names must be preceded by a single hyphen. For example, `-I` is the short name of `--include-path`. Long options are intended for use in build scripts, where the size of the option is less important than the descriptive value. In contrast, short options are intended for interactive use.

`nvcc` recognizes three types of command options: boolean options, single value options, and list options.

Boolean options do not have an argument; they are either specified on the command line or not. Single value options must be specified at most once, but list options may be repeated. Examples of each of these option types are, respectively: `--verbose` (switch to verbose mode), `--output-file` (specify output file), and `--include-path` (specify include path).

Single value options and list options must have arguments, which must follow the name of the option itself by either one or more spaces or an equals character. When a one-character short name such as `-I`, `-L`, and `-l` is used, the value of the option may also immediately follow the option itself without being separated by spaces or an equal character. The individual values of list options may be separated by commas in a single instance of the option, or the option may be repeated, or any combination of these two cases.

Hence, for the two sample options mentioned above that may take values, the following notations are legal:

```
-o file
```

```
-o=file
```

```
-I dir1,dir2 -I=dir3 -I dir4,dir5
```

Unless otherwise specified, long option names are used throughout this document. However, short names can be used instead of long names for the same effect.

## 5.2. Command Option Description

This section presents tables of nvcc options. The option type in the tables can be recognized as follows: Boolean options do not have arguments specified in the first column, while the other two types do. List options can be recognized by the repeat indicator , . . . at the end of the argument.

Long options are described in the first column of the options table, and short options occupy the second column.

### 5.2.1. File and Path Specifications

#### 5.2.1.1 --output-file file (-o)

Specify name and location of the output file.

#### 5.2.1.2 --objdir-as-tempdir (-objtemp)

Create all intermediate files in the same directory as the object file. These intermediate files are deleted when the compilation is finished. This option will take effect only if -c, -dc or -dw is also used. Using this option will ensure that the intermediate file name that is embedded in the object file will not change in multiple compiles of the same file. However, this is not guaranteed if the input is stdin. If the same file is compiled with two different options, ex., 'nvcc -c t.cu' and 'nvcc -c -ptx t.cu', then the files should be compiled in different directories. Compiling them in the same directory can either cause the compilation to fail or produce incorrect results.

#### 5.2.1.3 --pre-include file,... (-include)

Specify header files that must be pre-included during preprocessing.

#### 5.2.1.4 --library library,... (-l)

Specify libraries to be used in the linking stage without the library file extension.

The libraries are searched for on the library search paths that have been specified using option --library-path (see [Libraries](#)).

#### 5.2.1.5 --define-macro def,... (-D)

Define macros to be used during preprocessing.

*def* can be either *name* or *name=definition*.

- ▶ *name* - Predefine *name* as a macro.
- ▶ *name=definition* - The contents of *definition* are tokenized and preprocessed as if they appear during translation phase three in a #define directive. The definition will be truncated by embedded new line characters.

**5.2.1.6 --undefine-macro def,... (-U)**

Undefine an existing macro during preprocessing or compilation.

**5.2.1.7 --include-path path,... (-I)**

Specify include search paths.

**5.2.1.8 --system-include path,... (-isystem)**

Specify system include search paths.

**5.2.1.9 --library-path path,... (-L)**

Specify library search paths (see [Libraries](#)).

**5.2.1.10 --output-directory directory (-odir)**

Specify the directory of the output file.

This option is intended for letting the dependency generation step (see `--generate-dependencies`) generate a rule that defines the target object file in the proper directory.

**5.2.1.11 --dependency-output file (-MF)**

Specify the dependency output file.

This option specifies the output file for the dependency generation step (see `--generate-dependencies`). The option `--generate-dependencies` or `--generate-nonystem-dependencies` must be specified if a dependency output file is set.

**5.2.1.12 --generate-dependency-targets (-MP)**

Add an empty target for each dependency.

This option adds phony targets to the dependency generation step (see `--generate-dependencies`) intended to avoid makefile errors if old dependencies are deleted. The input files are not emitted as phony targets.

### 5.2.1.13 **--compiler-bindir directory (-ccbin)**

Specify the directory in which the default host compiler executable resides.

The host compiler executable name can be also specified to ensure that the correct host compiler is selected. In addition, driver prefix options (`--input-drive-prefix`, `--dependency-drive-prefix`, or `--drive-prefix`) may need to be specified, if `nvcc` is executed in a Cygwin shell or a MinGW shell on Windows.

### 5.2.1.14 **--allow-unsupported-compiler (-allow-unsupported-compiler)**

Disable `nvcc` check for supported host compiler versions.

Using an unsupported host compiler may cause compilation failure or incorrect run time execution. Use at your own risk. This option has no effect on MacOS.

### 5.2.1.15 **--archiver-binary executable (-arbin)**

Specify the path of the archiver tool used create static library with `--lib`.

### 5.2.1.16 **--cudart {none|shared|static} (-cudart)**

Specify the type of CUDA runtime library to be used: no CUDA runtime library, shared/dynamic CUDA runtime library, or static CUDA runtime library.

#### **Allowed Values**

- ▶ none
- ▶ shared
- ▶ static

#### **Default**

The static CUDA runtime library is used by default.

### 5.2.1.17 **--cudadevrt {none|static} (-cudadevrt)**

Specify the type of CUDA device runtime library to be used: no CUDA device runtime library, or static CUDA device runtime library.

#### **Allowed Values**

- ▶ none
- ▶ static

#### **Default**

The static CUDA device runtime library is used by default.



#### 5.2.1.18 `--libdevice-directory directory (-ldir)`

Specify the directory that contains the libdevice library files.

Libdevice library files are located in the `nvvm/libdevice` directory in the CUDA Toolkit.

#### 5.2.1.19 `--target-directory string (-target-dir)`

Specify the subfolder name in the targets directory where the default include and library paths are located.

### 5.2.2. Options for Specifying the Compilation Phase

Options of this category specify up to which stage the input files must be compiled.

#### 5.2.2.1 `--link (-link)`

Specify the default behavior: compile and link all input files.

##### **Default Output File Name**

`a.exe` on Windows or `a.out` on other platforms is used as the default output file name.

#### 5.2.2.2 `--lib (-lib)`

Compile all input files into object files, if necessary, and add the results to the specified library output file.

##### **Default Output File Name**

`a.lib` on Windows or `a.a` on other platforms is used as the default output file name.

#### 5.2.2.3 `--device-link (-dlink)`

Link object files with relocatable device code and `.ptx`, `.cubin`, and `.fatbin` files into an object file with executable device code, which can be passed to the host linker.

##### **Default Output File Name**

`a_dlink.obj` on Windows or `a_dlink.o` on other platforms is used as the default output file name. When this option is used in conjunction with `--fatbin`, `a_dlink.fatbin` is used as the default output file name. When this option is used in conjunction with `--cubin`, `a_dlink.cubin` is used as the default output file name.

#### 5.2.2.4 `--device-c (-dc)`

Compile each `.c`, `.cc`, `.cpp`, `.cxx`, and `.cu` input file into an object file that contains relocatable device code.

It is equivalent to `--relocatable-device-code=true --compile`.

##### **Default Output File Name**

The source file name extension is replaced by `.obj` on Windows and `.o` on other platforms to create the default output file name. For example, the default output file name for `x.cu` is `x.obj` on Windows and `x.o` on other platforms.

#### 5.2.2.5 `--device-w (-dw)`

Compile each `.c`, `.cc`, `.cpp`, `.cxx`, and `.cu` input file into an object file that contains executable device code.

It is equivalent to `--relocatable-device-code=false --compile`.

##### **Default Output File Name**

The source file name extension is replaced by `.obj` on Windows and `.o` on other platforms to create the default output file name. For example, the default output file name for `x.cu` is `x.obj` on Windows and `x.o` on other platforms.

#### 5.2.2.6 `--cuda (-cuda)`

Compile each `.cu` input file to a `.cu.cpp.i` file.

##### **Default Output File Name**

`.cu.cpp.i` is appended to the basename of the source file name to create the default output file name. For example, the default output file name for `x.cu` is `x.cu.cpp.i`.

#### 5.2.2.7 `--compile (-c)`

Compile each `.c`, `.cc`, `.cpp`, `.cxx`, and `.cu` input file into an object file.

##### **Default Output File Name**

The source file name extension is replaced by `.obj` on Windows and `.o` on other platforms to create the default output file name. For example, the default output file name for `x.cu` is `x.obj` on Windows and `x.o` on other platforms.

#### 5.2.2.8 `--fatbin (-fatbin)`

Compile all `.cu`, `.ptx`, and `.cubin` input files to device-only `.fatbin` files.

`nvcc` discards the host code for each `.cu` input file with this option.

##### **Default Output File Name**

The source file name extension is replaced by `.fatbin` to create the default output file name. For example, the default output file name for `x.cu` is `x.fatbin`.

#### 5.2.2.9 `--cubin (-cubin)`

Compile all `.cu` and `.ptx` input files to device-only `.cubin` files.

`nvcc` discards the host code for each `.cu` input file with this option.

##### **Default Output File Name**

The source file name extension is replaced by `.cubin` to create the default output file name. For example, the default output file name for `x.cu` is `x.cubin`.

#### 5.2.2.10 `--ptx (-ptx)`

Compile all `.cu` input files to device-only `.ptx` files.

`nvcc` discards the host code for each `.cu` input file with this option.

##### **Default Output File Name**

The source file name extension is replaced by `.ptx` to create the default output file name. For example, the default output file name for `x.cu` is `x.ptx`.

#### 5.2.2.11 `--preprocess (-E)`

Preprocess all `.c`, `.cc`, `.cpp`, `.cxx`, and `.cu` input files.

##### **Default Output File Name**

The output is generated in `stdout` by default.

#### 5.2.2.12 `--generate-dependencies (-M)`

Generate a dependency file that can be included in a `Makefile` for the `.c`, `.cc`, `.cpp`, `.cxx`, and `.cu` input file.

`nvcc` uses a fixed prefix to identify dependencies in the preprocessed file (`'#line 1'` on Linux and `'# 1'` on Windows). The files mentioned in source location directives starting with this prefix will be included in the dependency list.

##### **Default Output File Name**

The output is generated in `stdout` by default.

#### 5.2.2.13 `--generate-nonsystem-dependencies (-MM)`

Same as `--generate-dependencies` but skip header files found in system directories (Linux only).

##### **Default Output File Name**

The output is generated in `stdout` by default.

#### 5.2.2.14 `--generate-dependencies-with-compile (-MD)`

Generate a dependency file and compile the input file. The dependency file can be included in a Make-file for the .c, .cc, .cpp, .cxx, and .cu input file.

This option cannot be specified together with -E. The dependency file name is computed as follows:

- ▶ If -MF is specified, then the specified file is used as the dependency file name.
- ▶ If -o is specified, the dependency file name is computed from the specified file name by replacing the suffix with '.d'.
- ▶ Otherwise, the dependency file name is computed by replacing the input file names's suffix with '.d'.

If the dependency file name is computed based on either -MF or -o, then multiple input files are not supported.

#### 5.2.2.15 `--generate-nonsystem-dependencies-with-compile (-MMD)`

Same as `--generate-dependencies-with-compile` but skip header files found in system directories (Linux only).

#### 5.2.2.16 `--optix-ir (-optix-ir)`

Compile CUDA source to OptiX IR (.optixir) output. The OptiX IR is only intended for consumption by OptiX through appropriate APIs. This feature is not supported with link-time-optimization (-dltto), the lto\_NN-arch target, or with -gencode.

##### **Default Output File Name**

The source file name extension is replaced by .optixir to create the default output file name. For example, the default output file name for x.cu is x.optixir.

#### 5.2.2.17 `--run (-run)`

Compile and link all input files into an executable, and executes it.

When the input is a single executable, it is executed without any compilation or linking. This step is intended for developers who do not want to be bothered with setting the necessary environment variables; these are set temporarily by nvcc.

## 5.2.3. Options for Specifying Behavior of Compiler/Linker

#### 5.2.3.1 `--profile (-pg)`

Instrument generated code/executable for use by gprof.

### 5.2.3.2 `--debug (-g)`

Generate debug information for host code.

### 5.2.3.3 `--device-debug (-G)`

Generate debug information for device code.

If `--dopt` is not specified, then this option turns off all optimizations on device code. It is not intended for profiling; use `--generate-line-info` instead for profiling.

### 5.2.3.4 `--extensible-whole-program (-ewp)`

Generate extensible whole program device code, which allows some calls to not be resolved until linking with `libcudadevrt`.

### 5.2.3.5 `--no-compress (-no-compress)`

Do not compress device code in fatbinary.

### 5.2.3.6 `--generate-line-info (-lineinfo)`

Generate line-number information for device code.

### 5.2.3.7 `--optimization-info kind,... (-opt-info)`

Provide optimization reports for the specified kind of optimization.

The following tags are supported:

`inline`

Emit remarks related to function inlining. Inlining pass may be invoked multiple times by the compiler and a function not inlined in an earlier pass may be inlined in a subsequent pass.

### 5.2.3.8 `--optimize level (-O)`

Specify optimization level for host code.

### 5.2.3.9 `--dopt kind (-dopt)`

Enable device code optimization. When specified along with `-G`, enables limited debug information generation for optimized device code (currently, only line number information). When `-G` is not specified, `-dopt=on` is implicit.

#### Allowed Values

- ▶ `on`: enable device code optimization.

### 5.2.3.10 `--dlink-time-opt (-dlto)`

Perform link-time optimization of device code. The option `'-lto'` is also an alias to `'-dlto'`. Link-time optimization must be specified at both compile and link time; at compile time it stores high-level intermediate code, then at link time it links together and optimizes the intermediate code. If that intermediate is not found at link time then nothing happens. Intermediate code is also stored at compile time with the `--gpu-code='lto_NN'` target. The options `-dlto -arch=sm_NN` will add a `lto_NN` target; if you want to only add a `lto_NN` target and not the `compute_NN` that `-arch=sm_NN` usually generates, use `-arch=lto_NN`.

### 5.2.3.11 `--gen-opt-lto (-gen-opt-lto)`

Run the optimizer passes before generating the LTO IR.

### 5.2.3.12 `--split-compile number (-split-compile)`

Perform compiler optimizations in parallel.

Split compilation attempts to reduce compile time by enabling the compiler to run certain optimization passes concurrently. It does this by splitting the device code into smaller translation units, each containing one or more device functions, and running optimization passes on each unit concurrently across multiple threads. It will then link back the split units prior to code generation. The option accepts a numerical value that specifies the maximum number of threads the compiler can use. One can also allow the compiler to use the maximum threads available on the system by setting `--split-compile=0`. Setting `--split-compile=1` will cause this option to be ignored. This option can work in conjunction with device Link Time Optimization (`-dlto`) as well as `--threads`.

### 5.2.3.13 `--split-compile-extended number (-split-compile-extended)`

A more aggressive form of `-split-compile`. Available in LTO mode only.

Extended split compilation attempts to reduce compile time even further by extending concurrent compilation through to the back-end. This aggressive form of split compilation can potentially impact performance of the compiled binary. The option accepts a numerical value that specifies the maximum number of threads the compiler can use. One can also allow the compiler to use the maximum threads available on the system by setting `--split-compile-extended=0`. Setting `--split-compile-extended=1` will cause this option to be ignored. This option is only applicable with device Link Time Optimization (`-dlto`) and can work in conjunction with `--threads`.

**5.2.3.14 --ftemplate-backtrace-limit limit (-ftemplate-backtrace-limit)**

Set the maximum number of template instantiation notes for a single warning or error to limit.

A value of 0 is allowed, and indicates that no limit should be enforced. This value is also passed to the host compiler if it provides an equivalent flag.

**5.2.3.15 --ftemplate-depth limit (-ftemplate-depth)**

Set the maximum instantiation depth for template classes to limit.

This value is also passed to the host compiler if it provides an equivalent flag.

**5.2.3.16 --no-exceptions (-noeh)**

Disable exception handling for host code.

Disable exception handling for host code, by passing “-EHs-c-” (for cl.exe) and “-fno-exceptions” (for other host compilers) during host compiler invocation. These flags are added to the host compiler invocation before any flags passed directly to the host compiler with “-Xcompiler”

**Default (on Windows)**

- ▶ On Windows, nvcc passes /EHsc to the host compiler by default.

**Example (on Windows)**

- ▶ `nvcc --no-exceptions -Xcompiler /EHa x.cu`

**5.2.3.17 --shared (-shared)**

Generate a shared library during linking.

Use option `--linker-options` when other linker options are required for more control.

**5.2.3.18 --x {c|c++|cu} (-x)**

Explicitly specify the language for the input files, rather than letting the compiler choose a default based on the file name suffix.

**Allowed Values**

- ▶ c
- ▶ c++
- ▶ cu

**Default**

The language of the source code is determined based on the file name suffix.

### 5.2.3.19 `--std {c++03|c++11|c++14|c++17|c++20} (-std)`

Select a particular C++ dialect.

#### Allowed Values

- ▶ `c++03`
- ▶ `c++11`
- ▶ `c++14`
- ▶ `c++17`
- ▶ `c++20`

#### Default

The default C++ dialect depends on the host compiler. `nvcc` matches the default C++ dialect that the host compiler uses.

### 5.2.3.20 `--no-host-device-initializer-list (-nohdinitlist)`

Do not consider member functions of `std::initializer_list` as `__host__ __device__` functions implicitly.

### 5.2.3.21 `--expt-relaxed-constexpr (-expt-relaxed-constexpr)`

**Experimental flag:** Allow host code to invoke `__device__ constexpr` functions, and device code to invoke `__host__ constexpr` functions.

Note that the behavior of this flag may change in future compiler releases.

### 5.2.3.22 `--extended-lambda (-extended-lambda)`

Allow `__host__`, `__device__` annotations in lambda declarations.

### 5.2.3.23 `--expt-extended-lambda (-expt-extended-lambda)`

Alias for `--extended-lambda`.

### 5.2.3.24 `--machine {64} (-m)`

Specify 64-bit architecture.

#### Allowed Values

- ▶ `64`

#### Default

This option is set based on the host platform on which `nvcc` is executed.



### 5.2.3.25 `--m64 (-m64)`

Alias for `--machine=64`

### 5.2.3.26 `--host-linker-script {use-lcs|gen-lcs} (-hls)`

Use the host linker script (GNU/Linux only) to enable support for certain CUDA specific requirements, while building executable files or shared libraries.

#### Allowed Values

##### `use-lcs`

Prepares a host linker script and enables host linker to support relocatable device object files that are larger in size, that would otherwise, in certain cases, cause the host linker to fail with relocation truncation error.

##### `gen-lcs`

Generates a host linker script that can be passed to host linker manually, in the case where host linker is invoked separately outside of `nvcc`. This option can be combined with `-shared` or `-r` option to generate linker scripts that can be used while generating host shared libraries or host relocatable links respectively.

The file generated using this options must be provided as the last input file to the host linker.

The output is generated to stdout by default. Use the option `-o filename` to specify the output filename.

A linker script may already be in used and passed to the host linker using the host linker option `--script` (or `-T`), then the generated host linker script must augment the existing linker script. In such cases, the option `-aug-hls` must be used to generate linker script that contains only the augmentation parts. Otherwise, the host linker behaviour is undefined.

A host linker option, such as `-z` with a non-default argument, that can modify the default linker script internally, is incompatible with this option and the behavior of any such usage is undefined.

#### Default Value

`use-lcs` is used as the default type.

### 5.2.3.27 `--augment-host-linker-script (-aug-hls)`

Enables generation of host linker script that augments an existing host linker script (GNU/Linux only). See option `--host-linker-script` for more details.

#### 5.2.3.28 `--host-relocatable-link (-r)`

When used in combination with `-hls=gen-lcs`, controls the behaviour of `-hls=gen-lcs` and sets it to generate host linker script that can be used in host relocatable link (`ld -r` linkage). See option `-hls=gen-lcs` for more information.

This option currently is effective only when used with `-hls=gen-lcs`; in all other cases, this option is ignored currently.

### 5.2.4. Options for Passing Specific Phase Options

These flags allow for passing specific options directly to the internal compilation tools that `nvcc` encapsulates, without burdening `nvcc` with too-detailed knowledge on these tools.

#### 5.2.4.1 `--compiler-options options,... (-Xcompiler)`

Specify options directly to the compiler/preprocessor.

#### 5.2.4.2 `--linker-options options,... (-Xlinker)`

Specify options directly to the host linker.

#### 5.2.4.3 `--archive-options options,... (-Xarchive)`

Specify options directly to the library manager.

#### 5.2.4.4 `--ptxas-options options,... (-Xptxas)`

Specify options directly to `ptxas`, the PTX optimizing assembler.

#### 5.2.4.5 `--nvlink-options options,... (-Xnvlink)`

Specify options directly to `nvlink`, the device linker.

### 5.2.5. Options for Guiding the Compiler Driver

#### 5.2.5.1 `--forward-unknown-to-host-compiler (-forward-unknown-to-host-compiler)`

Forward unknown options to the host compiler. An ‘unknown option’ is a command line argument that starts with `-` followed by another character, and is not a recognized `nvcc` flag or an argument for a recognized `nvcc` flag.

If the unknown option is followed by a separate command line argument, the argument will not be forwarded, unless it begins with the `-` character.

For example:

- ▶ `nvcc -forward-unknown-to-host-compiler -foo=bar a.cu` will forward `-foo=bar` to host compiler.
- ▶ `nvcc -forward-unknown-to-host-compiler -foo bar a.cu` will report an error for `bar` argument.
- ▶ `nvcc -forward-unknown-to-host-compiler -foo -bar a.cu` will forward `-foo` and `-bar` to host compiler.

Note: On Windows, also see option `-forward-slash-prefix-opts` for forwarding options that begin with `'/'`.

### 5.2.5.2 `--forward-unknown-to-host-linker (-forward-unknown-to-host-linker)`

Forward unknown options to the host linker. An 'unknown option' is a command line argument that starts with `-` followed by another character, and is not a recognized `nvcc` flag or an argument for a recognized `nvcc` flag.

If the unknown option is followed by a separate command line argument, the argument will not be forwarded, unless it begins with the `-` character.

For example:

- ▶ `nvcc -forward-unknown-to-host-linker -foo=bar a.cu` will forward `-foo=bar` to host linker.
- ▶ `nvcc -forward-unknown-to-host-linker -foo bar a.cu` will report an error for `bar` argument.
- ▶ `nvcc -forward-unknown-to-host-linker -foo -bar a.cu` will forward `-foo` and `-bar` to host linker.

Note: On Windows, also see option `-forward-slash-prefix-opts` for forwarding options that begin with `'/'`.

### 5.2.5.3 `--forward-unknown-opts (-forward-unknown-opts)`

Implies the combination of options `-forward-unknown-to-host-linker` and `-forward-unknown-to-host-compiler`.

For example:

- ▶ `nvcc -forward-unknown-opts -foo=bar a.cu` will forward `-foo=bar` to the host linker and compiler.
- ▶ `nvcc -forward-unknown-opts -foo bar a.cu` will report an error for `bar` argument.
- ▶ `nvcc -forward-unknown-opts -foo -bar a.cu` will forward `-foo` and `-bar` to the host linker and compiler.

Note: On Windows, also see option `-forward-slash-prefix-opts` for forwarding options that begin with `'/'`.

#### 5.2.5.4 `--forward-slash-prefix-opts (-forward-slash-prefix-opts)`

If this flag is specified, and forwarding unknown options to host toolchain is enabled (`-forward-unknown-opts` or `-forward-unknown-to-host-linker` or `-forward-unknown-to-host-compiler`), then a command line argument beginning with `/` is forwarded to the host toolchain.

For example:

- `nvcc -forward-slash-prefix-opts -forward-unknown-opts /T foo.cu` will forward the flag `/T` to the host compiler and linker.

When this flag is not specified, a command line argument beginning with `/` is treated as an input file.

For example:

- `nvcc /T foo.cu` will treat `/T` as an input file, and the Windows API function `GetFullPathName()` is used to determine the full path name.

Note: This flag is only supported on Windows.

#### 5.2.5.5 `--dont-use-profile (-noprof)`

Do not use configurations from the `nvcc.profile` file for compilation.

#### 5.2.5.6 `--threads number (-t)`

Specify the maximum number of threads to be used to execute the compilation steps in parallel.

This option can be used to improve the compilation speed when compiling for multiple architectures. The compiler creates *number* threads to execute the compilation steps in parallel. If *number* is 1, this option is ignored. If *number* is 0, the number of threads used is the number of CPUs on the machine.

#### 5.2.5.7 `--dryrun (-dryrun)`

List the compilation sub-commands without executing them.

#### 5.2.5.8 `--verbose (-v)`

List the compilation sub-commands while executing them.

#### 5.2.5.9 `--keep (-keep)`

Keep all intermediate files that are generated during internal compilation steps.

#### 5.2.5.10 `--keep-dir directory (-keep-dir)`

Keep all intermediate files that are generated during internal compilation steps in this directory.

#### 5.2.5.11 `--save-temps (-save-temps)`

This option is an alias of `--keep`.

#### 5.2.5.12 `--clean-targets (-clean)`

Delete all the non-temporary files that the same `nvcc` command would generate without this option.

This option reverses the behavior of `nvcc`. When specified, none of the compilation phases will be executed. Instead, all of the non-temporary files that `nvcc` would otherwise create will be deleted.

#### 5.2.5.13 `--run-args arguments, ... (-run-args)`

Specify command line arguments for the executable when used in conjunction with `--run`.

#### 5.2.5.14 `--use-local-env (-use-local-env)`

Skip MSVC environment initialization.

By default `nvcc` assumes that the MSVC environment needs to be initialized. This is done by executing the appropriate command file available for the MSVC installation detected or specified. Initializing the environment for each `nvcc` invocation can add noticeable overheads. If the environment used to invoke `nvcc` has already been configured, this option can be used to skip this step.

#### 5.2.5.15 `--input-drive-prefix prefix (-idp)`

Specify the input drive prefix.

On Windows, all command line arguments that refer to file names must be converted to the Windows native format before they are passed to pure Windows executables. This option specifies how the current development environment represents absolute paths. Use `/cygwin/` as prefix for Cygwin build environments and `/` as prefix for MinGW.

#### 5.2.5.16 `--dependency-drive-prefix prefix (-ddp)`

Specify the dependency drive prefix.

On Windows, when generating dependency files (see `--generate-dependencies`), all file names must be converted appropriately for the instance of `make` that is used. Some instances of `make` have trouble with the colon in absolute paths in the native Windows format, which depends on the environment in which the `make` instance has been compiled. Use `/cygwin/` as prefix for a Cygwin `make`, and `/` as prefix for MinGW. Or leave these file names in the native Windows format by specifying nothing.

#### 5.2.5.17 `--drive-prefix prefix (-dp)`

Specify the drive prefix.

This option specifies prefix as both `--input-drive-prefix` and `--dependency-drive-prefix`.

#### 5.2.5.18 `--dependency-target-name target (-MT)`

Specify the target name of the generated rule when generating a dependency file (see `--generate-dependencies`).

#### 5.2.5.19 `--no-align-double`

Specify that `-malign-double` should not be passed as a compiler argument on 32-bit platforms.

**WARNING:** this makes the ABI incompatible with the CUDA's kernel ABI for certain 64-bit types.

#### 5.2.5.20 `--no-device-link (-nodlink)`

Skip the device link step when linking object files.

#### 5.2.5.21 `--allow-unsupported-compiler (-allow-unsupported-compiler)`

Disable nvcc check for supported host compiler versions.

Using an unsupported host compiler may cause compilation failure or incorrect run time execution. Use at your own risk. This option has no effect on MacOS.

### 5.2.6. Options for Steering CUDA Compilation

#### 5.2.6.1 `--default-stream {legacy|null|per-thread} (-default-stream)`

Specify the stream that CUDA commands from the compiled program will be sent to by default.

##### **Allowed Values**

`legacy`

The CUDA legacy stream (per context, implicitly synchronizes with other streams)

`per-thread`

Normal CUDA stream (per thread, does not implicitly synchronize with other streams)

`null`

Deprecated alias for `legacy`

##### **Default**

`legacy` is used as the default stream.

## 5.2.7. Options for Steering GPU Code Generation

### 5.2.7.1 `--gpu-architecture (-arch)`

Specify the name of the class of NVIDIA virtual GPU architecture for which the CUDA input files must be compiled.

With the exception as described for the shorthand below, the architecture specified with this option must be a *virtual* architecture (such as `compute_50`). Normally, this option alone does not trigger assembly of the generated PTX for a *real* architecture (that is the role of `nvcc` option `--gpu-code`, see below); rather, its purpose is to control preprocessing and compilation of the input to PTX.

For convenience, in case of simple `nvcc` compilations, the following shorthand is supported. If no value for option `--gpu-code` is specified, then the value of this option defaults to the value of `--gpu-architecture`. In this situation, as the only exception to the description above, the value specified for `--gpu-architecture` may be a *real* architecture (such as a `sm_50`), in which case `nvcc` uses the specified *real* architecture and its closest *virtual* architecture as the effective architecture values. For example, `nvcc --gpu-architecture=sm_50` is equivalent to `nvcc --gpu-architecture=compute_50 --gpu-code=sm_50, compute_50`. If the accelerated *real* gpu (such as `-arch=sm_90a`) is specified, then both accelerated and non-accelerated virtual code are added to the code list: `--gpu-architecture=compute_90a --gpu-code=sm_90a, compute_90, compute_90a`.

When `-arch=native` is specified, `nvcc` detects the visible GPUs on the system and generates codes for them, no PTX program will be generated for this option. It is a warning if there are no visible supported GPU on the system, and the default architecture will be used.

If `-arch=all` is specified, `nvcc` embeds a compiled code image for all supported architectures (`sm_*`), and a PTX program for the highest major virtual architecture. For `-arch=all-major`, `nvcc` embeds a compiled code image for all supported major versions (`sm_*0`), plus the earliest supported, and adds a PTX program for the highest major virtual architecture.

See [Virtual Architecture Feature List](#) for the list of supported *virtual* architectures and [GPU Feature List](#) for the list of supported *real* architectures.

#### Default

`sm_52` is used as the default value; PTX is generated for `compute_52` then assembled and optimized for `sm_52`.

### 5.2.7.2 `--gpu-code code, ... (-code)`

Specify the name of the NVIDIA GPU to assemble and optimize PTX for.

`nvcc` embeds a compiled code image in the resulting executable for each specified *code* architecture, which is a true binary load image for each *real* architecture (such as `sm_50`), and PTX code for the *virtual* architecture (such as `compute_50`).

During runtime, such embedded PTX code is dynamically compiled by the CUDA runtime system if no binary load image is found for the *current* GPU.

Architectures specified for options `--gpu-architecture` and `--gpu-code` may be *virtual* as well as *real*, but the code architectures must be compatible with the `arch` architecture. When the `--gpu-code` option is used, the value for the `--gpu-architecture` option must be a *virtual* PTX architecture.

For instance, `--gpu-architecture=compute_60` is not compatible with `--gpu-code=sm_52`, because the earlier compilation stages will assume the availability of `compute_60` features that are not present on `sm_52`.

See [Virtual Architecture Feature List](#) for the list of supported *virtual* architectures and [GPU Feature List](#) for the list of supported *real* architectures.

### 5.2.7.3 `--generate-code` specification (`-gencode`)

This option provides a generalization of the `--gpu-architecture=arch --gpu-code=code, ...` option combination for specifying `nvcc` behavior with respect to code generation.

Where use of the previous options generates code for different *real* architectures with the PTX for the same *virtual* architecture, option `--generate-code` allows multiple PTX generations for different *virtual* architectures. In fact, `--gpu-architecture=arch --gpu-code=code, ...` is equivalent to `--generate-code=arch=arch,code=code, ...`

`--generate-code` options may be repeated for different virtual architectures.

See [Virtual Architecture Feature List](#) for the list of supported *virtual* architectures and [GPU Feature List](#) for the list of supported *real* architectures.

### 5.2.7.4 `--relocatable-device-code {true|false}` (`-rdc`)

Enable or disable the generation of relocatable device code.

If disabled, executable device code is generated. Relocatable device code must be linked before it can be executed.

#### Allowed Values

- `true`
- `false`

#### Default

The generation of relocatable device code is disabled.

### 5.2.7.5 `--entries entry,... (-e)`

Specify the global entry functions for which code must be generated.

PTX generated for all entry functions, but only the selected entry functions are assembled. Entry function names for this option must be specified in the mangled name.

#### Default

`nvcc` generates code for all entry functions.



### 5.2.7.6 `--maxrregcount amount (-maxrregcount)`

Specify the maximum amount of registers that GPU functions can use.

Until a function-specific limit, a higher value will generally increase the performance of individual GPU threads that execute this function. However, because thread registers are allocated from a global register pool on each GPU, a higher value of this option will also reduce the maximum thread block size, thereby reducing the amount of thread parallelism. Hence, a good `maxrregcount` value is the result of a trade-off.

A value less than the minimum registers required by ABI will be bumped up by the compiler to ABI minimum limit.

User program may not be able to make use of all registers as some registers are reserved by compiler.

#### Default

No maximum is assumed.

### 5.2.7.7 `--use_fast_math (-use_fast_math)`

Make use of fast math library.

`--use_fast_math` implies `--ftz=true` `--prec-div=false` `--prec-sqrt=false` `--fmad=true`.

### 5.2.7.8 `--ftz {true|false} (-ftz)`

Control single-precision denormals support.

`--ftz=true` flushes denormal values to zero and `--ftz=false` preserves denormal values.

`--use_fast_math` implies `--ftz=true`.

#### Allowed Values

- ▶ true
- ▶ false

#### Default

This option is set to `false` and `nvcc` preserves denormal values.

### 5.2.7.9 `--prec-div {true|false} (-prec-div)`

This option controls single-precision floating-point division and reciprocals.

`--prec-div=true` enables the IEEE round-to-nearest mode and `--prec-div=false` enables the fast approximation mode.

`--use_fast_math` implies `--prec-div=false`.

#### Allowed Values

- ▶ true
- ▶ false

#### Default

This option is set to `true` and `nvcc` enables the IEEE round-to-nearest mode.

#### 5.2.7.10 `--prec-sqrt {true|false} (-prec-sqrt)`

This option controls single-precision floating-point square root.

`--prec-sqrt=true` enables the IEEE round-to-nearest mode and `--prec-sqrt=false` enables the fast approximation mode.

`--use_fast_math` implies `--prec-sqrt=false`.

##### Allowed Values

- ▶ true
- ▶ false

##### Default

This option is set to `true` and `nvcc` enables the IEEE round-to-nearest mode.

#### 5.2.7.11 `--fmad {true|false} (-fmad)`

This option enables (disables) the contraction of floating-point multiplies and adds/subtracts into floating-point multiply-add operations (FMAD, FFMA, or DFMA).

`--use_fast_math` implies `--fmad=true`.

##### Allowed Values

- ▶ true
- ▶ false

##### Default

This option is set to `true` and `nvcc` enables the contraction of floating-point multiplies and adds/subtracts into floating-point multiply-add operations (FMAD, FFMA, or DFMA).

#### 5.2.7.12 `--extra-device-vectorization (-extra-device-vectorization)`

This option enables more aggressive device code vectorization.

#### 5.2.7.13 `--compile-as-tools-patch (-astoolspatch)`

Compile patch code for CUDA tools. Implies `-keep-device-functions`.

May only be used in conjunction with `--ptx` or `--cubin` or `--fatbin`.

Shall not be used in conjunction with `-rdc=true` or `-ewp`.

Some PTX ISA features may not be usable in this compilation mode.

#### 5.2.7.14 **--keep-device-functions (-keep-device-functions)**

In whole program compilation mode, preserve user defined external linkage `__device__` function definitions in generated PTX.

#### 5.2.7.15 **--jump-table-density percentage (-jtd)**

Specify the case density percentage in switch statements, and use it as a minimal threshold to determine whether jump table(`brx.idx` instruction) will be used to implement a switch statement.

The percentage ranges from 0 to 101 inclusively.

##### **Default**

This option is set to 101 and `nvcc` disables jump table generation for switch statements.

### 5.2.8. Generic Tool Options

#### 5.2.8.1 **--disable-warnings (-w)**

Inhibit all warning messages.

#### 5.2.8.2 **--source-in-ptx (-src-in-ptx)**

Interleave source in PTX.

May only be used in conjunction with `--device-debug` or `--generate-line-info`.

#### 5.2.8.3 **--restrict (-restrict)**

Assert that all kernel pointer parameters are restrict pointers.

#### 5.2.8.4 **--Wno-deprecated-gpu-targets (-Wno-deprecated-gpu-targets)**

Suppress warnings about deprecated GPU target architectures.

#### 5.2.8.5 **--Wno-deprecated-declarations (-Wno-deprecated-declarations)**

Suppress warning on use of a deprecated entity.

#### 5.2.8.6 `--Wreorder (-Wreorder)`

Generate warnings when member initializers are reordered.

#### 5.2.8.7 `--Wdefault-stream-launch (-Wdefault-stream-launch)`

Generate warning when an explicit stream argument is not provided in the `<<< . . . >>>` kernel launch syntax.

#### 5.2.8.8 `--Wmissing-launch-bounds (-Wmissing-launch-bounds)`

Generate warning when a `__global__` function does not have an explicit `__launch_bounds__` annotation.

#### 5.2.8.9 `--Wext-lambda-captures-this (-Wext-lambda-captures-this)`

Generate warning when an extended lambda implicitly captures `this`.

#### 5.2.8.10 `--Werror kind, ... (-Werror)`

Make warnings of the specified kinds into errors.

The following is the list of warning kinds accepted by this option:

`all-warnings`

Treat all warnings as errors.

`cross-execution-space-call`

Be more strict about unsupported cross execution space calls. The compiler will generate an error instead of a warning for a call from a `__host____device__` to a `__host__` function.

`reorder`

Generate errors when member initializers are reordered.

`default-stream-launch`

Generate error when an explicit stream argument is not provided in the `<<< . . . >>>` kernel launch syntax.

`missing-launch-bounds`

Generate warning when a `__global__` function does not have an explicit `__launch_bounds__` annotation.

`ext-lambda-captures-this`

Generate error when an extended lambda implicitly captures `this`.

`deprecated-declarations`

Generate error on use of a deprecated entity.

**5.2.8.11 --display-error-number (-err-no)**

This option displays a diagnostic number for any message generated by the CUDA frontend compiler (note: not the host compiler).

**5.2.8.12 --no-display-error-number (-no-err-no)**

This option disables the display of a diagnostic number for any message generated by the CUDA frontend compiler (note: not the host compiler).

**5.2.8.13 --diag-error errNum,... (-diag-error)**

Emit error for specified diagnostic message(s) generated by the CUDA frontend compiler (note: does not affect diagnostics generated by the host compiler/preprocessor).

**5.2.8.14 --diag-suppress errNum,... (-diag-suppress)**

Suppress specified diagnostic message(s) generated by the CUDA frontend compiler (note: does not affect diagnostics generated by the host compiler/preprocessor).

**5.2.8.15 --diag-warn errNum,... (-diag-warn)**

Emit warning for specified diagnostic message(s) generated by the CUDA frontend compiler (note: does not affect diagnostics generated by the host compiler/preprocessor).

**5.2.8.16 --resource-usage (-res-usage)**

Show resource usage such as registers and memory of the GPU code.

This option implies `--nvlink-options=--verbose` when `--relocatable-device-code=true` is set. Otherwise, it implies `--ptxas-options=--verbose`.

**5.2.8.17 --device-stack-protector {true|false} (-device-stack-protector)**

Enable or disable the generation of stack canaries in device code. Stack canaries make it more difficult to exploit certain types of memory safety bugs involving stack-local variables. The compiler uses heuristics to assess the risk of such a bug in each function. Only those functions which are deemed high-risk make use of a stack canary.

**Allowed Values**

- ▶ true
- ▶ false

**Default**

The generation of stack canaries in device code is disabled.

**5.2.8.18 --help (-h)**

Print help information on this tool.

**5.2.8.19 --version (-V)**

Print version information on this tool.

**5.2.8.20 --options-file file,... (-optf)**

Include command line options from specified file.

**5.2.8.21 --time filename (-time)**

Generate a comma separated value table with the time taken by each compilation phase, and append it at the end of the file given as the option argument. If the file is empty, the column headings are generated in the first row of the table.

If the file name is -, the timing data is generated in stdout.

**5.2.8.22 --qpp-config config (-qpp-config)**

Specify the configuration ([[compiler/]version,][target]) when using q++ host compiler. The argument will be forwarded to the q++ compiler with its -V flag.

**5.2.8.23 --list-gpu-code (-code-ls)**

List the non-accelerated gpu architectures (sm\_XX) supported by the tool and exit.

If both `-list-gpu-code` and `-list-gpu-arch` are set, the list is displayed using the same format as the `-generate-code` value.

**5.2.8.24 --list-gpu-arch (-arch-ls)**

List the non-accelerated virtual device architectures (compute\_XX) supported by the tool and exit.

If both `-list-gpu-arch` and `-list-gpu-code` are set, the list is displayed using the same format as the `-generate-code` value.

## 5.2.9. Phase Options

The following sections lists some useful options to lower level compilation tools.

### 5.2.9.1 Ptxas Options

The following table lists some useful ptxas options which can be specified with nvcc option `-Xptxas`.

#### 5.2.9.1.1 `--allow-expensive-optimizations (-allow-expensive-optimizations)`

Enable (disable) to allow compiler to perform expensive optimizations using maximum available resources (memory and compile-time).

If unspecified, default behavior is to enable this feature for optimization level  $\geq 02$ .

#### 5.2.9.1.2 `--compile-only (-c)`

Generate relocatable object.

#### 5.2.9.1.3 `--def-load-cache (-dlcm)`

Default cache modifier on global/generic load.

#### 5.2.9.1.4 `--def-store-cache (-dscm)`

Default cache modifier on global/generic store.

#### 5.2.9.1.5 `--device-debug (-g)`

Semantics same as nvcc option `--device-debug`.

#### 5.2.9.1.6 `--disable-optimizer-constants (-disable-optimizer-consts)`

Disable use of optimizer constant bank.

#### 5.2.9.1.7 `--entry entry, ... (-e)`

Semantics same as nvcc option `--entries`.

#### 5.2.9.1.8 `--fmad (-fmad)`

Semantics same as nvcc option `--fmad`.

#### 5.2.9.1.9 `--force-load-cache (-flcm)`

Force specified cache modifier on global/generic load.

#### 5.2.9.1.10 `--force-store-cache (-fscm)`

Force specified cache modifier on global/generic store.

#### 5.2.9.1.11 `--generate-line-info (-lineinfo)`

Semantics same as nvcc option `--generate-line-info`.

#### 5.2.9.1.12 `--gpu-name gpuname (-arch)`

Specify name of NVIDIA GPU to generate code for.

This option also takes virtual compute architectures, in which case code generation is suppressed. This can be used for parsing only.

Allowed values for this option: `compute_50`, `compute_52`, `compute_53`, `compute_60`, `compute_61`, `compute_62`, `compute_70`, `compute_72`, `compute_75`, `compute_80`, `compute_86`, `compute_87`, `compute_89`, `compute_90`, `lto_50`, `lto_52`, `lto_53`, `lto_60`, `lto_61`, `lto_62`, `lto_70`, `lto_72`, `lto_75`, `lto_80`, `lto_86`, `lto_87`, `lto_89`, `lto_90`, `sm_50`, `sm_52`, `sm_53`, `sm_60`, `sm_61`, `sm_62`, `sm_70`, `sm_72`, `sm_75`, `sm_80`, `sm_86`, `sm_87`, `sm_89`, `sm_90`

Default value: `sm_52`.

#### 5.2.9.1.13 `--help (-h)`

Semantics same as nvcc option `--help`.

#### 5.2.9.1.14 `--machine (-m)`

Semantics same as nvcc option `--machine`.



#### 5.2.9.1.15 `--maxrregcount amount (-maxrregcount)`

Semantics same as nvcc option `--maxrregcount`.

#### 5.2.9.1.16 `--opt-level N (-O)`

Specify optimization level.

Default value: 3.

#### 5.2.9.1.17 `--options-file file, ... (-optf)`

Semantics same as nvcc option `--options-file`.

#### 5.2.9.1.18 `--position-independent-code (-pic)`

Generate position-independent code.

Default value:

For whole-program compilation: `true`

Otherwise: `false`

#### 5.2.9.1.19 `--preserve-relocs (-preserve-relocs)`

This option will make ptxas to generate relocatable references for variables and preserve relocations generated for them in linked executable.

#### 5.2.9.1.20 `--sp-bound-check (-sp-bound-check)`

Generate stack-pointer bounds-checking code sequence.

This option is turned on automatically when `--device-debug` or `--opt-level=0` is specified.

#### 5.2.9.1.21 `--suppress-async-bulk-multicast-advisory-warning (-suppress-async-bulk-multicast-advisory-warning)`

Suppress the warning on use of `.multicast::cluster` modifier on `cp.async.bulk{.tensor}` instruction with `sm_90`.

**5.2.9.1.22 --verbose (-v)**

Enable verbose mode which prints code generation statistics.

**5.2.9.1.23 --version (-V)**

Semantics same as nvcc option --version.

**5.2.9.1.24 --warning-as-error (-Werror)**

Make all warnings into errors.

**5.2.9.1.25 --warn-on-double-precision-use (-warn-double-usage)**

Warning if double(s) are used in an instruction.

**5.2.9.1.26 --warn-on-local-memory-usage (-warn-lmem-usage)**

Warning if local memory is used.

**5.2.9.1.27 --warn-on-spills (-warn-spills)**

Warning if registers are spilled to local memory.

**5.2.9.1.28 --compile-as-tools-patch (-astoolspatch)**

Compile patch code for CUDA tools.

Shall not be used in conjunction with -Xptxas -c or -ewp.

Some PTX ISA features may not be usable in this compilation mode.

**5.2.9.1.29 --maxntid (-maxntid)**

Specify the maximum number of threads that a thread block can have.

This option will be ignored if used along with -maxrregcount option. This option is also ignored for entry functions that have .maxntid directive specified.

**5.2.9.1.30 --minnctapersm (-minnctapersm)**

Specify the minimum number of CTAs to be mapped to an SM.

This option will be ignored if used along with `-maxrregcount` option. This option is also ignored for entry functions that have `.minnctapersm` directive specified.

**5.2.9.1.31 --override-directive-values (-override-directive-values)**

Override the PTX directives values by the corresponding option values.

This option is effective only for `-minnctapersm`, `-maxntid` and `-maxrregcount` options.

**5.2.9.1.32 --make-errors-visible-at-exit (-make-errors-visible-at-exit)**

Generate required instructions at exit point to make memory faults and errors visible at exit.

**5.2.9.1.33 --oFast-compile (-Ofc)**

Specify level to prefer device code compilation speed.

Default value: 0.

**5.2.9.1.34 --device-stack-protector {true|false} (-device-stack-protector)**

Enable or disable the generation of stack canaries in device code. Stack canaries make it more difficult to exploit certain types of memory safety bugs involving stack-local variables. The compiler uses heuristics to assess the risk of such a bug in each function. Only those functions which are deemed high-risk make use of a stack canary.

**Allowed Values**

- ▶ true
- ▶ false

**Default**

The generation of stack canaries in device code is disabled.

**5.2.9.2 NVLINK Options**

The following is a list of some useful `nvlink` options which can be specified with `nvcc` option `--nvlink-options`.

**5.2.9.2.1 --disable-warnings (-w)**

Inhibit all warning messages.

**5.2.9.2.2 --preserve-relocs (-preserve-relocs)**

Preserve resolved relocations in linked executable.

**5.2.9.2.3 --verbose (-v)**

Enable verbose mode which prints code generation statistics.

**5.2.9.2.4 --warning-as-error (-Werror)**

Make all warnings into errors.

**5.2.9.2.5 --suppress-arch-warning (-suppress-arch-warning)**

Suppress the warning that otherwise is printed when object does not contain code for target arch.

**5.2.9.2.6 --suppress-stack-size-warning (-suppress-stack-size-warning)**

Suppress the warning that otherwise is printed when stack size cannot be determined.

**5.2.9.2.7 --dump-callgraph (-dump-callgraph)**

Dump information about the callgraph and register usage.

**5.2.9.2.8 --dump-callgraph-no-demangle (-dump-callgraph-no-demangle)**

Dump callgraph information without demangling.

**5.2.9.2.9 --Xptxas (-Xptxas)**

Ptxas options (only used with LTO).

**5.2.9.2.10 --cpu-arch (-cpu-arch)**

Specify the name of the cpu target architecture.

**5.2.9.2.11 --extra-warnings (-extrawarn)**

Emit extra warnings about possible problems.

**5.2.9.2.12 --gen-host-linker-script (-ghls)**

Specify the type of host linker script to be generated.

**5.2.9.2.13 --ignore-host-info (-ignore-host-info)**

Ignore information about host references, so don't remove device code that could potentially be referenced by host.

**5.2.9.2.14 --keep-system-libraries (-keep-system-libraries)**

Don't optimize away system library (e.g. cudadevrt) code.

**5.2.9.2.15 --kernels-used (-kernels-used)**

Specify kernels that are used. Can be part of a kernel name so any kernels with that string in name are matched. If this option is used, then any other kernels are considered dead-code and removed.

**5.2.9.2.16 --options-file (-optf)**

Include command line options from the specified file.

**5.2.9.2.17 --report-arch (-report-arch)**

Report SM target arch in error messages.

**5.2.9.2.18 --suppress-debug-info (-suppress-debug-info)**

Do not preserve debug symbols in output. This option is ignored if used without -debug option.

#### 5.2.9.2.19 `--variables-used` (`-variables used`)

Specify variables that are used. Can be part of a variable name so any variable with that string in name are matched. If this option is used, then any other variables are considered dead-code and potentially removed unless have other accesses from device code.

#### 5.2.9.2.20 `--device-stack-protector {true|false}` (`-device-stack-protector`)

Enable or disable the generation of stack canaries in device code (only used with LTO). Stack canaries make it more difficult to exploit certain types of memory safety bugs involving stack-local variables. The compiler uses heuristics to assess the risk of such a bug in each function. Only those functions which are deemed high-risk make use of a stack canary.

##### Allowed Values

- ▶ true
- ▶ false

##### Default

The generation of stack canaries in device code is disabled.

## 5.3. NVCC Environment Variables

### NVCC\_PREPEND\_FLAGS and NVCC\_APPEND\_FLAGS:

The nvcc command line flags can be augmented using the following environment variables, if set:

#### NVCC\_PREPEND\_FLAGS

Flags to be injected before the normal nvcc command line.

#### NVCC\_APPEND\_FLAGS

Flags to be injected after the normal nvcc command line.

For example, after setting:

```
export NVCC_PREPEND_FLAGS='-G -keep -arch=sm_60'
export NVCC_APPEND_FLAGS='-DNAME=" foo "'
```

The following invocation:

```
nvcc foo.cu -o foo
```

Becomes equivalent to:

```
nvcc -G -keep -arch=sm_60 foo.cu -o foo -DNAME=" foo "
```

These environment variables can be useful for injecting nvcc flags globally without modifying build scripts.

The additional flags coming from either NVCC\_PREPEND\_FLAGS or NVCC\_APPEND\_FLAGS will be listed in the verbose log (`--verbose`).

**NVCC\_CCBIN:**

A default host compiler can be set using the environment variable NVCC\_CCBIN. For example, after setting:

```
export NVCC_CCBIN='gcc'
```

nvcc will choose gcc as the host compiler if `--compiler-bindir` is not set.

NVCC\_CCBIN can be useful for controlling the default host compiler globally. If NVCC\_CCBIN and `--compiler-bindir` are both set, nvcc will choose the host compiler specified by `--compiler-bindir`. For example:

```
export NVCC_CCBIN='gcc'
```

```
nvcc foo.cu -ccbin='clang' -o foo
```

In this case, nvcc will choose clang as the host compiler.





---

# Chapter 6. GPU Compilation

This chapter describes the GPU compilation model that is maintained by `nvcc`, in cooperation with the CUDA driver. It goes through some technical sections, with concrete examples at the end.

## 6.1. GPU Generations

In order to allow for architectural evolution, NVIDIA GPUs are released in different generations. New generations introduce major improvements in functionality and/or chip architecture, while GPU models within the same generation show minor configuration differences that *moderately* affect functionality, performance, or both.

Binary compatibility of GPU applications is not guaranteed across different generations. For example, a CUDA application that has been compiled for a Fermi GPU will very likely not run on a Kepler GPU (and vice versa). This is because the instruction set and instruction encodings of a generation is different from those of other generations.

Binary compatibility within one GPU generation can be guaranteed under certain conditions because they share the basic instruction set. This is the case when two GPU versions do not show functional differences (for instance when one version is a scaled down version of the other), or when one version is functionally included in the other. An example of the latter is the *base* Maxwell version `sm_50` whose functionality is a subset of all other Maxwell versions: any code compiled for `sm_50` will run on all other Maxwell GPUs.

## 6.2. GPU Feature List

The following table lists the names of the current GPU architectures, annotated with the functional capabilities that they provide. There are other differences, such as amounts of register and processor clusters, that only affect execution performance.

In the CUDA naming scheme, GPUs are named `sm_xy`, where `x` denotes the GPU generation number, and `y` the version in that generation. Additionally, to facilitate comparing GPU capabilities, CUDA attempts to choose its GPU names such that if `x1y1 <= x2y2` then all non-ISA related capabilities of `sm_x1y1` are included in those of `sm_x2y2`. From this it indeed follows that `sm_50` is the *base* Maxwell model, and it also explains why higher entries in the tables are always functional extensions to the lower entries. Moreover, if we abstract from the instruction encoding, it implies that `sm_50`'s functionality will continue to be included in all later GPU generations. As we will see next, this property will be the foundation for application compatibility support by `nvcc`.

sm_50, sm_52 and sm_53	Maxwell support
sm_60, sm_61, and sm_62	Pascal support
sm_70 and sm_72	Volta support
sm_75	Turing support
sm_80, sm_86 and sm_87	NVIDIA Ampere GPU architecture support
sm_89	Ada support
sm_90, sm_90a	Hopper support

## 6.3. Application Compatibility

Binary code compatibility over CPU generations, together with a published instruction set architecture is the usual mechanism for ensuring that distributed applications *out there in the field* will continue to run on newer versions of the CPU when these become mainstream.

This situation is different for GPUs, because NVIDIA cannot guarantee binary compatibility without sacrificing regular opportunities for GPU improvements. Rather, as is already conventional in the graphics programming domain, `nvcc` relies on a two stage compilation model for ensuring application compatibility with future GPU generations.

## 6.4. Virtual Architectures

GPU compilation is performed via an intermediate representation, PTX, which can be considered as assembly for a virtual GPU architecture. Contrary to an actual graphics processor, such a virtual GPU is defined entirely by the set of capabilities, or features, that it provides to the application. In particular, a virtual GPU architecture provides a (largely) generic instruction set, and binary instruction encoding is a non-issue because PTX programs are always represented in text format.

Hence, a `nvcc` compilation command always uses two architectures: a *virtual* intermediate architecture, plus a *real* GPU architecture to specify the intended processor to execute on. For such an `nvcc` command to be valid, the *real* architecture must be an implementation of the *virtual* architecture. This is further explained below.

The chosen virtual architecture is more of a statement on the GPU capabilities that the application requires: using a *smaller* virtual architecture still allows a *wider* range of actual architectures for the second `nvcc` stage. Conversely, specifying a virtual architecture that provides features unused by the application unnecessarily restricts the set of possible GPUs that can be specified in the second `nvcc` stage.

From this it follows that the virtual architecture should always be chosen as *low* as possible, thereby maximizing the actual GPUs to run on. The *real* architecture should be chosen as *high* as possible (assuming that this always generates better code), but this is only possible with knowledge of the actual GPUs on which the application is expected to run on. As we will see later in the situation of just-in-time compilation, where the driver has this exact knowledge, the runtime GPU is the one on which the program is about to be launched/executed.

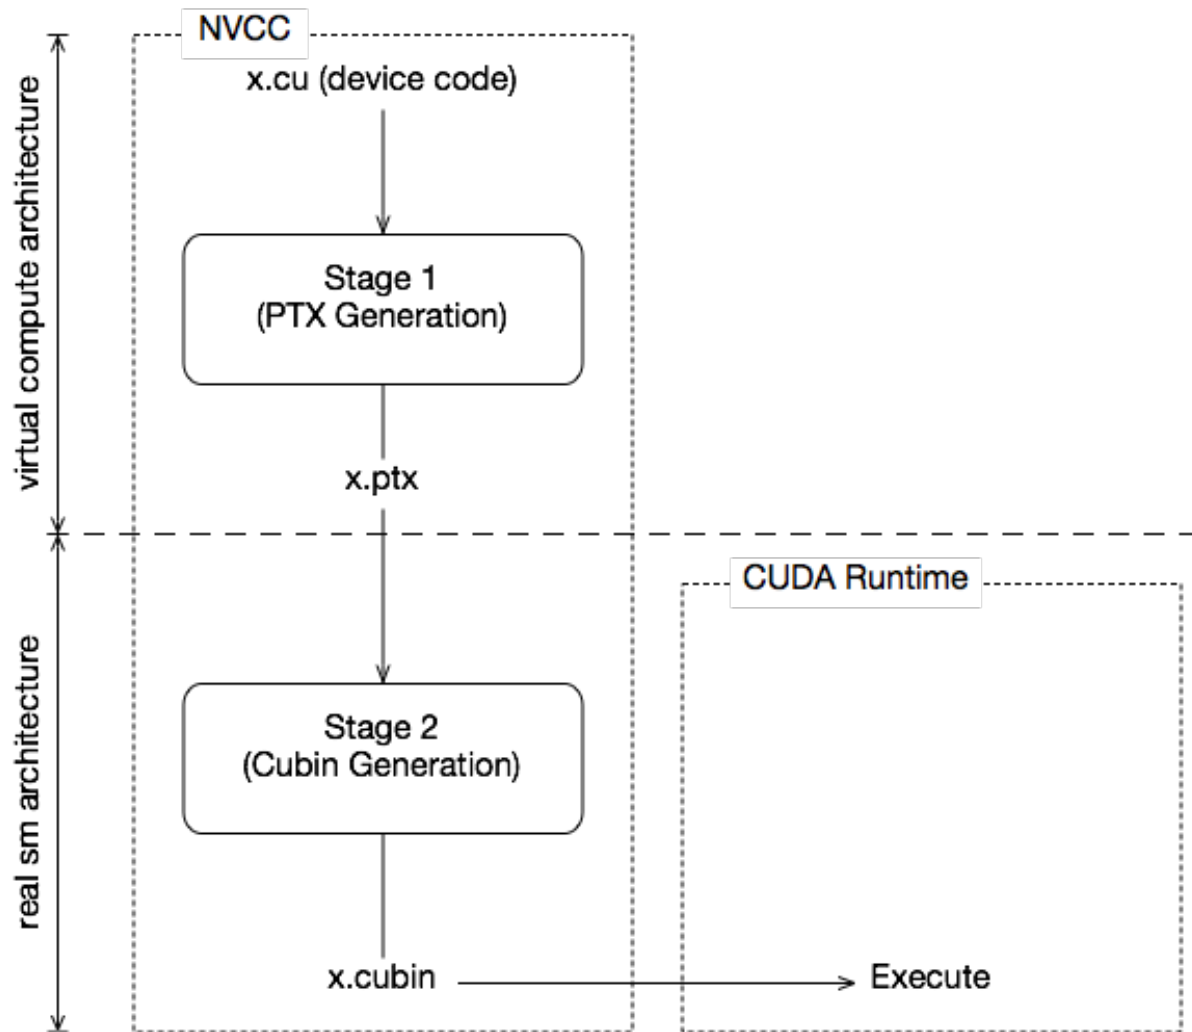


Fig. 1: Two-Staged Compilation with Virtual and Real Architectures

## 6.5. Virtual Architecture Feature List

compute_50, compute_52, and compute_53	Maxwell support
compute_60, compute_61, and compute_62	Pascal support
compute_70 and compute_72	Volta support
compute_75	Turing support
compute_80, compute_86 and compute_87	NVIDIA Ampere GPU architecture support
compute_89	Ada support
compute_90, compute_90a	Hopper support

The above table lists the currently defined virtual architectures. The virtual architecture naming scheme is the same as the real architecture naming scheme shown in [Section GPU Feature List](#).

## 6.6. Further Mechanisms

Clearly, compilation staging in itself does not help towards the goal of application compatibility with future GPUs. For this we need two other mechanisms: just-in-time compilation (JIT) and fatbinaries.

### 6.6.1. Just-in-Time Compilation

The compilation step to an actual GPU binds the code to one generation of GPUs. Within that generation, it involves a choice between GPU *coverage* and possible performance. For example, compiling to `sm_50` allows the code to run on all Maxwell generation GPUs, but compiling to `sm_53` would probably yield better code if Maxwell GM206 and later are the only targets.

By specifying a virtual code architecture instead of a *real* GPU, `nvcc` postpones the assembly of PTX code until application runtime, at which time the target GPU is exactly known. For instance, the command below allows generation of exactly matching GPU binary code, when the application is launched on an `sm_50` or later architecture.

```
nvcc x.cu --gpu-architecture=compute_50 --gpu-code=compute_50
```

The disadvantage of just-in-time compilation is increased application startup delay, but this can be alleviated by letting the CUDA driver use a compilation cache (refer to “Section 3.1.1.2. Just-in-Time Compilation” of [CUDA C++ Programming Guide](#)) which is persistent over multiple runs of the applications.

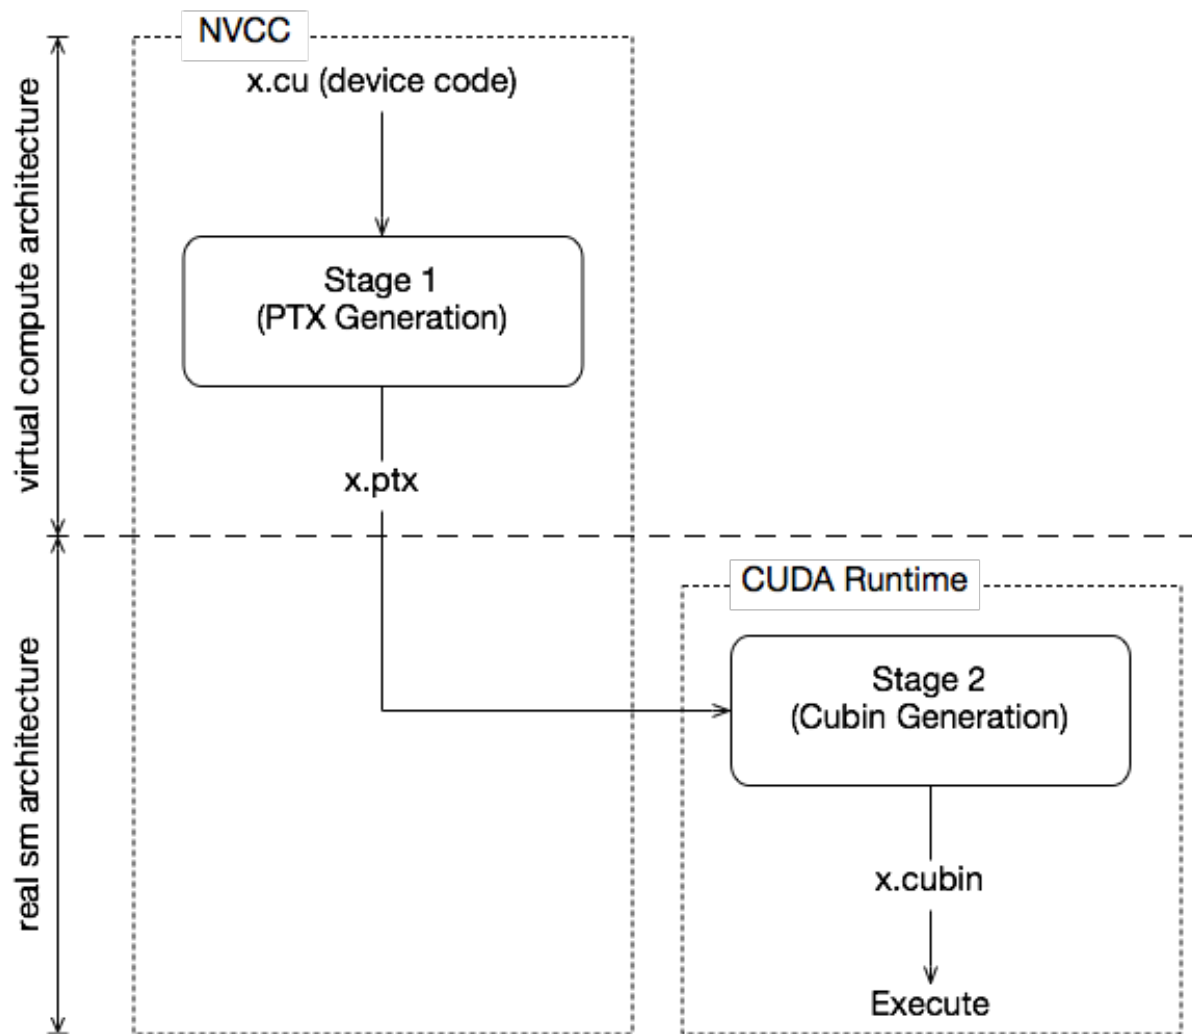


Fig. 2: Just-in-Time Compilation of Device Code

## 6.6.2. Fatbinaries

A different solution to overcome startup delay by JIT while still allowing execution on newer GPUs is to specify multiple code instances, as in

```
nvcc x.cu --gpu-architecture=compute_50 --gpu-code=compute_50,sm_50,sm_52
```

This command generates exact code for two Maxwell variants, plus PTX code for use by JIT in case a next-generation GPU is encountered. `nvcc` organizes its device code in fatbinaries, which are able to hold multiple translations of the same GPU source code. At runtime, the CUDA driver will select the most appropriate translation when the device function is launched.

## 6.7. NVCC Examples

### 6.7.1. Base Notation

`nvcc` provides the options `--gpu-architecture` and `--gpu-code` for specifying the target architectures for both translation stages. Except for allowed short hands described below, the `--gpu-architecture` option takes a single value, which must be the name of a virtual compute architecture, while option `--gpu-code` takes a list of values which must all be the names of actual GPUs. `nvcc` performs a stage 2 translation for each of these GPUs, and will embed the result in the result of compilation (which usually is a host object file or executable).

#### Example

```
nvcc x.cu --gpu-architecture=compute_50 --gpu-code=sm_50,sm_52
```

### 6.7.2. Shorthand

`nvcc` allows a number of shorthands for simple cases.

#### 6.7.2.1 Shorthand 1

`--gpu-code` arguments can be virtual architectures. In this case the stage 2 translation will be omitted for such virtual architecture, and the stage 1 PTX result will be embedded instead. At application launch, and in case the driver does not find a better alternative, the stage 2 compilation will be invoked by the driver with the PTX as input.

#### Example

```
nvcc x.cu --gpu-architecture=compute_50 --gpu-code=compute_50,sm_50,sm_52
```

### 6.7.2.2 Shorthand 2

The `--gpu-code` option can be omitted. Only in this case, the `--gpu-architecture` value can be a non-virtual architecture. The `--gpu-code` values default to the *closest* virtual architecture that is implemented by the GPU specified with `--gpu-architecture`, plus the `--gpu-architecture` value itself. The *closest* virtual architecture is used as the effective `--gpu-architecture` value. If the `--gpu-architecture` value is a virtual architecture, it is also used as the effective `--gpu-code` value.

#### Example

```
nvcc x.cu --gpu-architecture=sm_52
nvcc x.cu --gpu-architecture=compute_50
```

are equivalent to

```
nvcc x.cu --gpu-architecture=compute_52 --gpu-code=sm_52, compute_52
nvcc x.cu --gpu-architecture=compute_50 --gpu-code=compute_50
```

### 6.7.2.3 Shorthand 3

Both `--gpu-architecture` and `--gpu-code` options can be omitted.

#### Example

```
nvcc x.cu
```

is equivalent to

```
nvcc x.cu --gpu-architecture=compute_52 --gpu-code=sm_52, compute_52
```

## 6.7.3. Extended Notation

The options `--gpu-architecture` and `--gpu-code` can be used in all cases where code is to be generated for one or more GPUs using a common virtual architecture. This will cause a single invocation of `nvcc` stage 1 (that is, preprocessing and generation of virtual PTX assembly code), followed by a compilation stage 2 (binary code generation) repeated for each specified GPU.

Using a common virtual architecture means that all assumed GPU features are fixed for the entire `nvcc` compilation. For instance, the following `nvcc` command assumes no half-precision floating-point operation support for both the `sm_50` code and the `sm_53` code:

```
nvcc x.cu --gpu-architecture=compute_50 --gpu-code=compute_50, sm_50, sm_53
```

Sometimes it is necessary to perform different GPU code generation steps, partitioned over different architectures. This is possible using `nvcc` option `--generate-code`, which then must be used instead of a `--gpu-architecture` and `--gpu-code` combination.

Unlike option `--gpu-architecture` option `--generate-code`, may be repeated on the `nvcc` command line. It takes sub-options `arch` and `code`, which must not be confused with their main option equivalents, but behave similarly. If repeated architecture compilation is used, then the device code must use conditional compilation based on the value of the architecture identification macro `__CUDA_ARCH__`, which is described in the next section.

For example, the following assumes absence of half-precision floating-point operation support for the sm\_50 and sm\_52 code, but full support on sm\_53:

```
nvcc x.cu \  
  --generate-code arch=compute_50,code=sm_50 \  
  --generate-code arch=compute_50,code=sm_52 \  
  --generate-code arch=compute_53,code=sm_53
```

Or, leaving actual GPU code generation to the JIT compiler in the CUDA driver:

```
nvcc x.cu \  
  --generate-code arch=compute_50,code=compute_50 \  
  --generate-code arch=compute_53,code=compute_53
```

The code sub-options can be combined with a slightly more complex syntax:

```
nvcc x.cu \  
  --generate-code arch=compute_50,code=[sm_50,sm_52] \  
  --generate-code arch=compute_53,code=sm_53
```

## 6.7.4. Virtual Architecture Macros

The architecture identification macro `__CUDA_ARCH__` is assigned a three-digit value string `xy0` (ending in a literal `0`) for each stage 1 `nvcc` compilation that compiles for `compute_xy`.

This macro can be used in the implementation of GPU functions for determining the virtual architecture for which it is currently being compiled. The host code (the non-GPU code) must *not* depend on it.

The architecture list macro `__CUDA_ARCH_LIST__` is a list of comma-separated `__CUDA_ARCH__` values for each of the virtual architectures specified in the compiler invocation. The list is sorted in numerically ascending order.

The macro `__CUDA_ARCH_LIST__` is defined when compiling C, C++ and CUDA source files.

For example, the following `nvcc` compilation command line will define `__CUDA_ARCH_LIST__` as `500,530,800`:

```
nvcc x.cu \  
  --generate-code arch=compute_80,code=sm_80 \  
  --generate-code arch=compute_50,code=sm_52 \  
  --generate-code arch=compute_50,code=sm_50 \  
  --generate-code arch=compute_53,code=sm_53
```



---

# Chapter 7. Using Separate Compilation in CUDA

Prior to the 5.0 release, CUDA did not support separate compilation, so CUDA code could not call device functions or access variables across files. Such compilation is referred to as *whole program compilation*. We have always supported the separate compilation of host code, it was just the CUDA device code that needed to all be within one file. Starting with CUDA 5.0, separate compilation of device code is supported, but the old whole program mode is still the default, so there are new options to invoke separate compilation.

## 7.1. Code Changes for Separate Compilation

The code changes required for separate compilation of device code are the same as what you already do for host code, namely using `extern` and `static` to control the visibility of symbols. Note that previously `extern` was ignored in CUDA code; now it will be honored. With the use of `static` it is possible to have multiple device symbols with the same name in different files. For this reason, the CUDA API calls that referred to symbols by their string name are deprecated; instead the symbol should be referenced by its address.

## 7.2. NVCC Options for Separate Compilation

CUDA works by embedding device code into host objects. In whole program compilation, it embeds executable device code into the host object. In separate compilation, we embed relocatable device code into the host object, and run `nvlink`, the device linker, to link all the device code together. The output of `nvlink` is then linked together with all the host objects by the host linker to form the final executable.

The generation of relocatable vs executable device code is controlled by the `--relocatable-device-code` option.

The `--compile` option is already used to control stopping a compile at a host object, so a new option `--device-c` is added that simply does `--relocatable-device-code=true --compile`.

To invoke just the device linker, the `--device-link` option can be used, which emits a host object containing the embedded executable device code. The output of that must then be passed to the host linker. Or:

```
nvcc <objects>
```

can be used to implicitly call both the device and host linkers. This works because if the device linker does not see any relocatable code it does not do anything.

The following figure shows the flow.

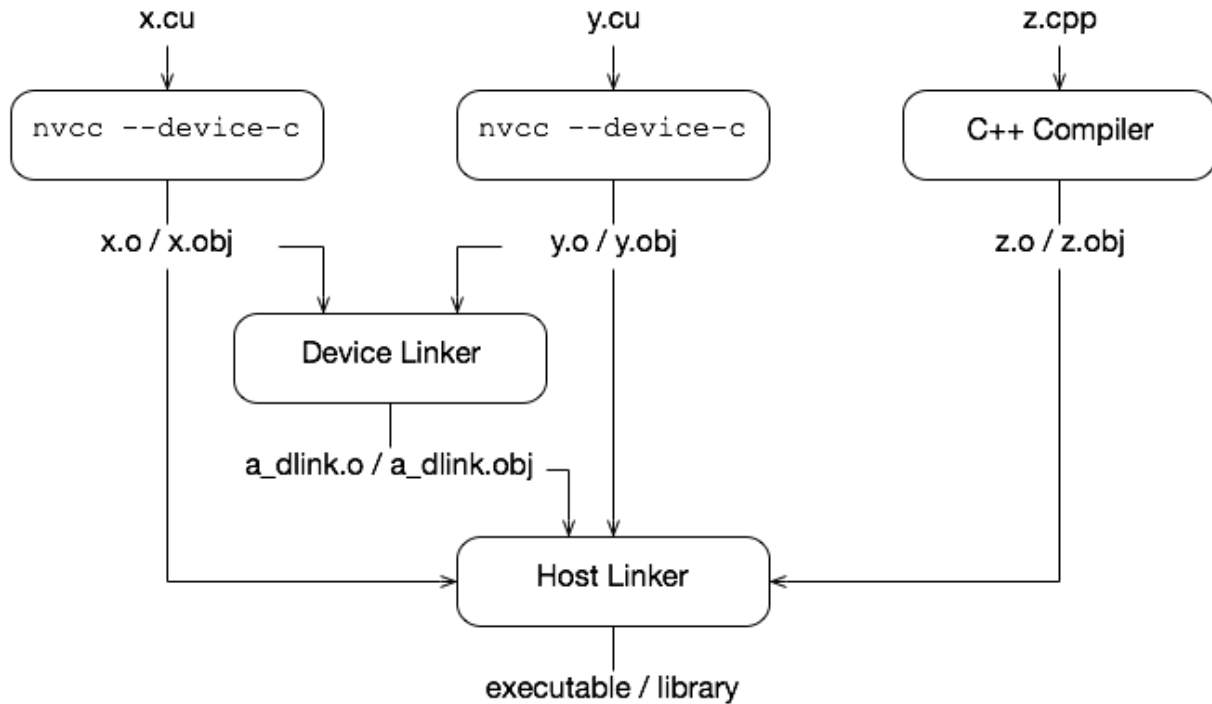


Fig. 1: CUDA Separate Compilation Trajectory

## 7.3. Libraries

The device linker has the ability to read the static host library formats (.a on Linux and Mac OS X, .lib on Windows). It ignores any dynamic (.so or .dll) libraries. The `--library` and `--library-path` options can be used to pass libraries to both the device and host linker. The library name is specified without the library file extension when the `--library` option is used.

```
nvcc --gpu-architecture=sm_50 a.o b.o --library-path=<path> --library=foo
```

Alternatively, the library name, including the library file extension, can be used without the `--library` option on Windows.

```
nvcc --gpu-architecture=sm_50 a.obj b.obj foo.lib --library-path=<path>
```

Note that the device linker ignores any objects that do not have relocatable device code.

## 7.4. Examples

Suppose we have the following files:

```
//----- b.h -----
#define N 8

extern __device__ int g[N];

extern __device__ void bar(void);
```

```
//----- b.cu -----
#include "b.h"

__device__ int g[N];

__device__ void bar (void)
{
    g[threadIdx.x]++;
}
```

```
//----- a.cu -----
#include <stdio.h>
#include "b.h"

__global__ void foo (void) {

    __shared__ int a[N];
    a[threadIdx.x] = threadIdx.x;

    __syncthreads();

    g[threadIdx.x] = a[blockDim.x - threadIdx.x - 1];

    bar();
}

int main (void) {
    unsigned int i;
    int *dg, hg[N];
    int sum = 0;

    foo<<<1, N>>>();

    if(cudaGetSymbolAddress((void**)&dg, g)){
        printf("couldn't get the symbol addr\n");
        return 1;
    }
    if(cudaMemcpy(hg, dg, N * sizeof(int), cudaMemcpyDeviceToHost)){
        printf("couldn't memcpy\n");
        return 1;
    }

    for (i = 0; i < N; i++) {
        sum += hg[i];
    }
}
```

(continues on next page)

(continued from previous page)

```
if (sum == 36) {  
    printf("PASSED\n");  
} else {  
    printf("FAILED (%d)\n", sum);  
}  
  
return 0;  
}
```

These can be compiled with the following commands (these examples are for Linux):

```
nvcc --gpu-architecture=sm_50 --device-c a.cu b.cu  
nvcc --gpu-architecture=sm_50 a.o b.o
```

If you want to invoke the device and host linker separately, you can do:

```
nvcc --gpu-architecture=sm_50 --device-c a.cu b.cu  
nvcc --gpu-architecture=sm_50 --device-link a.o b.o --output-file link.o  
g++ a.o b.o link.o --library-path=<path> --library=cudart
```

Note that all desired target architectures must be passed to the device linker, as that specifies what will be in the final executable (some objects or libraries may contain device code for multiple architectures, and the link step can then choose what to put in the final executable).

If you want to use the driver API to load a linked cubin, you can request just the cubin:

```
nvcc --gpu-architecture=sm_50 --device-link a.o b.o \  
    --cubin --output-file link.cubin
```

The objects could be put into a library and used with:

```
nvcc --gpu-architecture=sm_50 --device-c a.cu b.cu  
nvcc --lib a.o b.o --output-file test.a  
nvcc --gpu-architecture=sm_50 test.a
```

Note that only static libraries are supported by the device linker.

A PTX file can be compiled to a host object file and then linked by using:

```
nvcc --gpu-architecture=sm_50 --device-c a.ptx
```

An example that uses libraries, host linker, and dynamic parallelism would be:

```
nvcc --gpu-architecture=sm_50 --device-c a.cu b.cu  
nvcc --gpu-architecture=sm_50 --device-link a.o b.o --output-file link.o  
nvcc --lib --output-file libgpu.a a.o b.o link.o  
g++ host.o --library=gpu --library-path=<path> \  
    --library=cudadevrt --library=cudart
```

It is possible to do multiple device links within a single host executable, as long as each device link is independent of the other. This requirement of independence means that they cannot share code across device executables, nor can they share addresses (e.g., a device function address can be passed from host to device for a callback only if the device link sees both the caller and potential callback callee; you cannot pass an address from one device executable to another, as those are separate address spaces).

## 7.5. Optimization Of Separate Compilation

Separately compiled code may not have as high of performance as whole program code because of the inability to inline code across files. A way to still get optimal performance is to use link-time optimization, which stores intermediate code which is then linked together to perform high level optimizations. This can be done with the `--dlink-time-opt` or `-dlto` option. This option must be specified at both compile and link time. If only some of the files are compiled with `-dlto`, then those will be linked and optimized together while the rest uses the normal separate compilation. A side effect is that this shifts some of the compile time to the link phase, and there may be some scalability issues with really large codes. If you want to compile using `-gencode` to build for multiple arch, use `-dc -gencode arch=compute_NN,code=1to_NN` to specify the intermediate IR to be stored (where NN is the SM architecture version). Then use `-dlto` option to link for a specific architecture.

As of CUDA 12.0 there is support for runtime LTO via the `nvJitLink` library.

## 7.6. Potential Separate Compilation Issues

### 7.6.1. Object Compatibility

Only relocatable device code with the same ABI version, link-compatible SM target architecture, and same pointer size (32 or 64) can be linked together. The toolkit version of the linker must be  $\geq$  the toolkit version of the objects. Incompatible objects will produce a link error. Link-compatible SM architectures are ones that have compatible SASS binaries that can combine without translating, e.g. `sm_52` and `sm_50`. An object could have been compiled for a different architecture but also have PTX available, in which case the device linker will JIT the PTX to cubin for the desired architecture and then link. Relocatable device code requires CUDA 5.0 or later Toolkit.

If Link Time Optimization is used with `-dlto`, the intermediate LTOIR is only guaranteed to be compatible within a major release (e.g. can link together 12.0 and 12.1 LTO intermediates, but not 12.1 and 11.6).

If a kernel is limited to a certain number of registers with the `launch_bounds` attribute or the `--maxrregcount` option, then all functions that the kernel calls must not use more than that number of registers; if they exceed the limit, then a link error will be given.

### 7.6.2. JIT Linking Support

JIT linking means doing an implicit relink of the code at load time. If the cubin does not match the target architecture at load time, the driver re-invokes the device linker to generate cubin for the target architecture, by first JIT'ing the PTX for each object to the appropriate cubin, and then linking together the new cubin. If PTX or cubin for the target architecture is not found for an object, then the link will fail. Implicit JIT linking of the LTO intermediates is not supported at this time, although they can be explicitly linked with the `nvJitLink` library.

### 7.6.3. Implicit CUDA Host Code

A file like `b.o` above only contains CUDA device code, so one might think that the `b.o` object doesn't need to be passed to the host linker. But actually there is implicit host code generated whenever a device symbol can be accessed from the host side, either via a launch or an API call like `cudaGetSymbolAddress()`. This implicit host code is put into `b.o`, and needs to be passed to the host linker. Plus, for JIT linking to work all device code must be passed to the host linker, else the host executable will not contain device code needed for the JIT link. So a general rule is that the device linker and host linker must see the same host object files (if the object files have any device references in them—if a file is pure host then the device linker doesn't need to see it). If an object file containing device code is not passed to the host linker, then you will see an error message about the function `__cudaRegisterLinkedBinary_name` calling an undefined or unresolved symbol `__fatbinwrap_name`.

### 7.6.4. Using `__CUDA_ARCH__`

In separate compilation, `__CUDA_ARCH__` must not be used in headers such that different objects could contain different behavior. Or, it must be guaranteed that all objects will compile for the same compute\_arch. If a weak function or template function is defined in a header and its behavior depends on `__CUDA_ARCH__`, then the instances of that function in the objects could conflict if the objects are compiled for different compute arch. For example, if an `a.h` contains:

```
template<typename T>
__device__ T* getptr(void)
{
    #if __CUDA_ARCH__ == 500
        return NULL; /* no address */
    #else
        __shared__ T arr[256];
        return arr;
    #endif
}
```

Then if `a.cu` and `b.cu` both include `a.h` and instantiate `getptr` for the same type, and `b.cu` expects a non-NULL address, and compile with:

```
nvcc --gpu-architecture=compute_50 --device-c a.cu
nvcc --gpu-architecture=compute_52 --device-c b.cu
nvcc --gpu-architecture=sm_52 a.o b.o
```

At link time only one version of the `getptr` is used, so the behavior would depend on which version is picked. To avoid this, either `a.cu` and `b.cu` must be compiled for the same compute arch, or `__CUDA_ARCH__` should not be used in the shared header function.

## 7.6.5. Device Code in Libraries

If a device function with non-weak external linkage is defined in a library as well as a non-library object (or another library), the device linker will complain about the multiple definitions (this differs from traditional host linkers that may ignore the function definition from the library object, if it was already found in an earlier object).





---

# Chapter 8. Miscellaneous NVCC Usage

## 8.1. Cross Compilation

Cross compilation is controlled by using the following `nvcc` command line option:

- `--compiler-bindir` is used for cross compilation, where the underlying host compiler is capable of generating objects for the target platform.

On an x86 system, if a CUDA toolkit installation has been configured to support cross compilation to both Tegra and non-Tegra ARM targets, then `nvcc` will use the non-Tegra configuration by default, when an ARM host cross compiler has been specified. To use the Tegra configuration instead, pass `--target-dir aarch64-linux` to `nvcc`.

## 8.2. Keeping Intermediate Phase Files

`nvcc` stores intermediate results by default into temporary files that are deleted immediately before it completes. The location of the temporary file directories used are, depending on the current platform, as follows:

### Windows

Value of environment variable `TEMP` is used. If it is not set, `C:\Windows\temp` is used instead.

### Other Platforms

Value of environment variable `TMPDIR` is used. If it is not set, `/tmp` is used instead.

Option `--keep` makes `nvcc` store these intermediate files in the current directory or in the directory specified by `--keep-dir` instead, with names as described in [Supported Phases](#).

## 8.3. Cleaning Up Generated Files

All files generated by a particular `nvcc` command can be cleaned up by repeating the command, but with additional option `--clean-targets`. This option is particularly useful after using `--keep`, because the `--keep` option usually leaves quite an amount of intermediate files around.

Because using `--clean-targets` will remove exactly what the original `nvcc` command created, it is important to exactly repeat all of the options in the original command. For instance, in the following example, omitting `--keep`, or adding `--compile` will have different cleanup effects.

```
nvcc acos.cu --keep
nvcc acos.cu --keep --clean-targets
```

## 8.4. Printing Code Generation Statistics

A summary on the amount of used registers and the amount of memory needed per compiled device function can be printed by passing option `--resource-usage` to `nvcc`:

```
$ nvcc --resource-usage acos.cu -arch sm_80
ptxas info      : 1536 bytes gmem
ptxas info      : Compiling entry function 'acos_main' for 'sm_80'
ptxas info      : Function properties for acos_main
                  0 bytes stack frame, 0 bytes spill stores, 0 bytes spill loads
ptxas info      : Used 6 registers, 1536 bytes smem, 32 bytes cmem[0]
```

As shown in the above example, the amount of statically allocated global memory (gmem) is listed.

Global memory and some of the constant banks are module scoped resources and not per kernel resources. Allocation of constant variables to constant banks is profile specific.

Followed by this, per kernel resource information is printed.

Stack frame is per thread stack usage used by this function. Spill stores and loads represent stores and loads done on stack memory which are being used for storing variables that couldn't be allocated to physical registers.

Similarly number of registers, amount of shared memory and total space in constant bank allocated is shown.

---

# Chapter 9. Notices

## 9.1. Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. NVIDIA Corporation (“NVIDIA”) makes no representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. NVIDIA shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any Material (defined below), code, or functionality.

NVIDIA reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice.

Customer should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

NVIDIA products are sold subject to the NVIDIA standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NVIDIA and customer (“Terms of Sale”). NVIDIA hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the NVIDIA product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

NVIDIA products are not designed, authorized, or warranted to be suitable for use in medical, military, aircraft, space, or life support equipment, nor in applications where failure or malfunction of the NVIDIA product can reasonably be expected to result in personal injury, death, or property or environmental damage. NVIDIA accepts no liability for inclusion and/or use of NVIDIA products in such equipment or applications and therefore such inclusion and/or use is at customer’s own risk.

NVIDIA makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by NVIDIA. It is customer’s sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product. Weaknesses in customer’s product designs may affect the quality and reliability of the NVIDIA product and may result in additional or different conditions and/or requirements beyond those contained in this document. NVIDIA accepts no liability related to any default, damage, costs, or problem which may be based on or attributable to: (i) the use of the NVIDIA product in any manner that is contrary to this document or (ii) customer product designs.

No license, either expressed or implied, is granted under any NVIDIA patent right, copyright, or other NVIDIA intellectual property right under this document. Information published by NVIDIA regarding third-party products or services does not constitute a license from NVIDIA to use such products or

services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property rights of the third party, or a license from NVIDIA under the patents or other intellectual property rights of NVIDIA.

Reproduction of information in this document is permissible only if approved in advance by NVIDIA in writing, reproduced without alteration and in full compliance with all applicable export laws and regulations, and accompanied by all associated conditions, limitations, and notices.

THIS DOCUMENT AND ALL NVIDIA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." NVIDIA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL NVIDIA BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF ANY USE OF THIS DOCUMENT, EVEN IF NVIDIA HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Notwithstanding any damages that customer might incur for any reason whatsoever, NVIDIA's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms of Sale for the product.

## 9.2. OpenCL

OpenCL is a trademark of Apple Inc. used under license to the Khronos Group Inc.

## 9.3. Trademarks

NVIDIA and the NVIDIA logo are trademarks or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

## Copyright

©2012-2024, NVIDIA Corporation & affiliates. All rights reserved