





## FL112S/DX G5 19W T935

White LED strips

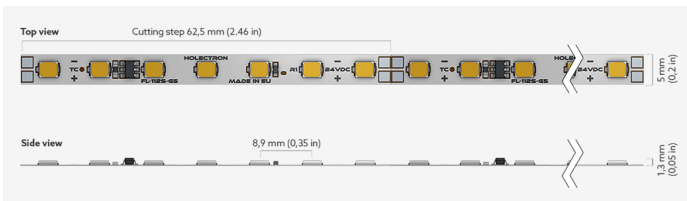

|                          |                       |
|--------------------------|-----------------------|
| <b>LIGHT TYPE</b>        | White                 |
| <b>LED Qty</b>           | 112 LEDs/m            |
| <b>CCT</b>               | 3500K                 |
| <b>CRI</b>               | CRI90                 |
| <b>COLOR CONSISTENCY</b> | 3-Step MacAdam        |
| <b>PHOTOMETRIC</b>       | 120° beam angle       |
| <b>LUMINOUS FLUX</b>     | 2643 Lm/m (806 Lm/ft) |
| <b>EFFICACY</b>          | 138 Lm/W              |
| <b>LIFETIME</b>          | L70B10 > 50.000h      |

|                |          |
|----------------|----------|
| <b>CONTROL</b> | Dimmable |
|----------------|----------|

|                |                      |
|----------------|----------------------|
| <b>VOLTAGE</b> | 24 VDC               |
| <b>WATTAGE</b> | 19.2 W/m (5.85 W/ft) |

|                     |                                          |
|---------------------|------------------------------------------|
| <b>CUTTING STEP</b> | 6,25 cm (2,46 in)                        |
| <b>MAX RUN</b>      | 4.5 m (14.8 ft)                          |
| <b>PACKING</b>      | 10 m, 50 m or customized length per reel |
| <b>DIMENSIONS</b>   | Width: 5mm; Height: 1.33mm               |

|                        |                                 |
|------------------------|---------------------------------|
| <b>TEMPERATURE</b>     | Tc max 75°C ( 167°F )           |
| <b>OPERATING TEMP.</b> | -25°C...+50°C ( -13°F...122°F ) |
| <b>STORAGE TEMP.</b>   | -25°C...+80°C ( -13°F...176°F ) |

