

1 Report

by Gullik Vetvik Killie, Steffen Brask Add yourself

Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

1.1 Introduction

Langmuir probes, as well as other instruments, are often situated outside of space crafts. The presence of the spacecraft causes disturbances to the local conditions we want to measure, these disturbances need to be corrected for. Many studies has been done on the flow of plasma around spacecraft and of the wake the spacecraft creates (Miloch, 2010; Engwall et al., 2006).

1.2 Theory

1.3 Numerical Methods

1.4 Results

1.4.1 Induced electric current

The plasma is flowing in in relation to the coordinate system in the simulations. Due to this an induced electrical field, $\vec{\varepsilon}$, will appear. The induced electrical field will neutralize the Lorentz force. Combined with the electrostatic approximation we can obtain the $\vec{\varepsilon}$

$$\vec{\varepsilon} = v_D \times \vec{B} \quad (1.1)$$

This will cause a potential gradient perpendicular to the plasma flow and the magnetic field, using the electrostatic approximation we obtain the magnitude of the gradient.

$$\int E dx = -\phi \quad (1.2)$$

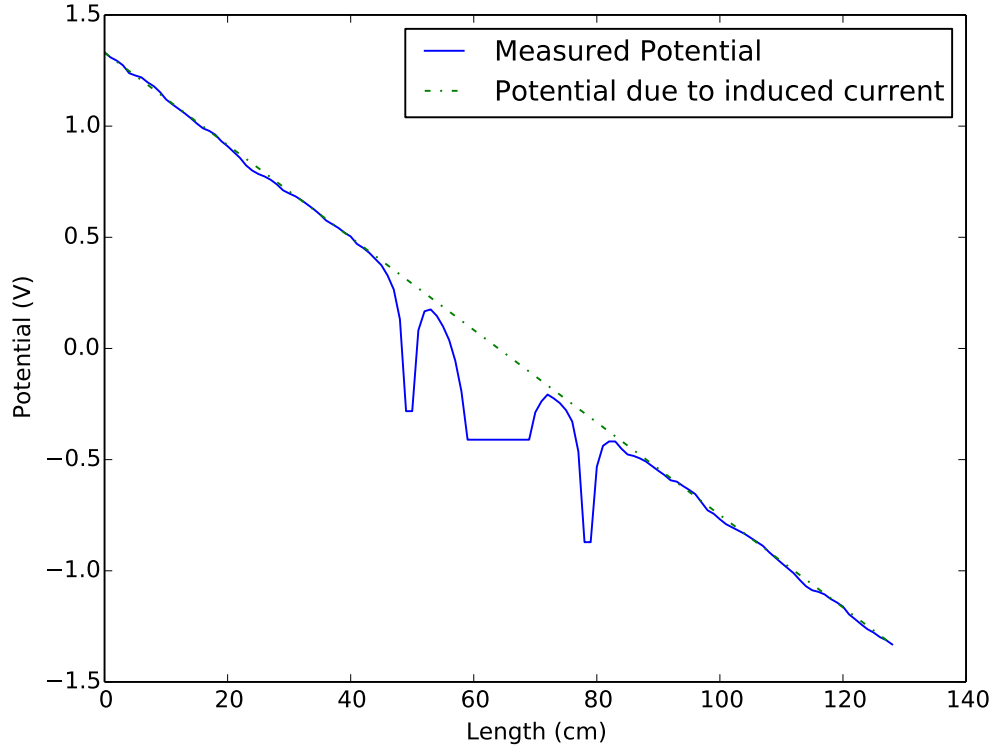


Figure 1.1: The blue line is the potential along direction x for simulation 6. In this case the potential gradient is along the x -axis. The dotted green line is the potential caused by the induced electrical field. This should be accounted for if we want to find the potential at the spacecraft and the probes.

$$\phi = - \int \vec{v}_d \times \vec{B} \approx - \int (41600\text{m/s} \cdot 50E - 6T) dx \quad (1.3)$$

$$|\nabla\phi| = 2.08\text{m}^{-1} \quad (1.4)$$

Figure 1.2 shows the measured potential at case 6.

1.4.2 Photoemmission paths

The electrons emitted from the spacecraft due to the photoelectric effect, have a kinetic energy corresponding to a Maxwellian distribution with a temperature of $T_{ph} = 3.8481 \cdot 10^4\text{K}$. Figure 1.3 illustrates the trajectories of the emitted electrons in simulation 6. As the probes are situated 10cm to the sides of the spacecraft on the x -axis, the probes may be hit by the photo-emitted electrons. In the following section, ??, we show the number of electrons hitting the probes.

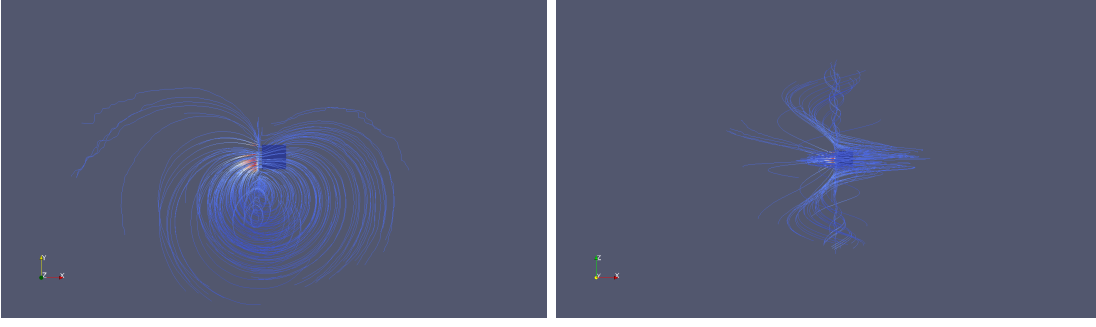


Figure 1.2: The trajectories of the electrons emitted by the photoelectric effect in simulation 6. The possible paths of the photoemitted electrons coincide with the volume occupied by the langmuir probes. The photoemitted electrons are strongly affected by the magnetic field \vec{B} , and follows a gyrating path guided by \vec{B} . The photoemitted electrons are in all the studied cases emitted from the spacecraft in $-x$ direction, and the paths are similar. The langmuir probes are situated 10cm to each side of the spacecraft along the x -direction. (NOTE, should have axis labels, and domain length.)

1.4.3 Accumulated Photoelectrons on Langmuir Probes

In the simulations both electrons and photoelectrons are absorbed by the probes. Table 1.4 shows the current of both regular electrons, as well as photoelectrons, interacting with the probes. The photoelectrons are emitted on the left side of the spacecraft and we see a larger current of photoelectrons here. The current caused by the photoemission is 10 – 100 smaller than the current from the electrons in the plasma.

	probe to +x	probe to -x		probe to +x	probe to -x
case 1	2.207E-07	2.851 E-07	case 4	2.3324E-09	3.49699E-08
case 2	2.794E-07	2.807E-07	case 5	1.9598E-09	3.51036E-08
case 3	2.786E-07	2.772E-07	case 6	1.3824E-09	3.66922E-08
case 4	2.117E-07	2.609E-07			
case 5	2.754E-07	2.616E-07			
case 6	2.777E-07	2.512E-07			

Figure 1.3: The left table shows the electron current hitting the inserted probes at for the simulated cases 1 – 6. On the table to the right the photoelectrons hitting the probes are shown. The photoelectron current is smaller than the electron current from the plasma, varying from 10 – 100 times smaller.

1.4.4 Potential difference with P-E and no P-E

Case 1 vs case 4

Here we have the emitted electrons in the negative flow direction. As expected this leads to a drop in potential in the left probe which is facing the plasma flow. The potential drop over the probe is 3.8%. The right probe is now the wake where we have a drop in




Figure 1.4: Potential of satellite and surroundings in the x-direction for case 1 and case 4.

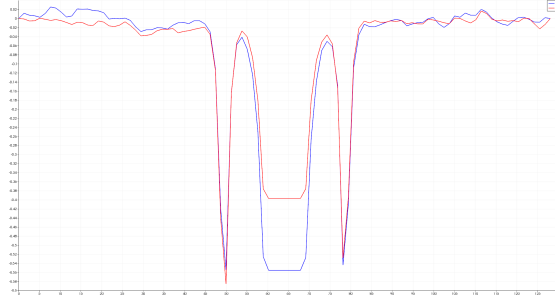


Figure 1.5: Figure show potential of satellite and surroundings in the x-direction for case 2 and 5.

the ion density. This yields a large drop in potential compared to the left probe, but it also has a larger than the left probe when comparing case 1 and 4. This might be because the potential drop on the left side redirects more ions from the right side. The potential drop comparing the two cases is 10%. The potential rise over the satellite is 28%.

Case 2 vs case 5

With the flow of emitted electrons in the negative x direction we would expect a rise in electron density around the left probe. This can be seen in figure 1.6 where we see a 5.4% drop in the potential of this probe compared to case 5 with no emitted electrons. On the right probe we have a small rise in the potential of 3.3%. With no emitted electrons on this side of the satellite the rise in potential can be explained by looking at the increase in ion density as seen in figure ???. In the satellite we have a potential rise of 28%. So the change in potential in the probes are small compared to the change in the satellite.

Case 3 vs case 6

A rather large drop in potential of 12% on both probes. Potential rise of 26% over the satellite.

1.4.5 Wake plots

The spacecraft is moving relative to the plasma flow, this causes a wake to be formed in the vicinity of the craft. Figures 1.8 illustrates the flow in case 1, 2 and 3.

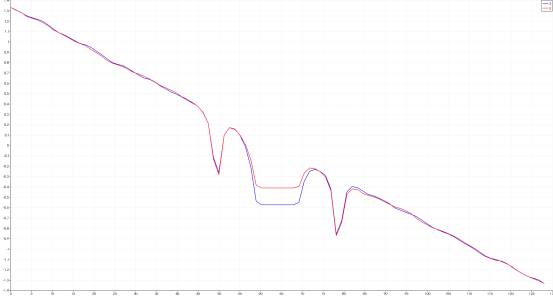


Figure 1.6: Figure show potential of satellite and surroundings in the x-direction for case 3 and 6.

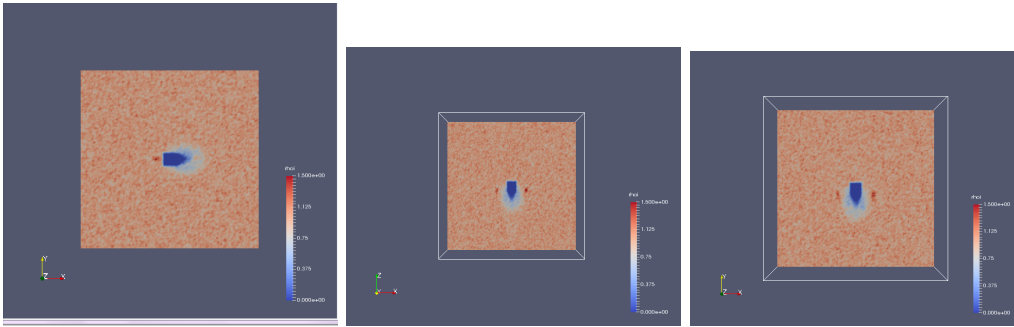


Figure 1.7: Ion density of spacecraft and surroundings without P-E Figure on the left displays case 1. Middle figure displays case 2. Rightmost figure displays case 3.

1.5 Discussion

1.6 Conclusions

In the simulated cases with exaggerated

- Proposal for further studies (Probably see if photoemmission is relevant in tenuous plasma (MEO CASE, magnetospheric tail lobes))

Bibliography

- Engwall, E. et al. (2006). “Wake formation behind positively charged spacecraft in flowing tenuous plasmas”. In: *Physics of Plasmas (1994-present)* 13.6, p. 062904. ISSN: 1070-664X, 1089-7674. DOI: [10.1063/1.2199207](https://doi.org/10.1063/1.2199207). URL: <http://scitation.aip.org/content/aip/journal/pop/13/6/10.1063/1.2199207> (visited on 27/10/2016).
- Miloch, W. J. (2010). “Wake effects and Mach cones behind objects”. en. In: *Plasma Physics and Controlled Fusion* 52.12, p. 124004. ISSN: 0741-3335. DOI: [10.1088/0741-3335/52/12/124004](https://doi.org/10.1088/0741-3335/52/12/124004). URL: <http://stacks.iop.org/0741-3335/52/i=12/a=124004> (visited on 27/10/2016).
- Nakashima, H. et al. (2009). “OhHelp: a scalable domain-decomposing dynamic load balancing for particle-in-cell simulations”. en. In: ACM Press, p. 90. ISBN: 978-1-60558-498-0. DOI: [10.1145/1542275.1542293](https://doi.org/10.1145/1542275.1542293). URL: <http://portal.acm.org/citation.cfm?doid=1542275.1542293> (visited on 27/10/2016).