





SCEC TPV104: strike slip rate at every station; LTS p=1 200 m (Vista 1082587) (dashed) against gold (Vista 1075919) and DRDG3D
x2_-12_x3_3
x2_0_x3_3
x2_12_x3_3
x2_-9_x3_7.5
x2_0_x3_7.5
x2_9_x3_7.5
x2_-12_x3_12
x2_0_x3_12
x2_12_x3_12
strike slip rate (m/s)
DRDG3D
gold (Vista 1075919)
LTS p=1 200 m (Vista 1082587)


SCEC TPV104 station x2_-12_x3_3 (strike -12 km, depth 3 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.74 ms peak -0.040 % final slip -0.092 %; vs DRDG3D: arrival -0.106 s peak -16.7 % slip -3.54 %

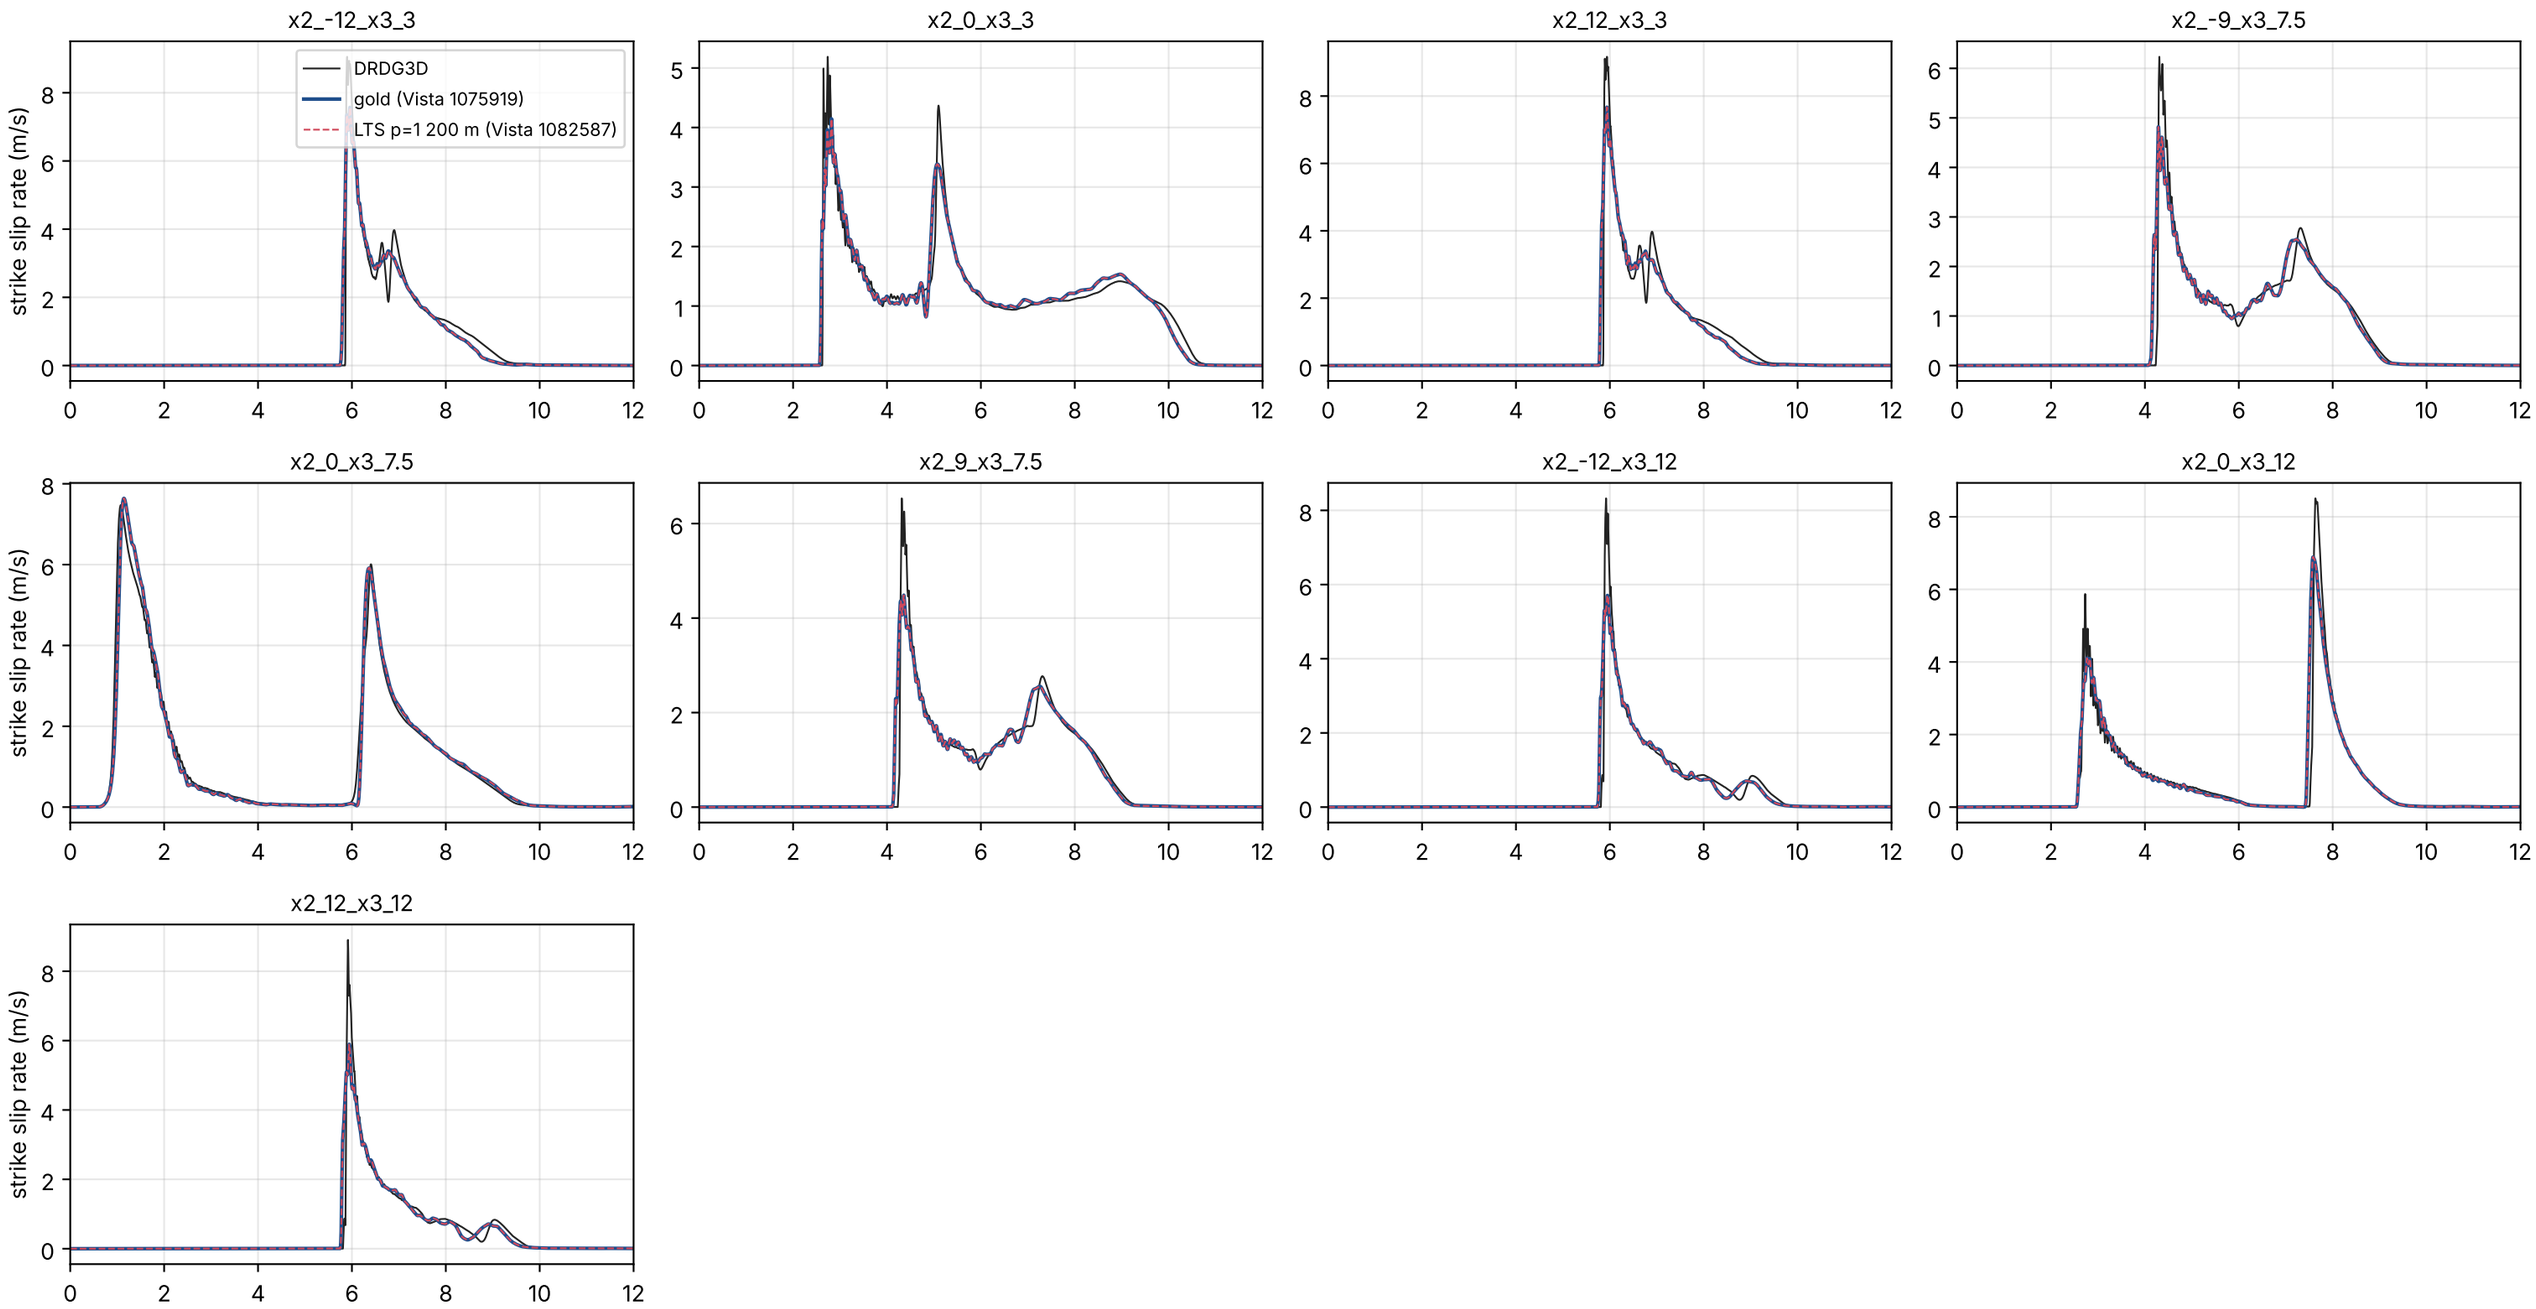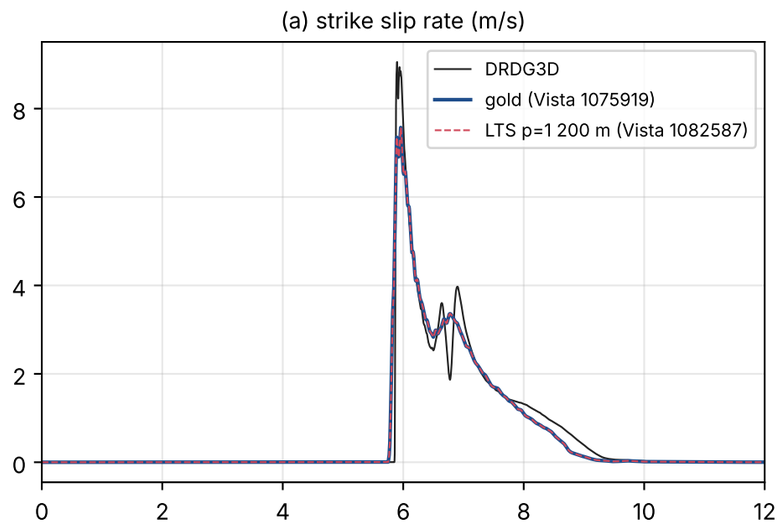


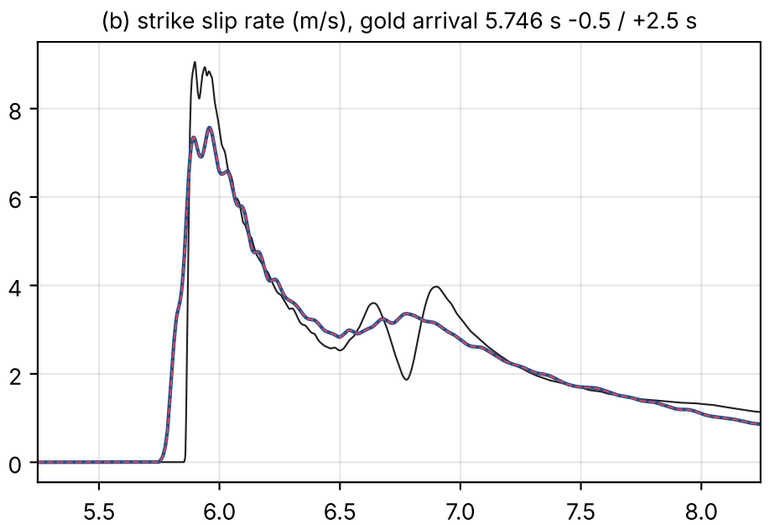


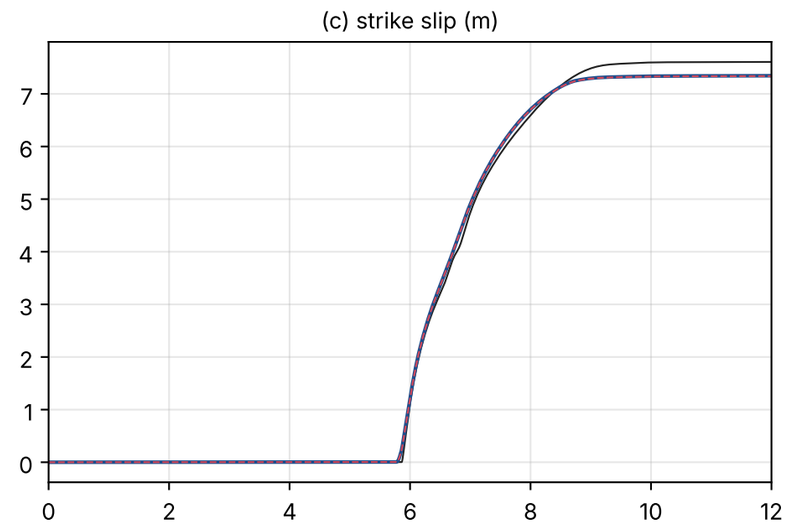


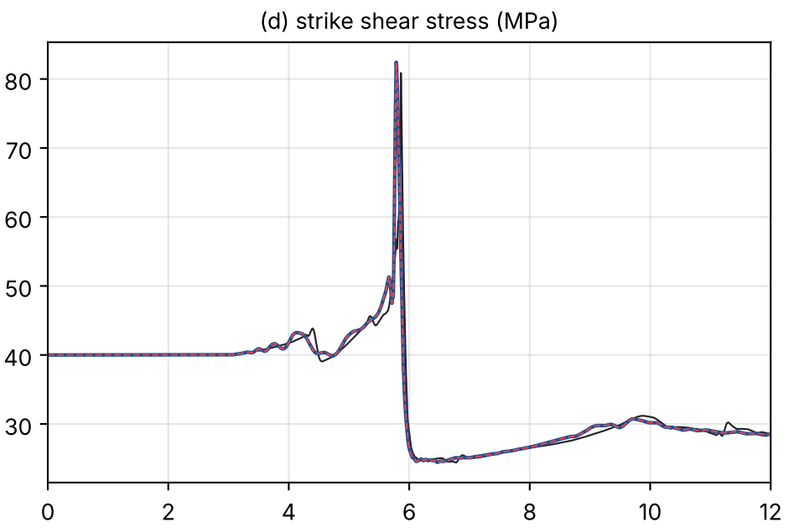


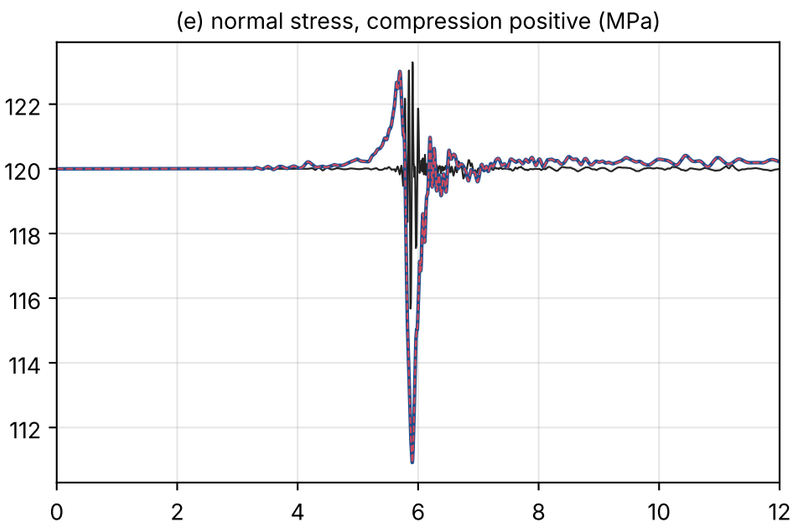


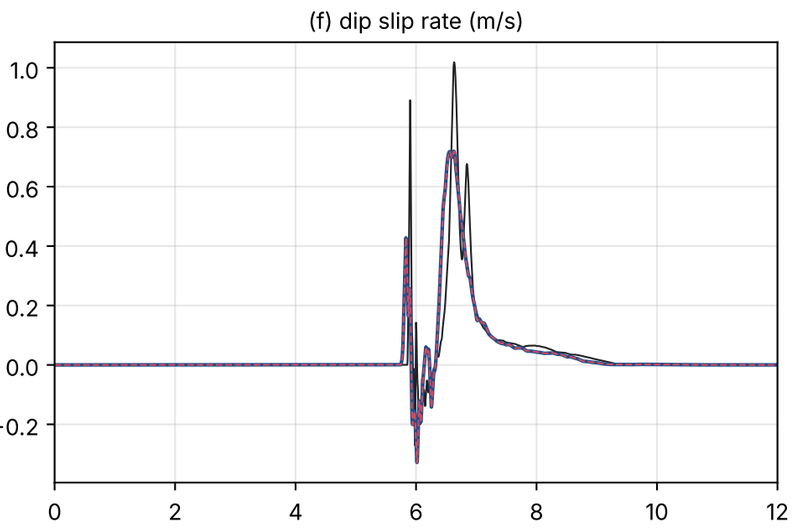


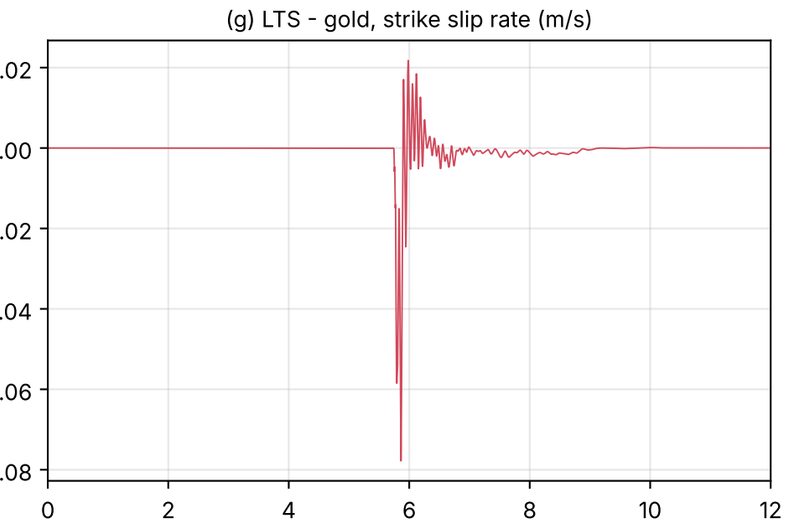


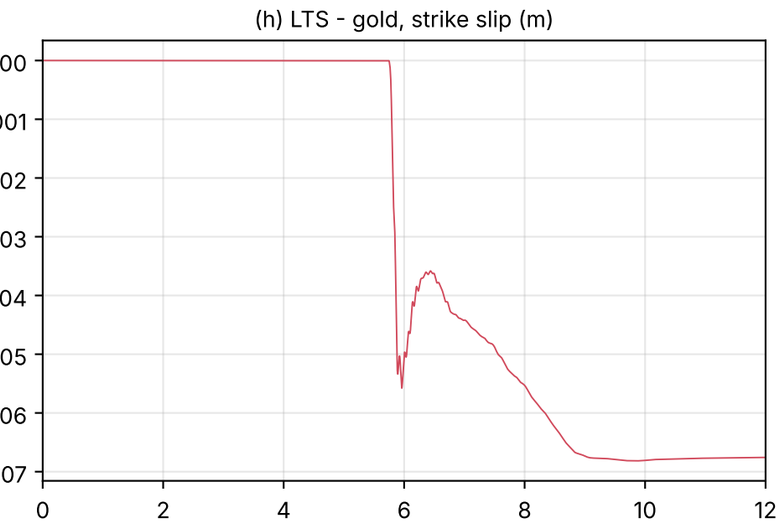

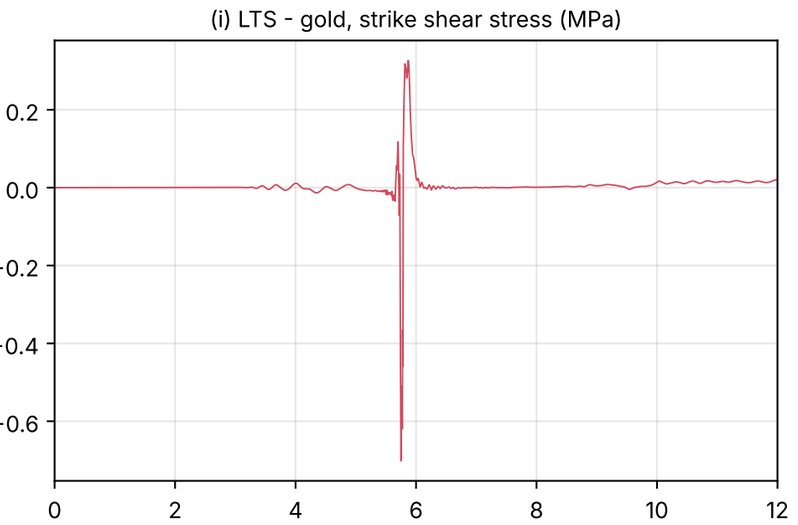

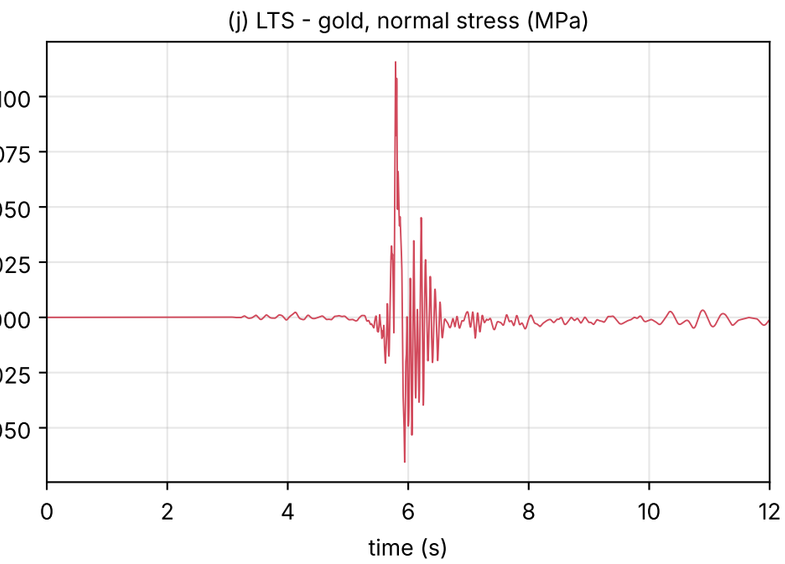


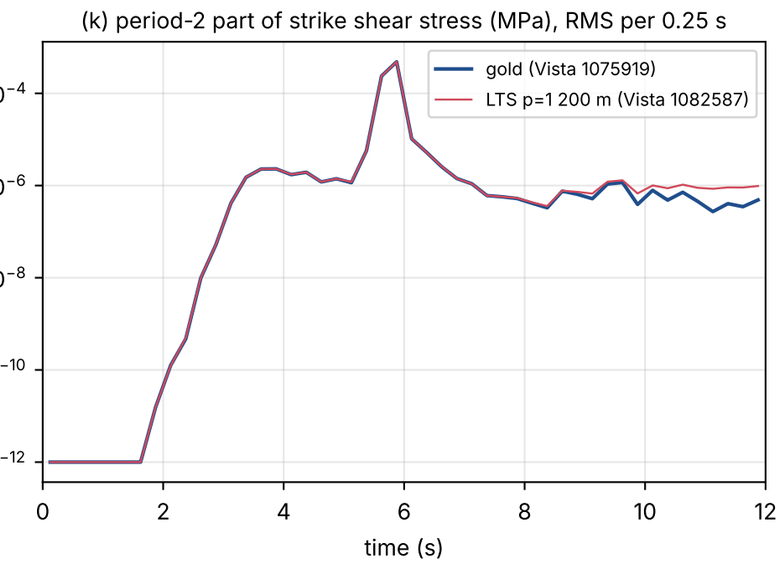

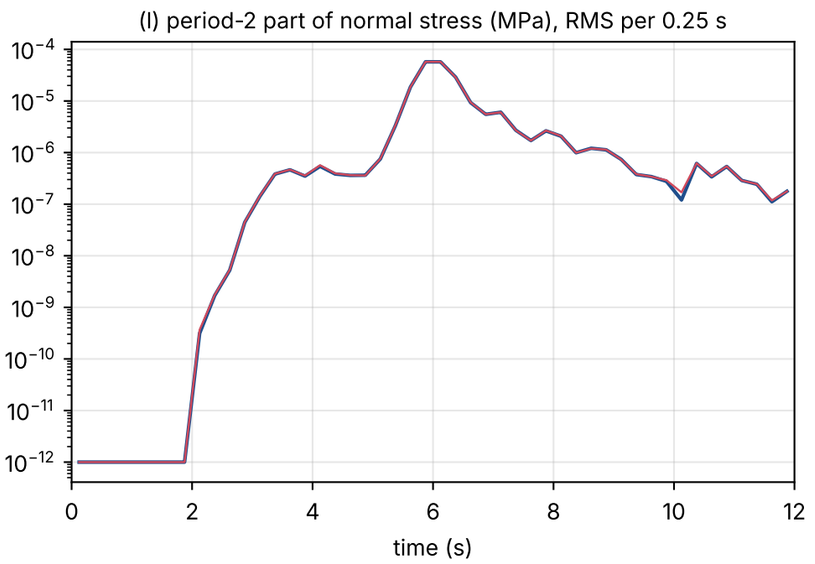


SCEC TPV104 station x2_0_x3_3 (strike 0 km, depth 3 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.25 ms peak -0.070 % final slip -0.045 %; vs DRDG3D: arrival -0.060 s peak -20.2 % slip -0.37 %


(a) strike slip rate (m/s)

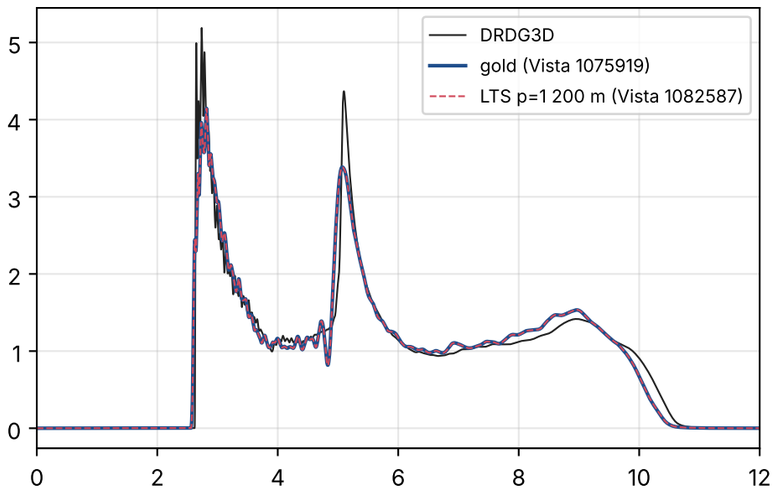


(b) strike slip rate (m/s), gold arrival 2.559 s -0.5 / +2.5 s

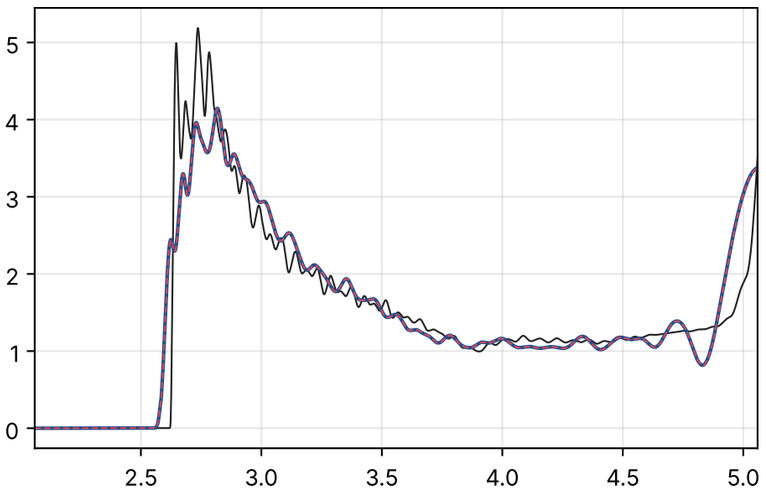


(c) strike slip (m)

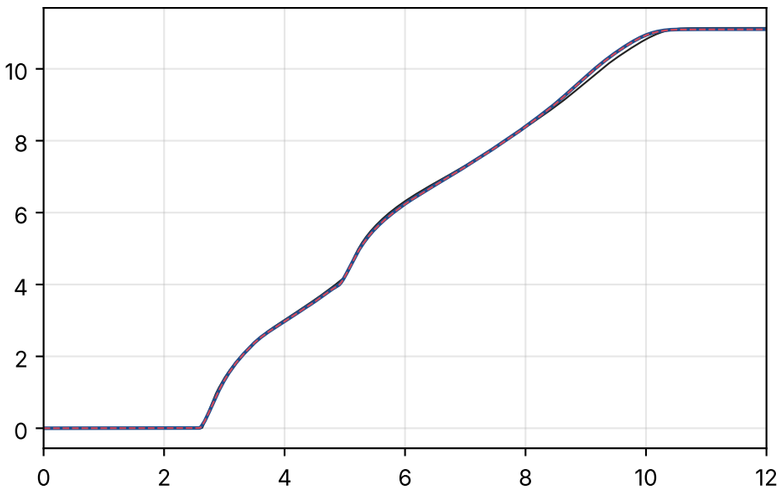


(d) strike shear stress (MPa)

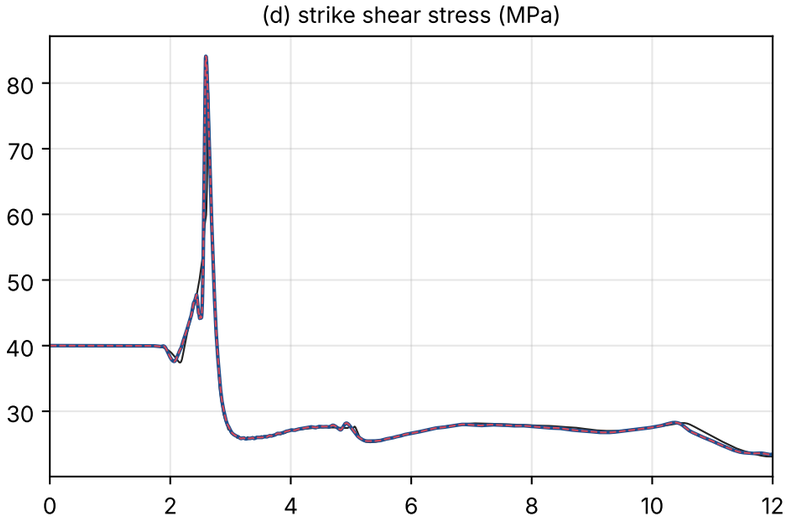


(e) normal stress, compression positive (MPa)

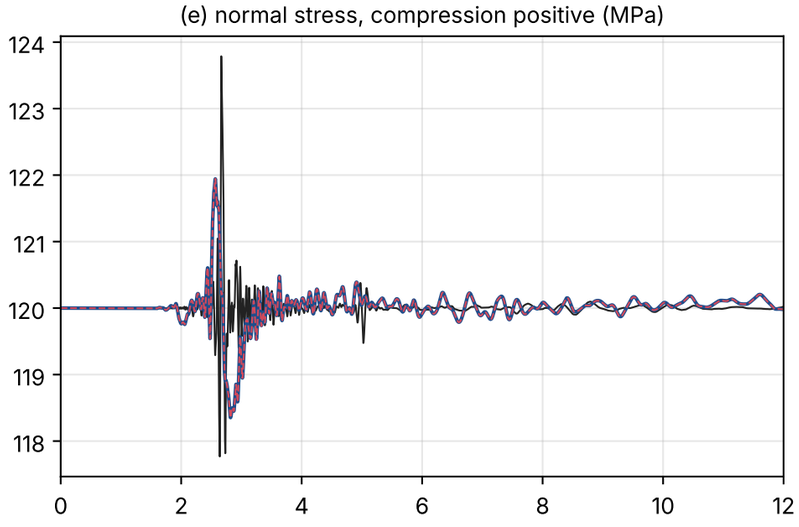


(f) dip slip rate (m/s)

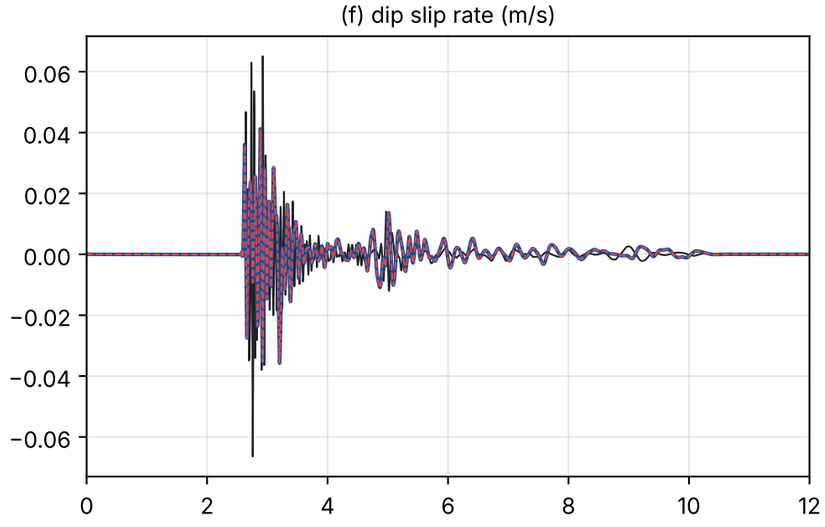


(g) LTS - gold, strike slip rate (m/s)

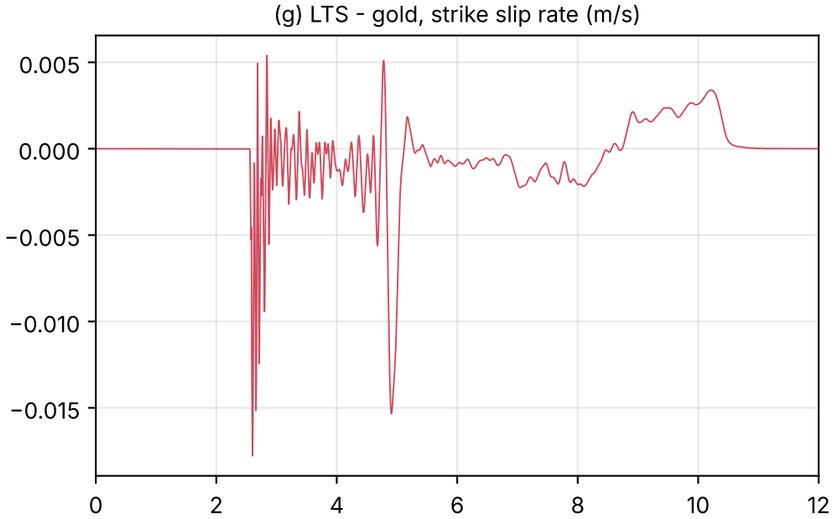


(h) LTS - gold, strike slip (m)

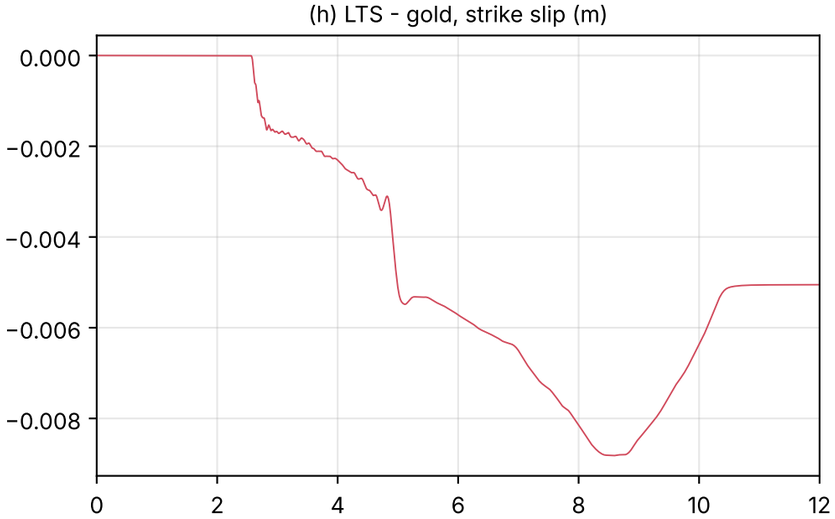


(i) LTS - gold, strike shear stress (MPa)

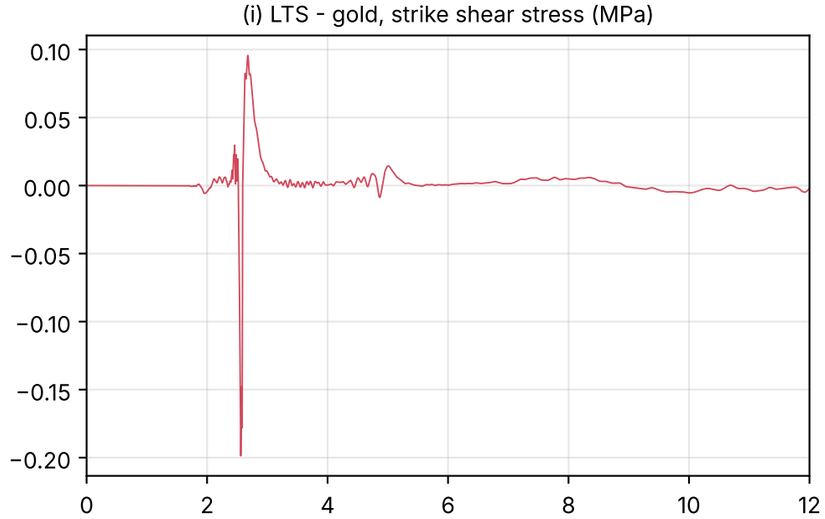


(j) LTS - gold, normal stress (MPa)

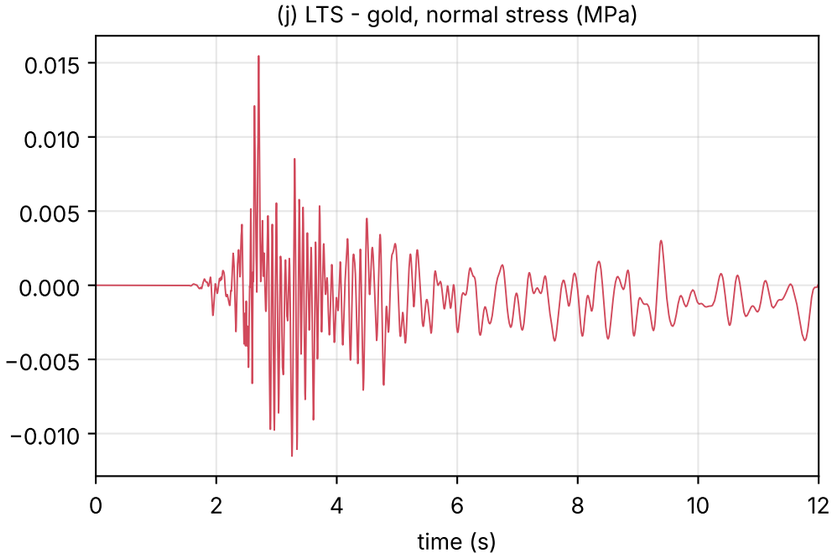

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

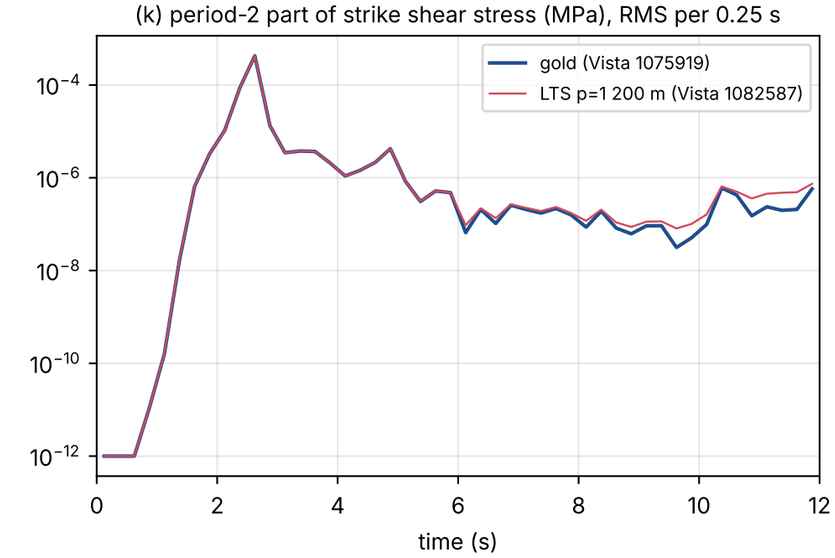


(l) period-2 part of normal stress (MPa), RMS per 0.25 s

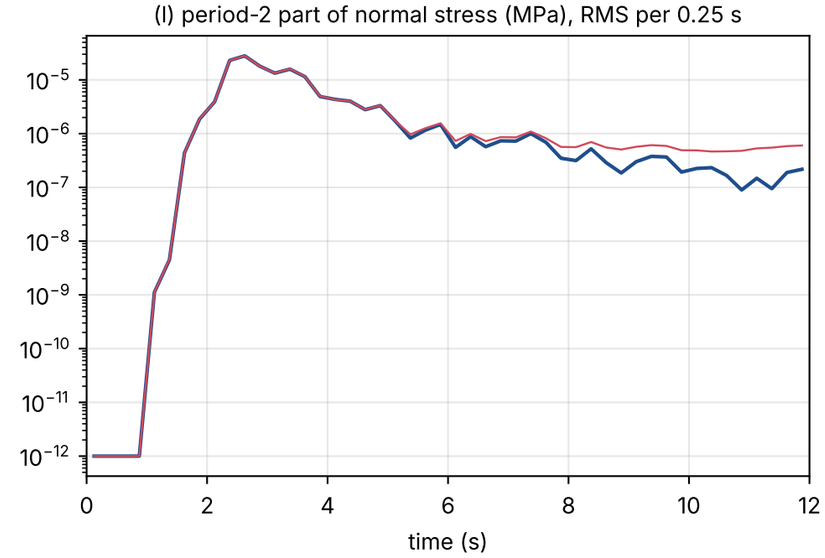


SCEC TPV104 station x2_12_x3_3 (strike 12 km, depth 3 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.74 ms peak -0.033 % final slip -0.092 %; vs DRDG3D: arrival -0.087 s peak -16.3 % slip -3.55 %


(a) strike slip rate (m/s)

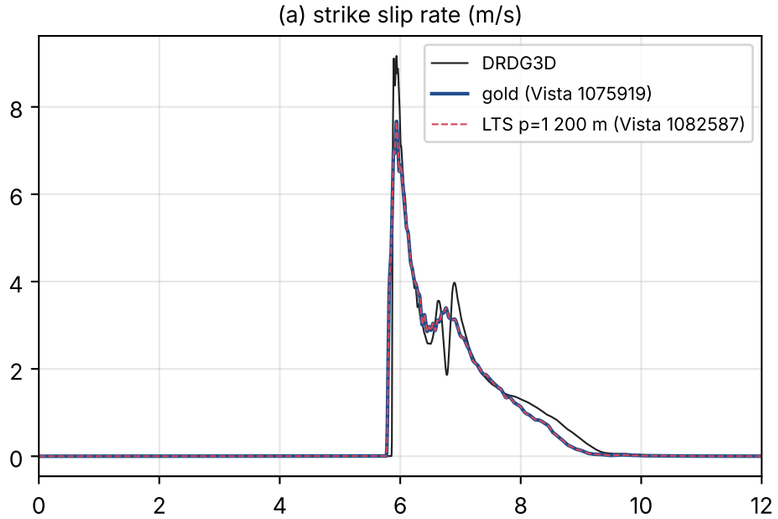


(b) strike slip rate (m/s), gold arrival 5.766 s -0.5 / +2.5 s

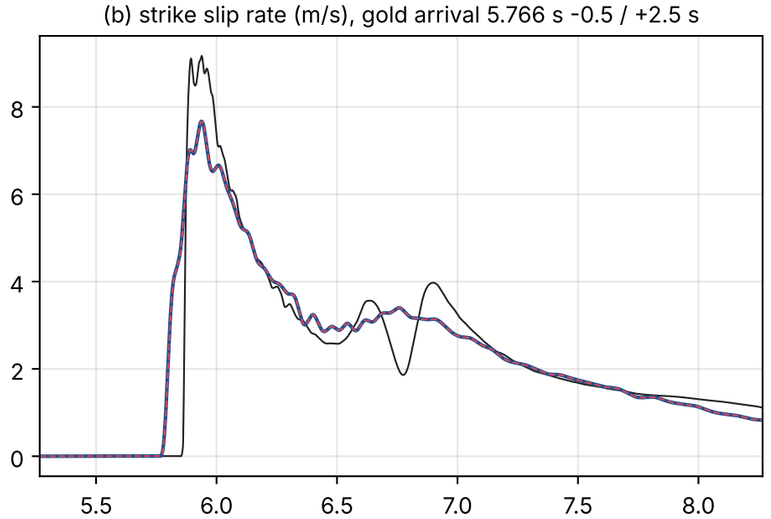


(c) strike slip (m)

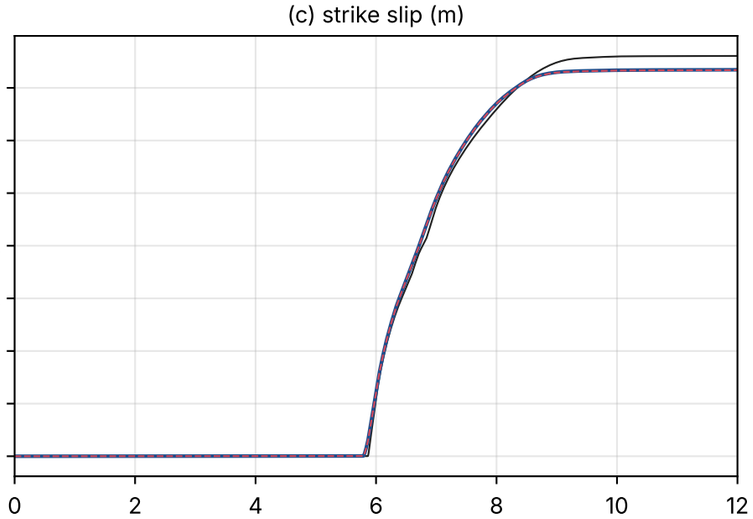


(d) strike shear stress (MPa)

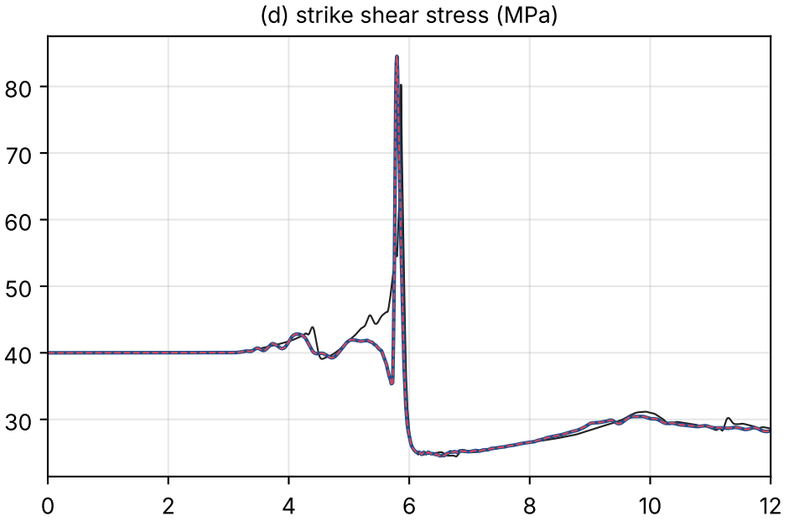


(e) normal stress, compression positive (MPa)

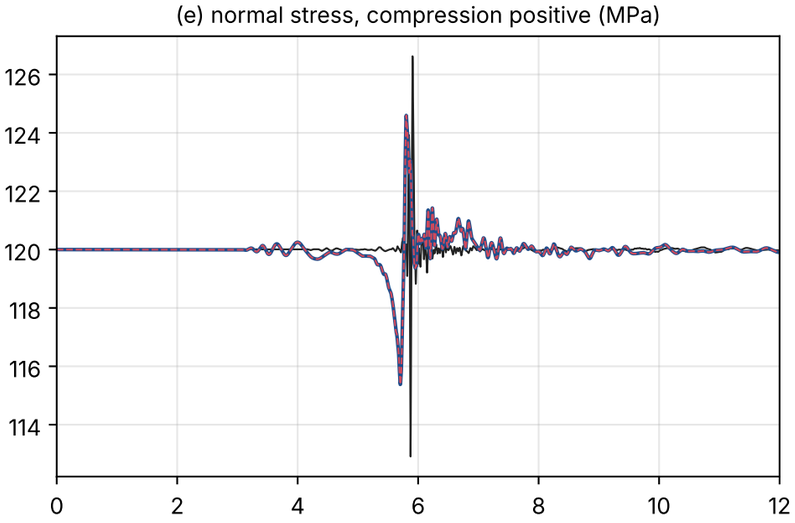


(f) dip slip rate (m/s)

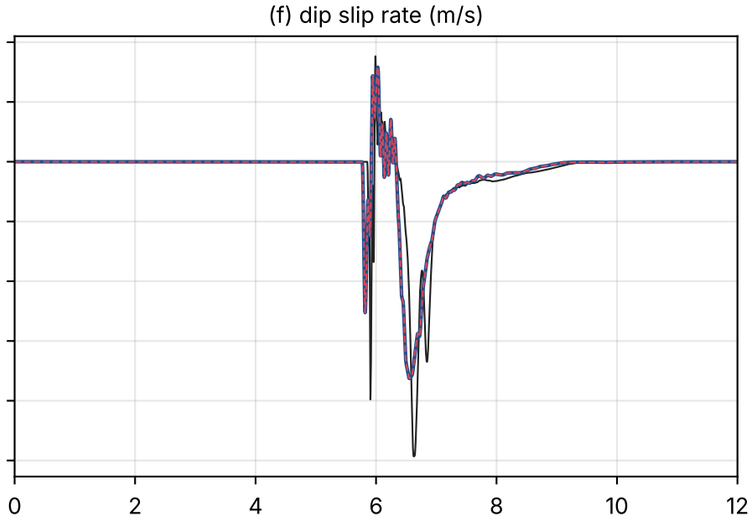


(g) LTS - gold, strike slip rate (m/s)

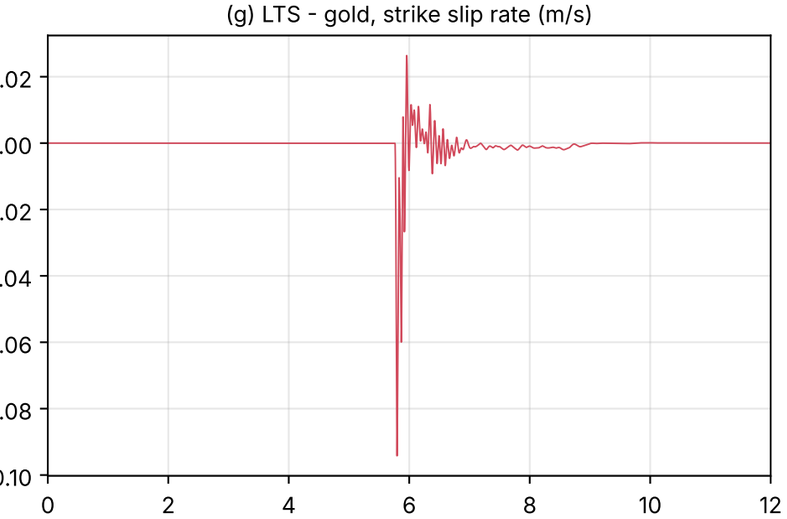


(h) LTS - gold, strike slip (m)

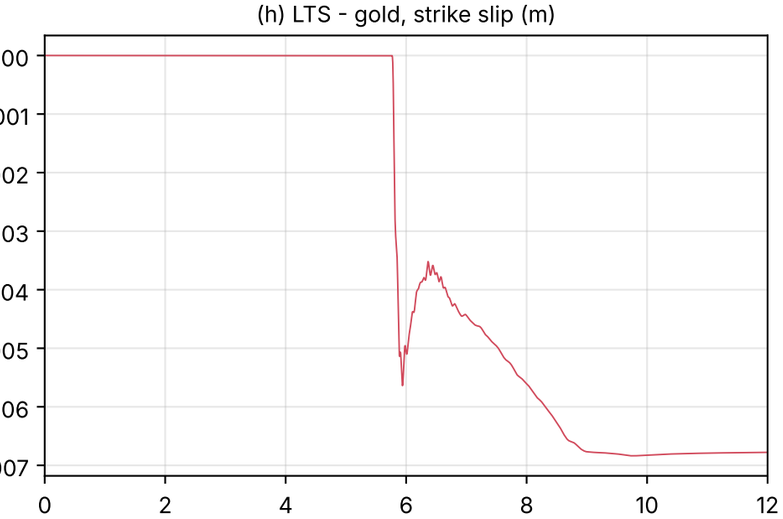


(i) LTS - gold, strike shear stress (MPa)

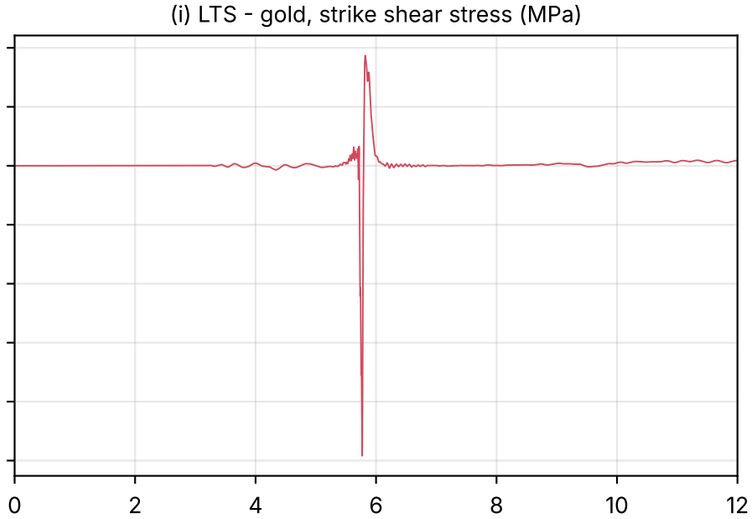


(j) LTS - gold, normal stress (MPa)

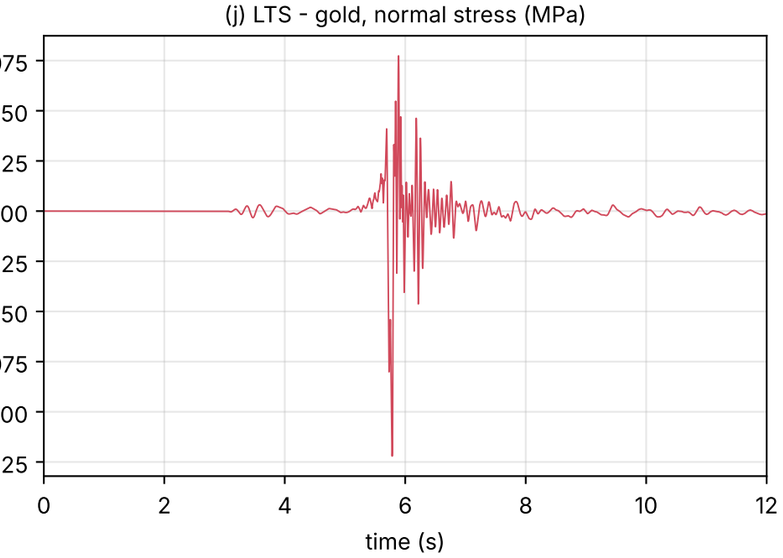


(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

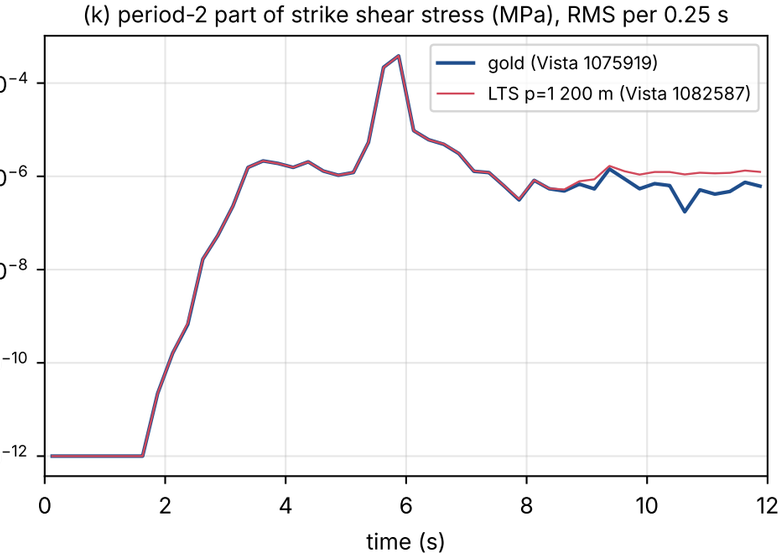


(l) period-2 part of normal stress (MPa), RMS per 0.25 s

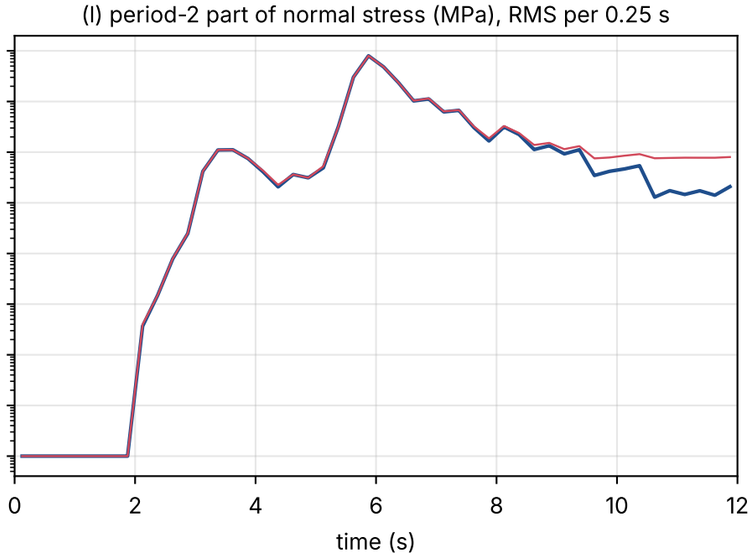


SCEC TPV104 station x2_-9_x3_7.5 (strike -9 km, depth 7.5 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.49 ms peak -0.076 % final slip -0.064 %; vs DRDG3D: arrival -0.161 s peak -22.7 % slip -0.56 %

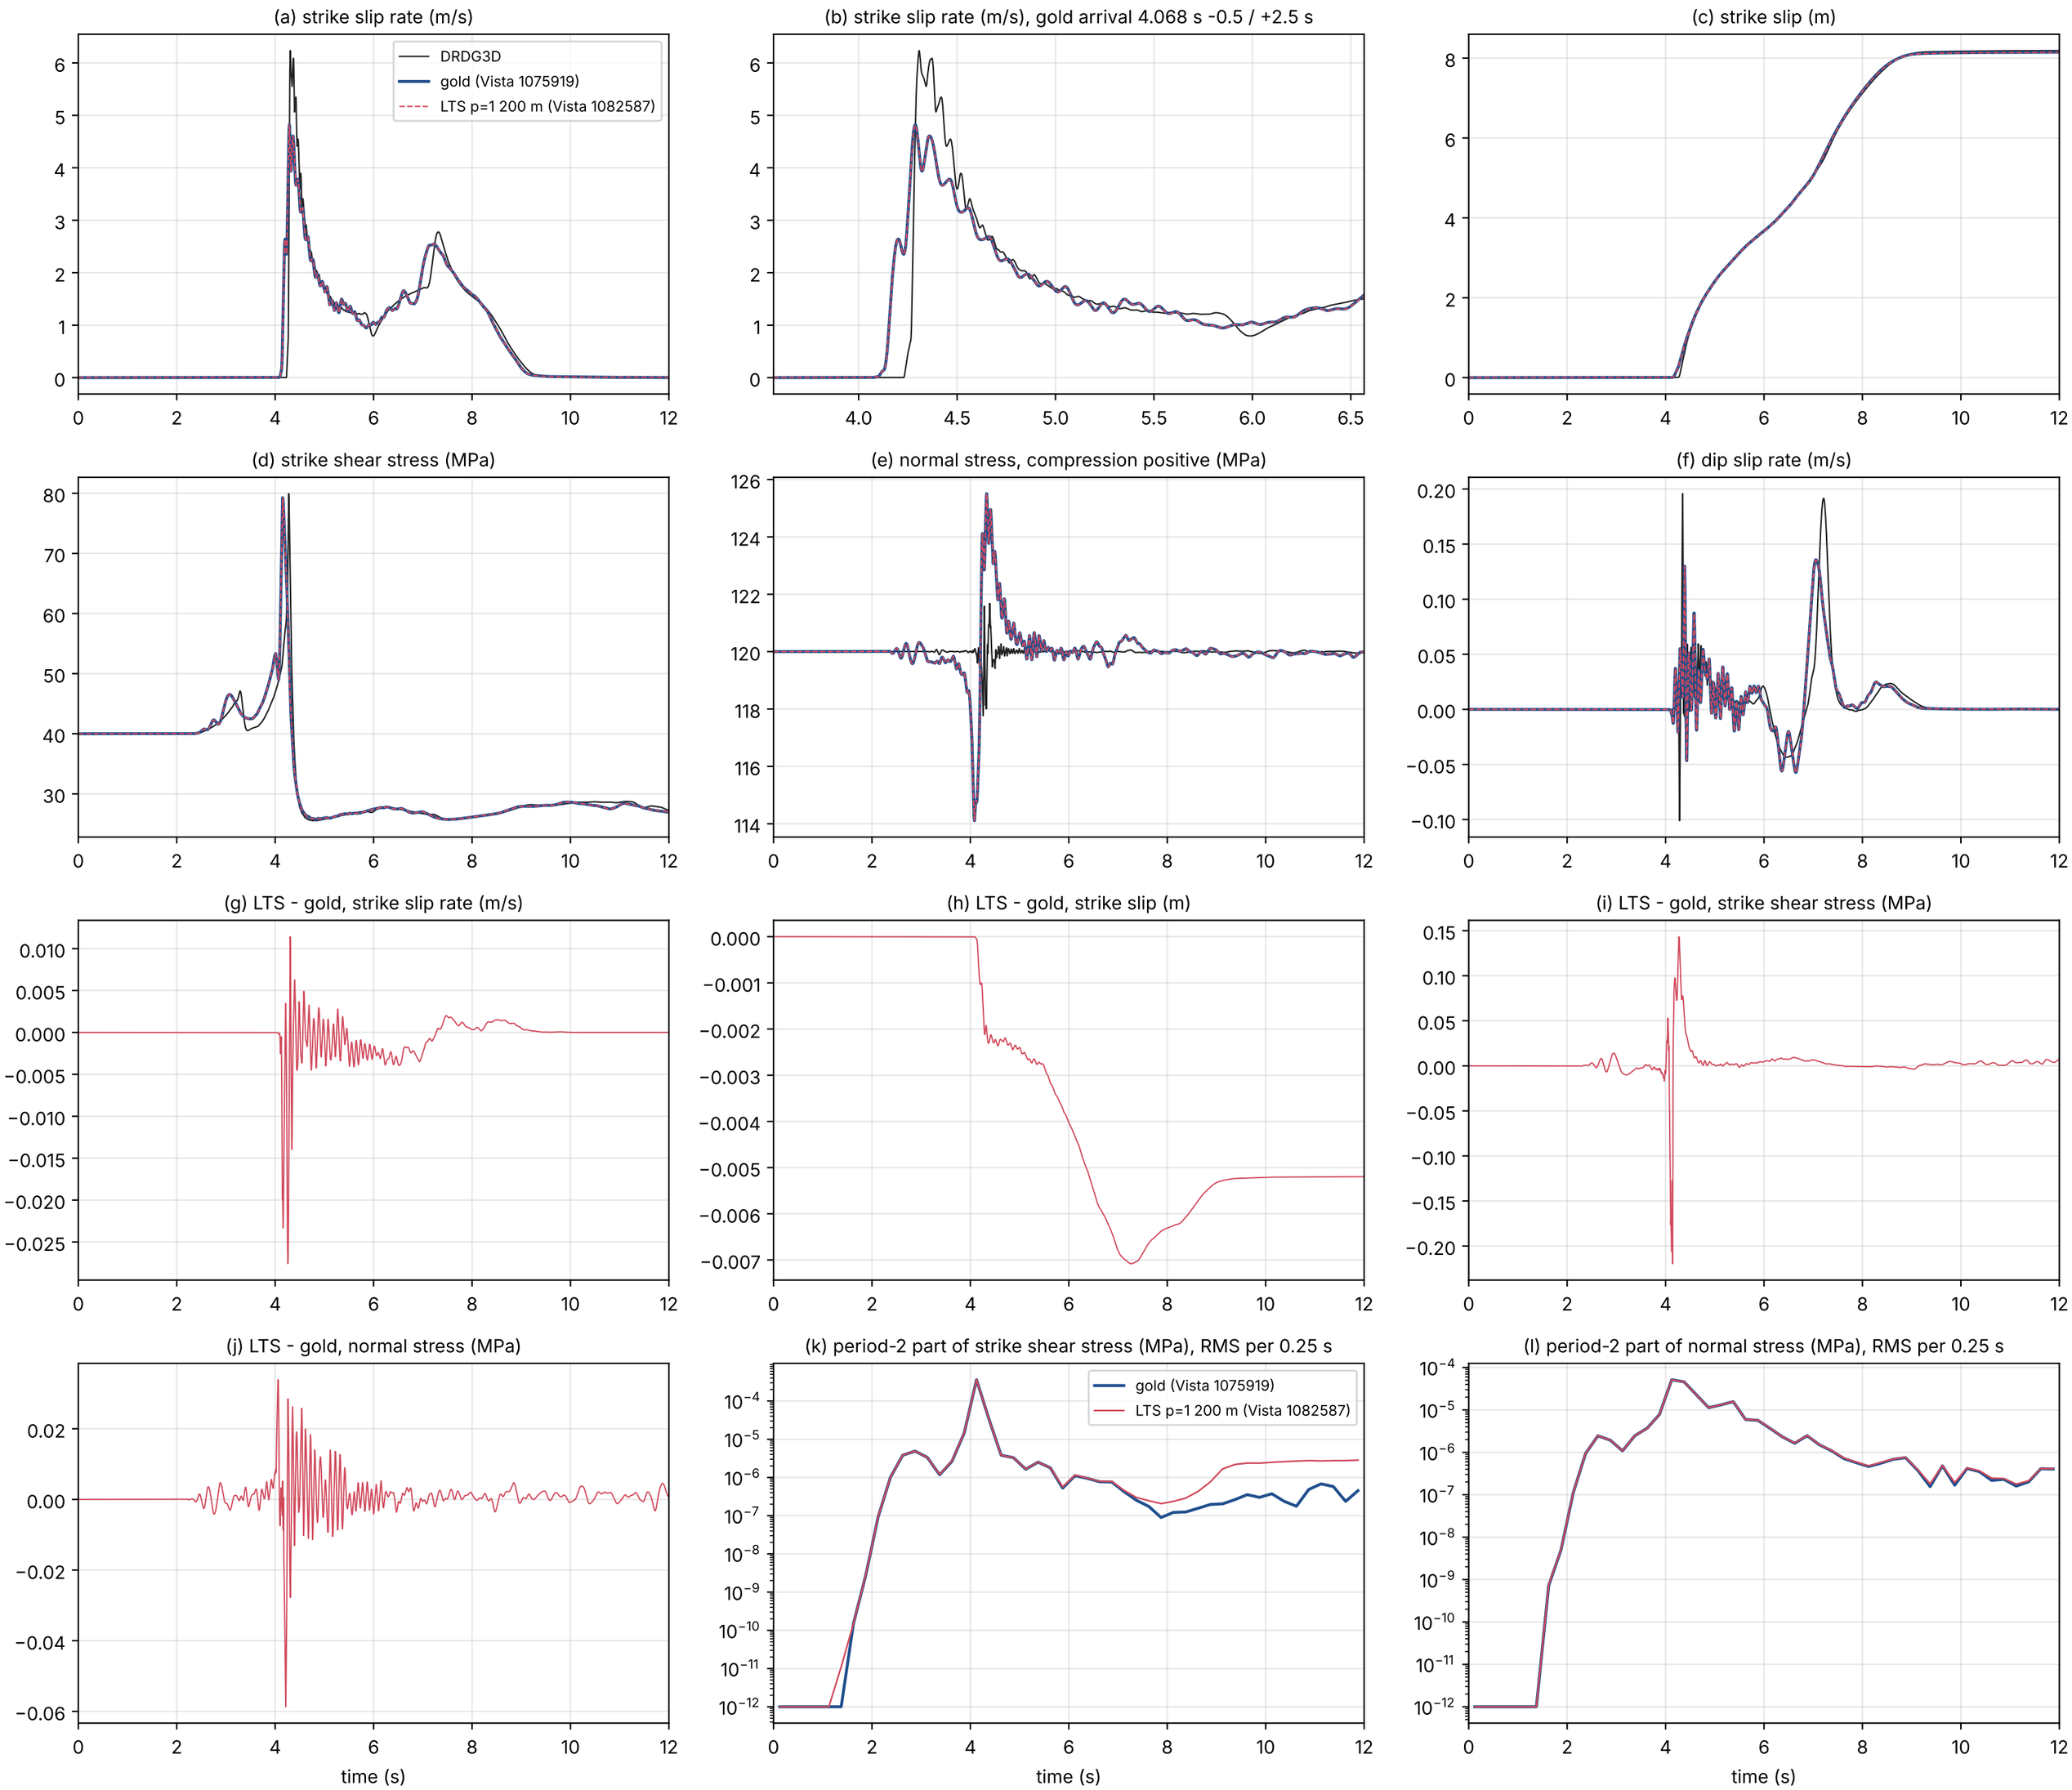



SCEC TPV104 station x2_0_x3_7.5 (strike 0 km, depth 7.5 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.00 ms peak -0.016 % final slip -0.038 %; vs DRDG3D: arrival -0.003 s peak +2.2 % slip +0.22 %

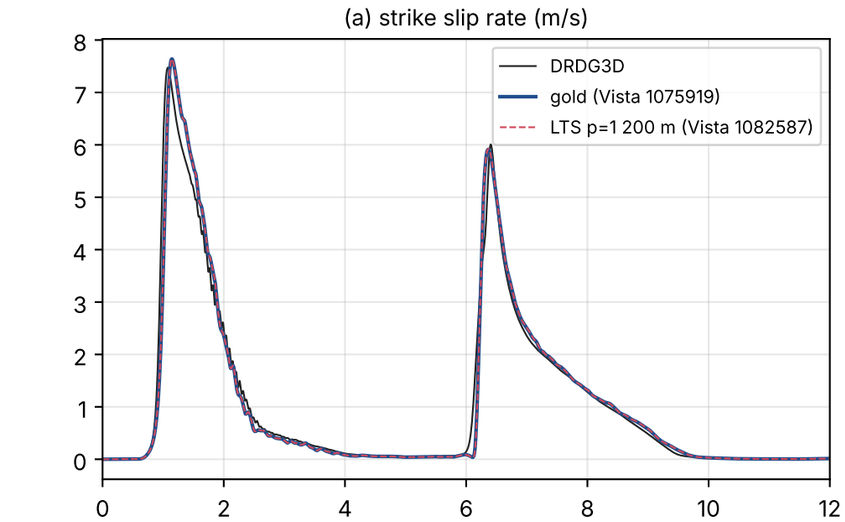


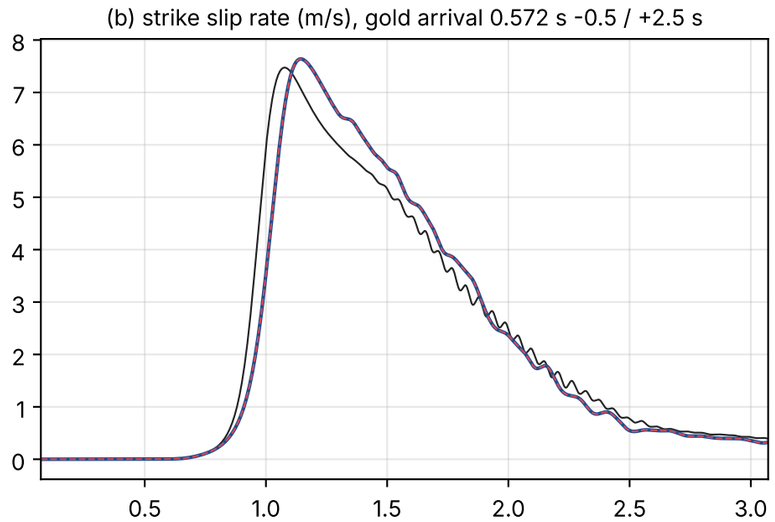





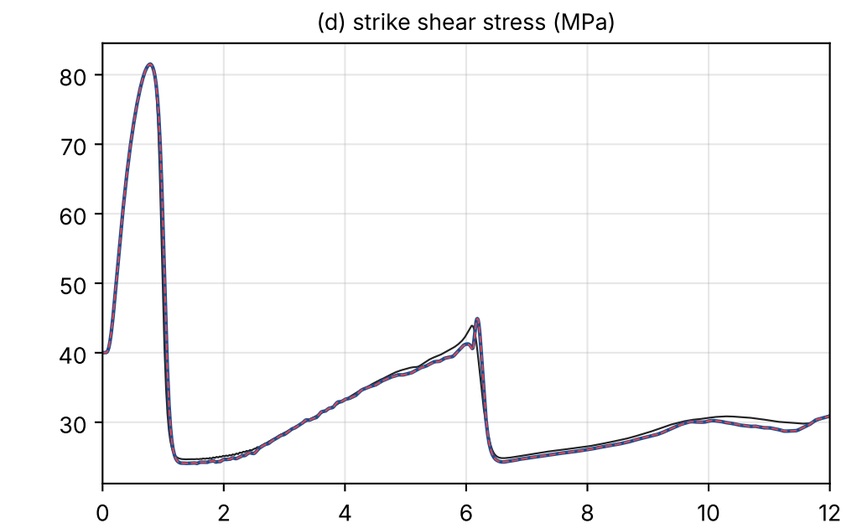


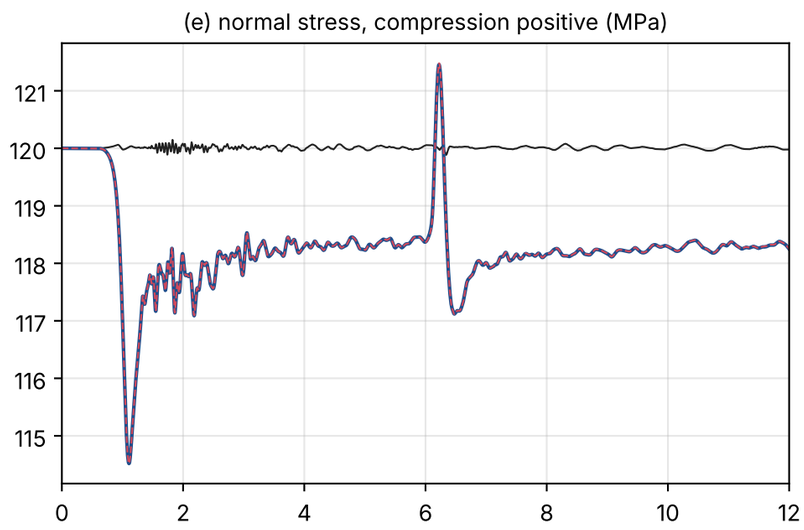


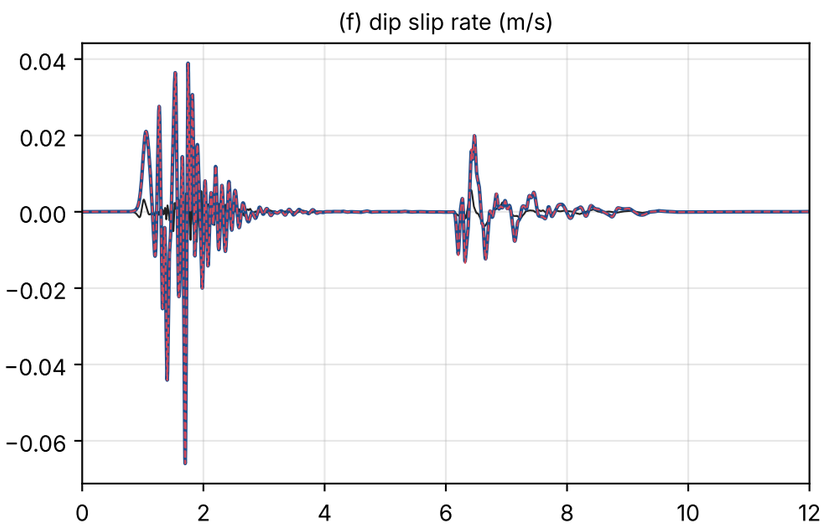


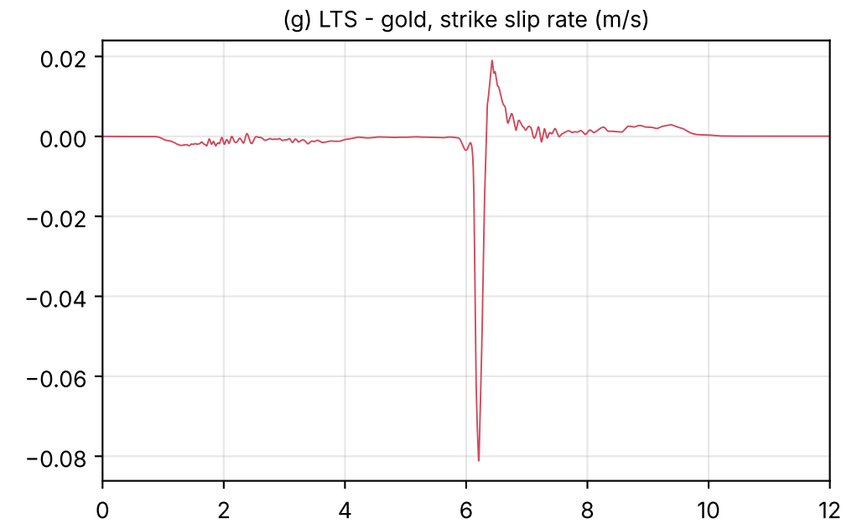


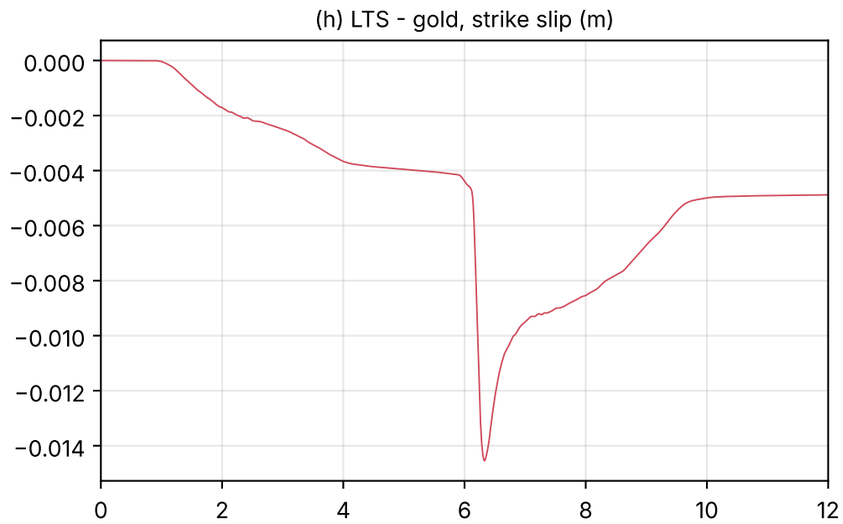

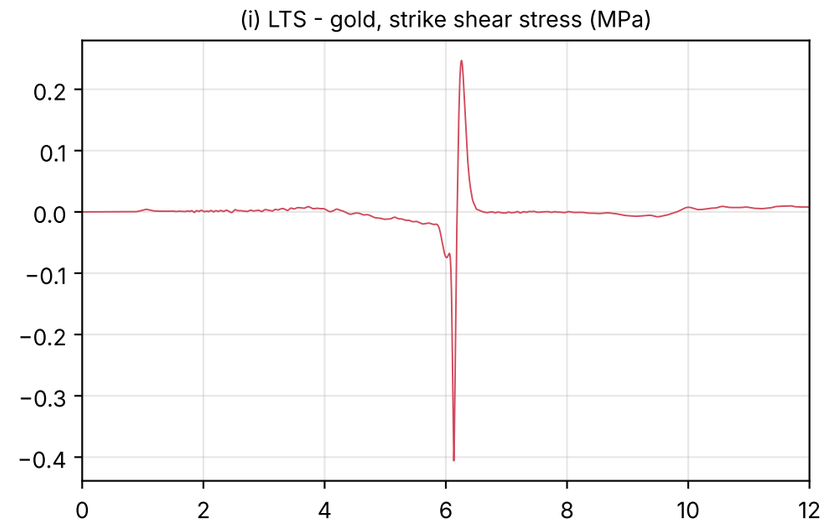


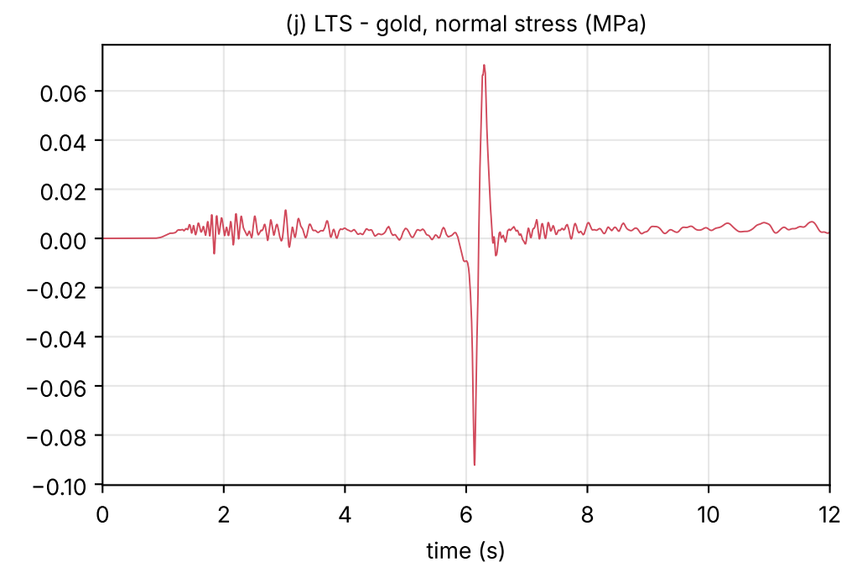

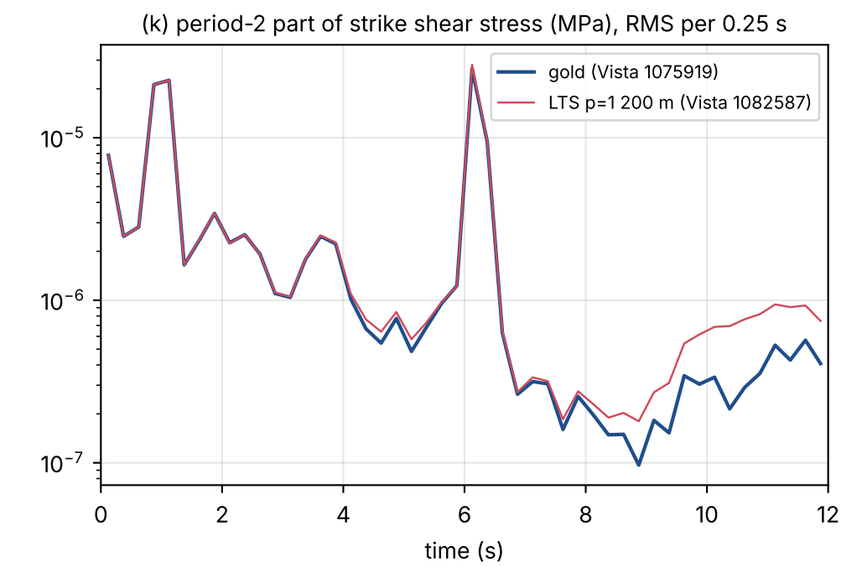

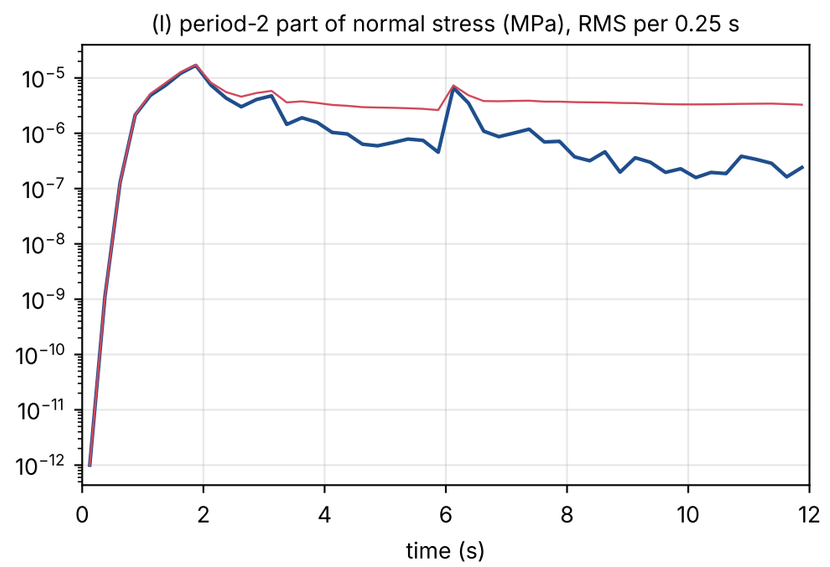


SCEC TPV104 station x2_9_x3_7.5 (strike 9 km, depth 7.5 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.49 ms peak -0.059 % final slip -0.065 %; vs DRDG3D: arrival -0.131 s peak -31.4 % slip -0.52 %

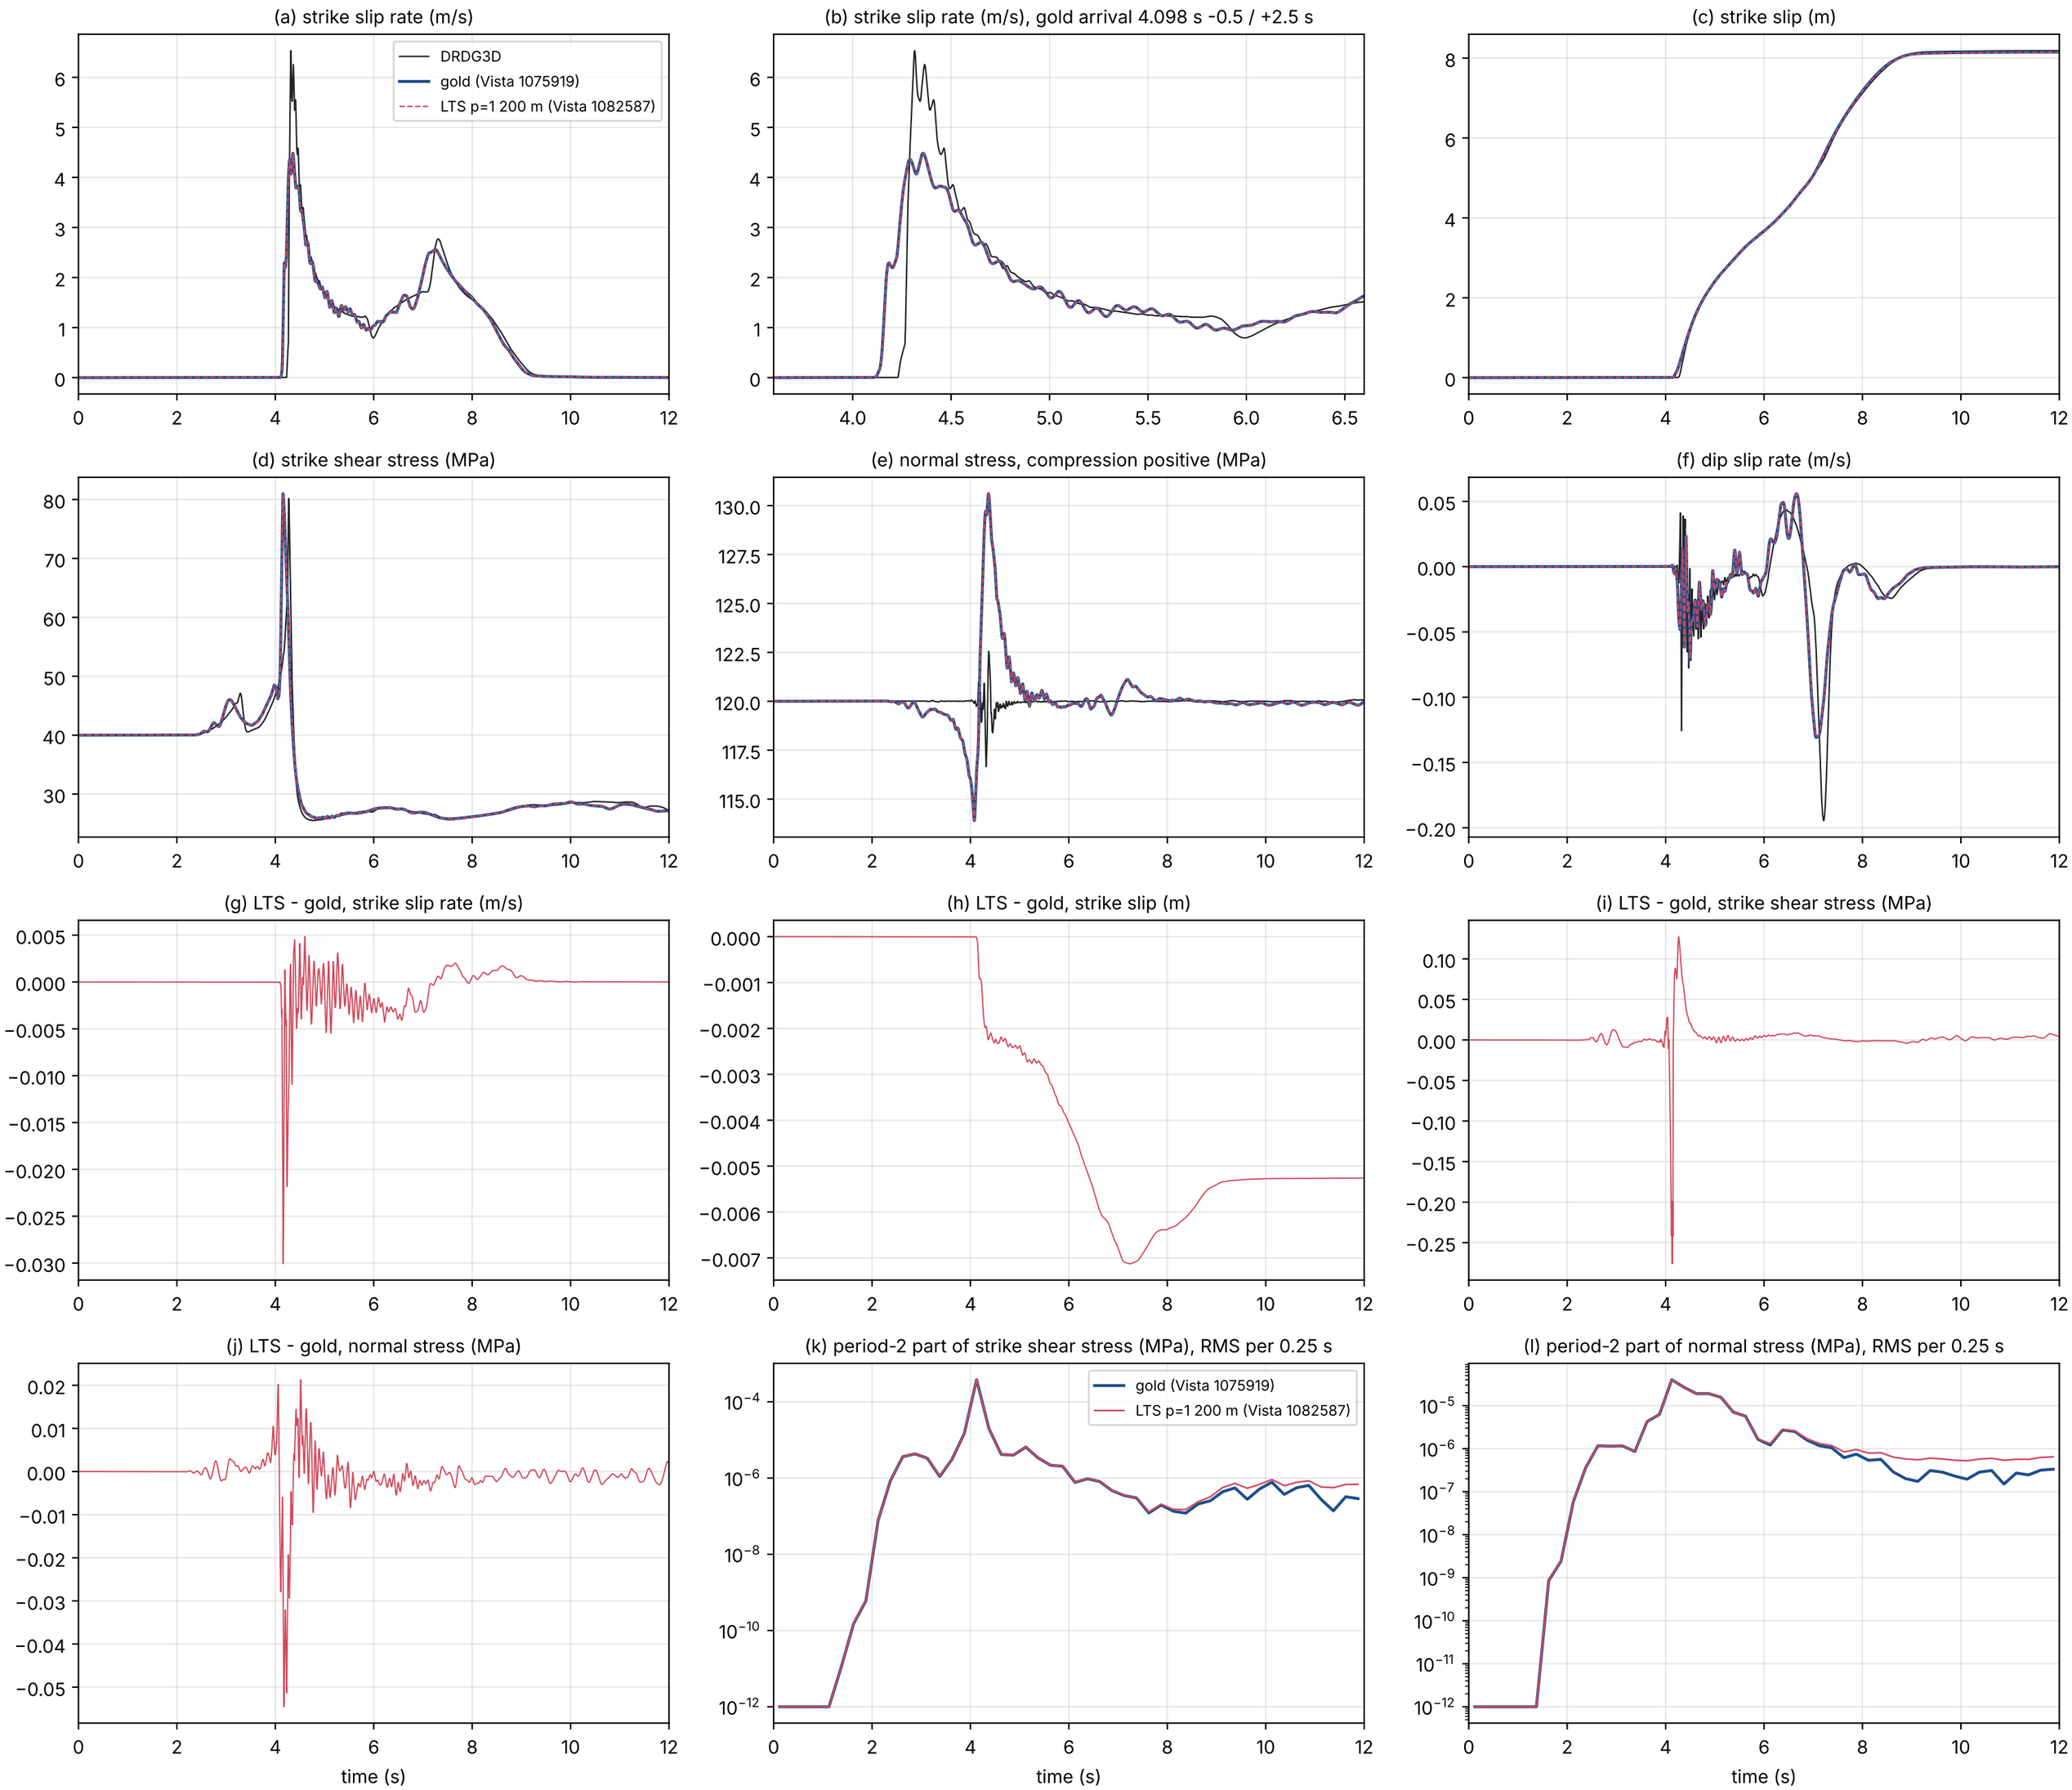


SCEC TPV104 station x2_-12_x3_12 (strike -12 km, depth 12 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.98 ms peak -0.052 % final slip -0.040 %; vs DRDG3D: arrival -0.078 s peak -31.5 % slip -2.71 %


(a) strike slip rate (m/s)

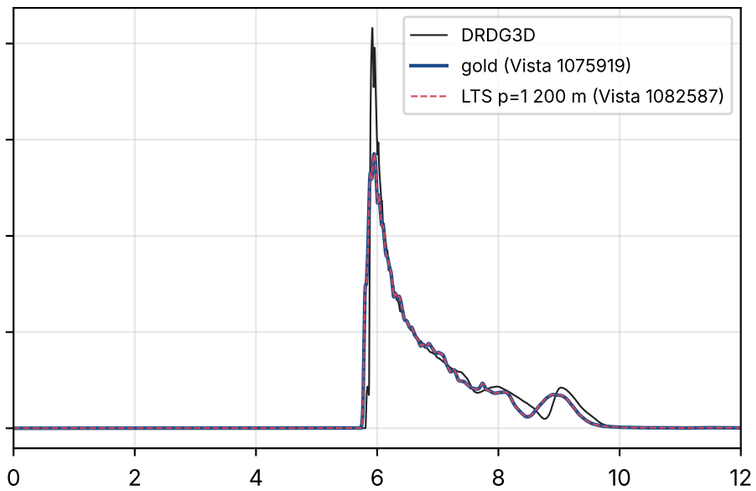


(b) strike slip rate (m/s), gold arrival 5.729 s -0.5 / +2.5 s

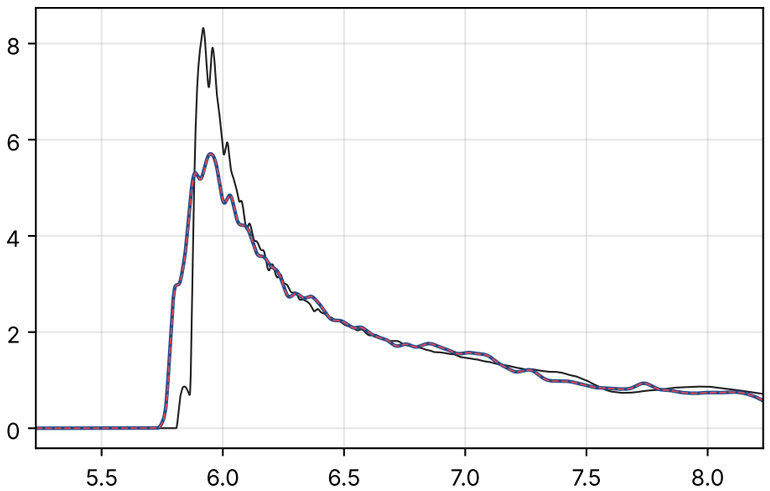


(c) strike slip (m)

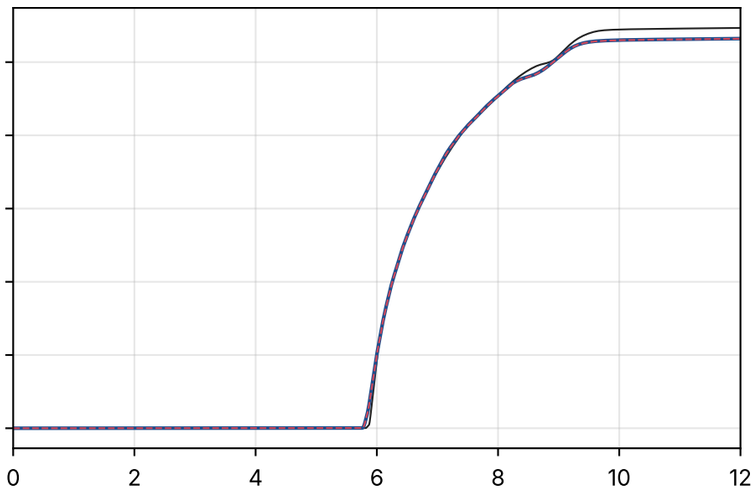


(d) strike shear stress (MPa)

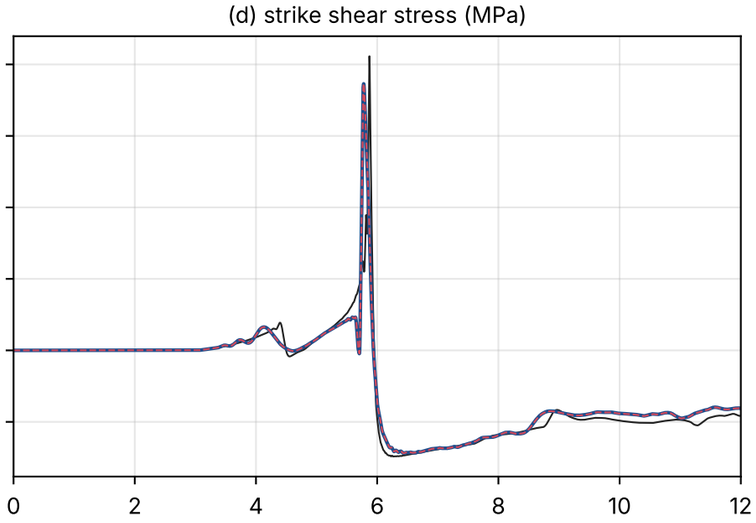


(e) normal stress, compression positive (MPa)

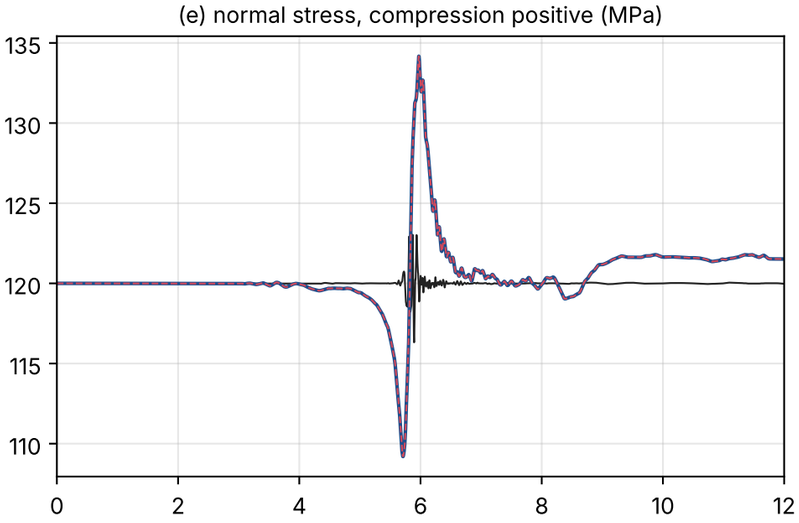


(f) dip slip rate (m/s)

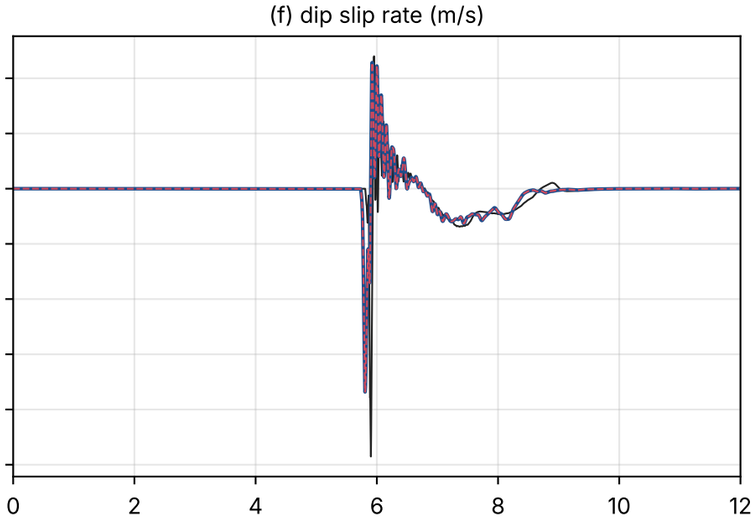


(g) LTS - gold, strike slip rate (m/s)

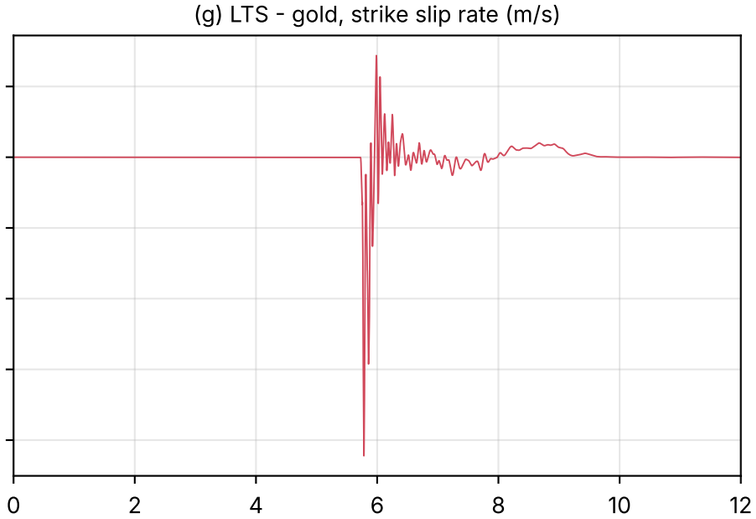


(h) LTS - gold, strike slip (m)

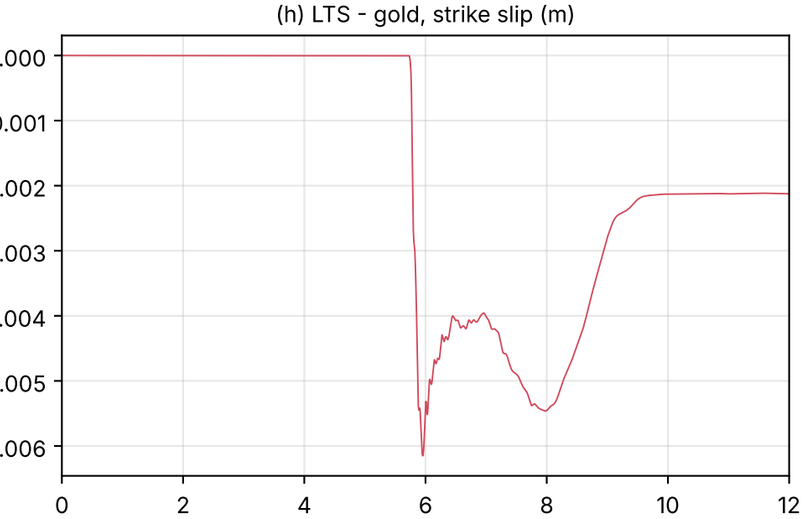


(i) LTS - gold, strike shear stress (MPa)

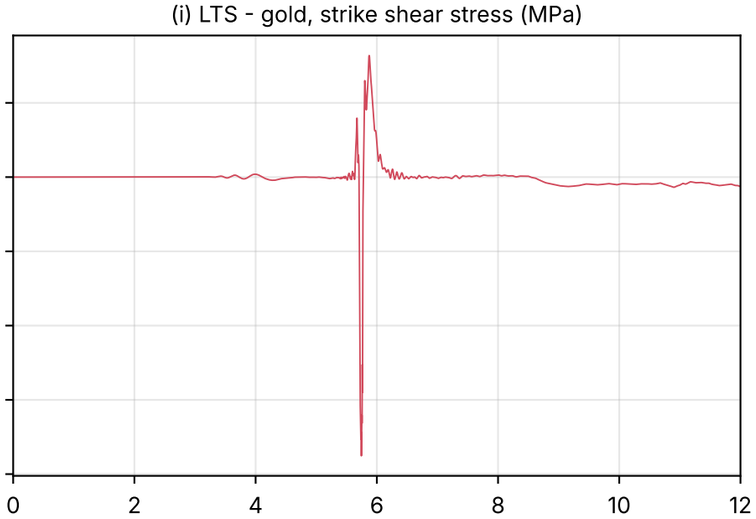


(j) LTS - gold, normal stress (MPa)

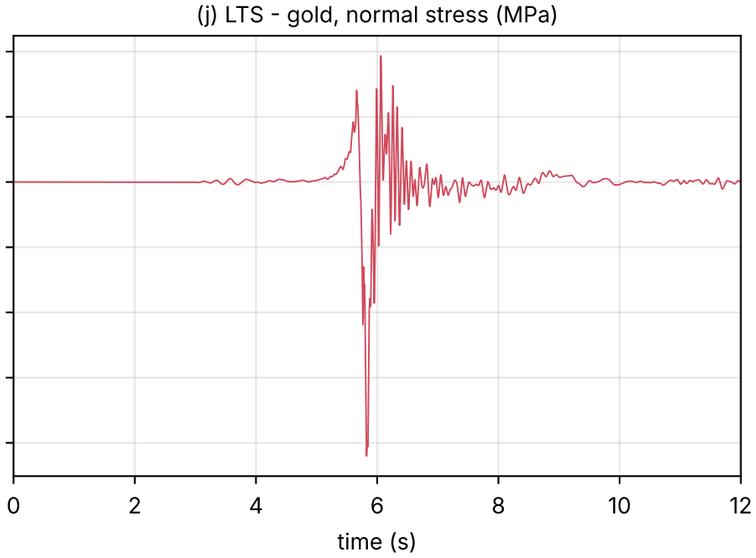

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

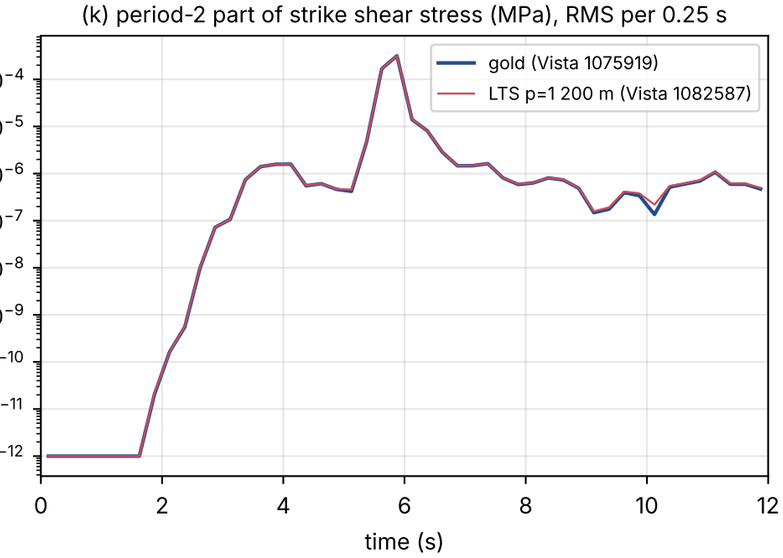


(l) period-2 part of normal stress (MPa), RMS per 0.25 s

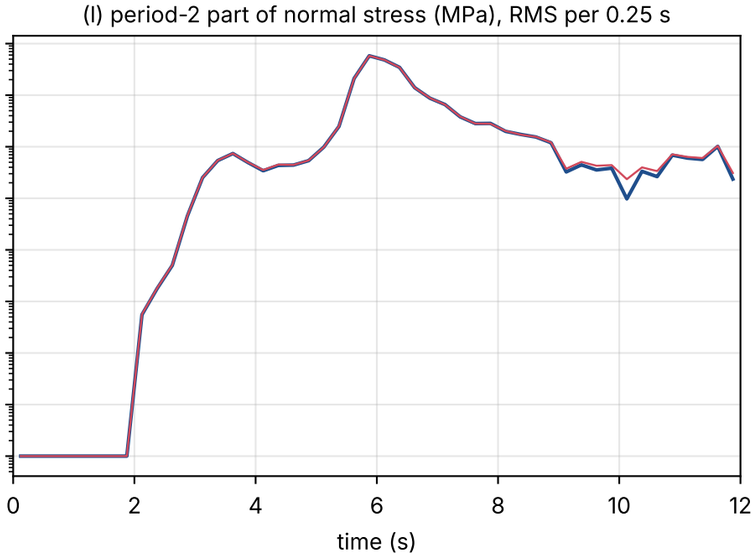


time (s)
time (s)
time (s)

SCEC TPV104 station x2_0_x3_12 (strike 0 km, depth 12 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.25 ms peak +0.114 % final slip -0.017 %; vs DRDG3D: arrival -0.026 s peak -18.9 % slip -0.12 %


(a) strike slip rate (m/s)

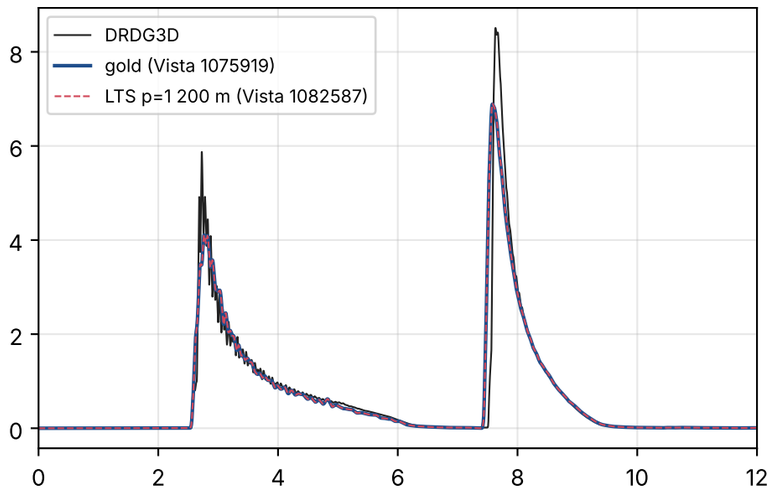


(b) strike slip rate (m/s), gold arrival 2.526 s -0.5 / +2.5 s

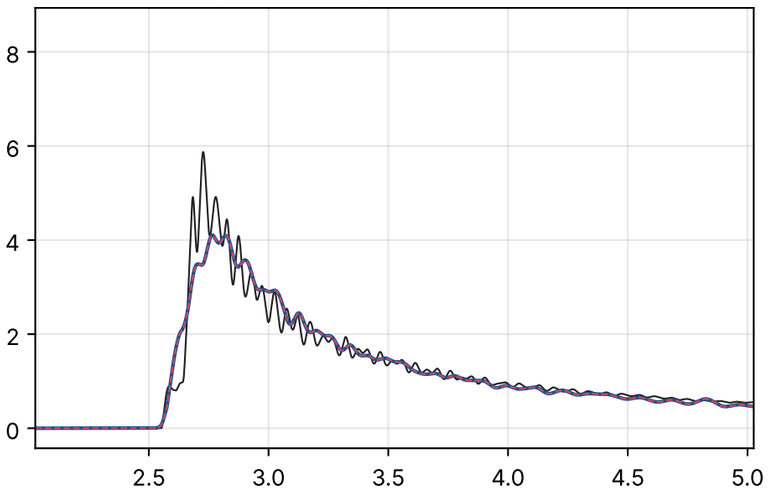


(c) strike slip (m)

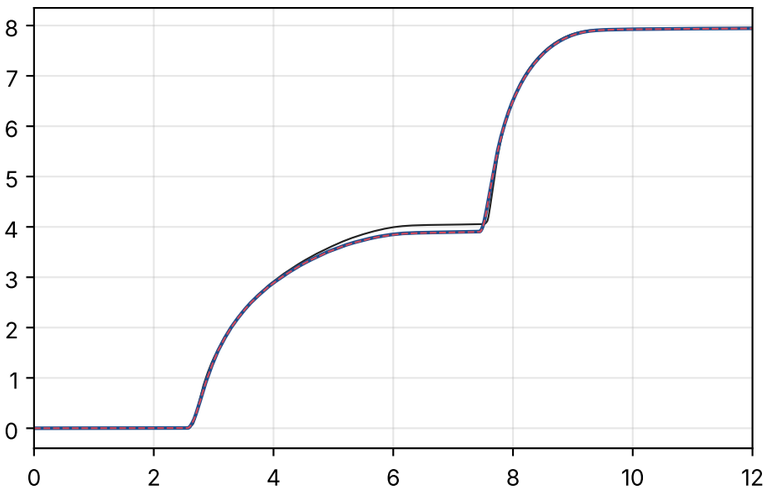


(d) strike shear stress (MPa)

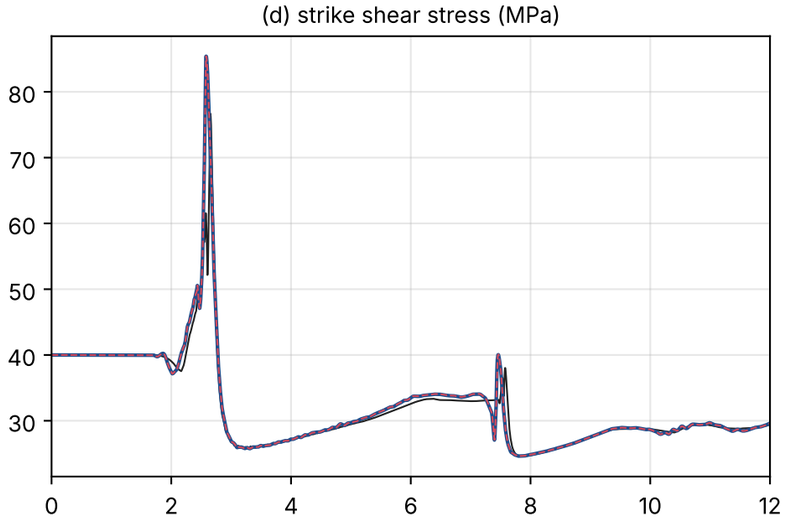


(e) normal stress, compression positive (MPa)

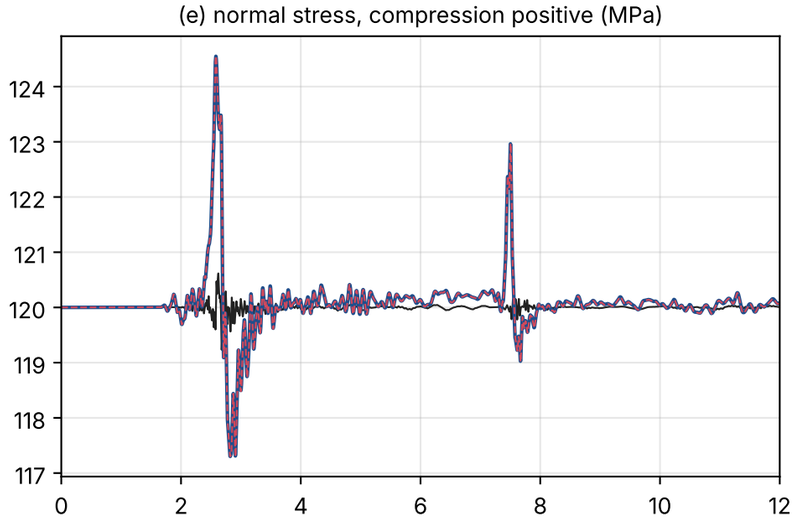


(f) dip slip rate (m/s)

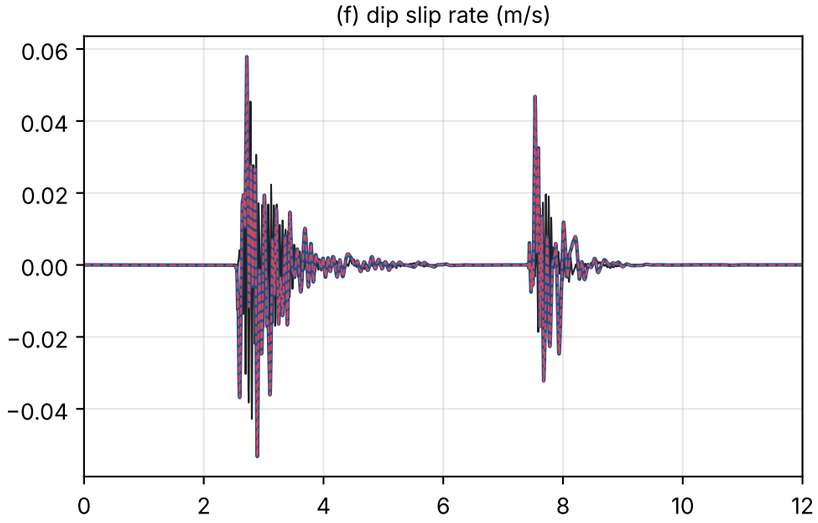


(g) LTS - gold, strike slip rate (m/s)

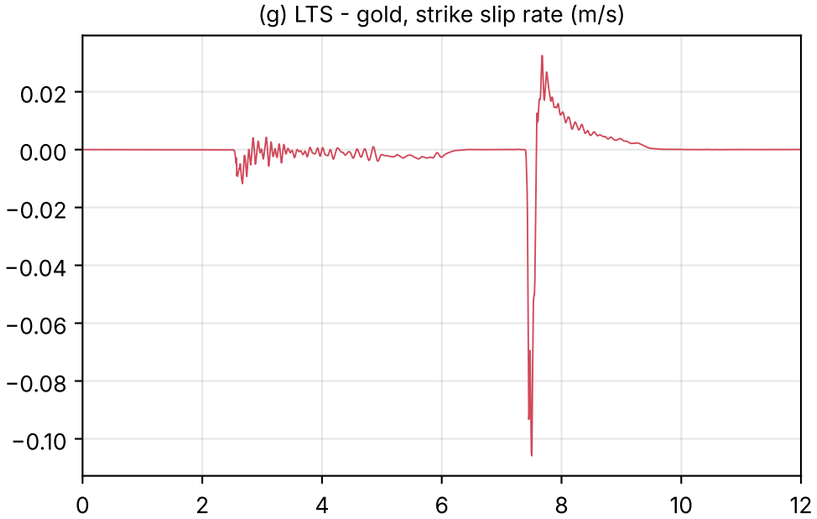


(h) LTS - gold, strike slip (m)

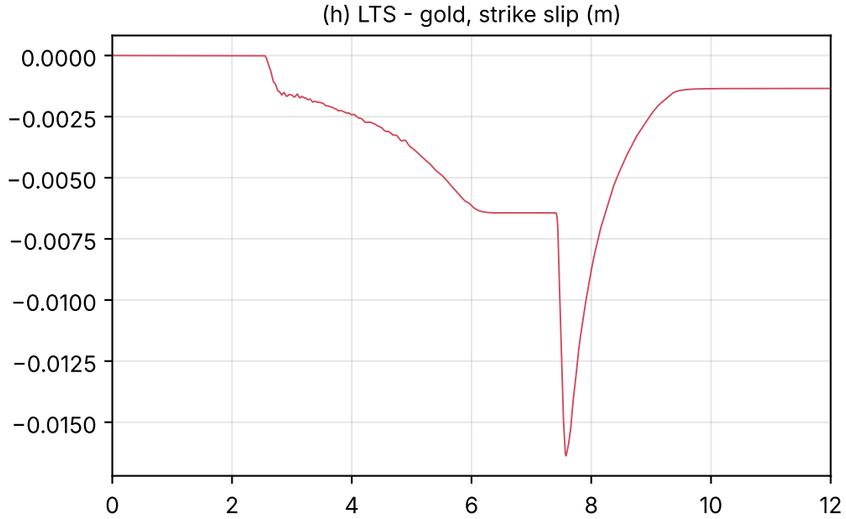


(i) LTS - gold, strike shear stress (MPa)

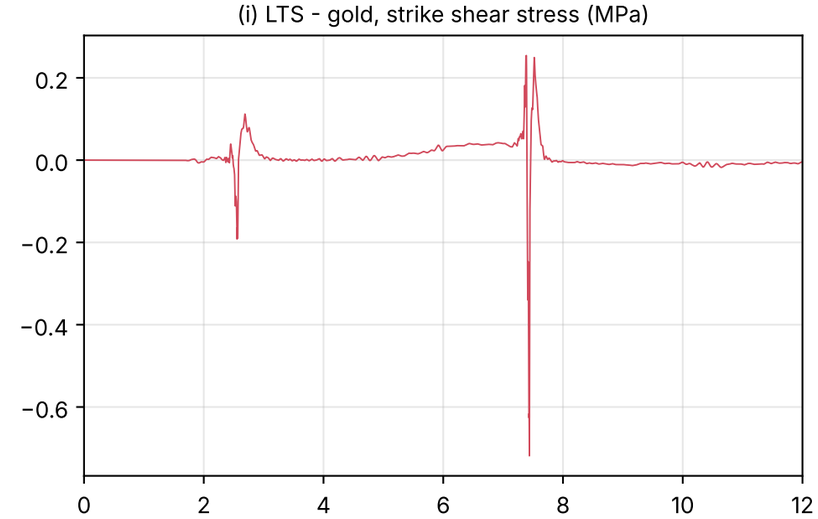


(j) LTS - gold, normal stress (MPa)

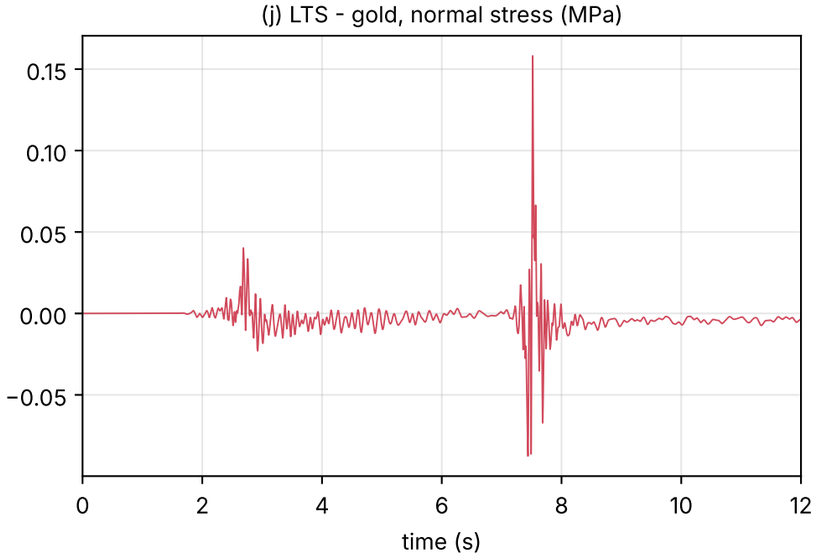

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

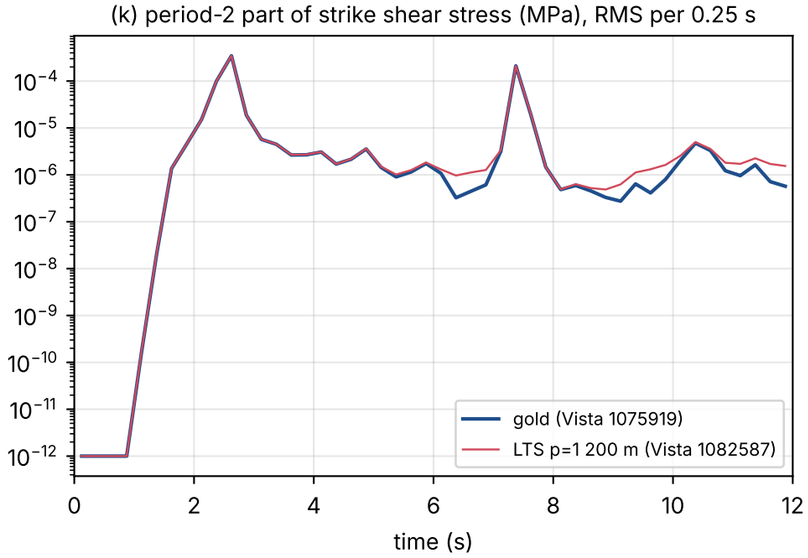


(l) period-2 part of normal stress (MPa), RMS per 0.25 s

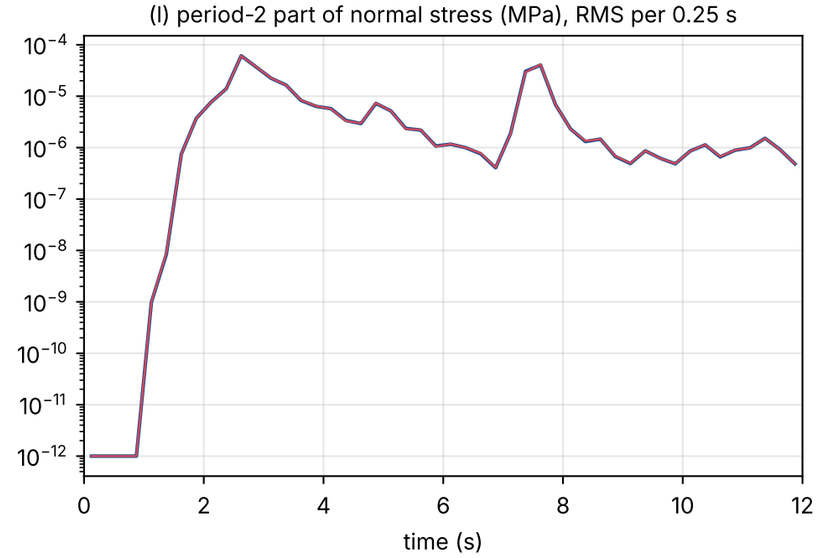


SCEC TPV104 station x2_12_x3_12 (strike 12 km, depth 12 km)
LTS p=1 200 m (Vista 1082587) vs gold (Vista 1075919): arrival +0.98 ms peak -0.076 % final slip -0.040 %; vs DRDG3D: arrival -0.061 s peak -33.8 % slip -2.62 %


(a) strike slip rate (m/s)

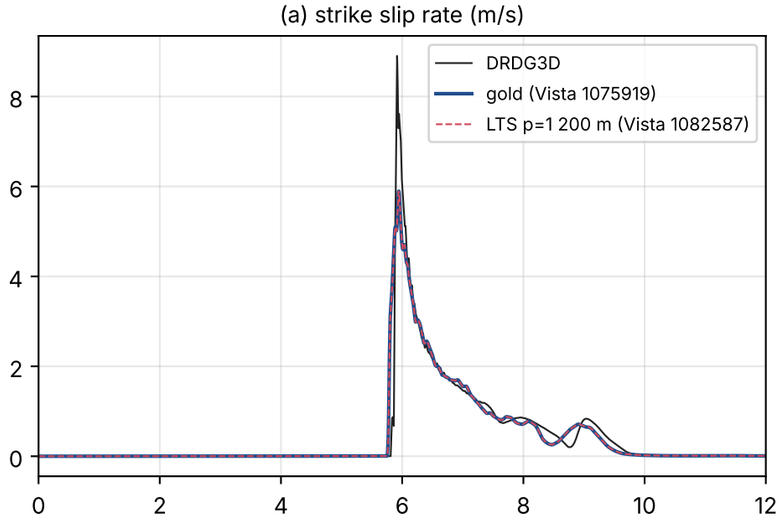


(b) strike slip rate (m/s), gold arrival 5.746 s -0.5 / +2.5 s

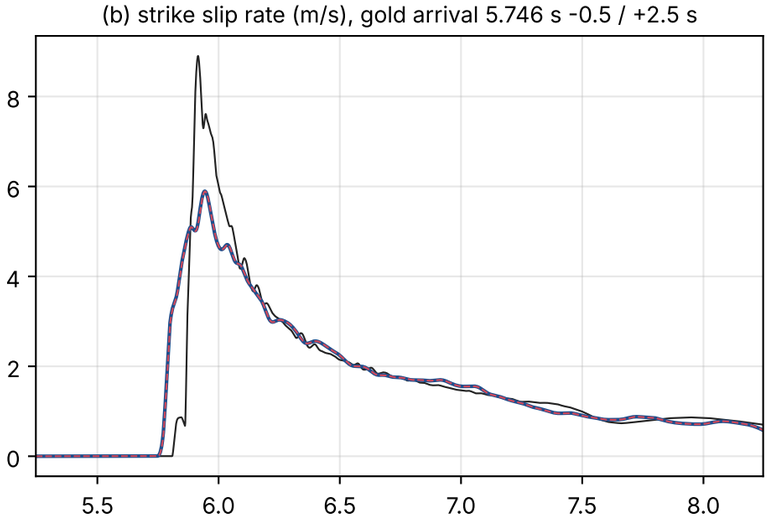


(c) strike slip (m)

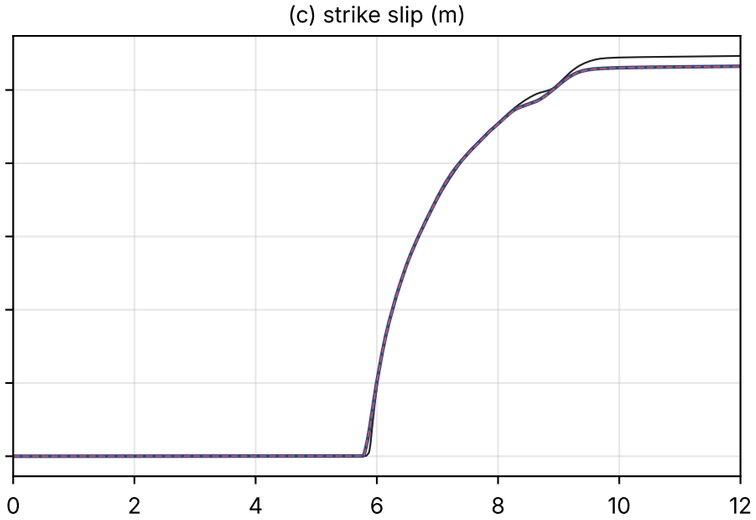


(d) strike shear stress (MPa)

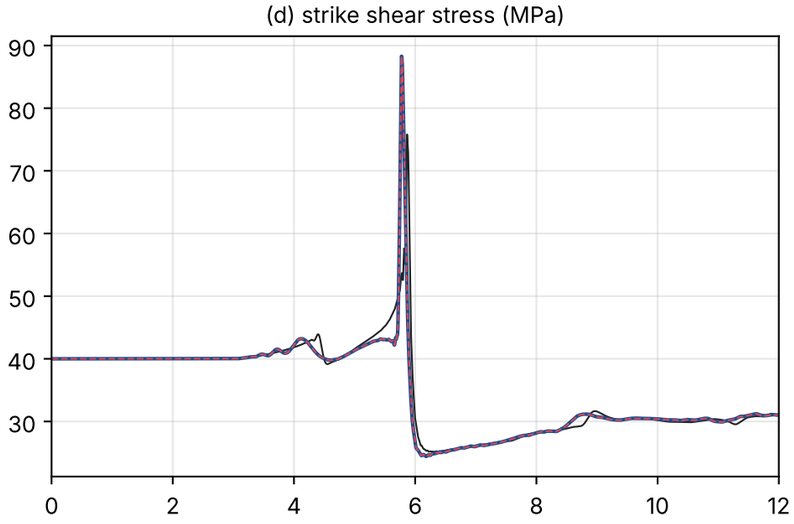


(e) normal stress, compression positive (MPa)

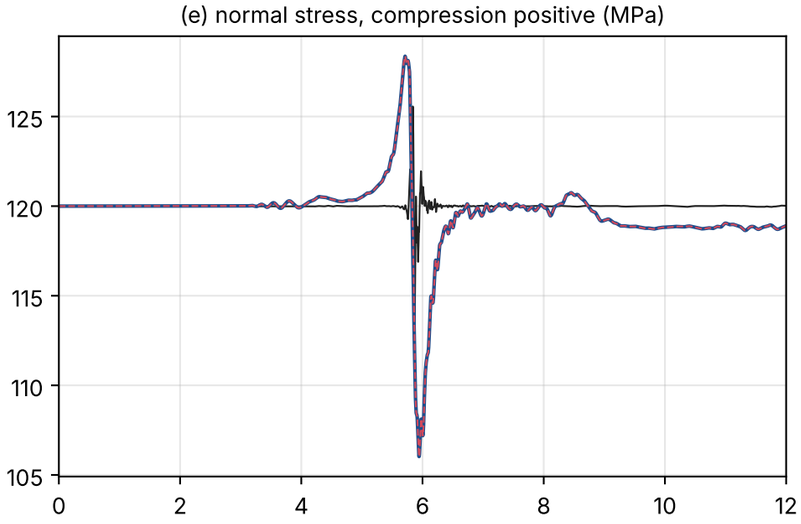


(f) dip slip rate (m/s)

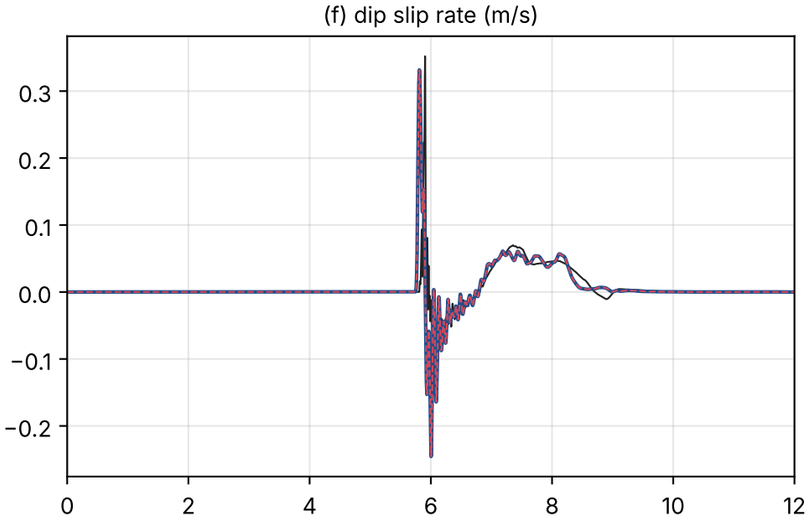


(g) LTS - gold, strike slip rate (m/s)

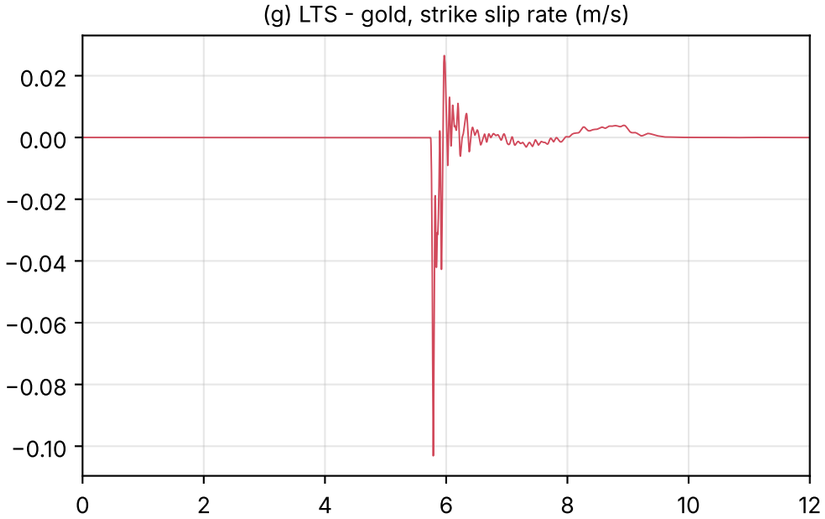


(h) LTS - gold, strike slip (m)

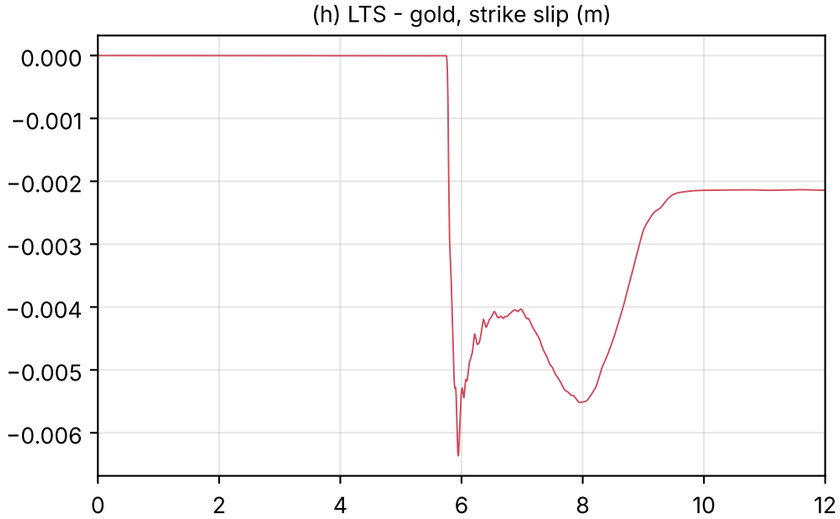


(i) LTS - gold, strike shear stress (MPa)

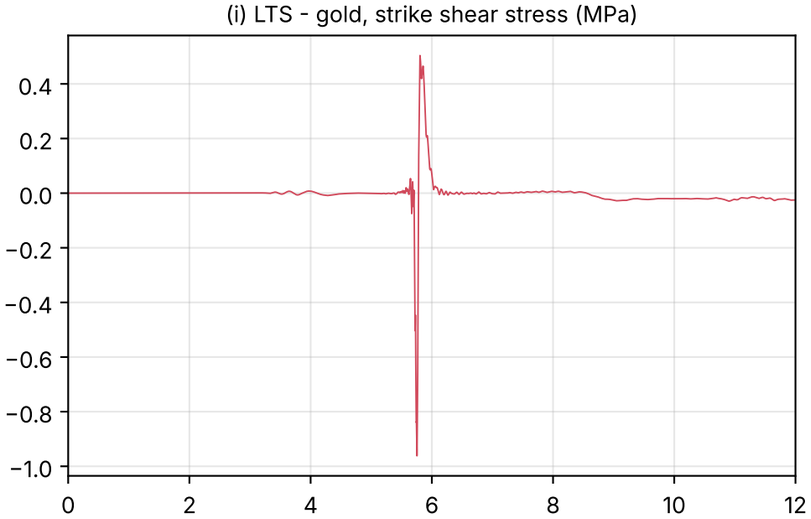

(j) LTS - gold, normal stress (MPa)

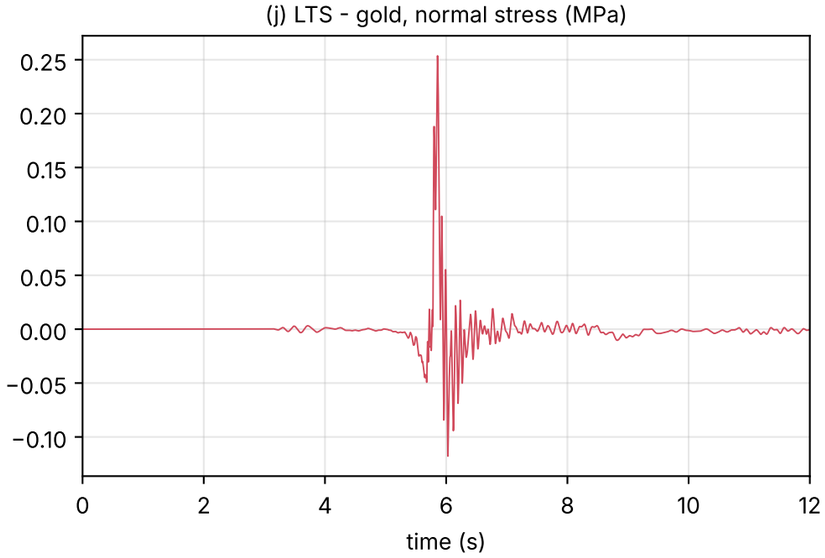

(k) period-2 part of strike shear stress (MPa), RMS per 0.25 s

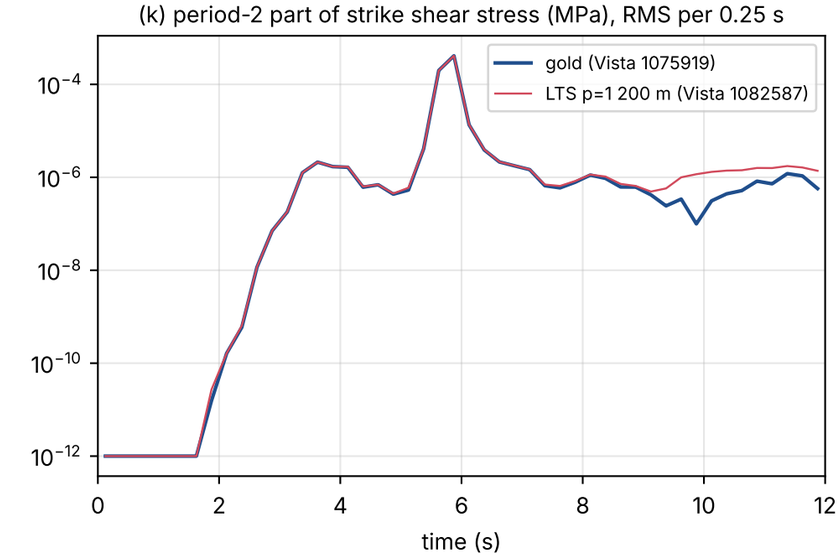

(l) period-2 part of normal stress (MPa), RMS per 0.25 s

