Exam Code: e20-512

Exam Name: business continuity specialist exam for

storage admins

Vendor: EMC

Version: DEMO

Part: A

- 1: What does a PowerPath pseudo-device represent?
- A.A logical path that leads to a single physical device
- B.A logical path set that leads to multiple physical devices
- C.A physical path that leads to multiple logical devices
- D.A path set that leads to a single logical device

Correct Answers: D

- 2: When performing LUN masking operations to support Open Replicator, what must be done to ensure that data can be accessed between two Symmetrix systems?
- A.Grant device access to the WWN of the controlling FA ports for the remote devices on the remote FA ports
- B.Grant device access to the WWN of the host HBA ports for the remote devices on the controlling FA ports
- C.Grant device access to the WWN of the host HBA ports for the remote devices on the remote FA ports
- D.Grant device access to the WWN of the remote FA ports for the remote devices on the controlling FA ports

Correct Answers: A

- 3: When using Open Replicator to do a Hot Pull without the donor_update option set, what is the result of terminating the session before it is complete?
- A.Requests for data not yet copied will cause a priority retrieve of the data from the remote volume.
- B.Session will run to completion before actually terminating.
- C.The local volume will revert to its state prior to the Hot Pull.
- D.There is data loss on the remote volume.

Correct Answers: D

- 4: What is the purpose of the half delete action in SRDF/Star?
- A.Used to dissolve RDF relationships when a partner device is unavailable
- B.Used to initiate a Star recovery procedure
- C.Used to reset the first two mirror positions to fully invalid
- D.Used to reverse the data flow after a link failure

Correct Answers: A

- 5: A customer requests that you create a user account for administering jobs and storage pools in EMC Replication Manager, but without controlling the storage array itself.
- What is the required account type that will satisfy only these operations?
- A.Database Administrator
- **B.**Operator
- C.Power DBA
- D.Power User

Correct Answers: C

- 6: What is the correct sequence of events when a synchronous write occurs in SRDF/S?
- 1. Host issues a write I/O
- 2. Remote Symmetrix acknowledges receipt of write
- 3. Write is transmitted to remote Symmetrix cache
- 4. Write is received in cache at source Symmetrix
- 5. Source Symmetrix acknowledges write completion to host

A.1, 3, 2, 4, 5

B.1, 4, 3, 2, 5

C.1, 4, 5, 3, 2

D.1, 5, 3, 4, 2

Correct Answers: B

7: PowerPath PPME with Open Replicator is planned for use in a migration of 172 LUNs. The source array is a Symmetrix 8830; the target array is a DMX-3.

For PPME-enabled migrations using Open Replicator, what is the configurable maximum number of concurrent replication sessions that can be supported in this configuration?

A.16

B.128

C.256

D.512

Correct Answers: D

8: A customer would like to create a point-in-time copy of the data for development purposes. The customer environment is not performance-sensitive. The customer would like to access the point-in-time copy at 9 A.M.

The amount of time required to copy the data from the source to the target is 60 minutes and application downtime is not available. Which solution is recommended?

A.Use TimeFinder/Clone to create and activate a clone with the background copy (-copy) option at 8 A.M.

B.Use TimeFinder/Clone to create a clone with the background copy (-copy) option at or before 8 A.M. Activate the clone at 9 A.M.

C.Use TimeFinder/Clone to create a clone using the deferred copy mode (default) prior to 9~A.M. Activate the clone with the consistent option at 9~A.M.

D.Use TimeFinder/Clone to create a clone with the Precopy (-precopy) option at or before 8 A.M. Activate the clone at 9 A.M.

Correct Answers: C

9: What can happen if BCV copies of database log and data volumes are created without using a consistent split while the database is running?

A.Database inconsistencies can occur

B.Database integrity is assured with Enginuity Consistency Assist (ECA) technology

C.The database application can block an I/O while waiting for the split operation to occur

D.The split may never finish due to database inconsistency

Correct Answers: A

10: You have created an EMC Replication Manager job to replicate your SQL Server database. You now want to delegate the day-to-day management of this job to another user with Database Administrator privileges within Replication Manager. This user complains that they are unable to access the job you created.

What must you do to enable your Database Administrator to access this job?

A.Grant the user access to the database on SQL Server.

B.Manually add the user account to the job.

C.Recreate the SQL Server job.

D.Upgrade the user's privileges to Power DBA.

Correct Answers: B

11: What is an advantage of using Open Replicator compared to the SRDF family of replication products?

A.When a zero data loss solution is required

B. When the environment contains a heterogeneous mixture of storage arrays

C.When the environment contains a homogenous set of storage arrays

D.When the environment contains servers with sufficient processor and memory

Correct Answers: B

12: How does Enginuity Consistency Assist (ECA) differ from PowerPath?

A.ECA and PowerPath I/O suspensions do not differ from each another.

B.ECA supports I/O suspension for hot splits while PowerPath does not.

C.ECA suspends I/O at the host level while PowerPath suspends I/O at the Symmetrix level.

D.ECA suspends I/O at the Symmetrix level while PowerPath suspends I/O at the host level.

Correct Answers: D

- 13: What are the steps for the administration of storage in an EMC Replication Manager environment?
- 1. Array configuration
- 2.Storage pools
- 3. Storage discovery
- 4. Array discovery
- 5.Include storage

A.3, 1, 4, 5, 2

B.3, 4, 1, 5, 2

C.4, 1, 3, 5, 2


D.4, 3, 1, 5, 2

Correct Answers: C

14: Click on the Exhibit Button.

Which Open Replicator operations can be performed between the DMX and third-party array with

the architecture displayed?

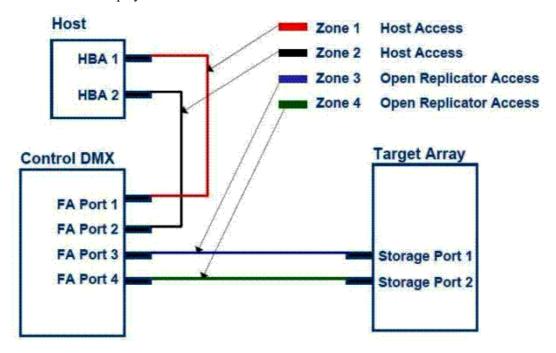

A.Cold and Hot Push and Pull

B.Cold Push and Pull

C.Hot Push and Pull

D.None; all FA ports must be zoned to the target array


Correct Answers: B

15: Click on the Exhibit Button.

A database server has its logs stored on a volume on the log source Symmetrix and its data stored on a volume on the data source Symmetrix.

Both source Symmetrix frames replicate data to the target Symmetrix at the disaster recovery site. There are two device groups that have been defined: one group for the data volume on the data source Symmetrix and one for the log volume on the log source Symmetrix.

What happens if the SRDF links between the log source Symmetrix and the target Symmetrix were to fail?

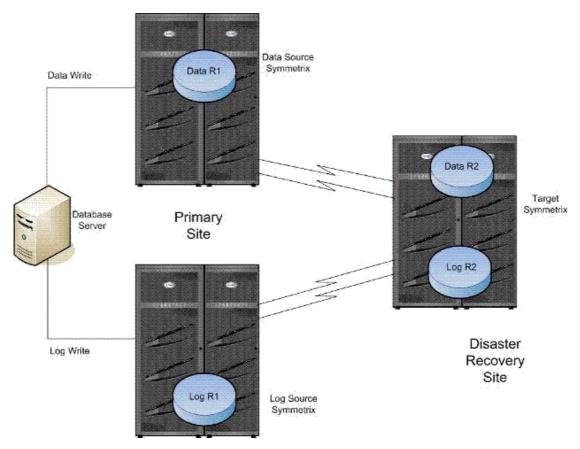

A.An SRDF failover would be initiated on all volumes and processing would automatically be switched over to the disaster recovery Site.

B.The data in the database becomes inconsistent at the disaster recovery site.

C.The R1 volumes in the log source Symmetrix would become write-disabled to the database server.

D.The R2 data in the database remains consistent because Enginuity Consistency Assist technology would ensure data consistency.

Correct Answers: B