Core Flight Executive Users Guide

Generated by Doxygen 1.8.13

Contents

1 Core Flight Executive Documentation

- General Information and Concepts

    - Background
    - Applicable Documents
    - Version Numbers
    - Dependencies
    - Acronyms
    - Glossary of Terms

- Executive Services (ES)

    - cFE Executive Services Overview
    - cFE Executive Services Commands
    - cFE Executive Services Telemetry

2 Background

The Core Flight Executive (cFE) is an application development and run-time environment. The cFE provides a set of core services including Software Bus (messaging), Time, Event (Alerts), Executive (startup and runtime), and Table services. The cFE defines an application programming interface (API) for each service which serves as the basis for application development.

The cFE Software Bus service provides a publish and subscribe messaging system that allows applications to easily plug and play into the system. Applications subscribe to cFE services at runtime, making system modifications easy. Facilitating rapid prototyping, new applications can be compiled, linked, loaded, and started without requiring the entire system to be rebuilt.

Each service comes complete with a built in application that allows users to interface with each service. To support reuse and project independence, the cFE contains a configurable set of requirements and code. The configurable parameters allow the cFE to be tailored for each environment including desk-top and closed loop simulation environments. This provides the ability to run and test software applications on a developer's desktop and then deploy that same software without changes to the embedded system. In addition the cFE includes the following software development tools:

- Unit Test Framework (UTF) for unit testing applications developed via the cFE

- Software Timing Analyzer that provides visibility into the real-time performance of embedded systems software

- Table Builder

- Command and Telemetry utilities

The cFE is one of the components of the Core Flight System (cFS), a platform and project independent reusable software framework and set of reusable software applications. There are three key aspects to the cFS architecture: a dynamic run-time environment, layered software, and a component based design. The combination of these key aspects along with an implementation targeted to the embedded software domain makes it suitable for reuse on any number of NASA flight projects and/or embedded software systems.

The pivotal design feature, abstracting the software architecture from the hardware and forming the basis of reuse, is component layering. Each layer of the architecture "hides" its implementation and technology details from the other layers by defining and using standard Application Programming Interfaces (APIs). The internals of a layer can be changed without affecting other layers' internals and components.

The layers include an OS Abstraction Layer (OSAL), Platform Support Package (PSP) layer, core Flight Executive (cFE) layer, and an Application layer. The cFE layer runs on top of the PSP and OSAL layers. The cFE comes complete with a build environment, deployment guide, API reference guide, and provides a sample PSP. The OSAL is available open source and once integrated into the cFE build environment, developers will be ready to build and run the system and start developing their mission/project specific applications that easily plug and play into the system.

Core Flight Executive (cFE) Goals

The main long term goal of the cFE is to form the basis for a platform and project independent reusable software framework. The cFE with the OSAL allow the development of portable embedded system software that is independent of a particular Real Time Operating System and hardware platform. A secondary long term goal is to create a standardized, product-line approach for development of embedded aerospace flight software.

Functional and Community Goals

The cFE allows embedded system software to be developed and tested on desktop workstations and ported to the target platform without changing a single line of code, providing a shorter development and debug time. The cFE is an enabler of software collaboration amongst all users promoting the growth of the application and library layers where new applications, libraries, tools, and lessons learned can be contributed and shared.

It is important for application developers to realize the long term and functional goals of the cFE. With a standard set of services providing a standard API, all applications developed with the cFE have an opportunity to become useful on future missions through code reuse. In order to achieve this goal, applications must be written with care to ensure that their code does not have dependencies on specific hardware, software or compilers. The cFE and the underlying generic operating system API (OS API) have been designed to insulate the cFE Application developer from hardware and software dependencies. The developer, however, must make the effort to identify the proper methods through the cFE and OS API to satisfy their software requirements and not be tempted to take a "short-cut" and accomplish their goal with a direct hardware or operating system software interface.

3   Applicable Documents

Document Title	Link
cFE System (L4) Requirements Document	cfe/docs/'cfe requirements.docx'
cFE Functional (L5) Requirements Document	cfe/docs/cFE_FunctionalRequirements.csv
cFE Application Developers Guide	cfe/docs/'cFE Application Developers Guide.md'
cFE User's Guide (includes API)	Autogenerated from code, provided with releases in cFE repository
OS Abstraction Layer (OSAL) API	Autogenerated from code, provided with releases in OSAL repository

4   Dependencies

The Core Flight Executive (cFE) is required to be built with the Operating System Abstraction Layer (OSAL) and Platform Support Package (PSP) componenets of the Core Flight System (cFS). It is always recommended to build with the latest versions of each of the components as backward compatability may not be supported.

Several internal data structures within the cFE use the "char" data type. This data type is typically 1 byte in storage size with a value range -128 to 127 or 0 to 255. The size of the "char" data type and whether or not the type is signed or unsigned can change across platforms. The cFE assumes use of the "char" data type as an **8-bit type.**

5   Acronyms

Acronym	Description
AC	Attitude Control
ACE	Attitude Control Electronics
ACS	Attitude Control System

Acronym	Description
API	Application Programming Interface
APID	CCSDS Application ID
App	Application
CCSDS	Consultative Committee for Space Data Systems
CDH, C&DH	Command and Data Handling
cFE	core Flight Executive
cFS	core Flight System
CM	Configuration Management
CMD	Command
CPU	Central Processing Unit
EDAC	Error Detection and Correction
EEPROM	Electrically Erasable Programmable Read-Only Memory
ES	Executive Services
EVS	Event Services
FC	Function Code
FDC	Failure Detection and Correction
FSW	Flight Software
HW, H/W	Hardware
ICD	Interface Control Document
MET	Mission Elapsed Time
MID	Message ID
OS	Operating System
OSAL	Operating System Abstraction Layer
PID	Pipeline ID
PKT	Packet
PSP	Platform Support Package
RAM	Random-Access Memory
SB	Software Bus
SDO	Solar Dynamics Observatory
ST5	Space Technology Five
STCF	Spacecraft Time Correlation Factor
SW, S/W	Software
TAI	International Atomic Time
TBD	To Be Determined
TBL	Table Services
TID	Task ID
TIME	Time Services
TLM	Telemetry
UTC	Coordinated Universal Time

6 Glossary of Terms

Term	Definition
Application (or App)	A set of data and functions that is treated as a single entity by the cFE. cFE resources are allocated on a per-Application basis. Applications are made up of a Main Task and zero or more Child Tasks.
Application ID	A processor unique reference to an Application. **NOTE: This is different from a CCSDS Application ID which is referred to as an "APID."**
Application Programmer's Interface (API)	A set of routines, protocols, and tools for building software applications
Platform Support Package (PSP)	A collection of user-provided facilities that interface an OS and the cFE with a specific hardware platform. The PSP is responsible for hardware initialization.
Child Task	A separate thread of execution that is spawned by an Application's Main Task.
Command	A Software Bus Message defined by the receiving Application. Commands can originate from other onboard Applications or from the ground.
Core Flight Executive (cFE)	A runtime environment and a set of services for hosting FSW Applications
Critical Data Store (CDS)	A collection of data that is not modified by the OS or cFE following a Processor Reset.
Cyclic Redundancy Check	A polynomial based method for checking that a data set has remained unchanged from one time period to another.
Developer	Anyone who is coding a cFE Application.
Event Data	Data describing an Event that is supplied to the cFE Event Service. The cFE includes this data in an Event Message.
Event Filter	A numeric value (bit mask) used to determine how frequently to output an application Event Message defined by its Event ID.
Event Format Mode	Defines the Event Message Format downlink option: short or long. The short format is used when there is limited telemetry bandwidth and is binary. The long format is in ASCII and is used for logging to a Local Event Log and to an Event Message Port.
Event ID	A numeric literal used to uniquely name an Application event.
Event Type	A numeric literal used to identify the type of an Application event. An event type may be CFE_EVS_DEBUG, CFE_EVS_INFORMATION, CFE_EVS_ERROR, or CFE_EVS_CRITICAL.
Event Message	A data item used to notify the user and/or an external Application of a significant event. Event Messages include a time-stamp of when the message was generated, a processor unique identifier, an Application ID, the Event Type (DEBUG,INFO,ERROR or CRITICAL), and Event Data. An Event Message can either be real-time or playback from a Local Event Log.

7 Version Numbers

Version Number Semantics

The version number is a sequence of four numbers, generally separated by dots when written. These are, in order, the Major number, the Minor number, the Revision number, and the Mission Revision number. Missions may modify the Mission Revision information as needed to suit their needs.

It is important to note that Major, Minor, and Revision numbers are only updated upon official releases of tagged versions, **NOT** on development builds. We aim to follow the Semantic Versioning v2.0 specification with our versioning.

The MAJOR number shall be incremented on release to indicate when there is a change to an API that may cause existing, correctly-written cFS components to stop working. It may also be incremented for a release that contains changes deemed to be of similar impact, even if there are no actual changes to the API.

The MINOR number shall be incremented on release to indicate the addition of features to the API which do not break the existing code. It may also be incremented for a release that contains changes deemed to be of similar impact, even if there are no actual updates to the API.

The REVISION number shall be incremented on changes that benefit from unique identification such as bug fixes or major documentation updates. The Revision number may also be updated if there are other changes contained within a release that make it desirable for applications to distinguish one release from another.

The Major, Minor, and Revision numbers are provided in this header file as part of the API definition; this macro must expand to a simple integer value, so that it can be used in simple if directives by the macro preprocessor.

The Mission Version number shall be set to zero in all officially released packages, and is entirely reserved for the use of the mission. The Mission Version is provided as a simple macro defined in the cfe_platform_cfg.h header file.

Version Number Flexibility

The major number may increment when there is no breaking change to the API, if the changes are significant enough to warrant the same level of attention as a breaking API change.

The minor number may increment when there have been no augmentations to the API, if changes are as significant as additions to the public API.

The revision numbers may increment in implementations where no actual implementation-specific code has changed, if there are other changes within the release with similar significance.

How and Where Defined

The Major, Minor, and Revision components of the version are provided as simple macros defined in the cfe_version.h header file as part of the API definition; these macros must expand to simple integer values, so that they can be used in simple if directives by the macro preprocessor.

The Mission Version is provided as a simple macro defined in the cfe_platform_cfg.h header file. As delivered in official releases, these macros must expand to simple integer values, so that they can be used in simple macro preprocessor conditions, but delivered code should not prevent a mission from, for example, deciding that the Mission Version is actually a text string.

Identification of development builds

In order to distinguish between development versions, we also provide a BUILDNUMBER.

The BUILD_NUMBER reflects the number of commits since the BUILD_BASELINE, a baseline git tag, for each particular component. The BUILD_NUMBER integer increases monotonically for a given development cycle. The BUILD_BAS←ELINE identifies the current development cycle and is a git tag with format vX.Y.Z. The Codename used in the version string also refers to the current development cycle. When a new baseline tag and codename are created, the the BUILD_NUMBER resets to zero and begins increasing from a new baseline.

Templates for the version and version string

The following templates are the code to be used in cfe_version.h for either official releases or development builds. The apps and repositories follow the same pattern by replacing the CFE_ prefix with the appropriate name; for example, osal uses OS_, psp uses CFE_PSP_IMPL, and so on.

Template for Official Releases

```
/*<! Official Release Version Number */
#define CFE_SRC_VERSION \
    CFE_STR(CFE_MAJOR_VERSION) "." \
    CFE_STR(CFE_MINOR_VERSION) "." \
    CFE_STR(CFE_REVISION) "."      \
    CFE_STR(CFE_MISSION_REV)

#define CFE_VERSION_STRING \
    "cFE version " CFE_SRC_VERSION
```

Template for Development Builds

```
/*! @brief Development Build Version Number.
 * Baseline git tag + Number of commits since baseline. @n
 * See cfs_versions.dox for format differences between development and release versions.
 */
#define CFE_SRC_VERSION \
    CFE_BUILD_BASELINE CFE_STR(CFE_BUILD_NUMBER)

/*! @brief Development Build Version String.
 * Reports the current development build's baseline, number, and name. Also includes a note about the latest offi
 * See cfs_versions.dox for format differences between development and release versions.
*/
#define CFE_VERSION_STRING                                                     \
" cFE Development Build\n "                                                     \
CFE_SRC_VERSION " (Codename: CONSTELLATION_NAME)"      /* Codename for current development */  \
"\n Last Offical Release: cfe vX.Y.Z"   /* For full support please use this version */
```

8 cFE Application Programmer's Interface (API) Reference

Executive Services API

- cFE Entry/Exit APIs
  - CFE_ES_Main - cFE Main Entry Point used by Board Support Package to start cFE
  - CFE_ES_ResetCFE - Reset the cFE Core and all cFE Applications.

- cFE Application Control APIs
  - CFE_ES_RestartApp - Restart a single cFE Application.
  - CFE_ES_ReloadApp - Reload a single cFE Application.
  - CFE_ES_DeleteApp - Delete a cFE Application.

- cFE Application Behavior APIs
  - CFE_ES_RegisterApp - Registers a cFE Application with the Executive Services.
  - CFE_ES_RunLoop - Check for Exit, Restart, or Reload commands.

- CFE_ES_WaitForStartupSync - Allow an Application to Wait for the "OPERATIONAL" global system state.
- CFE_ES_WaitForSystemState - Allow an Application to Wait for a minimum global system state.
- CFE_ES_IncrementTaskCounter - Increments the execution counter for the calling task.
- CFE_ES_ExitApp - Exit a cFE Application.

- cFE Information APIs

  - CFE_ES_GetResetType - Return the most recent Reset Type.
  - CFE_ES_GetAppID - Get an Application ID for the calling Application.
  - CFE_ES_GetAppIDByName - Get an Application ID associated with a specified Application name.
  - CFE_ES_GetAppName - Get an Application name for a specified Application ID.
  - CFE_ES_GetAppInfo - Get Application Information given a specified App ID.
  - CFE_ES_GetTaskInfo - Get Task Information given a specified Task ID.

- cFE Child Task APIs

  - CFE_ES_RegisterChildTask - Registers a cFE Child task associated with a cFE Application.
  - CFE_ES_CreateChildTask - Creates a new task under an existing Application.
  - CFE_ES_DeleteChildTask - Deletes a task under an existing Application.
  - CFE_ES_ExitChildTask - Exits a child task.

- cFE Critical Data Store APIs

  - CFE_ES_RegisterCDS - Reserve space (or re-obtain previously reserved space) in the Critical Data Store (CDS)
  - CFE_ES_CopyToCDS - Save a block of data in the Critical Data Store (CDS)
  - CFE_ES_RestoreFromCDS - Recover a block of data from the Critical Data Store (CDS)

- cFE Memory Manager APIs

  - CFE_ES_PoolCreate - Initializes a memory pool created by an application while using a semaphore during processing.
  - CFE_ES_PoolCreateEx - Initializes a memory pool created by an application with application specified block sizes.
  - CFE_ES_PoolCreateNoSem - Initializes a memory pool created by an application without using a semaphore during processing.
  - CFE_ES_GetPoolBuf - Gets a buffer from the memory pool created by CFE_ES_PoolCreate or CFE_ES↩ _PoolCreateNoSem.
  - CFE_ES_PutPoolBuf - Releases a buffer from the memory pool that was previously allocated via CFE_E↩ S_GetPoolBuf.
  - CFE_ES_GetMemPoolStats - Extracts the statistics maintained by the memory pool software.
  - CFE_ES_GetPoolBufInfo - Gets info on a buffer previously allocated via CFE_ES_GetPoolBuf.

- cFE Performance Monitor APIs

  - CFE_ES_PerfLogEntry - Entry marker for use with Software Performance Analysis Tool.
  - CFE_ES_PerfLogExit - Exit marker for use with Software Performance Analysis Tool.
  - CFE_ES_PerfLogAdd - Function called by CFE_ES_PerfLogEntry and CFE_ES_PerfLogExit macros.

- cFE Generic Counter APIs

  - CFE_ES_RegisterGenCounter - Register a generic counter.

Events Services API

File Services API

Software Bus API

- cFE Pipe Management APIs

    - CFE_SB_CreatePipe - Creates a new software bus pipe.
    - CFE_SB_DeletePipe - Delete a software bus pipe.
    - CFE_SB_SetPipeOpts - Set options on a pipe.
    - CFE_SB_GetPipeOpts - Get options on a pipe.
    - CFE_SB_GetPipeName - Get the pipe name for a given id.
    - CFE_SB_GetPipeIdByName - Get pipe id by pipe name.

- cFE Message Subscription Control APIs

    - CFE_SB_Subscribe - Subscribe to a message on the software bus with default parameters.
    - CFE_SB_SubscribeEx - Subscribe to a message on the software bus.
    - CFE_SB_SubscribeLocal - Subscribe to a message while keeping the request local to a cpu.
    - CFE_SB_Unsubscribe - Remove a subscription to a message on the software bus.
    - CFE_SB_UnsubscribeLocal - Remove a subscription to a message on the software bus on the current CPU.

- cFE Send/Receive Message APIs

    - CFE_SB_SendMsg - Send a software bus message.
    - CFE_SB_PassMsg - Passes a software bus message.
    - CFE_SB_RcvMsg - Receive a message from a software bus pipe.

- cFE Zero Copy Message APIs

    - CFE_SB_ZeroCopyGetPtr - Get a buffer pointer to use for "zero copy" SB sends.
    - CFE_SB_ZeroCopyReleasePtr - Release an unused "zero copy" buffer pointer.
    - CFE_SB_ZeroCopySend - Send an SB message in "zero copy" mode.
    - CFE_SB_ZeroCopyPass - Pass an SB message in "zero copy" mode.

- cFE Setting Message Characteristics APIs

    - CFE_SB_InitMsg - Initialize a buffer for a software bus message.
    - CFE_SB_SetMsgId - Sets the message ID of a software bus message.
    - CFE_SB_SetUserDataLength - Sets the length of user data in a software bus message.
    - CFE_SB_SetTotalMsgLength - Sets the total length of a software bus message.
    - CFE_SB_SetMsgTime - Sets the time field in a software bus message.
    - CFE_SB_TimeStampMsg - Sets the time field in a software bus message with the current spacecraft time.
    - CFE_SB_SetCmdCode - Sets the command code field in a software bus message.
    - CFE_SB_MessageStringSet - Copies a string into a software bus message.

- cFE Getting Message Characteristics APIs

    - CFE_SB_GetUserData - Get a pointer to the user data portion of a software bus message.
    - CFE_SB_GetMsgId - Get the message ID of a software bus message.
    - CFE_SB_GetUserDataLength - Gets the length of user data in a software bus message.
    - CFE_SB_GetTotalMsgLength - Gets the total length of a software bus message.
    - CFE_SB_GetMsgTime - Gets the time field from a software bus message.

Time Services API

- cFE Get Current Time APIs

    - CFE_TIME_GetTime - Get the current spacecraft time.

    - CFE_TIME_GetTAI - Get the current TAI (MET + SCTF) time.

    - CFE_TIME_GetUTC - Get the current UTC (MET + SCTF - Leap Seconds) time.

    - CFE_TIME_GetMET - Get the current value of the Mission Elapsed Time (MET).

    - CFE_TIME_GetMETseconds - Get the current seconds count of the mission-elapsed time.

    - CFE_TIME_GetMETsubsecs - Get the current sub-seconds count of the mission-elapsed time.

- cFE Get Time Information APIs

    - CFE_TIME_GetSTCF - Get the current value of the spacecraft time correction factor (STCF).

    - CFE_TIME_GetLeapSeconds - Get the current value of the leap seconds counter.

    - CFE_TIME_GetClockState - Get the current state of the spacecraft clock.

    - CFE_TIME_GetClockInfo - Provides information about the spacecraft clock.

- cFE Time Arithmetic APIs

    - CFE_TIME_Add - Adds two time values.

    - CFE_TIME_Subtract - Subtracts two time values.

    - CFE_TIME_Compare - Compares two time values.

- cFE Time Conversion APIs

    - CFE_TIME_MET2SCTime - Convert specified MET into Spacecraft Time.

    - CFE_TIME_Sub2MicroSecs - Converts a sub-seconds count to an equivalent number of microseconds.

    - CFE_TIME_Micro2SubSecs - Converts a number of microseconds to an equivalent sub-seconds count.

    - CFE_TIME_CFE2FSSeconds - DEPRECATED: Converts cFE seconds into the File System's seconds.

    - CFE_TIME_FS2CFESeconds - DEPRECATED: Converts a file system's seconds into cFE seconds.

- cFE External Time Source APIs

    - CFE_TIME_ExternalTone - Provides the 1 Hz signal from an external source.

    - CFE_TIME_ExternalMET - Provides the Mission Elapsed Time from an external source.

    - CFE_TIME_ExternalGPS - Provide the time from an external source that has data common to GPS receivers.

    - CFE_TIME_ExternalTime - Provide the time from an external source that measures time relative to a known epoch.

    - CFE_TIME_RegisterSynchCallback - Registers a callback function that is called whenever time synchronization occurs.

    - CFE_TIME_UnregisterSynchCallback - Unregisters a callback function that is called whenever time synchronization occurs.

- cFE Miscellaneous Time APIs

    - CFE_TIME_Print - Print a time value as a string.

    - CFE_TIME_Local1HzISR - This function should be called from the system PSP layer once per second.

9 cFE Executive Services Overview

Executive Services (ES) is one of the five core Flight Executive components. ES is the primary interface to the underlying Operating System, providing a high level interface to system control facilities. The ES component is responsible for starting up and restarting the cFE, starting up, shutting down, and restarting cFE Applications, logging errors and performance data, and providing a persistent memory store for cFE Applications.

The interfaces to the ES task include the Ground Interface (commands and telemetry) and the Application Programmer Interfaces (APIs). The ES task interfaces to the OS through the OS Abstraction Layer (OSAL) and platform through the Platform Support Package (PSP).

The functionality provided by the ES task include Software Reset, Application and Child Task Mangement, Basic File System, Performance Data Collection, Critical Data Store, Memory Pool, System Log, Shell Command.

For additional detail on Executive Services, see the following sections:

- Terminology

- Software Reset

  - Reset Types and Subtypes

  - Exception and Reset (ER) Log

- Application and Child Task Management

  - Starting an Application

  - Stopping an Application

  - Restarting an Application

  - Reloading an Application

  - Listing Current Applications

  - Listing Current Tasks

  - Loading Common Libraries

- Basic File System

- Performance Data Collection

- Critical Data Store

- Memory Pool

- System Log

- OS Shell

- Version Identification

- Executive Services Frequently Asked Questions

9.1 Terminology

The following sections describe terminology that is very relevant to understanding the Executive Services:

- "Application" and "cFE Application"

- "Task"

- "Startup Script"

Next: "Application" and "cFE Application"
Up To: cFE Executive Services Overview

9.1.1 "Application" and "cFE Application"

Application

The term 'Application' as defined in the Glossary of Terms is *a set of data and functions that is treated as a single entity by the cFE. cFE resources are allocated on a per-Application basis. Applications are made up of a Main Task and zero or more Child Tasks.*

cFE Application

A 'cFE Application' is an application that is external to the cFE and designed to interface to the cFE through the APIs. It is created through an entry in the "Startup Script" (with the 'Object Type' field set to CFE_APP) or by way of the CFE_ES_START_APP_CC ground command.

When referring to one of the five applications internal to the cFE (ES, EVS, SB, TIME or TBL), the term 'Service' or 'Core Application' is typically used.

A listing of cFE applications can be acquired by using the CFE_ES_QUERY_ALL_CC ground command. This listing will include the cFE internal applications as well as cFE applications that are loaded and running.

Next: "Task"
Up To: Terminology

9.1.2 "Task"

A Task is a thread of execution in the operating system, often associated with a cFE Application. Each cFE Application has a Main task providing its CPU context, stack and other OS resources. In addition, each cFE Application can create multiple Child Tasks which are closely associated with the Parent Task and cFE Application.

In a traditional Real Time Operating System such as vxWorks, the cFE Application Main task and child tasks end up being mapped to these OS tasks in the same shared memory space. For example, a Stored Command cFE Application that consists of a cFE Main Task and 10 Relative Time Sequence Child Tasks would have 11 tasks on a vxWorks system. The only association between these tasks exists in the cFE.

In a memory protected process oriented Operating System, the intention is to have a cFE Application implemented as a memory protected process with its own virtual address space. In this Process Model, each cFE Child Task would be a thread in the parent Process, much like a Unix process with multiple threads. In this model, the Stored Command example with a cFE Main Task and 10 Relative Time Sequence Child Tasks would consist of a Unix Process and 10 pthreads, all under the same virtual address space.

Next: "Startup Script"
Prev: "Application" and "cFE Application"
Up To: Terminology

9.1.3 "Startup Script"

The startup script is a text file, written by the user that contains a list of entries (one entry for each application) and is used by the ES application for automating the startup of applications. For a processor reset, ES checks for the CFE_↩ PLATFORM_ES_VOLATILE_STARTUP_FILE first, and if it doesn't exist or for a power on reset ES uses the file passed in to CFE_ES_Main (typically CFE_PLATFORM_ES_NONVOL_STARTUP_FILE but dependent on the PSP).

The fields in a single entry include:

Object Type	`CFE_APP` for an Application, or `CFE_LIB` for a library.
Path/Filename	This is a cFE Virtual filename, not a vxWorks device/pathname
Entry Point	This is the name of the "main" function for App.
CFE Name	The cFE name for the APP or Library
Priority	This is the Priority of the App, not used for a Library
Stack Size	This is the Stack size for the App, not used for a Library
Load Address	This is the Optional Load Address for the App or Library. It is currently not implemented so it should always be 0x0.
Exception Action	This is the Action the cFE should take if the Application has an exception. • 0 = Do a cFE Processor Reset • Non-Zero = Just restart the Application

Immediately after the cFE completes its initialization, the ES Application first looks for the volatile startup script. The location in the file system is defined by the cFE platform configuration parameter named CFE_ES_VOLATILE_STAR↩ TUP_FILE. This configuration parameter contains a path as well as a filename. If the file is found, ES begins to startup

the applications that are listed in the file. If ES does not find the file, it attempts to open the CFE_ES_NONVOL_STA↩
RTUP_FILE.

If ES finds the volatile startup script, the attempt to open the nonvolatile startup script is bypassed.

Any errors encountered in the startup script processing are written to the System Log. The System Log may also contain positive acknowledge messages regarding the startup script processing.

Refer to the CFS Deployment Guide for more information regarding the startup script. The startup script delivered with the cFE (`cfe_es_startup.scr`) also has some detailed information about the fields and the settings.

Next: Software Reset
Prev: Starting an Application
Up To: Terminology

9.2 Software Reset

The ES Software Reset provides a command to reset the cFE as well as resetting individual applications. Because applications are dependent on the cFE services, it is not possible to reset the cFE without affecting the applications. Therefore, a command to reset the cFE will also reset every application that is running at the time the command is received.

Also include is the Exception and Reset (ER) Log, which has a command for dumping or clearing the log and telemetry to show the number of entries in the log. In addition to the ER log, the user may find information about the most recent reset in the ES task housekeeping telemetry.

The ES Software Reset also provides a command to set the maximum number of processor resets before ES issues a power-on reset. There is a corresponding 'processor resets' counter in ES housekeeping telemetry that may be reset through another ES command.

Next: Reset Types and Subtypes
Prev: Terminology
Up To: cFE Executive Services Overview

9.3 Reset Types and Subtypes

The Reset Type is sent to the ground in the ES housekeeping packet and tells how the current running version of the cFE was invoked. The possible Reset Types expected in the telemetry field are CFE_ES_POWERON_RESET and C↩
FE_ES_PROCESSOR_RESET. There is a third Reset Type defined in the ES code as CFE_ES_APP_RESTART which applies only to restarting an individual application and is covered in more detail in the section titled Application and Child Task.

The Reset Subtype is also sent in the ES housekeeping packet and gives more detail about the type of reset that started the execution of the current running version of the cFE. The possible Reset Subtypes are CFE_ES_POWER_CYCLE, CFE_ES_PUSH_BUTTON, CFE_ES_HW_SPECIAL_COMMAND, CFE_ES_HW_WATCHDOG, CFE_ES_RESET_↩
COMMAND, CFE_ES_EXCEPTION, CFE_ES_UNDEFINED_RESET, CFE_ES_HWDEBUG_RESET, CFE_ES_BA↩
NKSWITCH_RESET.

Next: Exception and Reset (ER) Log
Prev: Software Reset
Up To: cFE Executive Services Overview

9.4 Exception and Reset (ER) Log

The Exception and Reset Log contains detailed information about past resets and exceptions. To view the information the CFE_ES_WRITE_ER_LOG_CC command must be sent. This command will write the log to a binary file. The path and filename may be specified in the command. If the filename command field contains an empty string, the configuration parameter CFE_ES_DEFAULT_ER_LOG_FILE is used to specify the path and filename. Use the ground system to get the file and display the contents. There is also a command to clear the ER log, CFE_ES_CLEAR_ER_↩ LOG_CC.

The size of the ER log is defined by the platform configuration parameter CFE_ES_ER_LOG_ENTRIES This log is preserved after a processor reset and held in the ES reset area.

A count of the number of entries in the log is present in the ES housekeeping telemetry. This count can be used with the configuration parameter CFE_ES_ER_LOG_ENTRIES to calculate the fullness of the log.

The information contained in a single log entry is defined by the structure CFE_ES_ERLog_t.

Next: Application and Child Task Management
Prev: Reset Types and Subtypes
Up To: cFE Executive Services Overview

9.5 Application and Child Task Management

The ES Application and Child Task Management provides the user with full control over starting and stopping applications as well as querying information regarding applications, tasks and library routines.

There is no command to start or stop a child task. Child tasks can be controlled (started, stopped or deleted) only by the parent application through an API call.

This provides a way for the user to load a set of library routines, (via the startup script) without starting a corresponding task. See the section related to library routines for more detail.

The ES task maintains a counter for the number of registered applications, number of registered child tasks and the number of registered libraries in the ES housekeeping data.

Next: Starting an Application
Prev: Software Reset
Up To: cFE Executive Services Overview

9.6 Starting an Application

There are two ways to start an application, through the ground command CFE_ES_START_APP_CC or through the startup script. In either case, the object file must be loaded on board before the command is sent or before the startup script is executed. The startup script contains a list of applications and library routines to load and start immediately after the cFE finishes its startup sequence. The parameters in the command, match the elements of an entry in the startup script. See the cFE Deployment Guide for more information about starting applications by way of the startup script.

The format of the Start Application command, is defined in the structure CFE_ES_StartApp_t. The members of the structure include, application name, entry point, filename, stack size, load address, exception action and priority.

If the command fails for any reason, an error event will be sent stating the reason for the failure. There may be additional information in the system log that can be viewed by sending the ES command to dump the system log.

After starting an application, the ES task sends an informational event message displaying the application name, filename of the object and the application ID. The new application will then show up in the query list downloaded in response to the CFE_ES_QUERY_ALL_CC command.

Next: Stopping an Application
Up To: Application and Child Task Management

9.7   Stopping an Application

Stopping an application can be done through the ground command CFE_ES_STOP_APP_CC. This command will terminate the application execution and all child tasks created by the application, free the system resources that it allocated and delete the corresponding object file.

The process of stopping an application is done in a controlled manner when the application is properly using the return code from the call to the CFE_ES_RunLoop. When the application properly uses this function, the ES task starts a timer and (via the return code) tells the application to exit at its own convenience. This gives the application time to free its own resources and do any cleanup that may be required before terminating itself by calling CFE_ES_ExitApp. If the timer expires and the application still exists, then ES must 'kill' the application. When the application is killed, ES attempts to cleanup the applications resources as best it could. In this case there is no guarantee that all the system resources are properly released.

The format of the Stop Application command, is defined in the structure CFE_ES_AppNameCmd_t. The only parameter in the command is an application name.

If the command fails for any reason, an error event will be sent stating the reason for the failure. There may be additional information in the system log that can be viewed by sending the ES command to dump the system log.

After stopping an application, the ES task sends a debug message stating the name of the application. After executing the command, the application (or any resources it allocated) should no longer be listed in any cFE tables or files.

9.8   Restarting an Application

The CFE_ES_RESTART_APP_CC command is used to restart an application. This command stops and restarts an application using the parameters defined when the application was originally started, either through the startup script or by way of the CFE_ES_START_APP_CC command.

9.9   Reloading an Application

The CFE_ES_RELOAD_APP_CC command is used to reload an application. This command stops the application, unloads the object file, loads the new object file specified in the command and starts the application again using the parameters defined when the application was originally started, either through the startup script or by way of the CF↩ E_ES_START_APP_CC command.

9.10 Listing Current Applications

There are two options for receiving information about applications, the CFE_ES_QUERY_ONE_CC command can be used to get details about a single application. This command takes an application name as its only parameter and the application information is sent as a software bus packet that can be telemetered to the ground.

Or the CFE_ES_QUERY_ALL_CC command can be used to get information about all the applications that are currently registered with ES. This command writes the application data to a file and has a one parameter which specifies the path and filename of the output file.

For either command, the following Application information is made available:

- **Application ID** - The Application ID assigned by the cFE to the Application

- **Type Identifier** - Identifies whether the Application is a CORE App or an EXTERNAL App

- **Name** - The Application Name

- **Entry Point** - The symbolic name for the entry point into the Application

- **Filename** - The name of the file the Application was loaded from

- **Stack Size** - The number of bytes allocated for the Application's stack

- **Load Address** - The starting address of memory where the Application was loaded

- **Load Size** - The size, in bytes, of the Application when loaded into memory

- **Start Address** - The physical address that maps to the Entry Point

- **Exception Action** - A flag that identifies whether the the Processor should undergo a Restart or whether just the Application should restart upon an exception condition within the Application

- **Priority** - The assigned priority for the Application

- **Main Task ID** - The Task ID assigned to the main task associated with the Application

- **Main Task Name** - The name of the main task associated with the Application

- **Number of Child Tasks** - The number of child tasks spawned by the main task

For a description of the format in which this data is dumped, see CFE_ES_AppInfo_t.

9.11 Listing Current Tasks

The CFE_ES_QUERY_ALL_TASKS_CC command is used to get a list of child tasks that are currently registered with ES. The following information is provided for each registered task:

- **Task ID** - The Task ID associated with the specified task

- **Task Name** - The name of the Task

- **Application ID** - The ID for the Application the Task is associated with

- **Application Name** - The name of the Application the Task is associated with

Next: Loading Common Libraries
Prev: Listing Current Applications
Up To: Application and Child Task Management

9.12 Loading Common Libraries

Library routines may be loaded only through the startup script. There is an option that allows a library routine initialization function to be executed after the library is loaded. Refer to the cFE Application Developers Guide for more information regarding Library Routines and startup scripts. The startup script delivered with the cFE (`cfe_es_startup.scr`) also has some detailed information about library routines.

Next: Basic File System
Prev: Listing Current Tasks
Up To: Application and Child Task Management

9.13 Basic File System

ES provides minimal functionality to initialize, read, and write cfe File headers.

Next: Performance Data Collection
Prev: Loading Common Libraries
Up To: Application and Child Task Management

9.14   Performance Data Collection

The Performance Data Collection provides precise timing information for each software application similar to how a logic analyzer can trigger and filter data.

API calls are inserted by the development team at key points in the code. The basic operation is to start the data collection, wait some amount of time, then send the command to stop the data collection. When the stop command is received, the ES task writes all the data from the buffer to a file. The file can then be imported to analysis tools for viewing. The size of the buffer is configurable through the CFE_ES_PERF_DATA_BUFFER_SIZE platform configuration parameter.

Additional information follows:

- Performance Data Collection Trigger Masks

- Starting to Collect Performance Data

- Stopping the Collection of Performance Data

- Viewing the Collection of Performance Data

Next: Performance Data Collection Trigger Masks
Prev: Basic File System
Up To: cFE Executive Services Overview

9.14.1   Performance Data Collection Trigger Masks

The trigger mask is used to control precisely when to start collecting the data. There is a bit in the trigger mask for every marker used in the code. After a start command is received, the trigger mask is read and dictates when to begin storing data in the buffer.

If the trigger mask is set to all zeros, then the collection will begin immediately after the start command and continue until a stop command is received. In this case the buffer behaves in a 'circular' manner.

Next: Starting to Collect Performance Data
Prev: Performance Data Collection
Up To: Performance Data Collection

9.14.2   Starting to Collect Performance Data

The CFE_ES_START_PERF_DATA_CC command is used to start the data collection process. The ES task sends a debug event when the command is received. It is not possible to start a collection if the buffer-to-file write is in process from an earlier collection. There is an ES telemetry point that can be used to ensure there is not a buffer-to-file write in progress. This ES telemetry point is called 'Perf Data to Write' and begins counting down from 'Data Count' to zero. If this counter is zero, it is ok to send the start command. If any errors are encountered when the start command is received, the details will be displayed in an error event message.

Next: Stopping the Collection of Performance Data
Prev: Performance Data Collection Trigger Masks
Up To: Performance Data Collection

9.14.3   Stopping the Collection of Performance Data

The CFE_ES_STOP_PERF_DATA_CC command is used to stop the data collection process and write the buffer data to a file. The path and filename may be specified in the command. If the filename command field contains an empty string, the configuration parameter CFE_ES_DEFAULT_PERF_DUMP_FILENAME is used to specify the path and filename. The number of entries written to the file is determined by the 'data count' variable, which is sent in the ES housekeeping telemetry packet. To ensure cpu hogging does not occur during the write process, ES creates a low priority child task to perform the file write operation. This child task will write a number of entries, then sleep for a short time to give tasks of lower priority a chance to run. The number of entries between delays, and the delay time is displayed in the debug event at the time the stop command is received.

9.14.4   Viewing the Collection of Performance Data

To view the performance data, the file created as a result of the stop command must be transferred to the ground and imported into a viewing tool. See `https://github.com/nasa/perfutils-java` as an example.

9.15   Critical Data Store

Some missions are required, for health, safety and mission success criteria, to survive Processor Resets. These mission requirements frequently flow down to Attitude Control and/or Command and Data Handling requirements that force an Application developer to design a mechanism for retaining software state information through a Processor Reset. The cFE provides the Critical Data Store to assist the developer in meeting these requirements.

The Critical Data Store is an area of memory that is not cleared during a Processor Reset. In addition, the contents of memory are validated when accessed with a Data Integrity Value that helps to ensure the contents have not been corrupted. Each processor platform, through the design of its Board Support Package, can implement this area of memory in a number of ways to ensure the contents survive a Processor Reset. Applications can allocate a section of this memory for their use in a way similar to the cFE Table Services Overview.

When an Application registers a Critical Data Store (CDS), the Executive Services allocates a section of the Critical Data Store memory for the application's use and assigns the Application specified name to the memory area. The operator can find and learn the characteristics of these Critical Data Stores by using the Dump CDS Registry Command.   This command will dump the contents of the CDS Registry maintained by the Executive Services into a file that can be downlinked and examined by the operator.

The CDS Registry dump will identify the following information for each registered CDS:

- **Handle** - the numeric identifier used by an Application to access the contents of the CDS

- **Size** - the number of bytes allocated to the specified CDS

- **Table Flag** - a flag that indicates whether the CDS is associated with a Critical Tables (when non-zero) or not (when equal to zero).

- **Name** - a processor specific name that uniquely identifies the CDS. The name comes in two parts, `"AppName.↩ CDSName"`. `AppName` identifies which Application registered the CDS. `CDSName` is the name the Application assigned to the CDS.

The format of the CDS Registry Dump File is a cFE Standard File header (see CFE_FS_Header_t) followed by one or more CDS Registry Dump File Records (see CFE_ES_CDSRegDumpRec_t).

Next: Memory Pool
Prev: Performance Data Collection
Up To: cFE Executive Services Overview

9.16 Memory Pool

Refer to the cFE Application Developers Guide for additional information.

Applications that are designed for generic missions, frequently have to wait until run-time before allocating memory for buffers, data records, etc.

The cFE provides a memory allocation algorithm that may be used by an application to manage its block of memory. The user provides a pointer to its memory block and a list of block sizes and the cFE provides 'get' and 'put' API's to the user for managing its memory pool.

Run-time memory allocation in an embedded system can be risky because of the potential problem of memory fragmentation. Memory fragmentation is also referred to as External Fragmentation and is defined in the wikipedia as:

```
External fragmentation is the phenomenon in which free storage becomes divided
into many small pieces over time. It is a weakness of certain storage
allocation algorithms, occurring when an application allocates and deallocates
("frees") regions of storage of varying sizes, and the allocation algorithm
responds by leaving the allocated and deallocated regions interspersed. The
result is that, although free storage is available, it is effectively unusable
because it is divided into pieces that are too small to satisfy the demands of
the application. The term "external" refers to the fact that the unusable
storage is outside the allocated regions.
```

To help prevent this from happening, the cFE has integrated a memory allocation algorithm that is designed to create blocks at run-time, based on the size of the blocks requested. After a reset, there are no blocks created, the memory pool is said to be unconfigured. As requests for memory blocks are made, the memory pool first tries to use blocks that have been created but are no longer in use. If it cannot find an available block, it will create a new one. The created blocks remain until a reset occurs.

This algorithm is recommended when the size of the requests and the peak rate of requests can be pre-determined. It is highly recommended that adequate margin is designed into the pool size. The memory pool should never get close to being fully configured (i.e. not enough memory to create a new block). If the memory does become fully configured, requests for new size blocks will fail, regardless of whether the created blocks are in-use or not. The margin on the memory pool can be monitored by viewing the 'free bytes' member of the memory pool statistics. The memory pool statistics are dumped only when commanded by way of the ES command CFE_ES_SEND_MEM_POOL_STATS_CC.

A user of the ES memory pool begins by tailoring the memory pool for the particular use, by defining a list of block sizes and allocating a block of memory. These block size definitions simply give the memory pool a set of sizes to choose

from. They do not configure the memory pool in any way and they do not affect the size of the pool. The cFE defines a default set of block sizes in the cfe_platform_cfg.h file.

If the default block sizes are used, the application will create the pool using the simpler CFE_ES_PoolCreate API. This API takes a pointer to the first byte of the memory pool (allocated by the application) and a size parameter. The API returns a handle to be used for the get and put requests.

If the defaults are not sufficient, the user must define the block sizes and use the CFE_ES_PoolCreateEx API.

After receiving a positive response from the PoolCreate API, the memory pool is ready to accept requests, but at this point it is completely unconfigured (meaning there are no blocks created). The first valid request (via CFE_ES_Get↩ PoolBuf API) after creating the pool will always cause the memory pool to create a block and return a pointer to the new block. The size of the block depends on the size definitions mentioned earlier. If there is not an exact match between the requested and defined sizes, then the memory pool will create and return the smallest block that meets the following criteria: is a defined size and large enough to hold the request.

If another request for that size comes in before the first block was released through the CFE_ES_PutPoolBuf API, then the memory pool will create a second block of that size and return a pointer to the second block. If both blocks were then released through the CFE_ES_PutPoolBuf API and the memory pool statistics were dumped via the CFE_ES_↩ SEND_MEM_POOL_STATS_CC command, the number of blocks created would be two. The number of 'free bytes' in the pool would be the size of the pool minus the sum of the following items:

- the size of the two blocks created (even though they are not 'in-use').

- a buffer descriptor for each of the two blocks created ($2 * 12$ bytes)

- a 168 byte pool descriptor Refer to the cFE Applications Developers Guide for more details.

This allocation algorithm does have its limits. There are certain conditions that can place the memory pool in an undesired state. For instance, if a burst of get requests were received for the same block size, the memory pool may create a large number of blocks of that size. If this is a one-time burst, the memory pool would be configured with this large number of blocks that may no longer be needed. This scenario would use up the 'free bytes' margin in an undesired way. It should be noted that once the blocks are created, they cannot be deleted by any means other than a processor or power-on reset. It is highly recommended that the memory pool statistics be carefully monitored to ensure that the 'free-bytes' margin is sufficient (which is typically dictated by mission requirements).

An operator can obtain information about an Application's Memory Pool by using the Telemeter Memory Pool Statistics Command.

This command will cause Executive Services to extract pertinent statistics from the data used to manage the Memory Pool and telemeter them to the ground in the Memory Pool Statistics Telemetry Packet.

In order to obtain the statistics associated with a memory pool, the operator **MUST** have the correct Memory Handle as reported by the Application who owns the Memory Pool. **It should be noted that an inappropriate Memory Pool Handle can** *(and likely will)* **cause the system software to crash!** Within the cFE itself, there are three cFE Core Applications that make use of the Executive Services Memory Pool API. These are Software Bus (SB), Event Services (EVS) and Table Services (TBL). Each of these cFE Core Applications report their memory pool handles in telemetry.

The Memory Pool Statistics Telemetry Packet contains the following information:

- **Memory Pool Handle** - the handle, as provided by the operator in the Telemeter Memory Pool Statistics Command.   This repeating of the handle in telemetry insures the operator knows which Memory Pool Statistics are being viewed

- **Pool Size** - The total size of the memory pool (in bytes)

- **Number Blocks Requested** - The total number of memory blocks requested for allocation

- **Number of Errors** - The total number of errors encountered when a block was released

- **Number of Free Bytes** - The total number of bytes in the Memory Pool that have never been allocated to a Memory Block

- **Block Statistics** - For each specified size of memory block (of which there are CFE_ES_MAX_MEMPOOL_B↩ LOCK_SIZES), the following statistics are kept

    - **Block Size** - The size, in bytes, of all blocks of this type

    - **Number of Blocks Allocated** - The number of this sized block which are currently allocated and in use

    - **Number of Blocks Free** - The number of this size block which have been in use previously but are no longer being used

9.17 System Log

The System Log is an array of bytes that contains back-to-back printf type messages from applications. The cFE internal applications use this log when errors are encountered during initialization before the Event Manager is fully initialized. To view the information the CFE_ES_WRITE_SYSLOG_CC command must be sent. This command will write the log to a binary file. The path and filename may be specified in the command. If the filename command field contains an empty string, the configuration parameter CFE_ES_DEFAULT_SYSLOG_FILE is used to specify the path and filename. Use the ground system to get the file and display the contents. The CFE_ES_CLEAR_SYSLOG_CC is used to clear the System log.

The size of the System log is defined by the platform configuration parameter CFE_ES_SYSTEM_LOG_SIZE. This log is preserved after a processor reset and held in the ES reset area.

A count of the number of entries in the log is present in the ES housekeeping telemetry.

9.18 OS Shell

NOTE: This cfe functionality is targeted for deprecation in favor of optionally including this capability via an application.

9.19   Version Identification

Version information is reported at startup, and upon receipt of a No-op command

9.20   Executive Services Frequently Asked Questions

10   cFE Executive Services Commands

The following is a list of commands that are processed by the cFE Executive Services Task.

Global CFE_ES_CLEAR_ER_LOG_CC

Clears the contents of the Exeception and Reset Log

Global CFE_ES_CLEAR_SYSLOG_CC

Clear Executive Services System Log

Global CFE_ES_DELETE_CDS_CC

Delete Critical Data Store

Global CFE_ES_DUMP_CDS_REGISTRY_CC

Dump Critical Data Store Registry to a File

Global CFE_ES_NOOP_CC

Executive Services No-Op

Global CFE_ES_OVER_WRITE_SYSLOG_CC

Set Executive Services System Log Mode to Discard/Overwrite

Global CFE_ES_QUERY_ALL_CC

Writes all Executive Services Information on All Applications to a File

Global CFE_ES_QUERY_ALL_TASKS_CC

Writes a list of All Executive Services Tasks to a File

Global CFE_ES_QUERY_ONE_CC

Request Executive Services Information on a Specified Application

Global CFE_ES_RELOAD_APP_CC

Stops, Unloads, Loads from a File and Restarts an Application

Global CFE_ES_RESET_COUNTERS_CC

Executive Services Reset Counters

Global CFE_ES_RESET_PR_COUNT_CC

Resets the Processor Reset Counter to Zero

Global CFE_ES_RESTART_APP_CC

    Stops and Restarts an Application

Global CFE_ES_RESTART_CC

    Executive Services Processor / Power-On Reset

Global CFE_ES_SEND_MEM_POOL_STATS_CC

    Telemeter Memory Pool Statistics

Global CFE_ES_SET_MAX_PR_COUNT_CC

    Configure the Maximum Number of Processor Resets before a Power-On Reset

Global CFE_ES_SET_PERF_FILTER_MASK_CC

    Set Performance Analyzer's Filter Masks

Global CFE_ES_SET_PERF_TRIGGER_MASK_CC

    Set Performance Analyzer's Trigger Masks

Global CFE_ES_SHELL_CC

    DEPRECATED: Executive Services O/S Shell Command

Global CFE_ES_START_APP_CC

    Load and Start an Application

Global CFE_ES_START_PERF_DATA_CC

    Start Performance Analyzer

Global CFE_ES_STOP_APP_CC

    Stop and Unload Application

Global CFE_ES_STOP_PERF_DATA_CC

    Stop Performance Analyzer

Global CFE_ES_WRITE_ER_LOG_CC

    Writes Exeception and Reset Log to a File

Global CFE_ES_WRITE_SYSLOG_CC

    Writes contents of Executive Services System Log to a File

11 cFE Executive Services Telemetry

The following are telemetry packets generated by the cFE Executive Services Task.

Class CFE_ES_HousekeepingTlm_Payload_t

    Executive Services Housekeeping Packet

Class CFE_ES_OneAppTlm_Payload_t

    Single Application Information Packet

Class CFE_ES_PoolStatsTlm_Payload_t

    Memory Pool Statistics Packet

Class CFE_ES_ShellPacket_Payload_t

    DEPRECATED: OS Shell Output Packet

12   cFE Executive Services Configuration Parameters

The following are configuration parameters used to configure the cFE Executive Services either for each platform or for a mission as a whole.

Global CFE_MISSION_ES_CDS_MAX_NAME_LEN

Maximum Length of Full CDS Name in messages

Global CFE_MISSION_ES_CDS_MAX_NAME_LENGTH

Maximum Length of CDS Name

Global CFE_MISSION_ES_DEFAULT_CRC

Mission Default CRC algorithm

Global CFE_MISSION_ES_MAX_APPLICATIONS

Mission Max Apps in a message

Global CFE_MISSION_ES_MAX_SHELL_CMD

Define Max Shell Command Size for messages

Global CFE_MISSION_ES_MAX_SHELL_PKT

Define Shell Command Telemetry Pkt Segment Size for messages

Global CFE_MISSION_ES_PERF_MAX_IDS

Define Max Number of Performance IDs for messages

Global CFE_MISSION_REV

Mission specific version number for cFE

Global CFE_PLATFORM_CORE_MAX_STARTUP_MSEC

CFE core application startup timeout

Global CFE_PLATFORM_ES_APP_KILL_TIMEOUT

Define ES Application Kill Timeout

Global CFE_PLATFORM_ES_APP_SCAN_RATE

Define ES Application Control Scan Rate

Global CFE_PLATFORM_ES_CDS_MAX_NUM_ENTRIES

Define Maximum Number of Registered CDS Blocks

Global CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_01

Define ES Critical Data Store Memory Pool Block Sizes

Global CFE_PLATFORM_ES_CDS_SIZE

Define Critical Data Store Size

Global CFE_PLATFORM_ES_DEFAULT_APP_LOG_FILE

Default Application Information Filename

Global CFE_PLATFORM_ES_DEFAULT_CDS_REG_DUMP_FILE

Default Critical Data Store Registry Filename

Global CFE_PLATFORM_ES_DEFAULT_ER_LOG_FILE

Default Exception and Reset (ER) Log Filename

Global CFE_PLATFORM_ES_DEFAULT_PERF_DUMP_FILENAME

Default Performance Data Filename

Global CFE_PLATFORM_ES_PERF_DATA_BUFFER_SIZE

Define Max Size of Performance Data Buffer

Global CFE_PLATFORM_ES_PERF_ENTRIES_BTWN_DLYS

Define Performance Analyzer Child Task Number of Entries Between Delay

Global CFE_PLATFORM_ES_PERF_FILTMASK_ALL

Define Filter Mask Setting for Enabling All Performance Entries

Global CFE_PLATFORM_ES_PERF_FILTMASK_INIT

Define Default Filter Mask Setting for Performance Data Buffer

Global CFE_PLATFORM_ES_PERF_FILTMASK_NONE

Define Filter Mask Setting for Disabling All Performance Entries

Global CFE_PLATFORM_ES_PERF_MAX_IDS

Define Max Number of Performance IDs

Global CFE_PLATFORM_ES_PERF_TRIGMASK_ALL

Define Filter Trigger Setting for Enabling All Performance Entries

Global CFE_PLATFORM_ES_PERF_TRIGMASK_INIT

Define Default Filter Trigger Setting for Performance Data Buffer

Global CFE_PLATFORM_ES_PERF_TRIGMASK_NONE

Define Default Filter Trigger Setting for Disabling All Performance Entries

Global CFE_PLATFORM_ES_RAM_DISK_MOUNT_STRING

RAM Disk Mount string

Global CFE_PLATFORM_ES_RAM_DISK_NUM_SECTORS

ES Ram Disk Number of Sectors

Global CFE_PLATFORM_ES_RAM_DISK_PERCENT_RESERVED

Percentage of Ram Disk Reserved for Decompressing Apps

Global CFE_PLATFORM_ES_RAM_DISK_SECTOR_SIZE

ES Ram Disk Sector Size

Global CFE_PLATFORM_ES_RESET_AREA_SIZE

Define ES Reset Area Size

Global CFE_PLATFORM_ES_SHELL_OS_DELAY_MILLISEC

Define OS Task Delay Value for ES Shell Command

Global CFE_PLATFORM_ES_START_TASK_PRIORITY

Define ES Task Priority

Global CFE_PLATFORM_ES_START_TASK_STACK_SIZE

Define ES Task Stack Size

Global CFE_PLATFORM_ES_STARTUP_SCRIPT_TIMEOUT_MSEC

Startup script timeout

Global CFE_PLATFORM_ES_STARTUP_SYNC_POLL_MSEC

Poll timer for startup sync delay

Global CFE_PLATFORM_ES_SYSTEM_LOG_SIZE

Define Size of the cFE System Log.

Global CFE_PLATFORM_ES_USER_RESERVED_SIZE

Define User Reserved Memory Size

Global CFE_PLATFORM_ES_VOLATILE_STARTUP_FILE

ES Volatile Startup Filename

Global CFE_PLATFORM_EVS_START_TASK_PRIORITY

Define EVS Task Priority

Global CFE_PLATFORM_EVS_START_TASK_STACK_SIZE

Define EVS Task Stack Size

Global CFE_PLATFORM_SB_MEM_BLOCK_SIZE_01

Define SB Memory Pool Block Sizes

Global CFE_PLATFORM_SB_START_TASK_PRIORITY

Define SB Task Priority

Global CFE_PLATFORM_SB_START_TASK_STACK_SIZE

Define SB Task Stack Size

Global CFE_PLATFORM_TBL_START_TASK_PRIORITY

Define TBL Task Priority

Global CFE_PLATFORM_TBL_START_TASK_STACK_SIZE

Define TBL Task Stack Size

13   cFE Event Services Overview

Event Services (EVS) provides centralized control for the processing of event messages originating from the EVS task itself, other cFE core applications (ES, SB, TIME, and TBL), and from cFE applications. Event messages are asynchronous messages that are used to inform the operator of a significant event from within the context of a registered application or core service. EVS provides various ways to filter event messages in order to manage event message generation.

Note for messages outside the context of a registered appliction (for example early in app initialization or if registration fails) CFE_ES_WriteToSysLog can be used for reporting.

For more information on cFE Event Services, see the following sections:

- Event Message Format

- Local Event Log

- Event Message Control

- Event Message Filtering

- EVS Registry

- EVS Counters

- [Resetting EVS Counters](#)

- [Effects of a Processor Reset on EVS](#)

- [Frequently Asked Questions about Event Services](#)

13.1   Event Message Format

Event messages are software bus messages that contain the following fields:

- Timestamp

- Event Type

- Spacecraft ID

- Processor ID

- Application Name

- Event ID

- Message

The *Timestamp* corresponds to when the event was generated, in spacecraft time. The *Event Type* is one of the following: DEBUG, INFO, ERROR or CRITICAL. The *Spacecraft ID* and *Processor ID* identify the spacecraft and processor from which the event was generated. Note that the *Spacecraft ID* is defined in the cfe_mission_cfg.h file; The *Processor ID* is defined in the appropriate [cfe_platform_cfg.h](#) file. The *Application Name* refers to the Application that issued the event message as specified on application startup (either startup script or app start command). The *Event ID* is an Application unique number that identifies the event. The *Message* is an ASCII text string describing the event. Event messages may have parameters associated with the event message. EVS formats the parameters such that they are part of the ASCII text string that make up the event message.

In order to accommodate missions that have limited telemetry bandwidth, EVS can be configured such that the ASCII text string part of the event message is omitted, thus reducing the size of each event message. This is referred to as *Short Format*; Event messages including the ASCII text string are referred to as *Long Format*. The default setting is specified in the [cfe_platform_cfg.h](#) file. EVS also provides commands in order to set the mode (short or long).

Since the design of the cFE's Software Bus is based on run-time registration, no predetermined message routing is defined, hence it is not truly correct to say that events are generated as telemetry. Technically, EVS generates events in the form of software bus messages. Applications such as Telemetry Output and Data Storage can then subscribe to these messages making them telemetry. For the purposes of this document, any references to telemetry assumes that a telemetry application subscribes to the EVS event software bus message and routes it to the ground as telemetry.

Note that short format event messages on the Software Bus have different message lengths than long form messages and do not include any part of the long format message string.

The EVS can be configured via ground command to send event messages out one or more message ports. These message ports may include ports such as debug, console, and UART. Messages sent out of the message ports will be in ASCII text format. This is generally used for lab purposes. Note that the event mode (short or long) does affect the event message content sent out these message ports.

Next: Local Event Log
Up To: cFE Event Services Overview

13.2 Local Event Log

In addition to generating a software bus message, EVS logs the event message to a Local Event Log. Note that this is an optional feature that must be enabled via the cfe_platform_cfg.h file. The Local Event Log resides on the same processor as the EVS which is used to store events without relying on an external bus. In multi-processor cFE configurations the Local Event Buffer preserves event messages during non-deterministic processor initialization sequences and during failure scenarios. In order to obtain the contents of the Local Event Log, a command must be sent to write the contents of the buffer to a file which can then be sent to the ground via a file transfer mechanism. Note that event messages stored in the EVS Local Event Log are always long format messages and are not affected by the event mode (short or long).

EVS provides a command in order to clear the Local Event Log .

Local Event Log Mode

EVS can be configured to control the Local Event Log to either discard or overwrite the contents of the log when it becomes full. If the mode is set to overwrite, the log is treated like a circular buffer, overwriting the oldest event message contained in the log first. This control is configured by default in the cfe_platform_cfg.h file but can be modified by a command .

Next: Event Message Control
Prev: Event Message Format
Up To: cFE Event Services Overview

13.3 Event Message Control

In order for an application to be serviced by EVS, it must be registered with EVS. EVS provides various commands in order to control the event messages that are generated as software bus messages.

Event Message Control - By Type

The highest level of event message control that EVS provides is the ability to enable and disable event message types. As mentioned above, there are four event types. They are:

1. DEBUG

2. INFORMATION

3. ERROR

4. CRITICAL

When commands are sent to enable or disable a particular type of event message, ALL event messages of the specified type are affected. Typically, event meesages of type DEBUG are disabled on-orbit. Note that EVS provides the capability to affect multiple types within one command using a bit mask. Note also that the configuration parameter CFE_EV↩ S_DEFAULT_TYPE_FLAG in the cfe_platform_cfg.h file specifies which event message types are enabled/disabled by default.

Event Message Control - By Application

Commands are available to enable and disable the generation of event messages for a particular application. The result is that ALL event messages for the specified Application are affected (i.e. enabled or disabled).

Event Message Control - By Event Type for an Application

EVS also provides the capability to enable / disable an event type for a particular application. Note that EVS provides the capability to affect multiple event types within one command using a bit mask.

Event Message Control - Individual Events

There are two ways to control the generation of individual events depending on whether the application's event message has been registered with EVS or not.

Modifying a registered event message filter

When an application registers with EVS, the application has the option of specifying the events that it wants to register for filtering along with the Event Message Filtering (only the Binary Filtering Scheme exists currently). Note that applications are limited in the number of events that they can register for filtering (see CFE_EVS_MAX_EVENT_FILTERS in cfe_platform_cfg.h for the mission defined limit). The filtering method uses a mask to determine if the message is forwarded to the software bus, making it available in telemetry (see Event Message Filtering for a description on filtering). Commands are available to modify the filter mask for any registered event.

An on-orbit mission, for example, might be experiencing a problem resulting in an application's event message being repeatedly issued, flooding the downlink. If the event message for the application is registered with EVS, then a command can be issued to set the event message filter to the specified value in order to prevent flooding of the downlink.

Adding/Removing an event message for filtering

Commands are also available to add filtering for those events that are not registered for filtering. Once an event is registered for filtering , the filter can be modified (see above) or removed .

An on-orbit mission, for example, might be experiencing a problem resulting in a event message being repeatedly issued, flooding the downlink. If the event message was not registered with EVS for filtering then the ground can add (i.e. register) the offending application's event for filtering (much like an application registers the event during initialization).

EVS also supports the ability to remove (i.e. unregister) an application's event message. Once it is removed, the event will no longer be filtered. Note that commands issued to disable events by event type, by application or by event type for an application are still valid and could affect this particular event.

13.4   Event Message Filtering

EVS uses a hexadecimal bit mask that controls how often a message is filtered. An event's filter mask is bit-wise ANDed with the event's event counter. There is one event counter for each event ID. If the result of the ANDing is zero then the message is sent.

Filter masks can be set so that one out of 1, 2, 4, 8 events are sent. Some examples of masks that use this pattern are: (0x0000, Every one), (0x0001, One of every 2), (0x0003, One of every 4), and (0x0007, One of every 8.

Filter masks can also be set so that only the first n events are sent. For example, the mask 0xFFFF generates one event message and then stops. Note that when the filter counter is reset to zero by command, this will restart the counting and enable n more events to be sent.

Event messages will be filtered until CFE_EVS_MAX_FILTER_COUNT events of the filtered event ID from the application have been received. After this, the filtering will become locked (no more of that event will be received by the ground) until the filter is either reset or deleted by ground command. This is to prevent the counter from rolling over, which would cause some filters to behave improperly. An event message will be sent when this maximum count is reached.

The following shows an example of how filtering works using a filter mask of x'0001', resulting in sending every other event:

	packet x	packet X+1	packet X+2	packet X+3	packet X+4	...
Event ID counter	x'0000'	x'0001'	x'0002'	x'0003'	x'0004'	
Event Filter mask	x'0001'	x'0001'	x'0001'	x'0001'	x'0001'	
Bitwise AND results	x'0000'	x'0001'	x'0000'	x'0001'	x'0000'	
Send event?	Yes	No	Yes	No	Yes	

In this example, the ground uses a filter mask of x'FFFE' resulting in the first two events being sent and then no more.

	packet x	packet X+1	packet X+2	packet X+3	packet X+4	...
Event ID counter	x'0000'	x'0001'	x'0002'	x'0003'	x'0004'	
Event Filter mask	x'FFFE'	x'FFFE'	x'FFFE'	x'FFFE'	x'FFFE'	
Bitwise AND results	x'0000'	x'0000'	x'0002'	x'0002'	x'0004'	
Send event?	Yes	Yes	No	No	No	

See cfe_evs.h for predefined macro values which can be used for masks.

Next: EVS Registry
Prev: Event Message Control
Up To: cFE Event Services Overview

13.5   EVS Registry

EVS maintains information on each registered application and all events registered for an application.

The registry contains the following information for each Registered Application:

- Active Flag - If equal to FALSE (0), all events from this Application are Filtered

- Event Count - Total number of events issued by this Application. Note that this value stop incrementing at 65535.

  The following information for each Filtered Event (up to CFE_EVS_MAX_EVENT_FILTERS):

- Event ID - Event ID for event whose filter has been defined

- Mask - Binary Filter mask value (see Event Message Filtering for an explanation)

- Count - Current number of times this Event ID has been issued by this Application

Next: EVS Counters
Prev: Event Message Filtering
Up To: cFE Event Services Overview

13.6 EVS Counters

There are 2 types of counters in EVS housekeeping telemetry:

- Total events sent counter

- Number of events sent for each Application

The difference is that the first one is the sum of all of the event messages sent. Both of these represent events that are actually sent (by EVS to the software bus). If an event message is filtered or disabled, neither counter is incremented.

There are other counters available that show how many event messages were generated by an App, however, these are only available for those events that are registered for filtering hence if you have a message that is not registered for filtering and the message type (e.g. DEBUG) is disabled then you won't know if the event was ever issued by an application. These counters are available by sending a command to write the EVS Application Data and transferring the file to the ground.

13.7 Resetting EVS Counters

As far as reset commands, there are 4 commands available:

1. Reset the total events sent counter

2. Reset the events sent counter for a particular Application - e.g. reset the LC application events counter

3. Reset all of the event counters for a particular registered event for a particular Application - e.g. Reset event counter for Event ID 5 for the LC Application.

4. Reset all of the event counters for ALL registered events for a particular App - e.g. Reset all registered event counters for LC.

Note that there is currently no way to reset ALL of the events sent counters for all of the Apps with one command.

13.8   Effects of a Processor Reset on EVS

On a processor reset, the EVS Registry is cleared such that applications must re-register with EVS in order to use EVS services. All counters are also cleared with the exceptions of those listed below.

On a processor reset, the following EVS data is preserved (if the cFE is configured to include an Local Event Log):

- Local Event Log if the Local Event Log Mode is configured to Discard (1). If the Local Event Log Mode is configured to Overwrite (0), the contents of the log may be overwritten depending on the size and contents of the log prior to the reset.

- Local Event Log Full Flag

- Local Event Log overflow counter

The Local Event Log Mode (overwrite/discard) is set to the configured value specified in the cfe_platform_cfg.h file. The default value is Discard (1). Discard mode will guarantee the contents of the event log are preserved over a processor restart.

This provides the ground with the capability to write the Local Event Log to a file and transfer it to the ground in order to help debug a reset.

Next: Frequently Asked Questions about Event Services
Prev: Resetting EVS Counters
Up To: cFE Event Services Overview

13.9   Frequently Asked Questions about Event Services

(Q) My telemetry stream is being flooded with the same event message. How do I make it stop?
The most direct way to stop an event message from flooding your downlink stream is to send a command to EVS to filter the offending event (see Event Message Control or $sc_$cpu_EVS_SetBinFltrMask). In order to stop the event message from being sent, a bit mask of `'0xFFFF'` should be used. If the event is not currently registered for filtering, the event message must be added using the command $sc_$cpu_EVS_AddEvtFltr .
(Q) I filtered an event message and would now like to see it again. What do I do in order to see those events again?

If the event message that you are interested is registered with EVS for filtering, then you have 2 options:
 	
 1. You can use the $sc_$cpu_EVS_SetBinFltrMask command using a bit mask of `'0x0000'` which will result in getting all of the events for that Event Id
 	
    or
 	
 2. You can remove the registration of that event with EVS (see $sc_$cpu_EVS_DelEvtFltr).
    Note that option (1) is the preferred method.

(Q) What is the purpose of DEBUG event messages?
Event message of type "DEBUG" are primarily used during flight software development in order to provide information that is most likely not needed on orbit. Some commands send debug event messages as verification that a command request was received. When writing the EVS local event log to a file, for example, an event message of type DEBUG is issued. On orbit, this event message is probably not needed. Instead, the command counter is used for command verification.
(Q) How do I find out which events are registered for filtering?
EVS provides a command ($sc_$cpu_EVS_WriteAppData2File) which generates a file containing all of the applications that have registered with EVS and all of the filters that are registered for each application. Note that EVS merely generates the file. The file must be transferred to the ground in order to view it.
(Q) Why do I see event messages in my console window?
By default, the events are configured to transmit out a "port" that shows event messages in the console
(Q) What is the difference between event services and the ES System Log
Events are within the context of an App or cFE Service (requires registration with ES). The system log can be written to outside of the Application or cFE Service context, for example during application startup to report errors before registration.

14 cFE Event Services Commands

The following is a list of commands that are processed by the cFE Event Services Task.

Global CFE_EVS_ADD_EVENT_FILTER_CC

   Add Application Event Filter

Global CFE_EVS_CLEAR_LOG_CC

   Clear Event Log

Global CFE_EVS_DELETE_EVENT_FILTER_CC

   Delete Application Event Filter

Global CFE_EVS_DISABLE_APP_EVENT_TYPE_CC

   Disable Application Event Type

Global CFE_EVS_DISABLE_APP_EVENTS_CC

   Disable Event Services for an Application

Global CFE_EVS_DISABLE_EVENT_TYPE_CC

   Disable Event Type

Global CFE_EVS_DISABLE_PORTS_CC

   Disable Event Services Output Ports

Global CFE_EVS_ENABLE_APP_EVENT_TYPE_CC

   Enable Application Event Type

Global CFE_EVS_ENABLE_APP_EVENTS_CC

   Enable Event Services for an Application

Global CFE_EVS_ENABLE_EVENT_TYPE_CC

Enable Event Type

Global CFE_EVS_ENABLE_PORTS_CC

Enable Event Services Output Ports

Global CFE_EVS_NOOP_CC

Event Services No-Op

Global CFE_EVS_RESET_ALL_FILTERS_CC

Reset All Event Filters for an Application

Global CFE_EVS_RESET_APP_COUNTER_CC

Reset Application Event Counters

Global CFE_EVS_RESET_COUNTERS_CC

Event Services Reset Counters

Global CFE_EVS_RESET_FILTER_CC

Reset an Event Filter for an Application

Global CFE_EVS_SET_EVENT_FORMAT_MODE_CC

Set Event Format Mode

Global CFE_EVS_SET_FILTER_CC

Set Application Event Filter

Global CFE_EVS_SET_LOG_MODE_CC

Set Logging Mode

Global CFE_EVS_WRITE_APP_DATA_FILE_CC

Write Event Services Application Information to File

Global CFE_EVS_WRITE_LOG_DATA_FILE_CC

Write Event Log to File

15 cFE Event Services Telemetry

The following are telemetry packets generated by the cFE Event Services Task.

Class CFE_EVS_HousekeepingTlm_Payload_t

Event Services Housekeeping Telemetry Packet

Class CFE_EVS_LongEventTlm_Payload_t

Event Message Telemetry Packet (Long format)

Class CFE_EVS_ShortEventTlm_Payload_t

Event Message Telemetry Packet (Short format)

16 cFE Event Services Configuration Parameters

The following are configuration parameters used to configure the cFE Event Services either for each platform or for a mission as a whole.

Global CFE_MISSION_EVS_MAX_MESSAGE_LENGTH

   Maximum Event Message Length

Global CFE_PLATFORM_EVS_DEFAULT_APP_DATA_FILE

   Default EVS Application Data Filename

Global CFE_PLATFORM_EVS_DEFAULT_LOG_FILE

   Default Event Log Filename

Global CFE_PLATFORM_EVS_DEFAULT_LOG_MODE

   Default EVS Local Event Log Mode

Global CFE_PLATFORM_EVS_DEFAULT_MSG_FORMAT_MODE

   Default EVS Message Format Mode

Global CFE_PLATFORM_EVS_DEFAULT_TYPE_FLAG

   Default EVS Event Type Filter Mask

Global CFE_PLATFORM_EVS_LOG_MAX

   Maximum Number of Events in EVS Local Event Log

Global CFE_PLATFORM_EVS_LOG_ON

   Enable or Disable EVS Local Event Log

Global CFE_PLATFORM_EVS_MAX_EVENT_FILTERS

   Define Maximum Number of Event Filters per Application

Global CFE_PLATFORM_EVS_PORT_DEFAULT

   Default EVS Output Port State

17 cFE Software Bus Overview

The Software Bus (SB) handles communication between software tasks on a processor. All tasks communicate with each other, with hardware devices, and with the ground by sending command and telemetry messages. The software bus provides an application programming interface (API) to other tasks for sending and receiving messages. This API is independent of the underlying operating system so that tasks can use the same interface regardless of which processor they reside on. Refer to the cFE Application Programmer's Interface (API) Reference for detailed information about the API functions.

The software bus is used internally by the flight software, and normally does not require attention from the ground. However, because of the scalability and the dynamic nature of the software bus, it is strongly recommended that each project carefully review the SB statistics and SB memory pool to be sure adequate margin is met on the configurable items.

The cFE software bus uses a dynamic protocol and builds its routing table at run-time through the SB subscribe API's. Also the cFE software bus pipes are created at run-time through the CFE_SB_CreatePipe API. Because the routing is established, and pipes are created at run-time, it is necessary to have a clear view of the routing details on command. The cFE software bus allows the user to dump the routing table, the pipe table, the message map and the statistics packet. Each of these items are described in detail in the corresponding section of this document.

- Software Bus Terminology

- Autonomous Actions

- Operation of the SB Software

- Frequently Asked Questions about Software Bus

17.1 Software Bus Terminology

In order to fully understand the Software Bus, it is imperative that the basic terms used to describe its features are also understood. Below are the critical terms that help identify what the Software Bus accomplishes for each Application:

- Messages

- Pipes

- Subscriptions

- Memory

17.1.1 Messages

The sole purpose of the software bus is to provide applications a way to send messages to each other. The term message and the term packet are used interchangeably throughout this document. A message is a combined set of bytes with a predefined format that is used as the basis of communication on a spacecraft. All commands, telemetry, and other data that are passed between the ground and the spacecraft, and between subsystems of the spacecraft, are considered to be messages. The most common message format is CCSDS (Consultative Committee for Space Data Systems).

The cFE software bus was designed with 'hooks' to allow message formats other than CCSDS to be used. The APIs that are used to set and get message header fields are intentionally designed to be decoupled from CCSDS.

There are two general types of messages - commands (or command packets) and telemetry (or telemetry packets). Command packets are sent to a particular software task from the ground (or another task). Telemetry packets are sent from a particular software task to the ground (or other tasks).

Each packet begins with a header that includes the message identifier, often abbreviated as MsgId or message ID. The MsgId for CCSDS messages is the first 16 bits of the packet. The message 'type' indicator (command or telemetry) is embedded in the Message ID. The header also contains a packet length field and a packet sequence field. The packet

sequence field is incremented by the software bus for telemetry packets each time a packet is sent. The software bus does not increment the sequence field for command packets. See the section named 'Packet Sequence Values' for more detail.

Telemetry packets typically contain a timestamp that indicates when the packet was produced. Command packets typically contain a command code that identifies the particular type of command.

The software bus provides APIs for 'setting' and 'getting' the fields in the header of the message.

Following the header is the user defined message data.

Next: Pipes
Up To: Software Bus Terminology

17.1.2 Pipes

The destinations to which messages are sent are called pipes. These are queues that can hold messages until they are read out and processed by a task. Each pipe is created at run-time through the CFE_SB_CreatePipe API. The pipe name and the pipe depth are given as arguments in the API. The pipe identifier (or PipeId) is given back to the caller after the API is executed. Each pipe can be read by only one task, but a task may read more than one pipe. Only the pipe owner is allowed to subscribe to messages on the pipe.

The Pipe IDs are specific to a particular processor (that is, the same ID number may refer to a different pipe on each processor). The pipe information for all pipes that have been created, may be requested at anytime by sending the 'Send Pipe Info' SB command . The software bus also provides a set of figures regarding capacity, current utilization and high water marks relevant to pipes. This information may be requested by sending the command to dump the SB statistics packet .

Next: Subscriptions
Prev: Messages
Up To: Software Bus Terminology

17.1.3 Subscriptions

A subscription is a run-time request for a particular message to be sent to a particular pipe. If the caller of the subscribe API is not the owner of the pipe, the request is rejected and an error event is sent. The application that creates the pipe is considered the owner of the pipe. The pipe specified in the subscription is sometimes referred to as the destination of the message. There are a maximum number of destinations for a particular message. This value is specified by the platform configuration parameter CFE_SB_MAX_DEST_PER_PKT.

As subscriptions are received, the destinations are added to the head of a linked list. During the sending of a message, the list is traversed beginning at the head of the list. Therefore the message will first be sent to the last subscriber. If an application has timing constraints and needs to receive a message in the shortest possible time, the developer may consider holding off its subscription until other applications have subscribed to the message.

The message limit specifies the maximum number of messages (with the specified Message ID) that are allowed on the specified pipe at any time. This limit is specified by the application at the time of the subscription. If the application uses the CFE_SB_Subscribe API, a message limit default value of four is used. If this default value is not sufficient, the caller would use the CFE_SB_SubscribeEx API that allows the message limit to be specified.

The software bus also provides the user with an option to unsubscribe to a message. The unsubscribe API takes two parameters, Message ID and Pipe ID. Only the owner of a pipe may unsubscribe to messages on that pipe.

Next: Memory
Prev: Pipes
Up To: Software Bus Terminology

17.1.4 Memory

The software bus statically allocates a block of memory for message buffers and subscription blocks. The size of this memory block is defined by the platform configuration parameter CFE_SB_BUF_MEMORY_BYTES. The memory is managed by the cFE ES memory pool and is used only by the software bus. The ES memory pool allows an application to define the block sizes for the pool at compile time. These sizes are defined by the platform configuration parameters prefixed with CFE_SB_MEM_BLOCK_SIZE (for example, CFE_SB_MEM_BLOCK_SIZE_01). It is recommended that a project tailor these values for the mission, based on the software bus packet sizes.

At the time a message is sent, two buffers are allocated from the pool. One for a buffer descriptor (CFE_SB_BufferD_t) and one for the size of the packet. Both buffers are returned to the pool when the message has been received by all recipients. More precisely, if there is one recipient for a message, the message buffers will be released on the following call to cFE_SB_RcvMsg for the pipe that received the message.

Also when subscriptions are received through the subscribe API's, the software bus allocates a subscription block (C↩FE_SB_DestinationD_t) from the pool. The subscription blocks are returned to the pool if and when the subscription is nullified through a CFE_SB_Unsubscribe call.

The software bus provides a set of figures regarding memory capacity, current memory utilization and high water marks relevant to the SB memory pool. This information may be requested by sending the command to dump the SB statistics packet. In addition, the current memory utilization value and the 'unmarked memory' value (CFE_SB_BUF_MEMOR↩Y_BYTES minus peak memory in use) are sent in software bus housekeeping telemetry. The unmarked memory value should be monitored regularly to ensure that the value (in bytes) does not continue to decline or approach zero. If this value were to approach zero, there is a possibility that memory requests would fail which may inhibit the sending of a message. The current memory utilization value should also be monitored to ensure the system contains no memory leaks. The value (in bytes) should remain stable under nominal conditions. Refer to the ES users guide for more information regarding the ES Memory Pool.

Next: Autonomous Actions
Prev: Subscriptions
Up To: Software Bus Terminology

17.2 Autonomous Actions

The software bus is primarily a set of library routines that are called by other software tasks to send and receive packets. The software bus does not perform any operations autonomously, except for sending event messages if errors are detected during the transfer of packets.

As do other tasks, the SB task sends out housekeeping telemetry when requested through the 'Send Housekeeping Data' command.

Next: Operation of the SB Software
Prev: Software Bus Terminology
Up To: cFE Software Bus Overview

17.3 Operation of the SB Software

- Initialization

- All Resets

- Message Routing

- Packet Sequence Values

- Message Limit Error

- Pipe Overflow Error

- SB Event Filtering

- Diagnostic Data

- Control of Packet Routing

- Quality of Service

- Known Problem

17.3.1 Initialization

No action is required by the ground to initialize the software bus. The software bus initializes internal data structures and tables the same way regardless of the type of reset.

17.3.2 All Resets

The software bus does not preserve any information across a reset of any kind. The software bus initializes internal data structures and tables the same way regardless of the type of reset. The routing is reestablished as the system initializes. It is normal procedure for each task of the system to create the pipe or pipes it needs and do all of its subscriptions during task initialization.

After any reset the following statements are true:

- The routing table is cleared and does not contain any routes.

- All subscriptions are lost and must be regenerated.

- The pipe table contains no data, all pipes must be recreated.

- Any packets in transit at the time of the reset are lost.

- The sequence counters for telemetry packets will begin again with a value of one.

17.3.3 Message Routing

In the software bus, all messages are processed in a similar way. The software bus uses the Message ID and the packet length fields (contained in the header) for routing the message to the destination pipe. If either of these two fields do not pass validation, the software bus generates an error event and aborts the delivery process. The software bus performs some validation checks by simply checking message header values against mission or platform configuration parameters. Messages originating from various tasks or instruments are routed to one or more pipes, where they wait until read by a task. The routing configuration for each message is established when applications call one of the SB subscribe APIs. The subscribe APIs take a Message ID and a Pipe ID as parameters. The routing for each packet is stored in SB memory and may be requested at any time by sending the 'Send Routing Info' command. The software bus also provides a set of figures regarding capacity, current utilization and high water marks relevant to the routing. This information may be requested by sending the command to dump the SB statistics packet.

17.3.4 Packet Sequence Values

The sequence count behavior depends on if the message is a command type or telemetry type.

The sequence counter for command messages is not altered by the software bus.

For telemetry messages sent with the CFE_SB_SendMsg API, the software bus populates the packet sequence header field for all messages. The first time a telemetry message is sent with a new Message ID, the sequence counter field in the header is set to a value of one. For subsequent sends of a message, the sequence counter is incremented by one regardless of the number of destinations for the packet. After a rollover condition the sequence counter will be a value of zero for one instance. The sequence counter is incremented in the CFE_SB_SendMsg API after all the checks have passed prior to the actual sending of the message. This includes the parameter checks and the memory allocation check. Note: The count is incremented regardless of whether there are any subscribers.

For telemetry messages sent with the CFE_SB_PassMsg API the sequence counter is not incremented. This method of message delivery is recommended for situations where the sender did not generate the packet, such as a network interface application passing a packet from a remote system to the local software bus.

Next: Message Limit Error
Prev: Message Routing
Up To: Operation of the SB Software

17.3.5 Message Limit Error

Before placing a message on a pipe, the software bus checks the message limit to ensure the maximum number of packets in transit to the destination is not exceeded. If placing the message on the pipe would exceed the message limit, then the action of sending to that pipe is aborted and the 'Message Limit Error' event is sent. This condition will typically occur when an application that receives the packets does not respond quickly enough, or if the sender of the packets produces them too quickly.

This condition occurs often during development and during integration, for example when a remote processor gets reset or a 1553 cable becomes disconnected. Because of the common occurrences, the event may have filtering associated with it. Any filtering for this event would be performed by the cFE Event Services (EVS). Filtering for SB events may be specified in the cFE platform configuration file or may be commanded after the system initializes.

If this error occurs during nominal conditions, it could be an indication that the 'message limit' is not set correctly. The message limit is given at the time of the subscription and given as a parameter in the subscribe API. With the CF←E_SB_Subscribe API, the SB uses a default message limit value specified by CFE_SB_DEFAULT_MSG_LIMIT. This constant is currently set to a value of four. If the default value is insufficient, the message limit value can be specified in the CFE_SB_SubscribeEx API.

A related failure is the pipe overflow condition, which can occur if the total number of packets (of all kinds) sent to a particular pipe is too large.

Next: Pipe Overflow Error
Prev: Packet Sequence Values
Up To: Operation of the SB Software

17.3.6   Pipe Overflow Error

Another common error that occurs during the send process is the pipe overflow error. This condition occurs if the total number of packets (of all kinds) sent to a particular pipe is too large. If this error occurs too frequently, it may be an indication that the pipe depth is not set correctly. The pipe depth is given at the time the pipe is created as a parameter in the CFE_SB_CreatePipe API.

Next: SB Event Filtering
Prev: Message Limit Error
Up To: Operation of the SB Software

17.3.7   SB Event Filtering

Most filtering for SB events is performed by the cFE Event Services (EVS). Filtering for SB events may be specified in the cFE platform configuration file or may be commanded after the system initializes. There is no SB event log that limits the number of events based on the capacity of the log, as in the heritage software bus.

There is one case in which events are filtered by the software bus instead of event services. This occurs when the software bus needs to suppress events so that a fatal recursive event condition does not transpire. Because the CFE↩ _SB_SendMsg API is a library function that calls CFE_EVS_SendEvent, and CFE_EVS_SendEvent is a library function that calls CFE_SB_SendMsg, a calling sequence could cause a stack overflow if the recursion is not properly terminated. The cFE software bus detects this condition and properly terminates the recursion. This is done by using a set of flags (one flag per event in the Send API) which determine whether an API has relinquished its stack. If the CFE_SB_Send↩ Msg needs to send an event that may cause recursion, the flag is set and the event is sent. CFE_EVS_SendEvent then calls CFE_SB_SendMsg in the same thread. If the second call to CFE_SB_SendMsg needs to send that same event again, it finds that the flag is set and the CFE_EVS_SendEvent call is bypassed, terminating the recursion. The result is that the user will see only one event instead of the many events that would normally occur without the protection. The heritage software bus did not have this condition because it stored events in the software bus event log and another thread would read them out at a later time.

Next: Diagnostic Data
Prev: Pipe Overflow Error
Up To: Operation of the SB Software

17.3.8   Diagnostic Data

The cFE software bus provides a set of commands to dump SB diagnostic data to help troubleshoot problems or check configuration settings. These commands allow the user to view the routing table, the pipe table or the message map. The message map is a lookup table used during a send operation to give fast access to the routing table index that corresponds to the message being sent.

The software bus also provides a statistics packet that can be used to tune the configuration parameters. This information is sent to the ground in the form of an SB packet when the corresponding command is received. The cFE limits the number of system pipes, unique Message IDs, buffer memory, messages on a pipe and subscriptions per Message ID. These limits are configurable through cFE platform and mission configuration parameters. The statistics packet was designed to let the project verify that these user settings provide the necessary margin to meet requirements.

The SB statistics information shows 'Currently In Use' figures, 'High Water Mark' figures and 'Max Allowed' figures for the following: buffer memory, messages on each pipe (pipe depth stats), System Pipes, Unique Message IDs and total subscriptions.

Depending on the task-scheduling implementation details of the operating system, it is possible to see the peak messages on a pipe occasionally exceed the depth of the pipe. The "Peak Messages In Use" parameter is included in the SB statistics packet under the pipe depth stats.

Next: Control of Packet Routing
Prev: SB Event Filtering
Up To: Operation of the SB Software

17.3.9 Control of Packet Routing

The software bus allows the ground to disable and enable the sending of packets of a specified Message ID to a specified pipe. All destinations that are needed for normal operation are enabled by default. Modifying the routing of packets may be required for the following reasons:

- In flight, one can enable diagnostic packets to see them on the ground.

- During testing, one can disable a destination to simulate an anomaly.

Next: Quality of Service
Prev: Diagnostic Data
Up To: Operation of the SB Software

17.3.10 Quality of Service

The software bus has a parameter in the CFE_SB_SubscribeEx API named Quality, which means Quality of Service (QOS) for off-board routing and is of the type CFE_SB_Qos_t. This structure has two members named priority and reliability. The Quality parameter is currently unused by the software bus. It is a placeholder to be used with the future software bus capability of inter-processor communication. Although currently the software bus does not read the Quality values, it would be best to set this parameter to the value defined as CFE_SB_Default_Qos. This value is set internally by the software bus with values of zero for priority and reliability. The values of zero will correspond to low priority and low reliability. Setting the QOS value to the CFE_SB_Default_Qos will ensure seamless integration when the software bus is expanded to support inter-processor communication.

Next: Known Problem
Prev: Control of Packet Routing
Up To: Operation of the SB Software

17.3.11 Known Problem

The software bus may perform unexpectedly under an unlikely corner-case scenario. This scenario was revealed in a stress test. The stress test was designed to deplete the Software Bus memory pool by having a high priority application continuously send 1000 byte packets to a lower priority application until the memory pool code returned an error code and sent the following event. "CFE_ES:getPoolBuf err:Request won't fit in remaining memory" At this point the higher priority sending application would stop executing. This would allow the lower priority receiving application to begin receiving the 1000 byte packets. After the receiving app processed all of the packets, the memory was restored to the memory pool as expected. The SB memory-in-use telemetry was zero because there were no software bus packets in transit. At this point any attempt to send a new-sized packet on the software bus was be rejected. The ES memory pool stated that the "... Request won't fit in remaining memory" even though there was currently no memory in use.

The simplest way to prevent this behavior is to ensure that there is margin when sizing the SB memory pool. To check the margin, monitor the "Peak Memory in Use" vs. the configuration parameter CFE_SB_BUF_MEMORY_BYTES which indicates the amount allocated.

Next: Frequently Asked Questions about Software Bus
Prev: Quality of Service
Up To: Operation of the SB Software

17.4 Frequently Asked Questions about Software Bus

(Q) How is the memory pool handle (sent in SB housekeeping telemetry) intended to be used?
The memory pool handle is used to analyze the SB memory pool statistics. The cFE ES command (CFE_E↩ S_SEND_MEM_POOL_STATS_CC) to dump the memory pool statistics takes the pool handle as a parameter. These statistics tell how the SB memory pool is configured and gives details on margin. An improperly configured SB memory pool may inhibit communication. This may occur if there is not enough margin to create a block of the size needed for a transfer. Refer to the ES memory pool users guide for more details. Memory Pool
(Q) When sending a message, what message header fields are critical for routing the message?
To route the message properly, the software bus uses only the Message ID and packet length fields from the header of the message. If the packet length field is incorrect, then the buffer allocation for the message will also be incorrect. This may appear to the receiver as a truncated message or a message with unknown data added to the end of the message.
(Q) How many copies of the message are performed in a typical message delivery?
There is a single copy of the message performed during a typical delivery. During the CFE_SB_SendMsg API, the software bus copies the message from the callers memory space to the software bus memory space. The CFE↩ _SB_RcvMsg API gives the user a pointer to the message in the software bus memory space. This is equivalent to the copy mode send and pointer mode receive in the heritage software bus used on WMAP, ST5, SDO etc.
(Q) When does the software bus free the message buffer during a typical message delivery process? Or how long is the message, and the pointer to the message in the CFE_SB_RcvMsg valid?
After receiving a message by calling CFE_SB_RcvMsg, the message received stays in the software bus memory until the next call to CFE_SB_RcvMsg with the same Pipe Id. This means that the message pointer given by the software bus to the caller of CFE_SB_RcvMsg is valid until the next call to CFE_SB_RcvMsg with the same pipe id. If the caller needs the message longer than the next call to CFE_SB_RcvMsg, the caller must copy the message to its memory space.
(Q) The first parameter in the CFE_SB_RcvMsg API is a pointer to a pointer which can get confusing. How can I be sure that the correct address is given for this parameter.
Typically a caller declares a ptr of type CFE_SB_Msg_t (i.e. CFE_SB_Msg_t ∗Ptr) then gives the address of that pointer (&Ptr) as this parameter. After a successful call to CFE_SB_RcvMsg, Ptr will point to the first byte of the software bus message header. This should be used as a read-only pointer. In systems with an MMU, writes to this pointer may cause a memory protection fault.
(Q) Why am I not seeing expected Message Limit error events or Pipe Overflow events?
It is possible the events are being filtered by cFE Event Services. The filtering for this event may be specified in the platform configuration file or it may have been commanded after the system initializes. There is a corresponding counter for each of these conditions. First verify that the condition is happening by viewing the counter in SB HK telemetry. If the condition is happening, you can view the SB filter information through the EVS App Data Main page by clicking the 'go to' button for SB. The event Id for these events can be learned through a previous event or from the cfe_sb_events.h file.
(Q) Why does the SB provide event filtering through the platform configuration file?
To give the user the ability to filter events before an EVS command can be sent. During system initialization, there are many conditions occurring that can cause a flood of SB events such as No Subscribers, Pipe Overflow and MsgId to Pipe errors. This gives the user a way to limit these events.
(Q) Why does SB have so many debug event messages?
The SB debug messages are positive acknowledgments that an action (like receiving a cmd, creating a pipe or subscribing to a message) has occurred. They are intended to help isolate system problems. For instance, if an expected response to a command is not happening, it may be possible to repeat the scenario with the debug event turned on to verify that the command was successfully received.
(Q) How is the QOS parameter in the CFE_SB_SubscribeEx used by the software bus?

The QOS parameter is currently unused by the software bus. It is a placeholder to be used with the future software bus capability of inter-processor communication. Setting the QOS value to the SB defined CFE_SB_Default_↩ Qos (QOS.Priority=0,QOS.Reliability=0) will ensure seamless integration when the software bus is expanded to support inter-processor communication.

(Q) Can I confirm my software bus message was delivered?

There is no built in mechanism for confirming delivery (it could span systems). This could be accomplished by generating a response message from the receiver.

18 cFE Software Bus Commands

The following is a list of commands that are processed by the cFE Software Bus Task.

Global CFE_SB_DISABLE_ROUTE_CC

Disable Software Bus Route

Global CFE_SB_DISABLE_SUB_REPORTING_CC

Disable Subscription Reporting Command

Global CFE_SB_ENABLE_ROUTE_CC

Enable Software Bus Route

Global CFE_SB_ENABLE_SUB_REPORTING_CC

Enable Subscription Reporting Command

Global CFE_SB_NOOP_CC

Software Bus No-Op

Global CFE_SB_RESET_COUNTERS_CC

Software Bus Reset Counters

Global CFE_SB_SEND_MAP_INFO_CC

Write Map Info to a File

Global CFE_SB_SEND_PIPE_INFO_CC

Write Pipe Info to a File

Global CFE_SB_SEND_PREV_SUBS_CC

Send Previous Subscriptions Command

Global CFE_SB_SEND_ROUTING_INFO_CC

Write Software Bus Routing Info to a File

Global CFE_SB_SEND_SB_STATS_CC

Send Software Bus Statistics

19   cFE Software Bus Telemetry

The following are telemetry packets generated by the cFE Software Bus Task.

Class CFE_SB_AllSubscriptionsTlm_Payload_t

SB Previous Subscriptions Packet

Class CFE_SB_HousekeepingTlm_Payload_t

Software Bus task housekeeping Packet

Class CFE_SB_SingleSubscriptionTlm_Payload_t

SB Subscription Report Packet

Class CFE_SB_StatsTlm_Payload_t

SB Statistics Telemetry Packet

20   cFE Software Bus Configuration Parameters

The following are configuration parameters used to configure the cFE Software Bus either for each platform or for a mission as a whole.

Global CFE_MISSION_SB_MAX_PIPES

Maximum Number of pipes that SB command/telemetry messages may hold

Global CFE_MISSION_SB_MAX_SB_MSG_SIZE

Maximum SB Message Size

Global CFE_PLATFORM_ENDIAN

Platform Endian Indicator

Global CFE_PLATFORM_SB_BUF_MEMORY_BYTES

Size of the SB buffer memory pool

Global CFE_PLATFORM_SB_DEFAULT_MAP_FILENAME

Default Message Map Filename

Global CFE_PLATFORM_SB_DEFAULT_MSG_LIMIT

Default Subscription Message Limit

Global CFE_PLATFORM_SB_DEFAULT_PIPE_FILENAME

Default Pipe Information Filename

Global CFE_PLATFORM_SB_DEFAULT_REPORT_SENDER

Define Default Sender Information Storage Mode

Global CFE_PLATFORM_SB_DEFAULT_ROUTING_FILENAME

Default Routing Information Filename

Global CFE_PLATFORM_SB_FILTERED_EVENT1

SB Event Filtering

Global CFE_PLATFORM_SB_HIGHEST_VALID_MSGID

Highest Valid Message Id

Global CFE_PLATFORM_SB_MAX_DEST_PER_PKT

Maximum Number of unique local destinations a single MsgId can have

Global CFE_PLATFORM_SB_MAX_MSG_IDS

Maximum Number of Unique Message IDs SB Routing Table can hold

Global CFE_PLATFORM_SB_MAX_PIPE_DEPTH

Maximum depth allowed when creating an SB pipe

Global CFE_PLATFORM_SB_MAX_PIPES

Maximum Number of Unique Pipes SB Routing Table can hold

21   cFE Table Services Overview

Applications often organize sets of their parameters into logical units called tables. These are typically constant parameters that can change the behavior of a flight software algorithm and are only intended to be modified by operations personnel. Examples of this would be attitude control gains, sensor scalefactors, telemetry filter settings, etc.

Table Services (TBL) provides a centralized control of flight software tables. Operations personnel would interact with TBL in order to dump the contents of current tables, load new table images, verify the contents of a table image and manage Critical tables.

None of the cFE core applications (EVS, SB, ES, TIME, or TBL) use tables, and it is possible to build cFE without Table Services if not needed or an alternative parameter management mechanism is to be utilized.

For additional detail on Tables and how to manage them, see the following sections:

- Managing Tables

- cFE Table Types and Table Options

- Table Registry

- Table Services Telemetry

- Effects of Processor Reset on Tables

- How To Remove cFE Table Services

- Frequently Asked Questions about Table Services

21.1 Managing Tables

In order to effectively manage tables, an operator needs to understand how cFE Applications manage tables from their end. There are a number of methods that cFE Applications typically use to manage their tables. Each method is appropriate based upon the nature of the contents of the table.

cFE Applications are required to periodically check to see if their table is to be validated, updated (or in the case of dump-only tables, dumped). Most Applications perform this periodic management at the same time as housekeeping requests are processed. This table management is performed by the cFE Application that "owns" a table (ie - the cFE Application that registered the table with cFE Table Services). It is possible for cFE Applications to "share" a table with other cFE Applications. An Application that shares a table does not typically perform any of the management duties associated with that table.

A table can have one of two different types and a number of different options. These are discussed further in later sections. An operator should understand the chosen type and selected options for a particular table before attempting to modify a table's contents.

To understand the methods of maintaining a table, it is important that the terminology be clear. A table has two images: "Active" and "Inactive". The Active table is the one that a cFE Application is currently accessing when it executes. The Inactive table is a copy of the Active table that an operator (or on-board process such as a stored command processor) can manipulate and change to have a newly desired set of data.

To create an Inactive table image on board, the operator would be required to perform a "Load" to the table. Loads are table images stored in on-board files. The Load can contain either a complete table image or just a part of a table image. If the Load contains just a portion, the Inactive image is first initialized with the contents of the Active image and then the portion identified in the Load file is written on top of the Active image. After the initial Load, an operator can continue to manipulate the Inactive table image with additional partial table load images. This allows the operator to reconfigure the contents of multiple portions of the table before deciding to "Validate" and/or "Activate" it.

Some cFE Applications provide special functions that will examine a table image to determine if the contents are logically sound. This function is referred to as the "Validation Function." When a cFE Application assigns a Validation Function to a table during the table registration process, it is then requiring that a Validation be performed before the table can be Activated. When an operator requests a Validation of a table image, they are sending a request to the owning Application to execute the associated Validation Function on that image. The results of this function are then reported in telemetry. If the Validation is successful, the operator is free to perform a table Activation. If the Validation fails, the operator would be required to make additional changes to the Inactive table image and attempt another Validation before commanding an Activation.

To change an Inactive table image into the Active table image, an operator must Activate a table. When an operator sends the table Activation command, they are notifying the table's owning Application that a new table image is available. It is then up to the Application to determine when is the best time to perform the "Update" of the table. When an Application performs an Update, the contents of the Inactive table image become the Active table image.

21.2 cFE Table Types and Table Options

A cFE Application Developer has several choices when creating a cFE Application. There are two basic types of tables: single buffered and double buffered. In addition to these two basic types there are a small variety of options possible with each table. These options control special characteristics of the table such as whether it is dump-only, critical or whether it has an application defined location in memory.

Each choice has its advantages and disadvantages. The developer chooses the appropriate type based upon the requirements of the application. Anyone operating a particular cFE Application must understand the nature of the type and options selected for a particular table before they can successfully understand how to perform updates, validations, etc.

For more information on the different types of tables available, see the following sections:

- Table Types

    - Single Buffered Tables

    - Double Buffered Tables

- Table Options

    - Tables with Validation Functions

    - Critical Tables

    - User Defined Address Tables

    - Dump Only Tables

Next: Single Buffered Tables
Prev: Managing Tables
Up To: cFE Table Services Overview

21.2.1 Single Buffered Tables

The default table type for a cFE Application to use is a single buffered table. The principle advantage of a single buffered table is that it can share one of several shared table buffers for uploaded and pending table images. Since many cFE Applications have relatively small tables that are not changed at time critical moments or are not changed very often during a mission, single buffered tables represent the most memory resource efficient method of being managed.

The number of single buffered tables that can have inactive table images being manipulated at one time is specified by a TBL Services configuration parameter (CFE_TBL_MAX_SIMULTANEOUS_LOADS) found in the cfe_platform_cfg.h file associated with the processor in question. This parameter identifies the number of shared table buffers that are available.

Since inactive single buffered table images share a common resource, it may not be prudent for an operator to load an image and then delay on the image's activation for an extended period of time.

Single buffered tables are allowed to be critical (see Critical Tables), dump-only (see Dump Only Tables) and/or have a user-defined address (see User Defined Address Tables).

Next: Double Buffered Tables
Up To: cFE Table Types and Table Options

21.2.2 Double Buffered Tables

Under certain conditions, a cFE Application Developer may choose to use a double buffered table type within their application. Double buffered tables retain a dedicated inactive image of the table data. With a dedicated inactive table image available, double buffered tables are then capable of efficiently swapping table contents and/or delaying the activation of a table's contents for an indeterminate amount of time.

Some cFE Applications prefer to delay the Activation of a table until a specified time (e.g. - a Spacecraft Ephemeris). These tables are typically defined as double buffered tables so that the Inactive image can be left sitting untouched for an extended period of time without interfering with shared resources for other tables. Then the Application can perform the Update when the time is right.

Applications which have unusually large tables may decide to conserve memory resources by making them double buffered. This is because the shared buffers used by single buffered tables must be sized to match the largest table. If there is one table that is unusually large, there is little reason to allocate up to CFE_TBL_MAX_SIMULTANEOUS_L↩ OADS number of buffers that size. A double buffered table will only allocate ONE extra buffer of that size.

Performance minded Applications that are required to perform processing with tight timing deadlines may choose to use double buffered tables because the Update for a double buffered table is deterministic and quick.

Next: Tables with Validation Functions
Prev: Single Buffered Tables
Up To: cFE Table Types and Table Options

21.2.3 Tables with Validation Functions

Applications that associate Validation Functions with their tables when the tables are registered are effectively requiring that the contents of a table be logically Validated before it is Activated. The cFE will refuse to let a table with an associated Validation Function be Activated until a successful Validation on the Inactive table image has occurred.

Tables that are NOT assigned a Validation Function are assumed to be valid regardless of the contents of the table image. These tables do not require a Validation Command prior to Activation.

Next: Critical Tables
Prev: Double Buffered Tables
Up To: cFE Table Types and Table Options

21.2.4 Critical Tables

Applications that must be able to recover quickly from a Processor Reset may select the "Critical" table option when registering their table. Table Services automatically creates a Critical Data Store for the table and ensures that the contents of the Critical Data Store are updated whenever a Table Activation occurs.

If a Processor Reset happens, when the Application attempts to Register the table again, Table Services automatically locates the associated Critical Data Store and initializes the Table with the saved contents.

Next: User Defined Address Tables
Prev: Tables with Validation Functions
Up To: cFE Table Types and Table Options

21.2.5 User Defined Address Tables

In order to provide a mechanism for Flight Software Maintenance teams to quickly create a table image for dumping contents of memory that isn't normally loaded by the ground, there is an option to create User-Defined Address tables. These tables, when they are first registered, provide a memory address where the Active image of the table is to be maintained. Normally, the address is specified by Table Services from its memory pool.

By specifying the address, the Flight Software Maintenance team can create a Dump-Only table that contains the contents of a data structure that is not normally accessible via telemetry or table dumps. Then, on command, the Flight Software Maintenance team can periodically dump the data structure's contents to an on-board file(s) that can then be transferred to the ground for later analysis.

Next: Dump Only Tables
Prev: Critical Tables
Up To: cFE Table Types and Table Options

21.2.6 Dump Only Tables

On occasion, cFE Applications require a segment of memory in which the Application writes data. The typical cFE Table is not normally modified directly by an Application but only via Load and Activate commands from either the Ground or Stored Command Processor. However, for those situations where an Application wishes to modify the contents of a data structure and the Application is limited in its telemtry bandwidth so that the modified data cannot be telemetered, the Application can create a Dump-Only table.

Dump-Only tables are not allowed to be modified via the Load/Validate/Activate process most other tables are. They are only supposed to be modified by onboard Applications. The Operator can still command a Dump which will be processed by the table's owning Application when it manages its tables. By letting the Application perform the dump, the Operator can feel confident that the table contents are a complete snapshot in time and not corrupted by taking a snapshot while the Application was in the process of modifying its contents.

Next: Table Registry
Prev: User Defined Address Tables
Up To: cFE Table Types and Table Options

21.3 Table Registry

When Applications register tables, Table Services retains pertinent information on the table in the Table Registry. The following information (along with other information that is less important for an operator) is kept for each table:

- The Application ID of the Application that Registered the table

- The full name of the table

- The size, in bytes, of the table

- Pointers to the start addresses of the Table's image buffers, Active and Inactive (if appropriate)

- A pointer to the start address of a Validation Function

- A flag indicating whether a table image has been loaded into an Inactive buffer

- A flag indicating whether the table is Critical and its associated CDS Handle if it is

- A flag indicating whether the table has ever been loaded (initialized)

- A flag indicating whether the table is Dump Only

- A flag indicating whether the table has an Update Pending

- A flag indicating whether the table is double buffered or not

- The System Time when the Table was last Updated

- The filename of the last file loaded into the table

- The File Creation Time for the last file used to load the contents of the table

This information can be obtained by either sending the Dump Registry command which will put all of the information from the Table Registry into an onboard file for later downlink or the operator can send a command to Telemeter the Registry Entry for a single table. This will cause the pertinent registry entry for a single table to be sent via a telemetry packet.

The API function CFE_TBL_Register() returns either CFE_SUCCESS or CFE_TBL_INFO_RECOVERED_TBL to indicate that the table was successfully registered. The difference is whether the table data was recovered from CDS as part of the registration. There are several error return values that describe why the function failed to register the table but nothing related to why the restoration from CDS might have failed. There is, however, a message written to the System Error Log by Table Services that can be dumped by the ground to get this information. Note that failure to restore a table from CDS is not an expected error and requires some sort of data corruption to occur.

21.4   Table Services Telemetry

Table Services produces two different telemetry packets. The first packet, referred to as the Table Services Housekeeping Packet, is routinely produced by Table Services upon receipt of the Housekeeping Request message that is typically sent to all Applications by an on board scheduler. The contents and format of this packet are described in detail at CFE_TBL_HkPacket_t.

21.5   Effects of Processor Reset on Tables

When a processor resets, the Table Registry is re-initialized. All Applications must, therefore, re-register and re-initialize their tables. The one exception, however, is if the Application has previously tagged a table as "Critical" during Table Registration, then Table Services will attempt to locate a table image for that table stored in the Critical Data Store. Table Services also attempts to locate the Critical Table Registry which is also maintained in the Critical Data Store.

If Table Services is able to find a valid table image for a Critical table in the Critical Data Store, the contents of the table are automatically loaded into the table and the Application is notified that the table does not require additional initialization.

21.6 How To Remove cFE Table Services

It is possible to build the CFE without including Table Services. This is only applicable if the mission does not intend to use any CFS applications that require CFE type table services, or if the mission intends to provide custom table services. If CFE Table Services are removed, the CFE makefile will no longer try to make the Table Services application and the link makefile will no longer include the Table Services object module in the CFE-CORE. Even if excluded from the build, the Table Services source and header files will remain in the CFE source tree.

If EXCLUDE_CFE_TBL is defined (typically in the applicable ∗_platform_config.h file) Executive services will not load or shut down table services. Note this option does not effect the build and link of table services.

To remove table services from the build completely, remove "tbl" from the CFE_CORE_MODULES in the cfe/fsw/cfe-core CMakeLists.txt directory (note this option also needs EXCLUDE_CFE_TBL defined or executive services will try to load it).

Removing Table Services reduces the size of the CFE-CORE load file and also reduces the amount of RAM memory required to load the cFE. Each development environment will have unique savings. The numbers from an example default linux build are as follows:

```
Size of core cFE binary load file with Table Services:        963K
Size of core cFE binary load file w/o building Table services:  871K

RAM used after loading cFE with Table Services:        153K
RAM used after loading cFE w/o loading Table Services: 144M
```

21.7 Frequently Asked Questions about Table Services

(Q) Is it an error to load a table image that is smaller than the registered size?
Table images that are smaller than the declared size of a table fall into one of two categories.   If the starting offset of the table image (as specified in the Table Image secondary file header) is not equal to zero, then the table image is considered to be a "partial" table load. Partial loads are valid as long as a table has been previously loaded with a non-"partial" table image.   If the starting offset of the table image is zero and the size is less than the declared size of the table, the image is considered "short" but valid. This feature allows application developers to use variable length tables.
(Q) I tried to validate a table and received the following event message that said the event failed: **"MyApp validation failed for Inactive 'MyApp.MyTable', Status=0x####"**   **What happened?**
The event message indicates the application who owns the table has discovered a problem with the contents of the image. The code number following the 'Status' keyword is defined by the Application. The documentation for the specified Application should be referred to in order to identify the exact nature of the problem.
(Q) What commands do I use to load a table with a new image?

There are a number of steps required to load a table.

1. The operator needs to create a cFE Table Services compatible table image file with the desired data contained in it. This can be accomplished by creating a 'C' source file, compiling it with the appropriate cross compiler for the onboard platform and then running the `elf2cfetbl` utility on the resultant object file.

2. The file needs to be loaded into the onboard processor's filesystem using whichever file transfer protocol is used for that mission.

3. The Load Command is sent next to tell Table Services to load the table image file into the Inactive Table Image Buffer for the table identified in the file.

4. The Validate Command is then sent to validate the contents of the inactive table image. This will ensure the file was not corrupted or improperly defined. The results of the validation are reported in Table Services Housekeeping Telemetry. If a table does not have a validation function associated with it, the operator may wish to compare the computed CRC to verify the table contents match what was intended.

5. Upon successful validation, the operator then sends the Activate Command. The application owning the table should, within a reasonable amount of time, perform a table update and send an event message.

(Q) What causes cFE Table Services to generate the following sys log message:
CFE_TBL:GetAddressInternal-App(%d) attempt to access unowned Tbl Handle=%d

---

When an application sharing its table(s) with one or more applications is reloaded, the reloaded application's table handle(s) are released. cFE Table Services sees that the table(s) are shared and keeps a 'shadow' version of the table in the Table Services registry. The registry will show the released, shared tables with no name. When the applications sharing the table attempt to access the table via the 'old', released handle, Table Services will return an error code to the applications and generate the sys log message. The applications may then unregister the 'old' handle(s) in order to remove the released, shared table(s) from the Table Services registry and share the newly loaded application table(s).

(Q) When does the Table Services Abort Table Load command need to be issued?

The Abort command should be used whenever a table image has been loaded but the application has not yet activated it and the operator no longer wants the table to be loaded.
The purpose of the Abort command is to free a previously allocated table buffer. It should be noted, however, that multiple table loads to the SAME table without an intervening activation or abort, will simply OVERWRITE the previous table load using the SAME buffer.
Therefore, the most likely scenarios that would lead to a needed abort are as follows:

1. Operator loads a table and realizes immediately that the load is not wanted.

2. Operator loads a table and performs a validation on it. Regardless of whether the table passes or fails the validation, if the operator no longer wants to activate the table, the abort command should be issued.

   It should be noted that a table image that fails activation is retained in the inactive buffer for diagnosis, if necessary. It is NOT released until it is aborted or overwritten and successfully validated and activated.

3. A table image was loaded; the image was successfully validated; the command for activation was sent; but the application fails to perform the activation.

   The Abort command will free the table buffer and clear the activation request.

   This situation can occur when either the application is improperly designed and fails to adequately manage its tables (sometimes seen in the lab during development) or the application is "hung" and not performing as it should.

22 cFE Table Services Commands

The following is a list of commands that are processed by the cFE Table Services Task.

Global CFE_TBL_ABORT_LOAD_CC

Abort Table Load

Global CFE_TBL_ACTIVATE_CC

Activate Table

Global CFE_TBL_DELETE_CDS_CC

Delete Critical Table from Critical Data Store

Global CFE_TBL_DUMP_CC

Dump Table

Global CFE_TBL_DUMP_REGISTRY_CC

Dump Table Registry

Global CFE_TBL_LOAD_CC

Load Table

Global CFE_TBL_NOOP_CC

Table No-Op

Global CFE_TBL_RESET_COUNTERS_CC

Table Reset Counters

Global CFE_TBL_SEND_REGISTRY_CC

Telemeter One Table Registry Entry

Global CFE_TBL_VALIDATE_CC

Validate Table

23 cFE Table Services Telemetry

The following are telemetry packets generated by the cFE Table Services Task.

Class CFE_TBL_HousekeepingTlm_Payload_t

Table Services Housekeeping Packet

Class CFE_TBL_TblRegPacket_Payload_t

Table Registry Info Packet

24   cFE Table Services Configuration Parameters

The following are configuration parameters used to configure the cFE Table Services either for each platform or for a mission as a whole.

Global CFE_MISSION_TBL_MAX_FULL_NAME_LEN

Maximum Length of Full Table Name in messages

Global CFE_MISSION_TBL_MAX_NAME_LENGTH

Maximum Table Name Length

Global CFE_PLATFORM_TBL_BUF_MEMORY_BYTES

Size of Table Services Table Memory Pool

Global CFE_PLATFORM_TBL_DEFAULT_REG_DUMP_FILE

Default Filename for a Table Registry Dump

Global CFE_PLATFORM_TBL_MAX_CRITICAL_TABLES

Maximum Number of Critical Tables that can be Registered

Global CFE_PLATFORM_TBL_MAX_DBL_TABLE_SIZE

Maximum Size Allowed for a Double Buffered Table

Global CFE_PLATFORM_TBL_MAX_NUM_HANDLES

Maximum Number of Table Handles

Global CFE_PLATFORM_TBL_MAX_NUM_TABLES

Maximum Number of Tables Allowed to be Registered

Global CFE_PLATFORM_TBL_MAX_NUM_VALIDATIONS

Maximum Number of Simultaneous Table Validations

Global CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_LOADS

Maximum Number of Simultaneous Loads to Support

Global CFE_PLATFORM_TBL_MAX_SNGL_TABLE_SIZE

Maximum Size Allowed for a Single Buffered Table

Global CFE_PLATFORM_TBL_VALID_PRID_1

Processor ID values used for table load validation

Global CFE_PLATFORM_TBL_VALID_PRID_COUNT

Number of Processor ID's specified for validation

Global CFE_PLATFORM_TBL_VALID_SCID_1

Spacecraft ID values used for table load validation

Global CFE_PLATFORM_TBL_VALID_SCID_COUNT

Number of Spacecraft ID's specified for validation

25 cFE Time Services Overview

The cFE Time Service (TIME) is one of the cFE core services. TIME provides time correlation, distribution and synchronization services. TIME exists in two varieties: a Time Server responsible for maintaining the master time reference for all remote systems, and a Time Client responsible for synchronizing to that master time reference.

Since TIME is a generic implementation aimed to meet the needs of a variety of mission configurations, there are numerous configuration parameters, which dictate the behavior of TIME (see cfe_mission_cfg.h and cfe_platform_cfg.h for the specific mission configuration).

With the exception of those sections specific to Time Clients and Servers, this document assumes the most common physical environment - one instantiation of cFE installed on a single processor. Therefore, TIME represents cFE Time Services configured as a Time Server.

For additional detail on Time Services and how to manage it, see the following sections:

- Time Components

- Time Structure

- Time Formats

- Time Configuration

    – Time Format Selection

    – Enabling Fake Tone Signal

    – Selecting Tone and Data Ordering

    – Specifying Tone and Data Window

    – Specifying Time Server/Client

    – Specifying Time Tone Byte Order

    – Virtual MET

    – Specifying Time Source

    – Specifying Time Signal

- Time Services Paradigm(s)

- Flywheeling

- Time State

- Initialization

  – Power-On Reset

  – Processor Reset

- Initialization

  – Power-On Reset

  – Processor Reset

- Normal Operation

  – Client

  – Server

    * Setting Time

    * Adjusting Time

    * Setting MET

- Frequently Asked Questions

25.1 Time Components

Time knowledge is stored in several pieces, so that the time information can more easily be manipulated and utilized. These components include:

The **Ground Epoch** is an arbitrary date and time that establishes the zero point for spacecraft time calculations. The selection of the epoch is mission specific, although in the past, it was common to select the same epoch as defined for the Operating System used by the computers hosting the ground system software. Recent mission epoch selections have also included using zero seconds after midnight, Jan 1, 2001.

Spacecraft Time is the number of seconds (and fraction of a second) since the ground epoch. Spacecraft time is the sum of **Mission Elapsed Time** (MET) and the **Spacecraft Time Correlation Factor** (STCF). By definition, MET is a measure of time since launch or separation. However, for most missions the MET actually represents the amount of time since powering on the hardware containing the MET timer. The STCF correlates the MET to the ground epoch.

The **Tone** is the signal that MET seconds have incremented. In most hardware configurations, the tone is synonymous with the **1 PPS** signal. The tone signal may be generated by a local hardware timer, or by an external event (G↩ PS receiver, spacewire time tick, 1553 bus signal, etc). TIME may also be configured to simulate the tone for lab environments that do not have the necessary hardware to provide a tone signal. Note that MET sub-seconds will be zero at the instant of the tone.

Time at the Tone is the spacecraft time at the most recent "valid" tone.

Time since the Tone is the amount of time since the tone (usually less than one second). This value is often measured using the local processor clock. Upon detecting the tone signal, TIME stores the contents of the local processor clock to facilitate this measurement.

Thus, **Current Spacecraft Time** is the sum of "time at the tone" and "time since the tone".

Leap Seconds occur to keep clocks correlated to astronomical observations. The modern definition of a second (9,192,631,770 oscillations of a cesium-133 atom) is constant while the earth's rotation has been slow by a small fraction of a second per day. The **International Earth Rotation and Reference System Service** (IERS) maintains the count of leap seconds as a signed whole number that is subject to update twice a year. Although it is possible to have a negative leap second count if the earth rotates too fast, it is highly unlikely. The initial count of leap seconds (10) was established in January of 1972 and the first leap second was added to the initial count in June of 1972. The most recent leap seconds are announced by the International Earth Rotation Service (IERS): https://www.iers.org in IERS Bulletin C (leap second announcements). Search the IERS site for "Bulletin C" to obtain the latest issue/announcement.

25.2 Time Structure

The cFE implementation of the **System Time Structure** is a modified version of the CCSDS Unsegmented Time Code (CUC) which includes 4 bytes of seconds, and 4 bytes of subseconds, where a subsecond is equivalent to $1/(2^{32})$ seconds. The system time structure is used by TIME to store current time, time at the tone, time since the tone, the MET, the STCF and command arguments for time adjustments. Note that typically the 32 bits of seconds and the upper 16 bits of subseconds are used for time stamping Software bus messages, but this is dependent on the underlying defintion.

The system time structure is defined as follows:

```
typedef struct {
     uint32      Seconds;      /* Number of seconds */
     uint32      Subseconds;   /* Number of 2^(-32) subseconds */
} CFE_TIME_SysTime_t;
```

25.3 Time Formats

International Atomic Time (TAI) is one of two time formats supported by cFE TIME. TAI is the number of seconds and sub-seconds elapsed since the ground epoch as measured with the atomic clock previously described. TAI has no reference to leap seconds and is calculated using the following equation:

```
TAI = MET + STCF
```

It should be noted that TAI is only "true" TAI when the selected ground epoch is the same as the TAI epoch (zero seconds after midnight, January 1, 1958). However, nothing precludes configuring cFE TIME to calculate time in the TAI format and setting the STCF to correlate to any other epoch definition.

Coordinated Universal Time (UTC) is the other time format supported by cFE TIME. UTC differs from TAI in the fact that UTC includes a leap seconds adjustment. TIME computes UTC using the following equation:

```
UTC = TAI - Leap Seconds.
```

The preceding UTC equation might seem to imply that TAI includes leap seconds and UTC does not - which is not the case. In fact, the UTC calculation includes a leap seconds adjustment that subtracts leap seconds from the same time components used to create TAI. Alternatively, it might be less confusing to express the UTC equation as follows:

```
UTC = MET + STCF - Leap Seconds
```

Next:
Prev:
Up To:

25.4 Time Configuration

All configurations of TIME require a local processor source for a 1Hz interrupt and access to a local clock with a resolution fine enough that it can be used to measure short periods of elapsed time. The local interrupt is used to wake-up TIME at a regular interval for the purpose of verifying that the tone is being received. The local clock is used to measure time since the tone and to provide coarse verification that the tone is occurring at approximately one second intervals. The presumption is that the tone is the most accurate timer in the system and, within reason, is to be trusted. Note that nothing precludes the use of the MET as the local clock, assuming the MET is both local and provides sub-second data. However, the tone must not be used as the source for the local 1Hz interrupt.

Consider the following brief description of three hypothetical hardware configurations. These sample systems may be used as reference examples to help clarify the descriptions of the various TIME configuration selections.

In the first system, there is no MET timer and therefore no tone signal. The MET is a count of the number of "fake" tones generated by TIME software. There is no validation performed regarding the quality of time data. This hardware configuration is a common lab environment using COTS equipment.

In the second system, the MET timer is a hardware register that is directly accessible by TIME. When MET seconds increment, a processor interrupt signals the tone. Upon detecting the tone, TIME can read the MET to establish the time at the tone. To verify that the tone is valid, TIME need only validate that this tone signal occurred approximately one second after the previous tone signal (as measured with the local clock).

In the third system, the MET is located on hardware connected via spacewire. When MET seconds increment, a spacewire time tick triggers a local processor interrupt to signal the tone. Shortly after announcing the tone, the hardware containing the MET also generates a spacewire data packet containing the MET value corresponding to the tone. T↩ IME must wait until both the tone and data packet have been received before validating the tone. The tone must have occurred approximately one second after the previous tone signal and the data packet must have been received within a specified window in time following the tone.

The hardware design choice for how the tone signal is distributed is not material to TIME configuration. The software detecting the tone need only call the cFE API function announcing the arrival of the tone. This function is designed to be called from interrupt handlers.

For detail on each of the individual configuration settings for cFE Time Services, see the following sections:

- Time Format Selection

- Enabling Fake Tone Signal

- Selecting Tone and Data Ordering

- Specifying Tone and Data Window

- Specifying Time Server/Client

- Specifying Time Tone Byte Order

- Virtual MET

- Specifying Time Source

- Specifying Time Signal

Next: Time Services Paradigm(s)
Prev: Time Formats
Up To: cFE Time Services Overview

25.4.1 Time Format Selection

Time format is defined in the mission configuration header file.

This selection defines the default time format as TAI or UTC. The API functions to get time in either specific format are still enabled, but the API function to get time in the default format will follow this selection. Enable one, and **only one**, of the following time format definitions:

```
#define CFE_TIME_CFG_DEFAULT_TAI   TRUE
#define CFE_TIME_CFG_DEFAULT_UTC   FALSE
```

or

```
#define CFE_TIME_CFG_DEFAULT_TAI   FALSE
#define CFE_TIME_CFG_DEFAULT_UTC   TRUE
```

The choice of time format is a mission specific decision and is not directly affected by the hardware configuration.

See also

CFE_TIME_CFG_DEFAULT_TAI, CFE_TIME_CFG_DEFAULT_UTC

Next: Enabling Fake Tone Signal
Up To: Time Configuration

25.4.2   Enabling Fake Tone Signal

The fake tone is defined in the mission configuration header file.

If this selection is set to TRUE, TIME will generate a "fake" tone signal by calling the same API function as would be called upon detection of the "real" tone signal. Enable the fake tone only for hardware configurations that do not provide a tone signal.

```
#define CFE_TIME_CFG_FAKE_TONE   TRUE
```

Hypothetical hardware configuration number one (described above) would enable the fake tone signal.

See also

CFE_TIME_CFG_FAKE_TONE

Next: Selecting Tone and Data Ordering
Prev: Time Format Selection
Up To: Time Configuration

25.4.3   Selecting Tone and Data Ordering

Tone and data order is defined in the mission configuration header file.

This selection defines which comes first - the tone or the time at the tone data. Does the time data describe the tone that already occurred, or the tone that has not yet occurred? This decision may be driven by the hardware design but can also be arbitrary. Enable one, and only one, of the following:

```
#define CFE_TIME_AT_TONE_WAS
#define CFE_TIME_AT_TONE_WILL_BE
```

Hypothetical hardware configuration number three (described Time Configuration above) would enable "time at the tone was".

See also

CFE_TIME_AT_TONE_WAS, CFE_TIME_AT_TONE_WILL_BE

Next: Specifying Tone and Data Window
Prev: Enabling Fake Tone Signal
Up To: Time Configuration

25.4.4   Specifying Tone and Data Window

The tone and data window is defined in the mission configuration header file.

In concert with the definition of tone and data order, this selection defines the valid window in time for the second of the pair to follow the first. Both must be defined, units are micro-seconds.

```
#define CFE_TIME_MIN_ELAPSED  0
#define CFE_TIME_MAX_ELAPSED  100000
```

Hypothetical hardware configuration number three (described above) might use these values which describe a window that begins immediately after the tone and lasts for one tenth of a second.

See also

> CFE_TIME_MIN_ELAPSED, CFE_TIME_MAX_ELAPSED

25.4.5   Specifying Time Server/Client

Configure TIME as a client only when the target system has multiple processors running separate instantiations of the cFE. One instantiation must be configured as the server and the remainder configured as clients. If the target system has only one processor running the cFE, then TIME must be configured as a server.

Enable one, and only one, of the following definitions in the platform configuration header file:

```
#define CFE_TIME_CFG_SERVER    TRUE
#define CFE_TIME_CFG_CLIENT    FALSE
```

or

```
#define CFE_TIME_CFG_SERVER    FALSE
#define CFE_TIME_CFG_CLIENT    TRUE
```

See also

> CFE_TIME_CFG_SERVER, CFE_TIME_CFG_CLIENT

25.4.6 Specifying Time Tone Byte Order

By default, the CFE time tone message is a payload of integers in platform-endian order (containing the tone's times-tamp, the leap seconds, and state information.) In some configurations, it may be better to have the payload produced in big-endian order–particularly in mixed-endian environments.

In order to force the tone message to be in big-endian order, you must define the following:

```
#define CFE_PLATFORM_TIME_CFG_BIGENDIAN
```

25.4.7 Virtual MET

This configuration option refers to whether the MET is local to this instantiation of TIME. If the MET is not local then TIME must be configured as using a virtual MET.

Therefore, all TIME clients must be configured as using a virtual MET. If the MET was local to any TIME client, then that instantiation of TIME would have to be the server.

TIME servers must be configured as using a virtual MET

25.4.8 Specifying Time Source

TIME configuration provides the ability to specify where the source for time data is originating - either internal or external. In hypothetical system one, the MET is internal. In system two, TIME cannot directly read the MET, therefore time data must be received from an external source.

This selection also enables a command interface to switch between internal and external input. When commanded to use internal time data, TIME will ignore the external data. However, TIME will continue to use the API function as the trigger to generate a "time at the tone" command packet regardless of the internal/external command selection.

Set the following definition to TRUE only for TIME servers using an external time data source.

```
#define CFE_TIME_CFG_SOURCE   TRUE
```

The remainder of this section pertains only to TIME servers configured to accept external time data.

When configured to accept external time data, TIME requires an additional definition for the type of external data (GPS, MET, spacecraft time, etc.). This selection will enable an API function specific to the selected data type. Regardless of how the time data is received, the receiver need only pass the data to the appropriate API function.

TIME servers using an external time data source must set one, and only one, of the following to TRUE, for example:

```
#define CFE_TIME_CFG_SRC_MET   TRUE
#define CFE_TIME_CFG_SRC_GPS   FALSE
#define CFE_TIME_CFG_SRC_TIME  FALSE
```

configuration definitions for the particular source.

If the cfe_platform_cfg.h file contains "#define CFE_TIME_CFG_SOURCE TRUE" then time is configured to allow switching between internal and external time sources (see CFE_TIME_SET_SOURCE_CC). If this configuration parameter is set to FALSE then the command to set the source will be rejected.

If this configuration parameter is set to TRUE then ONE and ONLY ONE of the following configuration parameters must also be set TRUE in order to specify the external time source, for example:

```
#define CFE_TIME_CFG_SRC_MET   TRUE
#define CFE_TIME_CFG_SRC_GPS   FALSE
#define CFE_TIME_CFG_SRC_TIME  FALSE
```

Note that Internal MET source depends on available hardware. It may be the local count of tone signals, the contents of a hardware register or an OS specific time function.

Note also that when configured to use an external time source, commands to set the time will be overwritten.

See also

    CFE_TIME_CFG_SRC_MET, CFE_TIME_CFG_SRC_GPS, CFE_TIME_CFG_SRC_TIME

25.4.9 Specifying Time Signal

Some hardware configurations support a primary and redundant tone signal selection. Setting the following configuration definition to TRUE will result in enabling a TIME command to select the active tone signal.

```
#define CFE_TIME_CFG_SIGNAL  TRUE
```

Note: this feature requires additional custom software to make the physical signal switch.

See also

    CFE_TIME_CFG_SIGNAL

25.5 Time Format Selection

Time format is defined in the mission configuration header file.

This selection defines the default time format as TAI or UTC. The API functions to get time in either specific format are still enabled, but the API function to get time in the default format will follow this selection. Enable one, and **only one**, of the following time format definitions:

```
#define CFE_TIME_CFG_DEFAULT_TAI   TRUE
#define CFE_TIME_CFG_DEFAULT_UTC   FALSE
```

or

```
#define CFE_TIME_CFG_DEFAULT_TAI   FALSE
#define CFE_TIME_CFG_DEFAULT_UTC   TRUE
```

The choice of time format is a mission specific decision and is not directly affected by the hardware configuration.

See also

    CFE_TIME_CFG_DEFAULT_TAI, CFE_TIME_CFG_DEFAULT_UTC

25.6 Enabling Fake Tone Signal

The fake tone is defined in the mission configuration header file.

If this selection is set to TRUE, TIME will generate a "fake" tone signal by calling the same API function as would be called upon detection of the "real" tone signal. Enable the fake tone only for hardware configurations that do not provide a tone signal.

```
#define CFE_TIME_CFG_FAKE_TONE   TRUE
```

Hypothetical hardware configuration number one (described above) would enable the fake tone signal.

See also

    CFE_TIME_CFG_FAKE_TONE

25.7 Selecting Tone and Data Ordering

Tone and data order is defined in the mission configuration header file.

This selection defines which comes first - the tone or the time at the tone data. Does the time data describe the tone that already occurred, or the tone that has not yet occurred? This decision may be driven by the hardware design but can also be arbitrary. Enable one, and only one, of the following:

```
#define CFE_TIME_AT_TONE_WAS
#define CFE_TIME_AT_TONE_WILL_BE
```

Hypothetical hardware configuration number three (described Time Configuration above) would enable "time at the tone was".

See also

> CFE_TIME_AT_TONE_WAS, CFE_TIME_AT_TONE_WILL_BE

25.8 Specifying Tone and Data Window

The tone and data window is defined in the mission configuration header file.

In concert with the definition of tone and data order, this selection defines the valid window in time for the second of the pair to follow the first. Both must be defined, units are micro-seconds.

```
#define CFE_TIME_MIN_ELAPSED  0
#define CFE_TIME_MAX_ELAPSED  100000
```

Hypothetical hardware configuration number three (described above) might use these values which describe a window that begins immediately after the tone and lasts for one tenth of a second.

See also

> CFE_TIME_MIN_ELAPSED, CFE_TIME_MAX_ELAPSED

25.9 Specifying Time Server/Client

Configure TIME as a client only when the target system has multiple processors running separate instantiations of the cFE. One instantiation must be configured as the server and the remainder configured as clients. If the target system has only one processor running the cFE, then TIME must be configured as a server.

Enable one, and only one, of the following definitions in the platform configuration header file:

```
#define CFE_TIME_CFG_SERVER    TRUE
#define CFE_TIME_CFG_CLIENT    FALSE
```

or

```
#define CFE_TIME_CFG_SERVER    FALSE
#define CFE_TIME_CFG_CLIENT    TRUE
```

See also

> CFE_TIME_CFG_SERVER, CFE_TIME_CFG_CLIENT

25.10 Specifying Time Tone Byte Order

By default, the CFE time tone message is a payload of integers in platform-endian order (containing the tone's timestamp, the leap seconds, and state information.) In some configurations, it may be better to have the payload produced in big-endian order–particularly in mixed-endian environments.

In order to force the tone message to be in big-endian order, you must define the following:

```
#define CFE_PLATFORM_TIME_CFG_BIGENDIAN
```

25.11 Virtual MET

This configuration option refers to whether the MET is local to this instantiation of TIME. If the MET is not local then TIME must be configured as using a virtual MET.

Therefore, all TIME clients must be configured as using a virtual MET. If the MET was local to any TIME client, then that instantiation of TIME would have to be the server.

TIME servers must be configured as using a virtual MET

25.12 Specifying Time Source

TIME configuration provides the ability to specify where the source for time data is originating - either internal or external. In hypothetical system one, the MET is internal. In system two, TIME cannot directly read the MET, therefore time data must be received from an external source.

This selection also enables a command interface to switch between internal and external input. When commanded to use internal time data, TIME will ignore the external data. However, TIME will continue to use the API function as the trigger to generate a "time at the tone" command packet regardless of the internal/external command selection.

Set the following definition to TRUE only for TIME servers using an external time data source.

```
#define CFE_TIME_CFG_SOURCE   TRUE
```

The remainder of this section pertains only to TIME servers configured to accept external time data.

When configured to accept external time data, TIME requires an additional definition for the type of external data (GPS, MET, spacecraft time, etc.). This selection will enable an API function specific to the selected data type. Regardless of how the time data is received, the receiver need only pass the data to the appropriate API function.

TIME servers using an external time data source must set one, and only one, of the following to TRUE, for example:

```
#define CFE_TIME_CFG_SRC_MET    TRUE
#define CFE_TIME_CFG_SRC_GPS    FALSE
#define CFE_TIME_CFG_SRC_TIME   FALSE
```

configuration definitions for the particular source.

If the cfe_platform_cfg.h file contains "#define CFE_TIME_CFG_SOURCE TRUE" then time is configured to allow switching between internal and external time sources (see CFE_TIME_SET_SOURCE_CC). If this configuration parameter is set to FALSE then the command to set the source will be rejected.

If this configuration parameter is set to TRUE then ONE and ONLY ONE of the following configuration parameters must also be set TRUE in order to specify the external time source, for example:

```
#define CFE_TIME_CFG_SRC_MET    TRUE
#define CFE_TIME_CFG_SRC_GPS    FALSE
#define CFE_TIME_CFG_SRC_TIME   FALSE
```

Note that Internal MET source depends on available hardware. It may be the local count of tone signals, the contents of a hardware register or an OS specific time function.

Note also that when configured to use an external time source, commands to set the time will be overwritten.

See also

>   CFE_TIME_CFG_SRC_MET, CFE_TIME_CFG_SRC_GPS, CFE_TIME_CFG_SRC_TIME

25.13   Specifying Time Signal

Some hardware configurations support a primary and redundant tone signal selection. Setting the following configuration definition to TRUE will result in enabling a TIME command to select the active tone signal.

```
#define CFE_TIME_CFG_SIGNAL   TRUE
```

Note: this feature requires additional custom software to make the physical signal switch.

See also

> CFE_TIME_CFG_SIGNAL

25.14   Time Services Paradigm(s)

In order for the cFE Time Services to work for a particular mission, the methods of obtaining time, distributing time and translating time must follow some standard paradigms used in previous missions. The following describes this expected context:

Mission dependent hardware provides the Tone. When this Tone message is received, TIME latches the local time based on the local clock. Note that in lab environments, a simulated Tone capability exists which uses an SB message. Mission dependent hardware also provides the "time at the tone" message based on the hardware latched time and the reference times stored by TIME Server. The TIME Client then updates its local reference time based on the local hardware latched time at the Tone and the provided Time-at-Tone message packet when certain checks (such as the Validity bit being set) pass.

When used in an environment that includes multiple processors, each running a separate instantiation of cFE software, the presumption is that TIME will be distributed in a client/server relationship. In this model, one processor will have TIME configured as the server and the other processors as clients. The TIME server will maintain the various time components and publish a "time at the tone" message to provide synchronized time to the TIME clients. Environments that have only a single instance of TIME must be configured as a TIME server.

In all configurations, the final step in calculating the time "right now" for any instantiation of TIME is to use a local processor clock to measure the "time since the tone".

The specific MET hardware properties will determine whether the MET value can be modified. However, the cFE design is such that there should never be a need to purposefully change or reset the MET.

Regardless of the physical hardware implementation for the MET (elapsed seconds, elapsed ticks, etc.), cFE TIME will convert the hardware MET value into a System Time Format structure for time calculations and will report the converted value in telemetry. cFE TIME will also maintain and report the STCF in a System Time Format structure.

cFE TIME has no knowledge of the current epoch; it is up to the user to keep time on the spacecraft correlated to an epoch. An exception might appear to be the epoch definition required in the cFE mission configuration definition file. However, this definition is for use only by the API functions that convert spacecraft time and file system time, and the API function that prints spacecraft time as a date and time text string. The cFE "get time" functions are independent of the ground epoch.

The mission configuration parameters, CFE_TIME_CFG_DEFAULT_TAI and CFE_TIME_CFG_DEFAULT_UTC specify the default time format. Applications are encouraged to use the CFE_TIME_GetTime API, which returns time in the format specified by this configuration parameter.

25.15 Flywheeling

Flywheeling occurs when TIME is not getting a valid tone signal or external "time at the tone" message. While this has minimal impact on internal operations, it can result in the drifting apart of times being stored by different spacecraft systems.

Flywheeling occurs when at least one of the following conditions is true:

- loss of tone signal

- loss of "time at the tone" data packet

- signal and packet not within valid window

- commanded into fly-wheel mode

If the TIME server is in Flywheel mode then the TIME client is also in flywheel mode.

25.16 Time State

Clock state is a combination of factors, most significantly whether the spacecraft time has been accurately set and whether Time Service is operating in FLYWHEEL mode. A ground command is provided to set the state to reflect when the ground has determined the spacecraft time is now correct, or that time is no longer correct. This information will be distributed to Time Clients, and in turn, to any interested sub-systems. If time has not been set then TIME services reports the state of time as invalid, regardless of whether time is flywheeling or not. Also, this command may be used to force a Time Server or Time Client into FLYWHEEL mode. Use of FLYWHEEL mode is mainly for debug purposes although, in extreme circumstances, it may be of value to force Time Service not to rely on normal time updates. Note that when commanded into FLYWHEEL mode, the Time Service will remain so until receipt of another "set state" command setting the state into a mode other than FLYWHEEL. Note also that setting the clock state to VALID or INV↩ ALID on a Time Client that is currently getting time updates from the Time Server will have very limited effect. As soon as the Time Client receives the next time update, the VALID/INVALID selection will be set to that of the Time Server. However, setting a Time Client to FLYWHEEL cannot be overridden by the Time Server since the Time Client will ignore time updates from the Time Server while in FLYWHEEL mode.

25.17 Initialization

No action is required by the ground to initialize the TIME software; however, time variables in the TIME Server must be set by command to allow correct time to propagate.

For a description of what happens during each type of reset, see below:

- Power-On Reset

- Processor Reset

Next: Power-On Reset
Prev: Time State
Up To: cFE Time Services Overview

25.17.1 Power-On Reset

TIME initializes all counters in housekeeping telemetry, sets the Validity state to Invalid, and initializes the STCF, Leap Seconds, and 1 Hz Adjustment to zero.

Next: Processor Reset
Up To: Initialization

25.17.2 Processor Reset

In the event of a processor reset, the following time values are preserved:

- MET

- STCF

- Leap Seconds

- Clock Signal Selection

- Current Time Client Delay (if applicable)

Note that since it is virtually impossible for TIME services to validate the actual data that is saved across a processor reset, a signature pattern is written to the preserved area. On a processor reset, TIME queries that signature to make sure that it matches what is expected. If the signature does not match, then TIME is initialized as if a cFE power-on reset occurred.

Next: Normal Operation
Prev: Power-On Reset
Up To: Initialization

25.18 Power-On Reset

TIME initializes all counters in housekeeping telemetry, sets the Validity state to Invalid, and initializes the STCF, Leap Seconds, and 1 Hz Adjustment to zero.

Next: Processor Reset
Up To: Initialization

25.19 Processor Reset

In the event of a processor reset, the following time values are preserved:

- MET

- STCF

- Leap Seconds

- Clock Signal Selection

- Current Time Client Delay (if applicable)

Note that since it is virtually impossible for TIME services to validate the actual data that is saved across a processor reset, a signature pattern is written to the preserved area. On a processor reset, TIME queries that signature to make sure that it matches what is expected. If the signature does not match, then TIME is initialized as if a cFE power-on reset occurred.

Next: Normal Operation
Prev: Power-On Reset
Up To: Initialization

25.20 Initialization

No action is required by the ground to initialize the TIME software; however, time variables in the TIME Server must be set by command to allow correct time to propagate.

For a description of what happens during each type of reset, see below:

- Power-On Reset

- Processor Reset

Next: Power-On Reset
Prev: Time State
Up To: cFE Time Services Overview

25.20.1   Power-On Reset

TIME initializes all counters in housekeeping telemetry, sets the Validity state to Invalid, and initializes the STCF, Leap Seconds, and 1 Hz Adjustment to zero.

Next: Processor Reset
Up To: Initialization

25.20.2   Processor Reset

In the event of a processor reset, the following time values are preserved:

- MET

- STCF

- Leap Seconds

- Clock Signal Selection

- Current Time Client Delay (if applicable)

Note that since it is virtually impossible for TIME services to validate the actual data that is saved across a processor reset, a signature pattern is written to the preserved area. On a processor reset, TIME queries that signature to make sure that it matches what is expected. If the signature does not match, then TIME is initialized as if a cFE power-on reset occurred.

Next: Normal Operation
Prev: Power-On Reset
Up To: Initialization

25.21   Power-On Reset

TIME initializes all counters in housekeeping telemetry, sets the Validity state to Invalid, and initializes the STCF, Leap Seconds, and 1 Hz Adjustment to zero.

Next: Processor Reset
Up To: Initialization

25.22 Processor Reset

In the event of a processor reset, the following time values are preserved:

- MET

- STCF

- Leap Seconds

- Clock Signal Selection

- Current Time Client Delay (if applicable)

Note that since it is virtually impossible for TIME services to validate the actual data that is saved across a processor reset, a signature pattern is written to the preserved area. On a processor reset, TIME queries that signature to make sure that it matches what is expected. If the signature does not match, then TIME is initialized as if a cFE power-on reset occurred.

Next: Normal Operation
Prev: Power-On Reset
Up To: Initialization

25.23 Normal Operation

The following sections describe the operator's resposibilities for maintaining time under nominal conditions:

- Client

- Server

Next: Client
Prev: Initialization
Up To: cFE Time Services Overview

25.23.1 Client

Under normal operation, TIME Client systems do not require any attention from the ground, however TIME clients do provide commands to set the persistent latency between the server and client. Latency can be either added or subtracted to the current TIME client time calculation to account for the latency.

Next: Server
Up To: Normal Operation

25.23.2   Server

TIME Servers require maintenance by the operations team to ensure the spacecraft is maintaining a time that can be successfully correlated to other entities. The following sections describe the commands that the operations team can use to help maintain a proper time reference:

- Setting Time

- Adjusting Time

- Setting MET

25.23.2.1   Setting Time

The Time Server provides commands to set time. The new time value represents the desired offset from mission-defined time epoch and takes effect immediately upon execution of this command. Time Service will calculate a new STCF value based on the current MET and the desired new time using one of the following:

If Time Service is configured to compute current time as TAI:

```
STCF = new time – current MET
current time =  current MET + STCF
```

If Time Service is configured to compute current time as UTC:

```
STCF = ((new time) – (current MET)) + Leap Seconds
current time = ((current MET) + STCF) – Leap Seconds
```

See also

> CFE_TIME_SET_TIME_CC

25.23.2.2 Adjusting Time

The TIME Server includes commands to set the STCF, Leap Seconds, and Validity state. The STCF should be set implicity using the CFE_TIME_SET_TIME_CC or explicitly using CFE_TIME_SET_STCF_CC. TIME provides the ability to command a one time adjustment (CFE_TIME_ADD_ADJUST_CC and CFE_TIME_SUB_ADJUST_CC) to the current STCF. In addition there is a 1Hz adjustment (CFE_TIME_ADD_1HZ_ADJUSTMENT_CC and CFE_TIME_SUB_1HZ_↩ ADJUSTMENT_CC) that can be made to the STCF to compensate for oscillator drift. Mission specific ground correlation should be used to assist in determining the proper values to use. The Leap Seconds should be set to the current TA↩ I-UTC. Note that the International Earth Rotation and Reference Systems Service Bulletin C, which defines the current difference, reports it as UTC-TAI, and thus that value must be negated. **The Leap Seconds value will always be a positive number.** The Validity state does not have to be set to invalid to change the STCF or Leap Seconds, and should be set to valid at any time that the TIME Server time reference should be synchronized to by the other systems.

See also

> CFE_TIME_ADD_ADJUST_CC, CFE_TIME_SUB_ADJUST_CC, CFE_TIME_SET_STCF_CC, CFE_TIME_A↩ DD_1HZ_ADJUSTMENT_CC, CFE_TIME_SUB_1HZ_ADJUSTMENT_CC, CFE_TIME_SET_LEAP_SECOND↩ S_CC

Next: Setting MET
Prev: Setting Time
Up To: Server

25.23.2.3 Setting MET

The TIME Server provides the capability to set the MET. Note that the MET (as implemented for cFE Time Service) is a logical representation and not a physical timer. Thus, setting the MET is not dependent on whether the hardware supports a MET register that can be written to. Note also that Time Service "assumes" that during normal operation, the MET is synchronized to the tone signal. Therefore, unless operating in FLYWHEEL mode, the sub-seconds portion of the MET will be set to zero at the next tone signal interrupt. The new MET takes effect immediately upon execution of this command.

See also

> CFE_TIME_SET_MET_CC

Next: Frequently Asked Questions
Prev: Adjusting Time
Up To: Server

25.24 Client

Under normal operation, TIME Client systems do not require any attention from the ground, however TIME clients do provide commands to set the persistent latency between the server and client. Latency can be either added or subtracted to the current TIME client time calculation to account for the latency.

Next: Server
Up To: Normal Operation

25.25 Server

TIME Servers require maintenance by the operations team to ensure the spacecraft is maintaining a time that can be successfully correlated to other entities. The following sections describe the commands that the operations team can use to help maintain a proper time reference:

- Setting Time

- Adjusting Time

- Setting MET

25.25.0.1 Setting Time

The Time Server provides commands to set time. The new time value represents the desired offset from mission-defined time epoch and takes effect immediately upon execution of this command. Time Service will calculate a new STCF value based on the current MET and the desired new time using one of the following:

If Time Service is configured to compute current time as TAI:

```
STCF = new time − current MET
current time =  current MET + STCF
```

If Time Service is configured to compute current time as UTC:

```
STCF = ((new time) − (current MET)) + Leap Seconds
current time = ((current MET) + STCF) − Leap Seconds
```

See also

> CFE_TIME_SET_TIME_CC

25.25.0.2 Adjusting Time

The TIME Server includes commands to set the STCF, Leap Seconds, and Validity state. The STCF should be set implicity using the CFE_TIME_SET_TIME_CC or explicitly using CFE_TIME_SET_STCF_CC. TIME provides the ability to command a one time adjustment (CFE_TIME_ADD_ADJUST_CC and CFE_TIME_SUB_ADJUST_CC) to the current STCF. In addition there is a 1Hz adjustment (CFE_TIME_ADD_1HZ_ADJUSTMENT_CC and CFE_TIME_SUB_1HZ_↩ ADJUSTMENT_CC) that can be made to the STCF to compensate for oscillator drift. Mission specific ground correlation should be used to assist in determining the proper values to use. The Leap Seconds should be set to the current TA↩ I-UTC. Note that the International Earth Rotation and Reference Systems Service Bulletin C, which defines the current difference, reports it as UTC-TAI, and thus that value must be negated. **The Leap Seconds value will always be a positive number.** The Validity state does not have to be set to invalid to change the STCF or Leap Seconds, and should be set to valid at any time that the TIME Server time reference should be synchronized to by the other systems.

See also

> CFE_TIME_ADD_ADJUST_CC, CFE_TIME_SUB_ADJUST_CC, CFE_TIME_SET_STCF_CC, CFE_TIME_A↩ DD_1HZ_ADJUSTMENT_CC, CFE_TIME_SUB_1HZ_ADJUSTMENT_CC, CFE_TIME_SET_LEAP_SECOND↩ S_CC

Next: Setting MET
Prev: Setting Time
Up To: Server

25.25.0.3 Setting MET

The TIME Server provides the capability to set the MET. Note that the MET (as implemented for cFE Time Service) is a logical representation and not a physical timer. Thus, setting the MET is not dependent on whether the hardware supports a MET register that can be written to. Note also that Time Service "assumes" that during normal operation, the MET is synchronized to the tone signal. Therefore, unless operating in FLYWHEEL mode, the sub-seconds portion of the MET will be set to zero at the next tone signal interrupt. The new MET takes effect immediately upon execution of this command.

See also

> CFE_TIME_SET_MET_CC

Next: Frequently Asked Questions
Prev: Adjusting Time
Up To: Server

25.26 Setting Time

The Time Server provides commands to set time. The new time value represents the desired offset from mission-defined time epoch and takes effect immediately upon execution of this command. Time Service will calculate a new STCF value based on the current MET and the desired new time using one of the following:

If Time Service is configured to compute current time as TAI:

```
STCF = new time - current MET
current time =  current MET + STCF
```

If Time Service is configured to compute current time as UTC:

```
STCF = ((new time) - (current MET)) + Leap Seconds
current time = ((current MET) + STCF) - Leap Seconds
```

See also

> CFE_TIME_SET_TIME_CC

25.27   Adjusting Time

The TIME Server includes commands to set the STCF, Leap Seconds, and Validity state. The STCF should be set implicity using the CFE_TIME_SET_TIME_CC or explicitly using CFE_TIME_SET_STCF_CC. TIME provides the ability to command a one time adjustment (CFE_TIME_ADD_ADJUST_CC and CFE_TIME_SUB_ADJUST_CC) to the current STCF. In addition there is a 1Hz adjustment (CFE_TIME_ADD_1HZ_ADJUSTMENT_CC and CFE_TIME_SUB_1HZ_↩ ADJUSTMENT_CC) that can be made to the STCF to compensate for oscillator drift. Mission specific ground correlation should be used to assist in determining the proper values to use. The Leap Seconds should be set to the current TA↩ I-UTC. Note that the International Earth Rotation and Reference Systems Service Bulletin C, which defines the current difference, reports it as UTC-TAI, and thus that value must be negated. **The Leap Seconds value will always be a positive number.** The Validity state does not have to be set to invalid to change the STCF or Leap Seconds, and should be set to valid at any time that the TIME Server time reference should be synchronized to by the other systems.

See also

> CFE_TIME_ADD_ADJUST_CC, CFE_TIME_SUB_ADJUST_CC, CFE_TIME_SET_STCF_CC, CFE_TIME_A↩ DD_1HZ_ADJUSTMENT_CC, CFE_TIME_SUB_1HZ_ADJUSTMENT_CC, CFE_TIME_SET_LEAP_SECOND↩ S_CC

25.28   Setting MET

The TIME Server provides the capability to set the MET. Note that the MET (as implemented for cFE Time Service) is a logical representation and not a physical timer. Thus, setting the MET is not dependent on whether the hardware supports a MET register that can be written to. Note also that Time Service "assumes" that during normal operation, the MET is synchronized to the tone signal. Therefore, unless operating in FLYWHEEL mode, the sub-seconds portion of the MET will be set to zero at the next tone signal interrupt. The new MET takes effect immediately upon execution of this command.

See also

> CFE_TIME_SET_MET_CC

25.29   Frequently Asked Questions

(Q)

26 cFE Time Services Commands

The following is a list of commands that are processed by the cFE Time Services Task.

Global CFE_TIME_ADD_1HZ_ADJUSTMENT_CC

    Add Delta to Spacecraft Time Correlation Factor each 1Hz

Global CFE_TIME_ADD_ADJUST_CC

    Add Delta to Spacecraft Time Correlation Factor

Global CFE_TIME_ADD_DELAY_CC

    Add Time to Tone Time Delay

Global CFE_TIME_NOOP_CC

    Time No-Op

Global CFE_TIME_RESET_COUNTERS_CC

    Time Reset Counters

Global CFE_TIME_SEND_DIAGNOSTIC_TLM_CC

    Request TIME Diagnostic Telemetry

Global CFE_TIME_SET_LEAP_SECONDS_CC

    Set Leap Seconds

Global CFE_TIME_SET_MET_CC

    Set Mission Elapsed Time

Global CFE_TIME_SET_SIGNAL_CC

    Set Tone Signal Source

Global CFE_TIME_SET_SOURCE_CC

    Set Time Source

Global CFE_TIME_SET_STATE_CC

    Set Time State

Global CFE_TIME_SET_STCF_CC

    Set Spacecraft Time Correlation Factor

Global CFE_TIME_SET_TIME_CC

    Set Spacecraft Time

Global CFE_TIME_SUB_1HZ_ADJUSTMENT_CC

    Subtract Delta from Spacecraft Time Correlation Factor each 1Hz

Global CFE_TIME_SUB_ADJUST_CC

    Subtract Delta from Spacecraft Time Correlation Factor

Global CFE_TIME_SUB_DELAY_CC

    Subtract Time from Tone Time Delay

27 cFE Time Services Telemetry

The following are telemetry packets generated by the cFE Time Services Task.

Class CFE_TIME_DiagnosticTlm_Payload_t

Time Services Diagnostics Packet

Class CFE_TIME_HousekeepingTlm_Payload_t

Time Services Housekeeping Packet

28 cFE Time Services Configuration Parameters

The following are configuration parameters used to configure the cFE Time Services either for each platform or for a mission as a whole.

Global CFE_MISSION_TIME_AT_TONE_WAS

Default Time and Tone Order

Global CFE_MISSION_TIME_CFG_DEFAULT_TAI

Default Time Format

Global CFE_MISSION_TIME_CFG_FAKE_TONE

Default Time Format

Global CFE_MISSION_TIME_DEF_MET_SECS

Default Time Values

Global CFE_MISSION_TIME_EPOCH_YEAR

Default EPOCH Values

Global CFE_MISSION_TIME_FS_FACTOR

Time File System Factor

Global CFE_MISSION_TIME_MIN_ELAPSED

Min and Max Time Elapsed

Global CFE_PLATFORM_TIME_CFG_LATCH_FLY

Define Periodic Time to Update Local Clock Tone Latch

Global CFE_PLATFORM_TIME_CFG_SERVER

Time Server or Time Client Selection

Global CFE_PLATFORM_TIME_CFG_SIGNAL

Include or Exclude the Primary/Redundant Tone Selection Cmd

Global CFE_PLATFORM_TIME_CFG_SOURCE

Include or Exclude the Internal/External Time Source Selection Cmd

Global CFE_PLATFORM_TIME_CFG_SRC_MET

Choose the External Time Source for Server only

Global CFE_PLATFORM_TIME_CFG_START_FLY

Define Time to Start Flywheel Since Last Tone

Global CFE_PLATFORM_TIME_CFG_TONE_LIMIT

    Define Timing Limits From One Tone To The Next

Global CFE_PLATFORM_TIME_CFG_VIRTUAL

    Time Tone In Big-Endian Order

    Local MET or Virtual MET Selection for Time Servers

Global CFE_PLATFORM_TIME_MAX_DELTA_SECS

    Define the Max Delta Limits for Time Servers using an Ext Time Source

Global CFE_PLATFORM_TIME_MAX_LOCAL_SECS

    Define the Local Clock Rollover Value in seconds and subseconds

Global CFE_PLATFORM_TIME_START_TASK_PRIORITY

    Define TIME Task Priorities

Global CFE_PLATFORM_TIME_START_TASK_STACK_SIZE

    Define TIME Task Stack Sizes

29 cFE Event Message Cross Reference

The following cross reference maps the text associated with each cFE Event Message to its Event Message Identifier. A user can search this page for the text of the message they wish to learn more about and then click on the associated Event Message Identifier to obtain more information.

Global CFE_ES_ALL_APPS_EID

    'App Info file written to %s, Entries=%d, FileSize=%d'

Global CFE_ES_BOOT_ERR_EID

    'Invalid cFE restart type %d'

Global CFE_ES_BUILD_INF_EID

    'Build s s'

Global CFE_ES_CC1_ERR_EID

    'Invalid ground command code: ID = 0x%X, CC = %d'

Global CFE_ES_CDS_DELETE_ERR_EID

    'Error while deleting '%s' from CDS, See SysLog.(Err=0x%08X)'

Global CFE_ES_CDS_DELETE_TBL_ERR_EID

    'CDS '%s' is a Critical Table CDS. Must be deleted via TBL Command'

Global CFE_ES_CDS_DELETED_INFO_EID

    'Successfully removed '%s' from CDS'

Global CFE_ES_CDS_DUMP_ERR_EID

    'Error writing CDS Registry to '%s', Status=0x%08X'

Global CFE_ES_CDS_NAME_ERR_EID

    'Unable to locate '%s' in CDS Registry'

Global CFE_ES_CDS_OWNER_ACTIVE_EID

    'CDS '%s' not deleted because owning app is active'

Global CFE_ES_CDS_REG_DUMP_INF_EID

'Successfully dumped CDS Registry to '%s':Size=%d,Entries=%d'

Global CFE_ES_CDS_REGISTER_ERR_EID

'%s Failed to Register CDS '%s', Status=0x%08X'

Global CFE_ES_CREATING_CDS_DUMP_ERR_EID

'Error creating CDS dump file '%s', Status=0x%08X'

Global CFE_ES_ERLOG1_INF_EID

'Cleared mode log data'

Global CFE_ES_ERLOG2_EID

'%s written:Size=%d'

Global CFE_ES_ERLOG2_ERR_EID

'Error creating file %s, stat=0x%x'

Global CFE_ES_ERLOG_PENDING_ERR_EID

'Error log write to file %s already in progress'

Global CFE_ES_ERR_SYSLOGMODE_EID

'Set OverWriteSysLog Command: Invalid Mode setting = %d'

Global CFE_ES_ERREXIT_APP_ERR_EID

'Exit Application %s on Error Failed: CleanUpApp Error 0x%08X.'

Global CFE_ES_ERREXIT_APP_INF_EID

'Exit Application %s Completed.'

Global CFE_ES_EXIT_APP_ERR_EID

'Exit Application %s Failed: CleanUpApp Error 0x%08X.'

Global CFE_ES_EXIT_APP_INF_EID

'Exit Application %s Completed.'

Global CFE_ES_FILEWRITE_ERR_EID

'File write,byte cnt err,file %s,request=%d,actual=%d'

Global CFE_ES_INIT_INF_EID

'cFE ES Initialized'

Global CFE_ES_INITSTATS_INF_EID

'cFE Version %d.%d.%d chksm %d, OSAL Version %d.%d'

Global CFE_ES_INVALID_POOL_HANDLE_ERR_EID

'Cannot telemeter memory pool stats. Illegal Handle (0x%08X)'

Global CFE_ES_LEN_ERR_EID

'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

Global CFE_ES_MID_ERR_EID

'Invalid command pipe message ID: 0x%X'

Global CFE_ES_NOOP_INF_EID

'No-op command'

Global CFE_ES_ONE_APP_EID

'Sent %s application data'

Global CFE_ES_ONE_APPID_ERR_EID

'Failed to send %s application data: GetAppIDByName Failed, RC = 0x%08X'

Global CFE_ES_ONE_ERR_EID

'Failed to send %s application data, RC = %08X'

Global CFE_ES_OSCREATE_ERR_EID

'Failed to write App Info file, OS_creat returned %d'

Global CFE_ES_PCR_ERR1_EID

'ES_ProcControlReq: Invalid State (EXCEPTION) Application %s.'

Global CFE_ES_PCR_ERR2_EID

'ES_ProcControlReq: Unknown State (%d) Application %s.'

Global CFE_ES_PERF_DATAWRITTEN_EID

'%s written:Size=%d,EntryCount=%d'

Global CFE_ES_PERF_FILTMSKCMD_EID

'Set Performance Filter Mask command'

Global CFE_ES_PERF_FILTMSKERR_EID

'Error:Performance Filter Mask Index value greater than CFE_ES_PERF_32BIT_←
WORDS_IN_MASK (which is a whole number derived from CFE_PLATFORM_ES_PERF_M←
AX_IDS / 32)'

Global CFE_ES_PERF_LOG_ERR_EID

'Error creating file %s, stat=%d'

Global CFE_ES_PERF_STARTCMD_EID

'Start collecting performance data command, trigger mode = d'

Global CFE_ES_PERF_STARTCMD_ERR_EID

'Cannot start collecting performance data,perf data write in progress'

Global CFE_ES_PERF_STARTCMD_TRIG_ERR_EID

'Cannot start collecting performance data, trigger mode (d) out of range (d
to d)'

Global CFE_ES_PERF_STOPCMD_EID

'Perf Stop Cmd Rcvd,%s will write %d entries.%dmS dly every %d entries'

Global CFE_ES_PERF_STOPCMD_ERR2_EID

'Stop performance data cmd ignored,perf data write in progress'

Global CFE_ES_PERF_TRIGMSKCMD_EID

'Set Performance Trigger Mask command'

Global CFE_ES_PERF_TRIGMSKERR_EID

'Error: Performance Trigger Mask Index value greater than CFE_ES_PERF_32B←
IT_WORDS_IN_MASK (which is a whole number derived from CFE_PLATFORM_ES_PER←
F_MAX_IDS / 32)'

Global CFE_ES_RELOAD_APP_DBG_EID

'Reload Application %s Initiated.'

Global CFE_ES_RELOAD_APP_ERR1_EID

'Failed to reload Application %s, rc = %08X'

Global CFE_ES_RELOAD_APP_ERR2_EID

'Reload Application %s, GetAppIDByName failed. RC = 0x%08X.'

Global CFE_ES_RELOAD_APP_ERR3_EID

'Reload Application %s Failed: AppCreate Error 0x%08X.'

Global CFE_ES_RELOAD_APP_ERR4_EID

'Reload Application %s Failed: CleanUpApp Error 0x%08X.'

Global CFE_ES_RELOAD_APP_INF_EID

'Reload Application %s Completed.'

Global CFE_ES_RESET_INF_EID

'Reset Counters command'

Global CFE_ES_RESET_PR_COUNT_EID

'Reset Processor Reset Count to Zero'

Global CFE_ES_RESTART_APP_DBG_EID

'Restart Application %s Initiated.'

Global CFE_ES_RESTART_APP_ERR1_EID

'Restart Application %s Failed, RC = 0x%08X'

Global CFE_ES_RESTART_APP_ERR2_EID

'Restart Application %s, GetAppIDByName failed. RC = 0x%08X.'

Global CFE_ES_RESTART_APP_ERR3_EID

'Restart Application %s Failed: AppCreate Error 0x%08X.'

Global CFE_ES_RESTART_APP_ERR4_EID

'Restart Application %s Failed: CleanUpApp Error 0x%08X.'

Global CFE_ES_RESTART_APP_INF_EID

'Restart Application %s Completed.'

Global CFE_ES_SET_MAX_PR_COUNT_EID

'Maximum Processor Reset Count set to: %d'

Global CFE_ES_SHELL_ERR_EID

'Failed to invoke shell command %s, rc = %08X'

Global CFE_ES_SHELL_INF_EID

'Invoked shell command %s'

Global CFE_ES_START_ERR_EID

'Failed to start %s from %s, RC = %08X'

Global CFE_ES_START_EXC_ACTION_ERR_EID

'CFE_ES_StartAppCmd: Invalid Exception Action: %d.'

Global CFE_ES_START_INF_EID

'Started %s from %s, AppID = %d'

Global CFE_ES_START_INVALID_ENTRY_POINT_ERR_EID

'CFE_ES_StartAppCmd: App Entry Point is NULL.'

Global CFE_ES_START_INVALID_FILENAME_ERR_EID

'CFE_ES_StartAppCmd: invalid filename: %s'

Global CFE_ES_START_NULL_APP_NAME_ERR_EID

'CFE_ES_StartAppCmd: App Name is NULL.'

Global CFE_ES_START_PRIORITY_ERR_EID

'CFE_ES_StartAppCmd: Priority is too large: %d.'

Global CFE_ES_START_STACK_ERR_EID

'CFE_ES_StartAppCmd: Stack size is less than system Minimum: %d.'

Global CFE_ES_STOP_DBG_EID

'Stop Application %s Initiated.'

Global CFE_ES_STOP_ERR1_EID

'Stop Application %s Failed, RC = 0x%08X'

Global CFE_ES_STOP_ERR2_EID

'Stop Application %s, GetAppIDByName failed. RC = 0x%08X.'

Global CFE_ES_STOP_ERR3_EID

'Stop Application %s Failed: CleanUpApp Error 0x%08X.'

Global CFE_ES_STOP_INF_EID

'Stop Application %s Completed.'

Global CFE_ES_SYSLOG1_INF_EID

'Cleared Executive Services log data'

Global CFE_ES_SYSLOG2_EID

'%s written:Size=%d,Entries=%d'

Global CFE_ES_SYSLOG2_ERR_EID

'Error creating file %s, stat=0x%x'

Global CFE_ES_SYSLOGMODE_EID

'Set OverWriteSysLog Command Received with Mode setting = %d'

Global CFE_ES_TASKINFO_EID

'Task Info file written to %s, Entries=%d, FileSize=%d'

Global CFE_ES_TASKINFO_OSCREATE_ERR_EID

'Failed to write Task Info file, OS_creat returned %d'

Global CFE_ES_TASKINFO_WR_ERR_EID

'Failed to write Task Info file, Task write RC = 0x%08X, exp %d'

Global CFE_ES_TASKINFO_WRHDR_ERR_EID

'Failed to write Task Info file, WriteHdr rtnd %08X, exp %d'

Global CFE_ES_TASKWR_ERR_EID

'Failed to write App Info file, Task write RC = 0x%08X, exp %d'

Global CFE_ES_TLM_POOL_STATS_INFO_EID

'Successfully telemetered memory pool stats for 0x%08X'

Global CFE_ES_VERSION_INF_EID

'Mission s.s, s, s'

Global CFE_ES_WRHDR_ERR_EID

'Failed to write App Info file, WriteHdr rtnd %08X, exp %d'

Global CFE_ES_WRITE_CFE_HDR_ERR_EID

'Error writing cFE File Header to '%s', Status=0x%08X'

Global CFE_EVS_ADDFILTER_EID

'Add Filter Command Received with AppName = %s, EventID = 0x%08x, Mask = 0x%04x'

Global CFE_EVS_DELFILTER_EID

'Delete Filter Command Received with AppName = %s, EventID = 0x%08x'

Global CFE_EVS_DISAPPENTTYPE_EID

    'Disable App Event Type Command Received with AppName = %s, EventType Bit Mask = 0x%02x'

Global CFE_EVS_DISAPPEVT_EID

    'Disable App Events Command Received with AppName = %s'

Global CFE_EVS_DISEVTTYPE_EID

    'Disable Event Type Command Received with Event Type Bit Mask = 0x%02x'

Global CFE_EVS_DISPORT_EID

    'Disable Ports Command Received with Port Bit Mask = 0x%02x'

Global CFE_EVS_ENAAPPEVT_EID

    'Enable App Events Command Received with AppName = %s'

Global CFE_EVS_ENAAPPEVTTYPE_EID

    'Enable App Event Type Command Received with AppName = %s, EventType Bit Mask = 0x%02x'

Global CFE_EVS_ENAEVTTYPE_EID

    'Enable Event Type Command Received with Event Type Bit Mask = 0x%02x'

Global CFE_EVS_ENAPORT_EID

    'Enable Ports Command Received with Port Bit Mask = 0x%02x'

Global CFE_EVS_ERR_APPNOREGS_EID

    '%s not registered with EVS: CC = %lu'

Global CFE_EVS_ERR_CC_EID

    'Invalid command code - ID = 0x%08x, CC = %d'

Global CFE_EVS_ERR_CRDATFILE_EID

    'Write App Data Command Error: OS_creat = 0x%08X, filename = %s'

Global CFE_EVS_ERR_CRLOGFILE_EID

    'Write Log File Command Error: OS_creat = 0x%08X, filename = %s'

Global CFE_EVS_ERR_EVTIDNOREGS_EID

    '%s Event ID %d not registered for filtering: CC = %lu'

Global CFE_EVS_ERR_ILLAPPIDRANGE_EID

    'Illegal application ID %d retrieved for %s: CC = %lu'

Global CFE_EVS_ERR_ILLEGALFMTMOD_EID

    'Set Event Format Mode Command: Invalid Event Format Mode = 0x%02x'

Global CFE_EVS_ERR_INVALID_BITMASK_EID

    'Bit Mask = 0x%X out of range: CC = %lu'

Global CFE_EVS_ERR_LOGMODE_EID

    'Set Log Mode Command Error: Log Mode = %d'

Global CFE_EVS_ERR_MAXREGSFILTER_EID

    'Add Filter Command: number of registered filters has reached max = %d'

Global CFE_EVS_ERR_MSGID_EID

    'Invalid command packet, Message ID = 0x%08X'

Global CFE_EVS_ERR_NOAPPIDFOUND_EID

    'Unable to retrieve application ID for %s: CC = %lu'

Global CFE_EVS_ERR_UNREGISTERED_EVS_APP

'App %s not registered with Event Services. Unable to send event'

Global CFE_EVS_ERR_WRDATFILE_EID

'Write App Data Command Error: OS_write = 0x%08X, filename = %s'

Global CFE_EVS_ERR_WRLOGFILE_EID

'Write Log File Command Error: OS_write = 0x%08X, filename = %s'

Global CFE_EVS_EVT_FILTERED_EID

'Add Filter Command:AppName = %s, EventID = 0x%08x is already registered for filtering'

Global CFE_EVS_FILTER_MAX_EID

'Max filter count reached, AppName = %s, EventID = 0x%08x: Filter locked until reset'

Global CFE_EVS_LEN_ERR_EID

'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

Global CFE_EVS_LOGMODE_EID

'Set Log Mode Command Error: Log Mode = %d'

Global CFE_EVS_NO_LOGCLR_EID

'Clear Log Command: Event Log is Disabled'

Global CFE_EVS_NO_LOGSET_EID

'Set Log Mode Command: Event Log is Disabled'

Global CFE_EVS_NO_LOGWR_EID

'Write Log Command: Event Log is Disabled'

Global CFE_EVS_NOOP_EID

'No-op command'

Global CFE_EVS_RSTALLFILTER_EID

'Reset All Filters Command Received with AppName = %s'

Global CFE_EVS_RSTCNT_EID

'Reset Counters Command Received'

Global CFE_EVS_RSTEVTCNT_EID

'Reset Event Counter Command Received with AppName = %s'

Global CFE_EVS_RSTFILTER_EID

'Reset Filter Command Received with AppName = %s, EventID = 0x%08x'

Global CFE_EVS_SETEVTFMTMOD_EID

'Set Event Format Mode Command Received with Mode = 0x%02x'

Global CFE_EVS_SETFILTERMSK_EID

'Set Filter Mask Command Received with AppName=%s, EventID=0x%08x, Mask=0x%04x'

Global CFE_EVS_STARTUP_EID

'cFE EVS Initialized'

Global CFE_EVS_WRDAT_EID

'Write App Data Command: %d application data entries written to %s'

Global CFE_EVS_WRLOG_EID

'Write Log File Command: %d event log entries written to %s'

Global CFE_SB_BAD_CMD_CODE_EID

    `'Invalid Cmd, Unexpected Command Code %d'`

Global CFE_SB_BAD_MSGID_EID

    `'Invalid Cmd, Unexpected Msg Id:  0x%04x'`

Global CFE_SB_BAD_PIPEID_EID

    `'Rcv Err:PipeId %d does not exist,app %s'`

Global CFE_SB_CMD0_RCVD_EID

    `'No-op Cmd Rcvd'`

Global CFE_SB_CMD1_RCVD_EID

    `'Reset Counters Cmd Rcvd'`

Global CFE_SB_CR_PIPE_BAD_ARG_EID

    `'CreatePipeErr:Bad Input Arg:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'`

Global CFE_SB_CR_PIPE_ERR_EID

    `'CreatePipeErr:OS_QueueCreate returned %d,app %s'`

Global CFE_SB_CR_PIPE_NAME_TAKEN_EID

    `'CreatePipeErr:Name Taken:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'`

Global CFE_SB_CR_PIPE_NO_FREE_EID

    `'CreatePipeErr:No Free:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'`

Global CFE_SB_DEL_PIPE_ERR1_EID

    `'Pipe Delete Error:Bad Argument,PipedId %d,Requestor %s,Idx %d,Stat %d'`

Global CFE_SB_DEL_PIPE_ERR2_EID

    `'Pipe Delete Error:Caller(%s) is not the owner of pipe %d'`

Global CFE_SB_DEST_BLK_ERR_EID

    `'Subscribe Err:Request for Destination Blk failed for Msg 0x%x,Pipe %s'`

Global CFE_SB_DSBL_RTE1_EID

    `'Disable Route Cmd:Route does not exist,Msg 0x%x,Pipe %d'`

Global CFE_SB_DSBL_RTE2_EID

    `'Route Disabled,Msg 0x%x,Pipe %d'`

Global CFE_SB_DSBL_RTE3_EID

    `'Disable Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'`

Global CFE_SB_DUP_SUBSCRIP_EID

    `'Duplicate Subscription,MsgId 0x%x on %s pipe,app %s'`

Global CFE_SB_ENBL_RTE1_EID

    `'Enbl Route Cmd:Route does not exist.Msg 0x%x,Pipe %d'`

Global CFE_SB_ENBL_RTE2_EID

    `'Enabling Route,Msg 0x%x,Pipe %d'`

Global CFE_SB_ENBL_RTE3_EID

    `'Enbl Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'`

Global CFE_SB_FILEWRITE_ERR_EID

    `'File write,byte cnt err,file %s,request=%d,actual=%d'`

Global CFE_SB_FULL_SUB_PKT_EID

'Full Sub Pkt %d Sent,Entries=%d,Stat=0x%x
'

Global CFE_SB_GET_BUF_ERR_EID

'Send Err:Request for Buffer Failed. MsgId 0x%x,app %s,size %d'

Global CFE_SB_GETPIPEIDBYNAME_EID

'GetPipeIdByName: ID retrieved. Name %s,IdOut 0x%x, app %s'

Global CFE_SB_GETPIPEIDBYNAME_NAME_ERR_EID

'GetPipeIdByName Err:Name not found,Name %s,IdOut 0xx,App %s'

Global CFE_SB_GETPIPEIDBYNAME_NULL_ERR_EID

'GetPipeIdByName Err:Bad input argument,Name 0x%x,IdOut 0xx,App %s'

Global CFE_SB_GETPIPENAME_EID

'GetPipeName: Name retrieved. NameOut %s,Id %d, app %s'

Global CFE_SB_GETPIPENAME_ID_ERR_EID

'GetPipeName: Id error. NameOut %s,Id %d, app %s'

Global CFE_SB_GETPIPENAME_NULL_PTR_EID

'GetPipeName: Null ptr error. Id %d, app %s'

Global CFE_SB_GETPIPEOPTS_EID

'GetPipeOpts: Options retrieved. app %s'

Global CFE_SB_GETPIPEOPTS_ID_ERR_EID

'GetPipeOptsErr:Invalid pipe id (%d).app %s'

Global CFE_SB_GETPIPEOPTS_PTR_ERR_EID

'GetPipeOptsErr:Invalid opts ptr.app %s'

Global CFE_SB_GLS_INV_CALLER_EID

'SB GetLastSender Err:Caller(%s) is not the owner of pipe %d'

Global CFE_SB_INIT_EID

'cFE SB Initialized'

Global CFE_SB_LEN_ERR_EID

'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

Global CFE_SB_LSTSNDER_ERR1_EID

'SB GetLastSender Err:Rcvd Null Ptr,Pipe=d,App=s'

Global CFE_SB_LSTSNDER_ERR2_EID

'SB GetLastSender Err:Rcvd Invalid Pipe=d,App=s'

Global CFE_SB_MAX_DESTS_MET_EID

'Subscribe Err:Max Dests(%d)In Use For Msg 0x%x,pipe %s,app %s'

Global CFE_SB_MAX_MSGS_MET_EID

'Subscribe Err:Max Msgs(%d)In Use,MsgId 0x%x,pipe %s,app %s'

Global CFE_SB_MAX_PIPES_MET_EID

'CreatePipeErr:Max Pipes(%d)In Use.app %s'

Global CFE_SB_MSG_TOO_BIG_EID

'Send Err:Msg Too Big MsgId=0x%x,app=%s,size=%d,MaxSz=%d'

Global CFE_SB_MSGID_LIM_ERR_EID

'Send Err:Msg Limit Err MsgId 0x%x,pipe %s,sender %s'

Global CFE_SB_PART_SUB_PKT_EID

'Partial Sub Pkt %d Sent,Entries=%d,Stat=0x%x'

Global CFE_SB_PIPE_ADDED_EID

'Pipe Created:name %s,id %d,app %s'

Global CFE_SB_PIPE_DELETED_EID

'Pipe Deleted:id %d,owner %s'

Global CFE_SB_Q_FULL_ERR_EID

'Pipe Overflow,MsgId 0x%x,pipe %s,stat 0x%x,app %s'

Global CFE_SB_Q_RD_ERR_EID

'Pipe Read Err,pipe %s,app %s,stat 0x%x'

Global CFE_SB_Q_WR_ERR_EID

'Pipe Write Err,MsgId 0x%x,pipe %s,stat 0x%x,app %s'

Global CFE_SB_RCV_BAD_ARG_EID

'Rcv Err:Bad Input Arg:BufPtr 0x%x,pipe %d,t/o %d,app %s'

Global CFE_SB_SEND_BAD_ARG_EID

'Send Err:Bad input argument,Arg 0x%x,App %s'

Global CFE_SB_SEND_INV_MSGID_EID

'Send Err:Invalid msgid in msg,MsgId 0x%x,App %s'

Global CFE_SB_SEND_NO_SUBS_EID

'No subscribers for MsgId 0x%x,sender %s'

Global CFE_SB_SETPIPEOPTS_EID

'SetPipeOpts: Options set (%d). app %s'

Global CFE_SB_SETPIPEOPTS_ID_ERR_EID

'SetPipeOptsErr:Invalid pipe id (%d).app %s'

Global CFE_SB_SETPIPEOPTS_OWNER_ERR_EID

'SetPipeOptsErr:Caller not owner (%d).app %s'

Global CFE_SB_SND_RTG_EID

'%s written:Size=%d,Entries=%d'

Global CFE_SB_SND_RTG_ERR1_EID

'Error creating file %s, stat=0x%x'

Global CFE_SB_SND_STATS_EID

'Software Bus Statistics packet sent'

Global CFE_SB_SUB_ARG_ERR_EID

'Subscribe Err:Bad Arg,MsgId 0x%x,PipeId %d,app %s,scope %d'

Global CFE_SB_SUB_INV_CALLER_EID

'Subscribe Err:Caller(%s) is not the owner of pipe %d, Msg=0x%x'

Global CFE_SB_SUB_INV_PIPE_EID

'Subscribe Err:Invalid Pipe Id,Msg=0x%x,PipeId=%d,App %s'

Global CFE_SB_SUBSCRIPTION_RCVD_EID

'Subscription Rcvd:MsgId 0x%x on %s(%d),app %s'

Global CFE_SB_SUBSCRIPTION_REMOVED_EID

    'Subscription Removed:Msg 0x%x on pipe %d,app %s'

Global CFE_SB_SUBSCRIPTION_RPT_EID

    'Sending Subscription Report Msg=0x%x,Pipe=%d,Stat=0x%x'

Global CFE_SB_UNSUB_ARG_ERR_EID

    'UnSubscribe Err:Bad Arg,MsgId 0x%x,PipeId %d,app %s,scope %d'

Global CFE_SB_UNSUB_INV_CALLER_EID

    'Unsubscribe Err:Caller(%s) is not the owner of pipe %d,Msg=0x%x'

Global CFE_SB_UNSUB_INV_PIPE_EID

    'Unsubscribe Err:Invalid Pipe Id Msg=0x%x,Pipe=%d,app=%s'

Global CFE_SB_UNSUB_NO_SUBS_EID

    'Unsubscribe Err:No subs for Msg 0x%x on %s,app %s'

Global CFE_TBL_ACTIVATE_DUMP_ONLY_ERR_EID

    'Illegal attempt to activate dump-only table '%s''

Global CFE_TBL_ACTIVATE_ERR_EID

    'Cannot activate table '%s'. No Inactive image available'

Global CFE_TBL_ASSUMED_VALID_INF_EID

    'Tbl Services assumes '%s' is valid. No Validation Function has been registered'

Global CFE_TBL_CC1_ERR_EID

    'Invalid command code - ID = 0x%X, CC = %d'

Global CFE_TBL_CDS_DELETE_ERR_EID

    'Error while deleting '%s' from CDS, See SysLog.(Err=0x%08X)'

Global CFE_TBL_CDS_DELETED_INFO_EID

    'Successfully removed '%s' from CDS'

Global CFE_TBL_CDS_NOT_FOUND_ERR_EID

    'Unable to locate '%s' in CDS Registry'

Global CFE_TBL_CDS_OWNER_ACTIVE_ERR_EID

    'CDS '%s' owning app is still active'

Global CFE_TBL_CREATING_DUMP_FILE_ERR_EID

    'Error creating dump file '%s', Status=0x%08X'

Global CFE_TBL_DUMP_PENDING_ERR_EID

    'A dump for '%s' is already pending'

Global CFE_TBL_FAIL_HK_SEND_ERR_EID

    'Unable to send Hk Packet (Status=0x%08X)'

Global CFE_TBL_FAIL_NOTIFY_SEND_ERR_EID

    'Manage Notification Pkt Error(MsgId=0x%08X, CC=0x%04X, Param=0x%08X, Status=0x%08X)'

Global CFE_TBL_FILE_ACCESS_ERR_EID

    'Unable to open file '%s' for table load, Status = 0x%08X'

Global CFE_TBL_FILE_INCOMPLETE_ERR_EID

    'Incomplete load of '%s' into '%s' working buffer'

Global CFE_TBL_FILE_LOADED_INF_EID

    'Successful load of '%s' into '%s' working buffer'

Global CFE_TBL_FILE_STD_HDR_ERR_EID

   `'Unable to read std header for '%s', Status = 0x%08X'`

Global CFE_TBL_FILE_SUBTYPE_ERR_EID

   `'File subtype for '%s' is wrong.  Subtype = 0x%08X'`

Global CFE_TBL_FILE_TBL_HDR_ERR_EID

   `'Unable to read tbl header for '%s', Status = 0x%08X'`

Global CFE_TBL_FILE_TOO_BIG_ERR_EID

   `'File '%s' has more data than Tbl Hdr indicates (%d)'`

Global CFE_TBL_FILE_TYPE_ERR_EID

   `'File '%s' is not a cFE file type, ContentType = 0x%08X'`

Global CFE_TBL_HANDLE_ACCESS_ERR_EID

   `No access to Tbl handle=d`

Global CFE_TBL_ILLEGAL_BUFF_PARAM_ERR_EID

   `'Cmd for Table '%s' had illegal buffer parameter (0x%08X)'`

Global CFE_TBL_IN_REGISTRY_ERR_EID

   `''%s' found in Table Registry.  CDS cannot be deleted until table is unregistered'`

Global CFE_TBL_INIT_INF_EID

   `'Task Initialized'`

Global CFE_TBL_INTERNAL_ERROR_ERR_EID

   `'Internal Error (Status=0x%08X)'`

Global CFE_TBL_LEN_ERR_EID

   `'Invalid cmd pkt – ID = 0x%X, CC = %d, Len = %d'`

Global CFE_TBL_LOAD_ABORT_ERR_EID

   `'Cannot abort load of '%s'.  No load started.'`

Global CFE_TBL_LOAD_ABORT_INF_EID

   `'Table Load Aborted for '%s''`

Global CFE_TBL_LOAD_DUMPONLY_ERR_EID

   `Attempted to load Dump Only Tbl 's'`

Global CFE_TBL_LOAD_EXCEEDS_SIZE_ERR_EID

   `'Cannot load '%s' (%d) at offset %d in '%s' (%d)'`

Global CFE_TBL_LOAD_FILENAME_LONG_ERR_EID

   `Filename is too long ('s' (lu) > lu)`

Global CFE_TBL_LOAD_IN_PROGRESS_ERR_EID

   `Load already in progress for 's'`

Global CFE_TBL_LOAD_PEND_REQ_INF_EID

   `'Tbl Services notifying App that '%s' has a load pending'`

Global CFE_TBL_LOAD_SUCCESS_INF_EID

   `'Successfully loaded '%s' from '%s''`

Global CFE_TBL_LOAD_TBLNAME_MISMATCH_ERR_EID

   `table name mismatch (exp=s, tblfilhdr=s)`

Global CFE_TBL_LOAD_TYPE_ERR_EID

'%s Failed to Load '%s' (Invalid Source Type)" </tt></dd> <dt>\anchor _←
cfeevents000241 Global _internalref cfe__tbl__events_8h#a0291d922d547d4c3e7f579c361e6f4
"CFE_TBL_LOADING_A_DUMP_ONLY_ERR_EID" </dt><dd> <tt> 'Attempted to load
DUMP-ONLY table '\%s' from '\%s'' </tt></dd> <dt>\anchor _cfeevents000250
Global _internalref cfe__tbl__events_8h#a251e3f2575102c2782539826e5acdd9e
"CFE_TBL_LOADING_PENDING_ERR_EID" </dt><dd> <tt> 'Attempted to load table
'\%s' while previous load is still pending' </tt></dd> <dt>\anchor _←
cfeevents000212 Global _internalref cfe__tbl__events_8h#a92b85df6bed26d6e37695db70b792c
"CFE_TBL_MID_ERR_EID" </dt><dd> <tt> 'Invalid message ID – ID = 0x\%X'
</tt></dd> <dt>\anchor _cfeevents000228 Global _internalref cfe__tbl←
__events_8h#a8d2fa0ab9e0f8cbb42f91ad9ae51ec1f "CFE_TBL_NO_INACTIVE_BUFF←
ER_ERR_EID" </dt><dd> <tt> 'No Inactive Buffer for Table '\%s' present'
</tt></dd> <dt>\anchor _cfeevents000219 Global _internalref cfe__tbl_←
_events_8h#a9bd232cdedd88a404ad836c6d8bbbf28 "CFE_TBL_NO_SUCH_TABLE_ERR_E←
ID" </dt><dd> <tt> 'Unable to locate '\%s' in Table Registry' </tt></dd>
<dt>\anchor _cfeevents000222 Global _internalref cfe__tbl__events_8h#aaec327141d014594c
"CFE_TBL_NO_WORK_BUFFERS_ERR_EID" </dt><dd> <tt> 'No working buffers available
for table '\%s'' </tt></dd> <dt>\anchor _cfeevents000200 Global _internalref
cfe__tbl__events_8h#acc829f747453b863fb05914bbae5bb7e "CFE_TBL_NOOP_INF_EID"
</dt><dd> <tt> 'No-op command' </tt> </dd> <dt>\anchor _cfeevents000245
Global _internalref cfe__tbl__events_8h#ac6bbd22efd1b2df7128e461e6f33533d
"CFE_TBL_NOT_CRITICAL_TBL_ERR_EID" </dt><dd> <tt> 'Table '\%s' is in Critical
Table Registry but CDS is not tagged as a table' </tt></dd> <dt>\anchor ←
_cfeevents000246 Global _internalref cfe__tbl__events_8h#a8160667895f1793ac33f0aedba370
"CFE_TBL_NOT_IN_CRIT_REG_ERR_EID" </dt><dd> <tt> 'Table '\%s' is not found
in Critical Table Registry' </tt></dd> <dt>\anchor _cfeevents000203 ←
Global _internalref cfe__tbl__events_8h#a8a9bff78075d63a98402accbd334885d
"CFE_TBL_OVERWRITE_DUMP_INF_EID" </dt><dd> <tt> 'Successfully overwrote
'\%s' with Table '\%s'' </tt></dd> <dt>\anchor _cfeevents000205 Global \←
_internalref cfe__tbl__events_8h#aa7bdcbfb91991a8ba1211a4864a3a610 "CFE←
_TBL_OVERWRITE_REG_DUMP_INF_EID" </dt><dd> <tt> 'Successfully overwrote
'\%s' with Table Registry' </tt></dd> <dt>\anchor _cfeevents000236 Global
_internalref cfe__tbl__events_8h#a9f3d77cb32582f4ff23e3c92acba4ab7 "CF←
E_TBL_PARTIAL_LOAD_ERR_EID" </dt><dd> <tt> ''\%s' has partial load for
uninitialized table '\%s'' </tt></dd> <dt>\anchor _cfeevents000263 Global
_internalref cfe__tbl__events_8h#a557fe388d1cda9389a954e258f112e7d "CFE←
_TBL_PROCESSOR_ID_ERR_EID" </dt><dd> <tt> 'Unable to verify Processor I←
D for '\%s', ID = 0x\%08X' </tt></dd> <dt>\anchor _cfeevents000256 Global
_internalref cfe__tbl__events_8h#a24a3ea7397da377a5ec207f2936e2cb9 "C←
FE_TBL_REGISTER_ERR_EID" </dt><dd> <tt> '\%s Failed to Register '\%s',
Status=0x\%08X' </tt></dd> <dt>\anchor _cfeevents000201 Global _internalref
cfe__tbl__events_8h#a285c927ff2a1185ff955fb250382fbe5 "CFE_TBL_RESET_INF_←
EID" </dt><dd> <tt> 'Reset Counters command' </tt> </dd> <dt>\anchor _←
cfeevents000257 Global _internalref cfe__tbl__events_8h#a63522653228fb514b11ecfefba22c6
"CFE_TBL_SHARE_ERR_EID" </dt><dd> <tt> '\%s Failed to Share '\%s', Status=0x\%08←
X' </tt></dd> <dt>\anchor _cfeevents000262 Global _internalref cfe__←
tbl__events_8h#a23f09c79f441fcc9876915992bf31d2f "CFE_TBL_SPACECRAFT_ID←
_ERR_EID" </dt><dd> <tt> 'Unable to verify Spacecraft ID for '\%s', I←
D = 0x\%08X' </tt></dd> <dt>\anchor _cfeevents000208 Global _internalref
cfe__tbl__events_8h#ae7b791d49aaf3209aa2b522150956a45 "CFE_TBL_TLM_REG_CMD←
_INF_EID" </dt><dd> <tt> 'Table Registry entry for '\%s' will be telemetered'
</tt></dd> <dt>\anchor _cfeevents000238 Global _internalref cfe__tbl__←
events_8h#a5bde087adb2b94b44c2cc949ea9eb2fe "CFE_TBL_TOO_MANY_DUMPS_ERR_←

EID" </dt><dd> <tt> 'Too many Dump Only Table Dumps have been requested'
</tt></dd> <dt>\anchor _cfeevents000229 Global _internalref cfe__tbl__↩
events_8h#a127191cb9457a8002052e92ebf8fe79d "CFE_TBL_TOO_MANY_VALIDATIONS↩
_ERR_EID" </dt><dd> <tt> 'Too many Table Validations have been requested'
</tt></dd> <dt>\anchor _cfeevents000258 Global _internalref cfe__tbl_↩
_events_8h#a2a595920826545f8f3daf127e6e2b5b9 "CFE_TBL_UNREGISTER_ERR_EID"
</dt><dd> <tt> '\%s Failed to Unregister '\%s', Status=0x\%08X' </tt></dd>
<dt>\anchor _cfeevents000243 Global _internalref cfe__tbl__events_8h#a28bcda5a746c811fe
"CFE_TBL_UNVALIDATED_ERR_EID" </dt><dd> <tt> 'Cannot activate table '\%s'.
Inactive image not Validated' </tt></dd> <dt>\anchor _cfeevents000260 ↩
Global _internalref cfe__tbl__events_8h#a5acdcade08086741149d2473c0fdaebb
"CFE_TBL_UPDATE_ERR_EID" </dt><dd> <tt> '\%s Failed to Update '\%s', Status=0x\%08↩
X"

Global CFE_TBL_UPDATE_SUCCESS_INF_EID

   '%s Successfully Updated '%s''

Global CFE_TBL_VAL_REQ_MADE_INF_EID

   'Tbl Services issued validation request for '%s''

Global CFE_TBL_VALIDATION_ERR_EID

   '%s validation failed for Inactive '%s', Status=0x%08X'

Global CFE_TBL_VALIDATION_INF_EID

   '%s validation successful for Inactive '%s''

Global CFE_TBL_WRITE_CFE_HDR_ERR_EID

   'Error writing cFE File Header to '%s', Status=0x%08X'

Global CFE_TBL_WRITE_DUMP_INF_EID

   'Successfully dumped Table '%s' to '%s''

Global CFE_TBL_WRITE_REG_DUMP_INF_EID

   'Successfully dumped Table Registry to '%s':Size=%d,Entries=%d'

Global CFE_TBL_WRITE_TBL_HDR_ERR_EID

   'Error writing Tbl image File Header to '%s', Status=0x%08X'

Global CFE_TBL_WRITE_TBL_IMG_ERR_EID

   'Error writing Tbl image to '%s', Status=0x%08X'

Global CFE_TBL_WRITE_TBL_REG_ERR_EID

   'Error writing Registry to '%s', Status=0x%08X'

Global CFE_TBL_ZERO_LENGTH_LOAD_ERR_EID

   'Table Hdr in '%s' indicates no data in file'

Global CFE_TIME_1HZ_CFG_EID

   '1Hz Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to
   true'

Global CFE_TIME_1HZ_EID

   'STCF 1Hz Adjust – secs = %d, ssecs = 0x%X, dir = %d'

Global CFE_TIME_CC_ERR_EID

   'Invalid command code – ID = 0x%X, CC = %d'

Global CFE_TIME_DELAY_CFG_EID

   'Set Delay commands invalid without CFE_PLATFORM_TIME_CFG_CLIENT set to true'

Global CFE_TIME_DELAY_EID

'Set Tone Delay – secs = %d, usecs = %d, ssecs = 0x%X, dir = %d'

Global CFE_TIME_DELAY_ERR_EID

'Invalid Tone Delay – secs = %d, usecs = %d'

Global CFE_TIME_DELTA_CFG_EID

'STCF Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to
true'

Global CFE_TIME_DELTA_EID

'STCF Adjust – secs = %d, usecs = %d, ssecs = 0x%X, dir[1=Positive, 2=Negative]
= %d'

Global CFE_TIME_DELTA_ERR_EID

'Invalid STCF Adjust – secs = %d, usecs = %d, dir[1=Positive, 2=Negative] =
%d'

Global CFE_TIME_DIAG_EID

'Request diagnostics command'

Global CFE_TIME_FLY_OFF_EID

'Stop FLYWHEEL'

Global CFE_TIME_FLY_ON_EID

'Start FLYWHEEL'

Global CFE_TIME_ID_ERR_EID

'Invalid message ID – ID = 0x%X'

Global CFE_TIME_INIT_EID

'cFE TIME Initialized'

Global CFE_TIME_LEAPS_CFG_EID

'Set Leaps commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'

Global CFE_TIME_LEAPS_EID

'Set Leap Seconds = %d'

Global CFE_TIME_LEN_ERR_EID

'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

Global CFE_TIME_MET_CFG_EID

'Set MET commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'

Global CFE_TIME_MET_EID

'Set MET – secs = %d, usecs = %d, ssecs = 0x%X'

Global CFE_TIME_MET_ERR_EID

'Invalid MET – secs = %d, usecs = %d'

Global CFE_TIME_NOOP_EID

'No-op command'

Global CFE_TIME_RESET_EID

'Reset Counters command'

Global CFE_TIME_SIGNAL_CFG_EID

'Set Signal commands invalid without CFE_PLATFORM_TIME_CFG_SIGNAL set to
true'

Global CFE_TIME_SIGNAL_EID

'Set Tone Source = %s'

Global CFE_TIME_SIGNAL_ERR_EID

'Invalid Tone Source = 0x%X'

Global CFE_TIME_SOURCE_CFG_EID

'Set Source commands invalid without CFE_PLATFORM_TIME_CFG_SOURCE set to true'

Global CFE_TIME_SOURCE_EID

'Set Time Source = %s'

Global CFE_TIME_SOURCE_ERR_EID

'Invalid Time Source = 0x%X'

Global CFE_TIME_STATE_EID

'Set Clock State = %s'

Global CFE_TIME_STATE_ERR_EID

'Invalid Clock State = 0x%X'

Global CFE_TIME_STCF_CFG_EID

'Set STCF commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'

Global CFE_TIME_STCF_EID

'Set STCF – secs = %d, usecs = %d, ssecs = 0x%X'

Global CFE_TIME_STCF_ERR_EID

'Invalid STCF – secs = %d, usecs = %d'

Global CFE_TIME_TIME_CFG_EID

'Set Time commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'

Global CFE_TIME_TIME_EID

'Set Time – secs = %d, usecs = %d, ssecs = 0x%X'

Global CFE_TIME_TIME_ERR_EID

'Invalid Time – secs = %d, usecs = %d'

30 cFE Command Mnemonic Cross Reference

The following cross reference maps the cFE command codes to Command Mnemonics. To learn about the details of a particular command, click on its associated command code.

Global CFE_ES_CLEAR_ER_LOG_CC

$sc_$cpu_ES_ClearERLog

Global CFE_ES_CLEAR_SYSLOG_CC

$sc_$cpu_ES_ClearSysLog

Global CFE_ES_DELETE_CDS_CC

$sc_$cpu_ES_DeleteCDS

Global CFE_ES_DUMP_CDS_REGISTRY_CC

$sc_$cpu_ES_WriteCDS2File

Global CFE_ES_NOOP_CC

$sc_$cpu_ES_NOOP

Global CFE_ES_OVER_WRITE_SYSLOG_CC

$sc_$cpu_ES_OverwriteSysLogMode

Global CFE_ES_QUERY_ALL_CC

$sc_$cpu_ES_WriteAppInfo2File

Global CFE_ES_QUERY_ALL_TASKS_CC

$sc_$cpu_ES_WriteTaskInfo2File

Global CFE_ES_QUERY_ONE_CC

$sc_$cpu_ES_QueryApp

Global CFE_ES_RELOAD_APP_CC

$sc_$cpu_ES_ReloadApp

Global CFE_ES_RESET_COUNTERS_CC

$sc_$cpu_ES_ResetCtrs

Global CFE_ES_RESET_PR_COUNT_CC

$sc_$cpu_ES_ResetPRCnt

Global CFE_ES_RESTART_APP_CC

$sc_$cpu_ES_ResetApp

Global CFE_ES_RESTART_CC

$sc_$cpu_ES_ProcessorReset, $sc_$cpu_ES_PowerOnReset

Global CFE_ES_SEND_MEM_POOL_STATS_CC

$sc_$cpu_ES_PoolStats

Global CFE_ES_SET_MAX_PR_COUNT_CC

$sc_$cpu_ES_SetMaxPRCnt

Global CFE_ES_SET_PERF_FILTER_MASK_CC

$sc_$cpu_ES_LAFilterMask

Global CFE_ES_SET_PERF_TRIGGER_MASK_CC

$sc_$cpu_ES_LATriggerMask

Global CFE_ES_SHELL_CC

$sc_$cpu$_ES_Shell

Global CFE_ES_START_APP_CC

$sc_$cpu_ES_StartApp

Global CFE_ES_START_PERF_DATA_CC

$sc_$cpu_ES_StartLAData

Global CFE_ES_STOP_APP_CC

$sc_$cpu_ES_StopApp

Global CFE_ES_STOP_PERF_DATA_CC

$sc_$cpu_ES_StopLAData

Global CFE_ES_WRITE_ER_LOG_CC

$sc_$cpu_ES_WriteERLog2File

Global CFE_ES_WRITE_SYSLOG_CC

$sc_$cpu_ES_WriteSysLog2File

Global CFE_EVS_ADD_EVENT_FILTER_CC

$sc_$cpu_EVS_AddEvtFltr

Global CFE_EVS_CLEAR_LOG_CC

$sc_$cpu_EVS_ClrLog

Global CFE_EVS_DELETE_EVENT_FILTER_CC

$sc_$cpu_EVS_DelEvtFltr

Global CFE_EVS_DISABLE_APP_EVENT_TYPE_CC

$sc_$cpu_EVS_DisAppEvtType, $sc_$cpu_EVS_DisAppEvtTypeMask

Global CFE_EVS_DISABLE_APP_EVENTS_CC

$sc_$cpu_EVS_DisAppEvGen

Global CFE_EVS_DISABLE_EVENT_TYPE_CC

$sc_$cpu_EVS_DisEventType, $sc_$cpu_EVS_DisEventTypeMask

Global CFE_EVS_DISABLE_PORTS_CC

$sc_$cpu_EVS_DisPort, $sc_$cpu_EVS_DisPortMask

Global CFE_EVS_ENABLE_APP_EVENT_TYPE_CC

$sc_$cpu_EVS_EnaAppEvtType, $sc_$cpu_EVS_EnaAppEvtTypeMask

Global CFE_EVS_ENABLE_APP_EVENTS_CC

$sc_$cpu_EVS_EnaAppEvGen

Global CFE_EVS_ENABLE_EVENT_TYPE_CC

$sc_$cpu_EVS_EnaEventType, $sc_$cpu_EVS_EnaEventTypeMask

Global CFE_EVS_ENABLE_PORTS_CC

$sc_$cpu_EVS_EnaPort, $sc_$cpu_EVS_EnaPortMask

Global CFE_EVS_NOOP_CC

$sc_$cpu_EVS_NOOP

Global CFE_EVS_RESET_ALL_FILTERS_CC

$sc_$cpu_EVS_RstAllFltrs

Global CFE_EVS_RESET_APP_COUNTER_CC

$sc_$cpu_EVS_RstAppCtrs

Global CFE_EVS_RESET_COUNTERS_CC

$sc_$cpu_EVS_ResetCtrs

Global CFE_EVS_RESET_FILTER_CC

$sc_$cpu_EVS_RstBinFltrCtr

Global CFE_EVS_SET_EVENT_FORMAT_MODE_CC

$sc_$cpu_EVS_SetEvtFmt

Global CFE_EVS_SET_FILTER_CC

$sc_$cpu_EVS_SetBinFltrMask

Global CFE_EVS_SET_LOG_MODE_CC

$sc_$cpu_EVS_SetLogMode

Global CFE_EVS_WRITE_APP_DATA_FILE_CC

$sc_$cpu_EVS_WriteAppData2File

Global CFE_EVS_WRITE_LOG_DATA_FILE_CC

$sc_$cpu_EVS_WriteLog2File

Global CFE_TIME_ADD_1HZ_ADJUSTMENT_CC

$sc_$cpu_TIME_Add1HzSTCF

Global CFE_TIME_ADD_ADJUST_CC

$sc_$cpu_TIME_AddSTCFAdj

Global CFE_TIME_ADD_DELAY_CC

$sc_$cpu_TIME_AddClockLat

Global CFE_TIME_NOOP_CC

$sc_$cpu_TIME_NOOP

Global CFE_TIME_RESET_COUNTERS_CC

$sc_$cpu_TIME_ResetCtrs

Global CFE_TIME_SEND_DIAGNOSTIC_TLM_CC

$sc_$cpu_TIME_RequestDiag

Global CFE_TIME_SET_LEAP_SECONDS_CC

$sc_$cpu_TIME_SetClockLeap

Global CFE_TIME_SET_MET_CC

$sc_$cpu_TIME_SetClockMET

Global CFE_TIME_SET_SIGNAL_CC

$sc_$cpu_TIME_SetSignal

Global CFE_TIME_SET_SOURCE_CC

$sc_$cpu_TIME_SetSource

Global CFE_TIME_SET_STATE_CC

$sc_$cpu_TIME_SetState

Global CFE_TIME_SET_STCF_CC

$sc_$cpu_TIME_SetClockSTCF

Global CFE_TIME_SET_TIME_CC

$sc_$cpu_TIME_SetClock

Global CFE_TIME_SUB_1HZ_ADJUSTMENT_CC

$sc_$cpu_TIME_Sub1HzSTCF

Global CFE_TIME_SUB_ADJUST_CC

$sc_$cpu_TIME_SubSTCFAdj

Global CFE_TIME_SUB_DELAY_CC

$sc_$cpu_TIME_SubClockLat

31   cFE Telemetry Mnemonic Cross Reference

The following cross reference maps the cFE telemetry packet members to their associated ground system telemetry mnemonics.

Global CFE_ES_AppInfo_t::AddressesAreValid

$sc_$cpu_ES_AddrsValid

Global CFE_ES_HousekeepingTlm_Payload_t::CFECoreChecksum

$sc_$cpu_ES_CKSUM

Global CFE_ES_HousekeepingTlm_Payload_t::CFEMajorVersion

$sc_$cpu_ES_CFEMAJORVER

Global CFE_ES_HousekeepingTlm_Payload_t::CFEMinorVersion

$sc_$cpu_ES_CFEMINORVER

Global CFE_ES_HousekeepingTlm_Payload_t::CFEMissionRevision

$sc_$cpu_ES_CFEMISSIONREV

Global CFE_ES_HousekeepingTlm_Payload_t::CFERevision

$sc_$cpu_ES_CFEREVISION

Global CFE_ES_HousekeepingTlm_Payload_t::CommandCounter

$sc_$cpu_ES_CMDPC

Global CFE_ES_HousekeepingTlm_Payload_t::CommandErrorCounter

$sc_$cpu_ES_CMDEC

Global CFE_ES_HousekeepingTlm_Payload_t::ERLogEntries

$sc_$cpu_ES_ERLOGENTRIES

Global CFE_ES_HousekeepingTlm_Payload_t::ERLogIndex

$sc_$cpu_ES_ERLOGINDEX

Global CFE_ES_HousekeepingTlm_Payload_t::HeapBlocksFree

$sc_$cpu_ES_HeapBlocksFree

Global CFE_ES_HousekeepingTlm_Payload_t::HeapBytesFree

$sc_$cpu_ES_HeapBytesFree

Global CFE_ES_HousekeepingTlm_Payload_t::HeapMaxBlockSize

$sc_$cpu_ES_HeapMaxBlkSize

Global CFE_ES_HousekeepingTlm_Payload_t::MaxProcessorResets

$sc_$cpu_ES_MaxProcResets

Global CFE_ES_HousekeepingTlm_Payload_t::OSALMajorVersion

$sc_$cpu_ES_OSMAJORVER

Global CFE_ES_HousekeepingTlm_Payload_t::OSALMinorVersion

$sc_$cpu_ES_OSMINORVER

Global CFE_ES_HousekeepingTlm_Payload_t::OSALMissionRevision

$sc_$cpu_ES_OSMISSIONREV

Global CFE_ES_HousekeepingTlm_Payload_t::OSALRevision

$sc_$cpu_ES_OSREVISION

Global CFE_ES_HousekeepingTlm_Payload_t::PerfDataCount

$sc_$cpu_ES_PerfDataCnt

Global CFE_ES_HousekeepingTlm_Payload_t::PerfDataEnd

$sc_$cpu_ES_PerfDataEnd

Global CFE_ES_HousekeepingTlm_Payload_t::PerfDataStart

$sc_$cpu_ES_PerfDataStart

Global CFE_ES_HousekeepingTlm_Payload_t::PerfDataToWrite

$sc_$cpu_ES_PerfData2Write

Global CFE_ES_PoolStatsTlm_Payload_t::PoolHandle

$sc_$cpu_ES_PoolHandle

Global CFE_EVS_AppTlmData_t::AppEnableStatus

$sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].APPENASTAT

Global CFE_EVS_AppTlmData_t::AppID

$sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].APPID

Global CFE_EVS_AppTlmData_t::AppMessageSentCounter

$sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].APPMSGSENTC

Global CFE_EVS_AppTlmData_t::Padding

$sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].SPARE2ALIGN3

Global CFE_EVS_HousekeepingTlm_Payload_t::AppData [CFE_MISSION_ES_MAX_APPLICATIONS]

$sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS]

Global CFE_EVS_HousekeepingTlm_Payload_t::CommandCounter

$sc_$cpu_EVS_CMDPC

Global CFE_EVS_HousekeepingTlm_Payload_t::CommandErrorCounter

$sc_$cpu_EVS_CMDEC

Global CFE_EVS_HousekeepingTlm_Payload_t::LogEnabled

$sc_$cpu_EVS_LOGENABLED

Global CFE_EVS_HousekeepingTlm_Payload_t::LogFullFlag

$sc_$cpu_EVS_LOGFULL

Global CFE_EVS_HousekeepingTlm_Payload_t::LogMode

$sc_$cpu_EVS_LOGMODE

Global CFE_EVS_HousekeepingTlm_Payload_t::LogOverflowCounter

$sc_$cpu_EVS_LOGOVERFLOWC

Global CFE_EVS_HousekeepingTlm_Payload_t::MessageFormatMode

$sc_$cpu_EVS_MSGFMTMODE

Global CFE_EVS_HousekeepingTlm_Payload_t::MessageSendCounter

$sc_$cpu_EVS_MSGSENTC

Global CFE_EVS_HousekeepingTlm_Payload_t::MessageTruncCounter

$sc_$cpu_EVS_MSGTRUNC

Global CFE_EVS_HousekeepingTlm_Payload_t::OutputPort

$sc_$cpu_EVS_OUTPUTPORT

Global CFE_EVS_HousekeepingTlm_Payload_t::Spare1

$sc_$cpu_EVS_HK_SPARE1

Global CFE_EVS_HousekeepingTlm_Payload_t::Spare2

$sc_$cpu_EVS_HK_SPARE2

Global CFE_EVS_HousekeepingTlm_Payload_t::Spare3

$sc_$cpu_EVS_HK_SPARE3

Global CFE_EVS_HousekeepingTlm_Payload_t::UnregisteredAppCounter

$sc_$cpu_EVS_UNREGAPPC

Global CFE_EVS_LongEventTlm_Payload_t::Message [CFE_MISSION_EVS_MAX_MESSAGE_LENGTH]

$sc_$cpu_EVS_EVENT[CFE_EVS_MAX_MESSAGE_LENGTH]

Global CFE_EVS_LongEventTlm_Payload_t::Spare1

$sc_$cpu_EVS_SPARE1

Global CFE_EVS_LongEventTlm_Payload_t::Spare2

$sc_$cpu_EVS_SPARE2

Global CFE_EVS_PacketID_t::AppName [CFE_MISSION_MAX_API_LEN]

$sc_$cpu_EVS_APPNAME[OS_MAX_API_NAME]

Global CFE_EVS_PacketID_t::EventID

$sc_$cpu_EVS_EVENTID

Global CFE_EVS_PacketID_t::EventType

$sc_$cpu_EVS_EVENTTYPE

Global CFE_EVS_PacketID_t::ProcessorID

$sc_$cpu_EVS_PROCESSORID

Global CFE_EVS_PacketID_t::SpacecraftID

$sc_$cpu_EVS_SCID

Global CFE_SB_HousekeepingTlm_Payload_t::CommandCounter

$sc_$cpu_SB_CMDPC

Global CFE_SB_HousekeepingTlm_Payload_t::CommandErrorCounter

$sc_$cpu_SB_CMDEC

Global CFE_SB_HousekeepingTlm_Payload_t::CreatePipeErrorCounter

$sc_$cpu_SB_NewPipeEC

Global CFE_SB_HousekeepingTlm_Payload_t::DuplicateSubscriptionsCounter

$sc_$cpu_SB_DupSubCnt

Global CFE_SB_HousekeepingTlm_Payload_t::GetPipeIdByNameErrorCounter

$sc_$cpu_SB_GetPipeIDByNameEC

Global CFE_SB_HousekeepingTlm_Payload_t::InternalErrorCounter

$sc_$cpu_SB_InternalEC

Global CFE_SB_HousekeepingTlm_Payload_t::MemInUse

$sc_$cpu_SB_MemInUse

Global CFE_SB_HousekeepingTlm_Payload_t::MemPoolHandle

$sc_$cpu_SB_MemPoolHdl

Global CFE_SB_HousekeepingTlm_Payload_t::MsgLimitErrorCounter

$sc_$cpu_SB_MsgLimEC

Global CFE_SB_HousekeepingTlm_Payload_t::MsgReceiveErrorCounter

$sc_$cpu_SB_MsgRecEC

Global CFE_SB_HousekeepingTlm_Payload_t::MsgSendErrorCounter

$sc_$cpu_SB_MsgSndEC

Global CFE_SB_HousekeepingTlm_Payload_t::NoSubscribersCounter

$sc_$cpu_SB_NoSubEC

Global CFE_SB_HousekeepingTlm_Payload_t::PipeOptsErrorCounter

$sc_$cpu_SB_PipeOptsEC

Global CFE_SB_HousekeepingTlm_Payload_t::PipeOverflowErrorCounter

$sc_$cpu_SB_PipeOvrEC

Global CFE_SB_HousekeepingTlm_Payload_t::Spare2Align [1]

$sc_$cpu_SB_Spare2Align[2]

Global CFE_SB_HousekeepingTlm_Payload_t::SubscribeErrorCounter

$sc_$cpu_SB_SubscrEC

Global CFE_SB_HousekeepingTlm_Payload_t::UnmarkedMem

$sc_$cpu_SB_UnMarkedMem

Global CFE_SB_PipeDepthStats_t::Depth

$sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDDEPTH

Global CFE_SB_PipeDepthStats_t::InUse

$sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDINUSE

Global CFE_SB_PipeDepthStats_t::PeakInUse

$sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDPKINUSE

Global CFE_SB_PipeDepthStats_t::PipeId

$sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDPIPEID

Global CFE_SB_PipeDepthStats_t::Spare

$sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDSPARE

Global CFE_SB_StatsTlm_Payload_t::MaxMemAllowed

$sc_$cpu_SB_Stat.SB_SMMBMALW

Global CFE_SB_StatsTlm_Payload_t::MaxMsgIdsAllowed

$sc_$cpu_SB_Stat.SB_SMMMIDALW

Global CFE_SB_StatsTlm_Payload_t::MaxPipeDepthAllowed

$sc_$cpu_SB_Stat.SB_SMMPDALW

Global CFE_SB_StatsTlm_Payload_t::MaxPipesAllowed

$sc_$cpu_SB_Stat.SB_SMMPALW

Global CFE_SB_StatsTlm_Payload_t::MaxSubscriptionsAllowed

$sc_$cpu_SB_Stat.SB_SMMSALW

Global CFE_SB_StatsTlm_Payload_t::MemInUse

$sc_$cpu_SB_Stat.SB_SMBMIU

Global CFE_SB_StatsTlm_Payload_t::MsgIdsInUse

$sc_$cpu_SB_Stat.SB_SMMIDIU

Global CFE_SB_StatsTlm_Payload_t::PeakMemInUse

$sc_$cpu_SB_Stat.SB_SMPBMIU

Global CFE_SB_StatsTlm_Payload_t::PeakMsgIdsInUse

$sc_$cpu_SB_Stat.SB_SMPMIDIU

Global CFE_SB_StatsTlm_Payload_t::PeakPipesInUse

$sc_$cpu_SB_Stat.SB_SMPPIU

Global CFE_SB_StatsTlm_Payload_t::PeakSBBuffersInUse

$sc_$cpu_SB_Stat.SB_SMPSBBIU

Global CFE_SB_StatsTlm_Payload_t::PeakSubscriptionsInUse

$sc_$cpu_SB_Stat.SB_SMPSIU

Global CFE_SB_StatsTlm_Payload_t::PipeDepthStats [CFE_MISSION_SB_MAX_PIPES]

$sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES]

Global CFE_TBL_HousekeepingTlm_Payload_t::NumTables

$sc_$cpu_TBL_NumTables

Global CFE_TBL_HousekeepingTlm_Payload_t::NumValRequests

$sc_$cpu_TBL_ValReqCtr

Global CFE_TBL_HousekeepingTlm_Payload_t::SuccessValCounter

$sc_$cpu_TBL_ValSuccessCtr

Global CFE_TBL_HousekeepingTlm_Payload_t::ValidationCounter

$sc_$cpu_TBL_ValCompltdCtr

Global CFE_TBL_TblRegPacket_Payload_t::ActiveBufferAddr

$sc_$cpu_TBL_ActBufAdd

Global CFE_TBL_TblRegPacket_Payload_t::ByteAlign4

$sc_$cpu_TBL_Spare4

Global CFE_TBL_TblRegPacket_Payload_t::Crc

$sc_$cpu_TBL_CRC

Global CFE_TBL_TblRegPacket_Payload_t::Critical

$sc_$cpu_TBL_Spare3

Global CFE_TBL_TblRegPacket_Payload_t::DoubleBuffered

$sc_$cpu_TBL_DblBuffered

Global CFE_TBL_TblRegPacket_Payload_t::DumpOnly

$sc_$cpu_TBL_DumpOnly

Global CFE_TBL_TblRegPacket_Payload_t::FileCreateTimeSecs

$sc_$cpu_TBL_FILECSECONDS

Global CFE_TBL_TblRegPacket_Payload_t::FileCreateTimeSubSecs

$sc_$cpu_TBL_FILECSUBSECONDS

Global CFE_TBL_TblRegPacket_Payload_t::InactiveBufferAddr

$sc_$cpu_TBL_IActBufAdd

Global CFE_TBL_TblRegPacket_Payload_t::LastFileLoaded [CFE_MISSION_MAX_PATH_LEN]

$sc_$cpu_TBL_LastFileUpd[OS_MAX_PATH_LEN]

Global CFE_TBL_TblRegPacket_Payload_t::LoadPending

$sc_$cpu_TBL_UpdatePndng

Global CFE_TBL_TblRegPacket_Payload_t::Name [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

$sc_$cpu_TBL_Name[CFE_TB_MAX_FULL_NAME_LEN]

Global CFE_TBL_TblRegPacket_Payload_t::OwnerAppName [CFE_MISSION_MAX_API_LEN]

$sc_$cpu_TBL_OwnerApp[OS_MAX_API_NAME]

Global CFE_TBL_TblRegPacket_Payload_t::Size

$sc_$cpu_TBL_SIZE

Global CFE_TBL_TblRegPacket_Payload_t::TableLoadedOnce

$sc_$cpu_TBL_LoadedOnce

Global CFE_TBL_TblRegPacket_Payload_t::TimeOfLastUpdate

$sc_$cpu_TBL_TimeLastUpd, $sc_$cpu_TBL_TLUSECONDS, $sc_$cpu_TBL_TLUSUBSECONDS

Global CFE_TBL_TblRegPacket_Payload_t::ValidationFuncPtr

$sc_$cpu_TBL_ValFuncPtr

Global CFE_TIME_DiagnosticTlm_Payload_t::LocalTaskCounter

$sc_$cpu_TIME_D1HzTaskCNT

Global CFE_TIME_DiagnosticTlm_Payload_t::MaxElapsed

$sc_$cpu_TIME_DMaxWindow

Global CFE_TIME_DiagnosticTlm_Payload_t::MaxLocalClock

$sc_$cpu_TIME_DWrapS, $sc_$cpu_TIME_DWrapSs

Global CFE_TIME_DiagnosticTlm_Payload_t::MinElapsed

$sc_$cpu_TIME_DMinWindow

Global CFE_TIME_DiagnosticTlm_Payload_t::OneHzAdjust

$sc_$cpu_TIME_D1HzAdjS, $sc_$cpu_TIME_D1HzAdjSs

Global CFE_TIME_DiagnosticTlm_Payload_t::OneHzDirection

$sc_$cpu_TIME_D1HzAdjDir

Global CFE_TIME_DiagnosticTlm_Payload_t::OneTimeAdjust

$sc_$cpu_TIME_DAdjustS, $sc_$cpu_TIME_DAdjustSs

Global CFE_TIME_DiagnosticTlm_Payload_t::OneTimeDirection

$sc_$cpu_TIME_DAdjustDir

Global CFE_TIME_DiagnosticTlm_Payload_t::ServerFlyState

$sc_$cpu_TIME_DSrvFly

Global CFE_TIME_DiagnosticTlm_Payload_t::TimeSinceTone

$sc_$cpu_TIME_DElapsedS, $sc_$cpu_TIME_DElapsedSs

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneDataCounter

$sc_$cpu_TIME_DTatTCNT

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneDataLatch

$sc_$cpu_TIME_DTDS, $sc_$cpu_TIME_DTDSs

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneIntCounter

$sc_$cpu_TIME_DTsISRCNT

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneIntErrorCounter

$sc_$cpu_TIME_DTsISRERR

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneMatchCounter

$sc_$cpu_TIME_DVerifyCNT

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneMatchErrorCounter

$sc_$cpu_TIME_DVerifyER

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneOverLimit

$sc_$cpu_TIME_DMaxSs

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneSignalCounter

$sc_$cpu_TIME_DTSDetCNT

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneSignalLatch

$sc_$cpu_TIME_DTTS, $sc_$cpu_TIME_DTTSs

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneTaskCounter

$sc_$cpu_TIME_DTsTaskCNT

Global CFE_TIME_DiagnosticTlm_Payload_t::ToneUnderLimit

$sc_$cpu_TIME_DMinSs

Global CFE_TIME_DiagnosticTlm_Payload_t::VersionCounter

$sc_$cpu_TIME_DVersionCNT

Global CFE_TIME_DiagnosticTlm_Payload_t::VirtualMET

$sc_$cpu_TIME_DLogicalMET

Global CFE_TIME_HousekeepingTlm_Payload_t::ClockStateAPI

$sc_$cpu_TIME_DAPIState

Global CFE_TIME_HousekeepingTlm_Payload_t::ClockStateFlags

$sc_$cpu_TIME_StateFlg, $sc_$cpu_TIME_FlagSet, $sc_$cpu_TIME_FlagFly, $sc_$cpu_TIME_FlagSrc, $sc_↩
$cpu_TIME_FlagPri, $sc_$cpu_TIME_FlagSfly, $sc_$cpu_TIME_FlagCfly, $sc_$cpu_TIME_FlagAdjd, $sc_$cpu↩
_TIME_Flag1Hzd, $sc_$cpu_TIME_FlagClat, $sc_$cpu_TIME_FlagSorC, $sc_$cpu_TIME_FlagNIU

Global CFE_TIME_HousekeepingTlm_Payload_t::CommandCounter

$sc_$cpu_TIME_CMDPC

Global CFE_TIME_HousekeepingTlm_Payload_t::CommandErrorCounter

$sc_$cpu_TIME_CMDEC

Global CFE_TIME_HousekeepingTlm_Payload_t::LeapSeconds

$sc_$cpu_TIME_LeapSecs

Global CFE_TIME_HousekeepingTlm_Payload_t::Seconds1HzAdj

$sc_$cpu_TIME_1HzAdjSecs

Global CFE_TIME_HousekeepingTlm_Payload_t::SecondsDelay

$sc_$cpu_TIME_1HzAdjSecs

Global CFE_TIME_HousekeepingTlm_Payload_t::SecondsMET

$sc_$cpu_TIME_METSecs

Global CFE_TIME_HousekeepingTlm_Payload_t::SecondsSTCF

$sc_$cpu_TIME_STCFSecs

Global CFE_TIME_HousekeepingTlm_Payload_t::Subsecs1HzAdj

$sc_$cpu_TIME_1HzAdjSSecs

Global CFE_TIME_HousekeepingTlm_Payload_t::SubsecsDelay

$sc_$cpu_TIME_1HzAdjSSecs

Global CFE_TIME_HousekeepingTlm_Payload_t::SubsecsMET

$sc_$cpu_TIME_METSubsecs

Global CFE_TIME_HousekeepingTlm_Payload_t::SubsecsSTCF

$sc_$cpu_TIME_STCFSubsecs

32 cFE Mission Configuration Parameters

Global CFE_MISSION_CMD_MID_BASE1

cFE Message ID Base Numbers

Global CFE_MISSION_ES_HK_TLM_MSG

cFE Portable Message Numbers for Telemetry

Global CFE_MISSION_EVS_CMD_MSG

cFE Portable Message Numbers for Commands

Global CFE_MISSION_MAX_API_LEN
cFE Maximum length for API names within data exchange structures

Global CFE_MISSION_MAX_FILE_LEN
cFE Maximum length for filenames within data exchange structures

Global CFE_MISSION_MAX_PATH_LEN
cFE Maximum length for pathnames within data exchange structures

Global CFE_MISSION_SB_PACKET_TIME_FORMAT
Packet Timestamp Format Selection

Global CFE_MISSION_SPACECRAFT_ID
Spacecraft ID

Global CFE_MISSION_TIME_DATA_CMD_MSG
cFE Portable Message Numbers for Global Messages

Module Packet timestamp format identifiers
cFE SB message format

33 Deprecated List

Global ATA_DISK
Volume type ATA disk

Global boolean
Use bool

Global CFE_ES_SHELL_CC

Class CFE_ES_Shell_t

Class CFE_ES_ShellCmd_Payload_t

Class CFE_ES_ShellPacket_Payload_t

Class CFE_ES_ShellTlm_t

Global CFE_FS_Decompress (const char ∗SourceFile, const char ∗DestinationFile)

Global CFE_FS_GetUncompressedFile (char ∗OutputNameBuffer, uint32 OutputNameBufferSize, const char ∗GzipFileName, const char ∗TempDir)

Global CFE_FS_GZIP_BAD_CODE_BLOCK

Global CFE_FS_GZIP_BAD_DATA

Global CFE_FS_GZIP_CRC_ERROR

Global CFE_FS_GZIP_INDEX_ERROR

Global CFE_FS_GZIP_LENGTH_ERROR

Global CFE_FS_GZIP_NO_MEMORY

Global CFE_FS_GZIP_NON_ZIP_FILE

Global CFE_FS_GZIP_OPEN_INPUT

Global CFE_FS_GZIP_OPEN_OUTPUT

Global CFE_FS_GZIP_READ_ERROR

Global CFE_FS_GZIP_READ_ERROR_HEADER

Global CFE_FS_GZIP_WRITE_ERROR

Global CFE_FS_IsGzFile (const char ∗FileName)

Global CFE_OS_ERR_INVALID_ID

Global CFE_OS_ERR_INVALID_PRIORITY

Global CFE_OS_ERR_NAME_NOT_FOUND

Global CFE_OS_ERR_NAME_TAKEN

Global CFE_OS_ERR_NAME_TOO_LONG

Global CFE_OS_ERR_NO_FREE_IDS

Global CFE_OS_ERR_SEM_NOT_FULL

Global CFE_OS_ERROR

Global CFE_OS_ERROR_ADDRESS_MISALIGNED

Global CFE_OS_ERROR_TIMEOUT

Global CFE_OS_FS_ERR_DRIVE_NOT_CREATED

Global CFE_OS_FS_ERR_INVALID_POINTER

Global CFE_OS_FS_ERR_NAME_TOO_LONG

Global CFE_OS_FS_ERR_PATH_TOO_LONG

Global CFE_OS_FS_ERROR

Global CFE_OS_INVALID_INT_NUM

Global CFE_OS_INVALID_POINTER

Global CFE_OS_QUEUE_EMPTY

Global CFE_OS_QUEUE_FULL

Global CFE_OS_QUEUE_ID_ERROR

Global CFE_OS_QUEUE_INVALID_SIZE

Global CFE_OS_QUEUE_TIMEOUT

Global CFE_OS_SEM_FAILURE

Global CFE_OS_SEM_TIMEOUT

Global CFE_OSAPI_NOT_IMPLEMENTED

Global CFE_TIME_CFE2FSSeconds (uint32 SecondsCFE)

Utilize CFE_FS_Header_t time fields for the creation time in mission format, or syncronize local OS time with mission time for use with stat command.

Global CFE_TIME_FS2CFESeconds (uint32 SecondsFS)

Utilize CFE_FS_Header_t time fields for the creation time in mission format, or syncronize local OS time with mission time for use with stat command.

Global EEPROM_DISK

Volume type EEPROM disk

Global FALSE

Use false

Global FS_BASED

Volume type FS based

Global NUM_FILE_SYSTEMS

Global os_dirp_t

Global OS_ExcAttachHandler (uint32 ExceptionNumber, void(∗ExceptionHandler)(uint32, const void ∗, uint32), int32 parameter)

　　Planning move to PSP due to platform dependencies

Global OS_ExcDisable (int32 ExceptionNumber)

　　Planning move to PSP due to platform dependencies

Global OS_ExcEnable (int32 ExceptionNumber)

　　Planning move to PSP due to platform dependencies

Global OS_FDTableEntry

　　Use OS_file_prop_t

Global OS_FPUExcAttachHandler (uint32 ExceptionNumber, osal_task_entry ExceptionHandler, int32 parameter)

　　Planning move to PSP due to platform dependencies

Global OS_FPUExcDisable (int32 ExceptionNumber)

　　Planning move to PSP due to platform dependencies

Global OS_FPUExcEnable (int32 ExceptionNumber)

　　Planning move to PSP due to platform dependencies

Global OS_FPUExcGetMask (uint32 ∗mask)

　　Planning move to PSP due to platform dependencies

Global OS_FPUExcSetMask (uint32 mask)

　　Planning move to PSP due to platform dependencies

Global OS_FS_ERR_INVALID_FD

　　Invalid ID

Global OS_FS_ERR_INVALID_POINTER

　　Invalid pointer

Global OS_FS_ERR_NO_FREE_FDS

　　No free IDs

Global OS_FS_ERROR

　　Failed execution

Global OS_FS_SUCCESS

　　Successful execution

Global OS_FS_UNIMPLEMENTED

　　Not implemented

Global os_fshealth_t

　　type no longer used

Global OS_IntAck (int32 InterruptNumber)

　　platform dependencies, removing from OSAL

Global OS_IntAttachHandler (uint32 InterruptNumber, osal_task_entry InterruptHandler, int32 parameter)

　　platform dependencies, removing from OSAL

Global OS_IntDisable (int32 Level)

　　platform dependencies, removing from OSAL

Global OS_IntEnable (int32 Level)

    platform dependencies, removing from OSAL

Global OS_IntGetMask (uint32 ∗mask)

    platform dependencies, removing from OSAL

Global OS_IntLock (void)

    platform dependencies, removing from OSAL

Global OS_IntSetMask (uint32 mask)

    platform dependencies, removing from OSAL

Global OS_IntUnlock (int32 IntLevel)

    platform dependencies, removing from OSAL

Global OS_module_record_t

    Use OS_module_prop_t

Global OS_opendir (const char ∗path)

    Replaced by OS_DirectoryOpen()

Global OS_ShMemAttach (cpuaddr ∗Address, uint32 Id)

    Never implemented

Global OS_ShMemCreate (uint32 ∗Id, uint32 NBytes, const char ∗SegName)

    Never implemented

Global OS_ShMemGetIdByName (uint32 ∗ShMemId, const char ∗SegName)

    Never implemented

Global OS_ShMemInit (void)

    Never implemented

Global OS_ShMemSemGive (uint32 Id)

    Never implemented

Global OS_ShMemSemTake (uint32 Id)

    Never implemented

Global OS_task_prop_t::OStask_id

Global OS_TaskRegister (void)

    Explicit registration call no longer needed

Class OS_VolumeInfo_t

    Use the OSAL file system API to register volumes

Global osalbool

    Use bool

Module OSAPIExc

    Planning move to PSP due to platform dependencies

Module OSAPIFPUExc

    Planning move to PSP due to platform dependencies

Module OSAPIInterrupt

    Platform dependencies

Module OSAPIShMem

    Not in current implementations

Global RAM_DISK

   Volume type RAM disk

Global TRUE

   Use true

34   Module Index

34.1   Modules

Here is a list of all modules:

35 Data Structure Index

35.1 Data Structures

Here are the data structures with brief descriptions:

36 File Index

36.1 File List

Here is a list of all files with brief descriptions:

37 Module Documentation

37.1 cFE Return Code Defines

Macros

- #define CFE_SUCCESS (0)

    Sucessful execution.
- #define CFE_STATUS_NO_COUNTER_INCREMENT ((int32)0x48000001)

    No Counter Increment.
- #define CFE_STATUS_WRONG_MSG_LENGTH ((int32)0xc8000002)

    Wrong Message Length.
- #define CFE_STATUS_UNKNOWN_MSG_ID ((int32)0xc8000003)

    Unknown Message ID.
- #define CFE_STATUS_BAD_COMMAND_CODE ((int32)0xc8000004)

    Bad Command Code.
- #define CFE_STATUS_NOT_IMPLEMENTED ((int32)0xc800ffff)

    Not Implemented.
- #define CFE_EVS_UNKNOWN_FILTER ((int32)0xc2000001)

    Unknown Filter.
- #define CFE_EVS_APP_NOT_REGISTERED ((int32)0xc2000002)

    Application Not Registered.
- #define CFE_EVS_APP_ILLEGAL_APP_ID ((int32)0xc2000003)

    Illegal Application ID.
- #define CFE_EVS_APP_FILTER_OVERLOAD ((int32)0xc2000004)

    Application Filter Overload.
- #define CFE_EVS_RESET_AREA_POINTER ((int32)0xc2000005)

    Reset Area Pointer Failure.
- #define CFE_EVS_EVT_NOT_REGISTERED ((int32)0xc2000006)

    Event Not Registered.
- #define CFE_EVS_FILE_WRITE_ERROR ((int32)0xc2000007)

    File Write Error.
- #define CFE_EVS_INVALID_PARAMETER ((int32)0xc2000008)

    Invalid Pointer.
- #define CFE_EVS_FUNCTION_DISABLED ((int32)0xc2000009)

Function Disabled.
- #define CFE_EVS_NOT_IMPLEMENTED ((int32)0xc200ffff)

    Not Implemented.
- #define CFE_ES_ERR_APPID ((int32)0xc4000001)

    Application ID Error.
- #define CFE_ES_ERR_APPNAME ((int32)0xc4000002)

    Application Name Error.
- #define CFE_ES_ERR_BUFFER ((int32)0xc4000003)

    Invalid Pointer.
- #define CFE_ES_ERR_APP_CREATE ((int32)0xc4000004)

    Application Create Error.
- #define CFE_ES_ERR_CHILD_TASK_CREATE ((int32)0xc4000005)

    Child Task Create Error.
- #define CFE_ES_ERR_SYS_LOG_FULL ((int32)0xc4000006)

    System Log Full.
- #define CFE_ES_ERR_MEM_HANDLE ((int32)0xc4000007)

    Memory Handle Error.
- #define CFE_ES_ERR_MEM_BLOCK_SIZE ((int32)0xc4000008)

    Memory Block Size Error.
- #define CFE_ES_ERR_LOAD_LIB ((int32)0xc4000009)

    Load Library Error.
- #define CFE_ES_BAD_ARGUMENT ((int32)0xc400000a)

    Bad Argument.
- #define CFE_ES_ERR_CHILD_TASK_REGISTER ((int32)0xc400000b)

    Child Task Register Error.
- #define CFE_ES_ERR_SHELL_CMD ((int32)0xc400000c)

    Shell Command Error.
- #define CFE_ES_CDS_ALREADY_EXISTS ((int32)0x4400000d)

    CDS Already Exists.
- #define CFE_ES_CDS_INSUFFICIENT_MEMORY ((int32)0xc400000e)

    CDS Insufficient Memory.
- #define CFE_ES_CDS_INVALID_NAME ((int32)0xc400000f)

    CDS Invalid Name.
- #define CFE_ES_CDS_INVALID_SIZE ((int32)0xc4000010)

    CDS Invalid Size.
- #define CFE_ES_CDS_REGISTRY_FULL ((int32)0xc4000011)

    CDS Registry Full.
- #define CFE_ES_CDS_INVALID ((int32)0xc4000012)

    CDS Invalid.
- #define CFE_ES_CDS_ACCESS_ERROR ((int32)0xc4000013)

    CDS Access Error.
- #define CFE_ES_FILE_IO_ERR ((int32)0xc4000014)

    File IO Error.
- #define CFE_ES_RST_ACCESS_ERR ((int32)0xc4000015)

    Reset Area Access Error.
- #define CFE_ES_ERR_TASKID ((int32)0xc4000016)

    Task ID Error.

- #define CFE_ES_ERR_APP_REGISTER ((int32)0xc4000017)

    Application Register Error.
- #define CFE_ES_ERR_CHILD_TASK_DELETE ((int32)0xc4000018)

    Child Task Delete Error.
- #define CFE_ES_ERR_CHILD_TASK_DELETE_MAIN_TASK ((int32)0xc4000019)

    Child Task Delete Passed Main Task.
- #define CFE_ES_CDS_BLOCK_CRC_ERR ((int32)0xc400001A)

    CDS Block CRC Error.
- #define CFE_ES_MUT_SEM_DELETE_ERR ((int32)0xc400001B)

    Mutex Semaphore Delete Error.
- #define CFE_ES_BIN_SEM_DELETE_ERR ((int32)0xc400001C)

    Binary Semaphore Delete Error.
- #define CFE_ES_COUNT_SEM_DELETE_ERR ((int32)0xc400001D)

    Counte Semaphore Delete Error.
- #define CFE_ES_QUEUE_DELETE_ERR ((int32)0xc400001E)

    Queue Delete Error.
- #define CFE_ES_FILE_CLOSE_ERR ((int32)0xc400001F)

    File Close Error.
- #define CFE_ES_CDS_WRONG_TYPE_ERR ((int32)0xc4000020)

    CDS Wrong Type Error.
- #define CFE_ES_CDS_NOT_FOUND_ERR ((int32)0xc4000021)

    CDS Not Found Error.
- #define CFE_ES_CDS_OWNER_ACTIVE_ERR ((int32)0xc4000022)

    CDS Owner Active Error.
- #define CFE_ES_APP_CLEANUP_ERR ((int32)0xc4000023)

    Application Cleanup Error.
- #define CFE_ES_TIMER_DELETE_ERR ((int32)0xc4000024)

    Timer Delete Error.
- #define CFE_ES_BUFFER_NOT_IN_POOL ((int32)0xc4000025)

    Buffer Not In Pool.
- #define CFE_ES_TASK_DELETE_ERR ((int32)0xc4000026)

    Task Delete Error.
- #define CFE_ES_OPERATION_TIMED_OUT ((int32)0xc4000027)

    Operation Timed Out.
- #define CFE_ES_LIB_ALREADY_LOADED ((int32)0x44000028)

    Library Already Loaded.
- #define CFE_ES_ERR_SYS_LOG_TRUNCATED ((int32)0x44000028)

    System Log Message Truncated.
- #define CFE_ES_NOT_IMPLEMENTED ((int32)0xc400ffff)

    Not Implemented.
- #define CFE_FS_BAD_ARGUMENT ((int32)0xc6000001)

    Bad Argument.
- #define CFE_FS_INVALID_PATH ((int32)0xc6000002)

    Invalid Path.
- #define CFE_FS_FNAME_TOO_LONG ((int32)0xc6000003)

    Filename Too Long.
- #define CFE_FS_GZIP_BAD_DATA ((int32)0xc6000004)

> *DEPRECATED: GZIP File Bad Data.*

- #define CFE_FS_GZIP_BAD_CODE_BLOCK ((int32)0xc6000005)

  > *DEPRECATED: GZIP File Bad Code Block.*

- #define CFE_FS_GZIP_NO_MEMORY ((int32)0xc6000006)

  > *DEPRECATED: GZIP Memory Buffer Exhausted.*

- #define CFE_FS_GZIP_CRC_ERROR ((int32)0xc6000007)

  > *DEPRECATED: GZIP CRC Error.*

- #define CFE_FS_GZIP_LENGTH_ERROR ((int32)0xc6000008)

  > *DEPRECATED: GZIP Length Error.*

- #define CFE_FS_GZIP_WRITE_ERROR ((int32)0xc6000009)

  > *DEPRECATED: GZIP Write Error.*

- #define CFE_FS_GZIP_READ_ERROR ((int32)0xc600000A)

  > *DEPRECATED: GZIP Read Error.*

- #define CFE_FS_GZIP_OPEN_OUTPUT ((int32)0xc600000B)

  > *DEPRECATED: GZIP Open Output Error.*

- #define CFE_FS_GZIP_OPEN_INPUT ((int32)0xc600000C)

  > *DEPRECATED: GZIP Open Input Error.*

- #define CFE_FS_GZIP_READ_ERROR_HEADER ((int32)0xc600000D)

  > *DEPRECATED: GZIP Read Header Error.*

- #define CFE_FS_GZIP_INDEX_ERROR ((int32)0xc600000E)

  > *DEPRECATED: GZIP Index Error.*

- #define CFE_FS_GZIP_NON_ZIP_FILE ((int32)0xc600000F)

  > *DEPRECATED: GZIP Not Zip File.*

- #define CFE_FS_NOT_IMPLEMENTED ((int32)0xc600ffff)

  > *Not Implemented.*

- #define CFE_OS_ERROR (OS_ERROR)

  > *DEPRECATED.*

- #define CFE_OS_INVALID_POINTER (OS_INVALID_POINTER)

  > *DEPRECATED.*

- #define CFE_OS_ERROR_ADDRESS_MISALIGNED (OS_ERROR_ADDRESS_MISALIGNED)

  > *DEPRECATED.*

- #define CFE_OS_ERROR_TIMEOUT (OS_ERROR_TIMEOUT)

  > *DEPRECATED.*

- #define CFE_OS_INVALID_INT_NUM (OS_INVALID_INT_NUM)

  > *DEPRECATED.*

- #define CFE_OS_SEM_FAILURE (OS_SEM_FAILURE)

  > *DEPRECATED.*

- #define CFE_OS_SEM_TIMEOUT (OS_SEM_TIMEOUT)

  > *DEPRECATED.*

- #define CFE_OS_QUEUE_EMPTY (OS_QUEUE_EMPTY)

  > *DEPRECATED.*

- #define CFE_OS_QUEUE_FULL (OS_QUEUE_FULL)

  > *DEPRECATED.*

- #define CFE_OS_QUEUE_TIMEOUT (OS_QUEUE_TIMEOUT)

  > *DEPRECATED.*

- #define CFE_OS_QUEUE_INVALID_SIZE (OS_QUEUE_INVALID_SIZE)

  > *DEPRECATED.*

- #define CFE_OS_QUEUE_ID_ERROR (OS_QUEUE_ID_ERROR)

  DEPRECATED.
- #define CFE_OS_ERR_NAME_TOO_LONG (OS_ERR_NAME_TOO_LONG)

  DEPRECATED.
- #define CFE_OS_ERR_NO_FREE_IDS (OS_ERR_NO_FREE_IDS)

  DEPRECATED.
- #define CFE_OS_ERR_NAME_TAKEN (OS_ERR_NAME_TAKEN)

  DEPRECATED.
- #define CFE_OS_ERR_INVALID_ID (OS_ERR_INVALID_ID)

  DEPRECATED.
- #define CFE_OS_ERR_NAME_NOT_FOUND (OS_ERR_NAME_NOT_FOUND)

  DEPRECATED.
- #define CFE_OS_ERR_SEM_NOT_FULL (OS_ERR_SEM_NOT_FULL)

  DEPRECATED.
- #define CFE_OS_ERR_INVALID_PRIORITY (OS_ERR_INVALID_PRIORITY)

  DEPRECATED.
- #define CFE_OS_FS_ERROR (OS_ERROR)

  DEPRECATED.
- #define CFE_OS_FS_ERR_INVALID_POINTER (OS_INVALID_POINTER)

  DEPRECATED.
- #define CFE_OS_FS_ERR_PATH_TOO_LONG (OS_FS_ERR_PATH_TOO_LONG)

  DEPRECATED.
- #define CFE_OS_FS_ERR_NAME_TOO_LONG (OS_FS_ERR_NAME_TOO_LONG)

  DEPRECATED.
- #define CFE_OS_FS_ERR_DRIVE_NOT_CREATED (OS_FS_ERR_DRIVE_NOT_CREATED)

  DEPRECATED.
- #define CFE_OSAPI_NOT_IMPLEMENTED (OS_ERR_NOT_IMPLEMENTED)

  DEPRECATED.
- #define CFE_SB_TIME_OUT ((int32)0xca000001)

  Time Out.
- #define CFE_SB_NO_MESSAGE ((int32)0xca000002)

  No Message.
- #define CFE_SB_BAD_ARGUMENT ((int32)0xca000003)

  Bad Argument.
- #define CFE_SB_MAX_PIPES_MET ((int32)0xca000004)

  Max Pipes Met.
- #define CFE_SB_PIPE_CR_ERR ((int32)0xca000005)

  Pipe Create Error.
- #define CFE_SB_PIPE_RD_ERR ((int32)0xca000006)

  Pipe Read Error.
- #define CFE_SB_MSG_TOO_BIG ((int32)0xca000007)

  Message Too Big.
- #define CFE_SB_BUF_ALOC_ERR ((int32)0xca000008)

  Buffer Allocation Error.
- #define CFE_SB_MAX_MSGS_MET ((int32)0xca000009)

  Max Messages Met.
- #define CFE_SB_MAX_DESTS_MET ((int32)0xca00000a)

Max Destinations Met.
- #define CFE_SB_NO_SUBSCRIBERS ((int32)0xca00000b)

  No Subscribers.
- #define CFE_SB_INTERNAL_ERR ((int32)0xca00000c)

  Internal Error.
- #define CFE_SB_WRONG_MSG_TYPE ((int32)0xca00000d)

  Wrong Message Type.
- #define CFE_SB_BUFFER_INVALID ((int32)0xca00000e)

  Buffer Invalid.
- #define CFE_SB_NO_MSG_RECV ((int32)0xca00000f)

  No Message Recieved.
- #define CFE_SB_NOT_IMPLEMENTED ((int32)0xca00ffff)

  Not Implemented.
- #define CFE_TBL_ERR_INVALID_HANDLE ((int32)0xcc000001)

  Invalid Handle.
- #define CFE_TBL_ERR_INVALID_NAME ((int32)0xcc000002)

  Invalid Name.
- #define CFE_TBL_ERR_INVALID_SIZE ((int32)0xcc000003)

  Invalid Size.
- #define CFE_TBL_INFO_UPDATE_PENDING ((int32)0x4c000004)

  Update Pending.
- #define CFE_TBL_ERR_NEVER_LOADED ((int32)0xcc000005)

  Never Loaded.
- #define CFE_TBL_ERR_REGISTRY_FULL ((int32)0xcc000006)

  Registry Full.
- #define CFE_TBL_WARN_DUPLICATE ((int32)0x4c000007)

  Duplicate Warning.
- #define CFE_TBL_ERR_NO_ACCESS ((int32)0xcc000008)

  No Access.
- #define CFE_TBL_ERR_UNREGISTERED ((int32)0xcc000009)

  Unregistered.
- #define CFE_TBL_ERR_BAD_APP_ID ((int32)0xcc00000A)

  Bad Application ID.
- #define CFE_TBL_ERR_HANDLES_FULL ((int32)0xcc00000B)

  Handles Full.
- #define CFE_TBL_ERR_DUPLICATE_DIFF_SIZE ((int32)0xcc00000C)

  Duplicate Table With Different Size.
- #define CFE_TBL_ERR_DUPLICATE_NOT_OWNED ((int32)0xcc00000D)

  Dupicate Table And Not Owned.
- #define CFE_TBL_INFO_UPDATED ((int32)0x4c00000E)

  Updated.
- #define CFE_TBL_ERR_NO_BUFFER_AVAIL ((int32)0xcc00000F)

  No Buffer Available.
- #define CFE_TBL_ERR_DUMP_ONLY ((int32)0xcc000010)

  Dump Only Error.
- #define CFE_TBL_ERR_ILLEGAL_SRC_TYPE ((int32)0xcc000011)

  Illegal Source Type.

- #define CFE_TBL_ERR_LOAD_IN_PROGRESS ((int32)0xcc000012)

  Load In Progress.
- #define CFE_TBL_ERR_FILE_NOT_FOUND ((int32)0xcc000013)

  File Not Found.
- #define CFE_TBL_ERR_FILE_TOO_LARGE ((int32)0xcc000014)

  File Too Large.
- #define CFE_TBL_WARN_SHORT_FILE ((int32)0x4c000015)

  Short File Warning.
- #define CFE_TBL_ERR_BAD_CONTENT_ID ((int32)0xcc000016)

  Bad Content ID.
- #define CFE_TBL_INFO_NO_UPDATE_PENDING ((int32)0x4c000017)

  No Update Pending.
- #define CFE_TBL_INFO_TABLE_LOCKED ((int32)0x4c000018)

  Table Locked.
- #define CFE_TBL_INFO_VALIDATION_PENDING ((int32)0x4c000019)
- #define CFE_TBL_INFO_NO_VALIDATION_PENDING ((int32)0x4c00001A)
- #define CFE_TBL_ERR_BAD_SUBTYPE_ID ((int32)0xcc00001B)

  Bad Subtype ID.
- #define CFE_TBL_ERR_FILE_SIZE_INCONSISTENT ((int32)0xcc00001C)

  File Size Inconsistent.
- #define CFE_TBL_ERR_NO_STD_HEADER ((int32)0xcc00001D)

  No Standard Header.
- #define CFE_TBL_ERR_NO_TBL_HEADER ((int32)0xcc00001E)

  No Table Header.
- #define CFE_TBL_ERR_FILENAME_TOO_LONG ((int32)0xcc00001F)

  Filename Too Long.
- #define CFE_TBL_ERR_FILE_FOR_WRONG_TABLE ((int32)0xcc000020)

  File For Wrong Table.
- #define CFE_TBL_ERR_LOAD_INCOMPLETE ((int32)0xcc000021)

  Load Incomplete.
- #define CFE_TBL_WARN_PARTIAL_LOAD ((int32)0x4c000022)

  Partial Load Warning.
- #define CFE_TBL_ERR_PARTIAL_LOAD ((int32)0xcc000023)

  Partial Load Error.
- #define CFE_TBL_INFO_DUMP_PENDING ((int32)0x4c000024)

  Dump Pending.
- #define CFE_TBL_ERR_INVALID_OPTIONS ((int32)0xcc000025)

  Invalid Options.
- #define CFE_TBL_WARN_NOT_CRITICAL ((int32)0x4c000026)

  Not Critical Warning.
- #define CFE_TBL_INFO_RECOVERED_TBL ((int32)0x4c000027)

  Recovered Table.
- #define CFE_TBL_ERR_BAD_SPACECRAFT_ID ((int32)0xcc000028)

  Bad Spacecraft ID.
- #define CFE_TBL_ERR_BAD_PROCESSOR_ID ((int32)0xcc000029)

  Bad Processor ID.
- #define CFE_TBL_MESSAGE_ERROR ((int32)0xcc00002a)

Message Error.
- #define CFE_TBL_ERR_SHORT_FILE ((int32)0xcc00002b)
- #define CFE_TBL_ERR_ACCESS ((int32)0xcc00002c)
- #define CFE_TBL_NOT_IMPLEMENTED ((int32)0xcc00ffff)

    Not Implemented.
- #define CFE_TIME_NOT_IMPLEMENTED ((int32)0xce00ffff)

    Not Implemented.
- #define CFE_TIME_INTERNAL_ONLY ((int32)0xce000001)

    Internal Only.
- #define CFE_TIME_OUT_OF_RANGE ((int32)0xce000002)

    Out Of Range.
- #define CFE_TIME_TOO_MANY_SYNCH_CALLBACKS ((int32)0xce000003)

    Too Many Sync Callbacks.
- #define CFE_TIME_CALLBACK_NOT_REGISTERED ((int32)0xce000004)

    Callback Not Registered.

37.1.1 Detailed Description

37.1.2 Macro Definition Documentation

37.1.2.1 CFE_ES_APP_CLEANUP_ERR

```
#define CFE_ES_APP_CLEANUP_ERR ((int32)0xc4000023)
```

Application Cleanup Error.

Occurs when an attempt was made to Clean Up an application which involves calling Table, EVS, and SB cleanup functions, then deleting all ES resources, child tasks, and unloading the object module. The approach here is to keep going even though one of these steps had an error. There will be syslog messages detailing each problem.

Definition at line 580 of file cfe_error.h.

37.1.2.2 CFE_ES_BAD_ARGUMENT

```
#define CFE_ES_BAD_ARGUMENT ((int32)0xc400000a)
```

Bad Argument.

Bad parameter passed into an ES API.

Definition at line 347 of file cfe_error.h.

37.1.2.3   CFE_ES_BIN_SEM_DELETE_ERR

```
#define CFE_ES_BIN_SEM_DELETE_ERR ((int32)0xc400001C)
```

Binary Semaphore Delete Error.

Occurs when trying to delete a Binary Semaphore that belongs to a task that ES is cleaning up.

Definition at line 509 of file cfe_error.h.

37.1.2.4   CFE_ES_BUFFER_NOT_IN_POOL

```
#define CFE_ES_BUFFER_NOT_IN_POOL ((int32)0xc4000025)
```

Buffer Not In Pool.

The specified address is not in the memory pool.

Definition at line 597 of file cfe_error.h.

37.1.2.5   CFE_ES_CDS_ACCESS_ERROR

```
#define CFE_ES_CDS_ACCESS_ERROR ((int32)0xc4000013)
```

CDS Access Error.

The CDS was inaccessible

Definition at line 429 of file cfe_error.h.

37.1.2.6   CFE_ES_CDS_ALREADY_EXISTS

```
#define CFE_ES_CDS_ALREADY_EXISTS ((int32)0x4400000d)
```

CDS Already Exists.

The Application is receiving the pointer to a CDS that was already present.

Definition at line 371 of file cfe_error.h.

37.1.2.7   CFE_ES_CDS_BLOCK_CRC_ERR

```
#define CFE_ES_CDS_BLOCK_CRC_ERR ((int32)0xc400001A)
```

CDS Block CRC Error.

Occurs when trying to read a CDS Data block and the CRC of the current data does not match the stored CRC for the data. Either the contents of the CDS Data Block are corrupted or the CDS Control Block is corrupted.

Definition at line 490 of file cfe_error.h.

37.1.2.8   CFE_ES_CDS_INSUFFICIENT_MEMORY

```
#define CFE_ES_CDS_INSUFFICIENT_MEMORY ((int32)0xc400000e)
```

CDS Insufficient Memory.

The Application is requesting a CDS Block that is larger than the remaining CDS memory.

Definition at line 381 of file cfe_error.h.

37.1.2.9   CFE_ES_CDS_INVALID

```
#define CFE_ES_CDS_INVALID ((int32)0xc4000012)
```

CDS Invalid.

The CDS contents are invalid.

Definition at line 420 of file cfe_error.h.

37.1.2.10   CFE_ES_CDS_INVALID_NAME

```
#define CFE_ES_CDS_INVALID_NAME ((int32)0xc400000f)
```

CDS Invalid Name.

The Application is requesting a CDS Block with an invalid ASCII string name. Either the name is too long (> CFE_MI←↩
SSION_ES_CDS_MAX_NAME_LENGTH) or was an empty string.

Definition at line 391 of file cfe_error.h.

37.1.2.11 CFE_ES_CDS_INVALID_SIZE

```
#define CFE_ES_CDS_INVALID_SIZE ((int32)0xc4000010)
```

CDS Invalid Size.

The Application is requesting a CDS Block with a size of zero.

Definition at line 400 of file cfe_error.h.

37.1.2.12 CFE_ES_CDS_NOT_FOUND_ERR

```
#define CFE_ES_CDS_NOT_FOUND_ERR ((int32)0xc4000021)
```

CDS Not Found Error.

Occurs when a search of the Critical Data Store Registry does not find a critical data store with the specified name.

Definition at line 555 of file cfe_error.h.

37.1.2.13 CFE_ES_CDS_OWNER_ACTIVE_ERR

```
#define CFE_ES_CDS_OWNER_ACTIVE_ERR ((int32)0xc4000022)
```

CDS Owner Active Error.

Occurs when an attempt was made to delete a CDS when an application with the same name associated with the CDS is still present. CDSs can ONLY be deleted when Applications that created them are not present in the system.

Definition at line 566 of file cfe_error.h.

37.1.2.14 CFE_ES_CDS_REGISTRY_FULL

```
#define CFE_ES_CDS_REGISTRY_FULL ((int32)0xc4000011)
```

CDS Registry Full.

The CDS Registry has as many entries in it as it can hold. The CDS Registry size can be adjusted with the CFE_PL←
ATFORM_ES_CDS_MAX_NUM_ENTRIES macro defined in the cfe_platform_cfg.h file.

Definition at line 411 of file cfe_error.h.

37.1.2.15 CFE_ES_CDS_WRONG_TYPE_ERR

```
#define CFE_ES_CDS_WRONG_TYPE_ERR ((int32)0xc4000020)
```

CDS Wrong Type Error.

Occurs when Table Services is trying to delete a Critical Data Store that is not a Critical Table Image or when Executive Services is trying to delete a Critical Table Image.

Definition at line 546 of file cfe_error.h.

37.1.2.16 CFE_ES_COUNT_SEM_DELETE_ERR

```
#define CFE_ES_COUNT_SEM_DELETE_ERR ((int32)0xc400001D)
```

Counte Semaphore Delete Error.

Occurs when trying to delete a Counting Semaphore that belongs to a task that ES is cleaning up.

Definition at line 518 of file cfe_error.h.

37.1.2.17 CFE_ES_ERR_APP_CREATE

```
#define CFE_ES_ERR_APP_CREATE ((int32)0xc4000004)
```

Application Create Error.

There was an error loading or creating the App.

Definition at line 298 of file cfe_error.h.

37.1.2.18 CFE_ES_ERR_APP_REGISTER

```
#define CFE_ES_ERR_APP_REGISTER ((int32)0xc4000017)
```

Application Register Error.

Occurs when the CFE_ES_RegisterApp fails.

Definition at line 463 of file cfe_error.h.

37.1.2.19 CFE_ES_ERR_APPID

```
#define CFE_ES_ERR_APPID ((int32)0xc4000001)
```

Application ID Error.

The given application ID does not reflect a currently active application.

Definition at line 274 of file cfe_error.h.

37.1.2.20 CFE_ES_ERR_APPNAME

```
#define CFE_ES_ERR_APPNAME ((int32)0xc4000002)
```

Application Name Error.

There is no match for the given application name in the current application list.

Definition at line 282 of file cfe_error.h.

37.1.2.21 CFE_ES_ERR_BUFFER

```
#define CFE_ES_ERR_BUFFER ((int32)0xc4000003)
```

Invalid Pointer.

Invalid pointer argument (NULL)

Definition at line 290 of file cfe_error.h.

37.1.2.22 CFE_ES_ERR_CHILD_TASK_CREATE

```
#define CFE_ES_ERR_CHILD_TASK_CREATE ((int32)0xc4000005)
```

Child Task Create Error.

There was an error creating a child task.

Definition at line 306 of file cfe_error.h.

37.1.2.23 CFE_ES_ERR_CHILD_TASK_DELETE

#define CFE_ES_ERR_CHILD_TASK_DELETE ((int32)0xc4000018)

Child Task Delete Error.

There was an error deleting a child task.

Definition at line 471 of file cfe_error.h.

37.1.2.24 CFE_ES_ERR_CHILD_TASK_DELETE_MAIN_TASK

#define CFE_ES_ERR_CHILD_TASK_DELETE_MAIN_TASK ((int32)0xc4000019)

Child Task Delete Passed Main Task.

There was an attempt to delete a cFE App Main Task with the CFE_ES_DeleteChildTask API.

Definition at line 480 of file cfe_error.h.

37.1.2.25 CFE_ES_ERR_CHILD_TASK_REGISTER

#define CFE_ES_ERR_CHILD_TASK_REGISTER ((int32)0xc400000b)

Child Task Register Error.

Errors occured when trying to register a child task.

Definition at line 355 of file cfe_error.h.

37.1.2.26 CFE_ES_ERR_LOAD_LIB

#define CFE_ES_ERR_LOAD_LIB ((int32)0xc4000009)

Load Library Error.

Could not load the shared library.

Definition at line 339 of file cfe_error.h.

37.1.2.27 CFE_ES_ERR_MEM_BLOCK_SIZE

#define CFE_ES_ERR_MEM_BLOCK_SIZE ((int32)0xc4000008)

Memory Block Size Error.

The block size requested is invalid.

Definition at line 331 of file cfe_error.h.

37.1.2.28 CFE_ES_ERR_MEM_HANDLE

#define CFE_ES_ERR_MEM_HANDLE ((int32)0xc4000007)

Memory Handle Error.

The Memory Pool handle is invalid.

Definition at line 323 of file cfe_error.h.

37.1.2.29 CFE_ES_ERR_SHELL_CMD

#define CFE_ES_ERR_SHELL_CMD ((int32)0xc400000c)

Shell Command Error.

Error occured ehen trying to pass a system call to the OS shell

Definition at line 363 of file cfe_error.h.

37.1.2.30 CFE_ES_ERR_SYS_LOG_FULL

#define CFE_ES_ERR_SYS_LOG_FULL ((int32)0xc4000006)

System Log Full.

The cFE system Log is full. This error means the message was not logged at all

Definition at line 315 of file cfe_error.h.

37.1.2.31 CFE_ES_ERR_SYS_LOG_TRUNCATED

#define CFE_ES_ERR_SYS_LOG_TRUNCATED (([int32](https://)0x44000028)

System Log Message Truncated.

This information code means the last syslog message was truncated due to insufficient space in the log buffer.

Definition at line 634 of file cfe_error.h.

37.1.2.32 CFE_ES_ERR_TASKID

#define CFE_ES_ERR_TASKID (([int32](https://)0xc4000016)

Task ID Error.

Occurs when the Task ID passed into CFE_ES_GetTaskInfo is invalid.

Definition at line 455 of file cfe_error.h.

37.1.2.33 CFE_ES_FILE_CLOSE_ERR

#define CFE_ES_FILE_CLOSE_ERR (([int32](https://)0xc400001F)

File Close Error.

Occurs when trying to close a file that belongs to a task that ES is cleaning up.

Definition at line 536 of file cfe_error.h.

37.1.2.34 CFE_ES_FILE_IO_ERR

#define CFE_ES_FILE_IO_ERR (([int32](https://)0xc4000014)

File IO Error.

Occurs when a file operation fails

Definition at line 438 of file cfe_error.h.

37.1.2.35 CFE_ES_LIB_ALREADY_LOADED

```
#define CFE_ES_LIB_ALREADY_LOADED ((int32)0x44000028)
```

Library Already Loaded.

Occurs if CFE_ES_LoadLibrary detects that the requested library name is already loaded.

Definition at line 624 of file cfe_error.h.

37.1.2.36 CFE_ES_MUT_SEM_DELETE_ERR

```
#define CFE_ES_MUT_SEM_DELETE_ERR ((int32)0xc400001B)
```

Mutex Semaphore Delete Error.

Occurs when trying to delete a Mutex that belongs to a task that ES is cleaning up.

Definition at line 499 of file cfe_error.h.

37.1.2.37 CFE_ES_NOT_IMPLEMENTED

```
#define CFE_ES_NOT_IMPLEMENTED ((int32)0xc400ffff)
```

Not Implemented.

Current version of cFE does not have the function or the feature of the function implemented. This could be due to either an early build of the cFE for this platform or the platform does not support the specified feature.

Definition at line 645 of file cfe_error.h.

37.1.2.38 CFE_ES_OPERATION_TIMED_OUT

```
#define CFE_ES_OPERATION_TIMED_OUT ((int32)0xc4000027)
```

Operation Timed Out.

Occurs if the timeout for a given operation was exceeded

Definition at line 615 of file cfe_error.h.

37.1.2.39   CFE_ES_QUEUE_DELETE_ERR

#define CFE_ES_QUEUE_DELETE_ERR ((int320xc400001E)

Queue Delete Error.

Occurs when trying to delete a Queue that belongs to a task that ES is cleaning up.

Definition at line 527 of file cfe_error.h.

37.1.2.40   CFE_ES_RST_ACCESS_ERR

#define CFE_ES_RST_ACCESS_ERR ((int320xc4000015)

Reset Area Access Error.

Occurs when the BSP is not successful in returning the reset area address.

Definition at line 447 of file cfe_error.h.

37.1.2.41   CFE_ES_TASK_DELETE_ERR

#define CFE_ES_TASK_DELETE_ERR ((int320xc4000026)

Task Delete Error.

Occurs when trying to delete a task that ES is cleaning up.

Definition at line 607 of file cfe_error.h.

37.1.2.42   CFE_ES_TIMER_DELETE_ERR

#define CFE_ES_TIMER_DELETE_ERR ((int320xc4000024)

Timer Delete Error.

Occurs when trying to delete a Timer that belongs to a task that ES is cleaning up.

Definition at line 589 of file cfe_error.h.

37.1.2.43 CFE_EVS_APP_FILTER_OVERLOAD

```
#define CFE_EVS_APP_FILTER_OVERLOAD ((int32)0xc2000004)
```

Application Filter Overload.

Number of Application event filters input upon registration is greater than CFE_PLATFORM_EVS_MAX_EVENT_FIL↩
TERS

Definition at line 207 of file cfe_error.h.

37.1.2.44 CFE_EVS_APP_ILLEGAL_APP_ID

```
#define CFE_EVS_APP_ILLEGAL_APP_ID ((int32)0xc2000003)
```

Illegal Application ID.

Application ID returned by CFE_ES_GetAppIDByName is greater than CFE_PLATFORM_ES_MAX_APPLICATIONS

Definition at line 198 of file cfe_error.h.

37.1.2.45 CFE_EVS_APP_NOT_REGISTERED

```
#define CFE_EVS_APP_NOT_REGISTERED ((int32)0xc2000002)
```

Application Not Registered.

Calling application never previously called CFE_EVS_Register

Definition at line 189 of file cfe_error.h.

37.1.2.46 CFE_EVS_EVT_NOT_REGISTERED

```
#define CFE_EVS_EVT_NOT_REGISTERED ((int32)0xc2000006)
```

Event Not Registered.

CFE_EVS_ResetFilter EventID argument was not found in any event filter registered by the calling application.

Definition at line 226 of file cfe_error.h.

37.1.2.47   CFE_EVS_FILE_WRITE_ERROR

#define CFE_EVS_FILE_WRITE_ERROR ((int32)0xc2000007)

File Write Error.

A file write error occurred while processing an EVS command

Definition at line 234 of file cfe_error.h.

37.1.2.48   CFE_EVS_FUNCTION_DISABLED

#define CFE_EVS_FUNCTION_DISABLED ((int32)0xc2000009)

Function Disabled.

EVS command sent that requires a feature currently turned off This is to differentiate between "NOT_IMPLEMENTED" where the feature IS implemented but it is disabled at runtime.

Definition at line 251 of file cfe_error.h.

37.1.2.49   CFE_EVS_INVALID_PARAMETER

#define CFE_EVS_INVALID_PARAMETER ((int32)0xc2000008)

Invalid Pointer.

Invalid parameter supplied to EVS command

Definition at line 242 of file cfe_error.h.

37.1.2.50   CFE_EVS_NOT_IMPLEMENTED

#define CFE_EVS_NOT_IMPLEMENTED ((int32)0xc200ffff)

Not Implemented.

Current version of cFE does not have the function or the feature of the function implemented. This could be due to either an early build of the cFE for this platform or the platform does not support the specified feature.

Definition at line 262 of file cfe_error.h.

37.1.2.51 CFE_EVS_RESET_AREA_POINTER

#define CFE_EVS_RESET_AREA_POINTER ((int32)0xc2000005)

Reset Area Pointer Failure.

Could not get pointer to the ES Reset area, so we could not get the pointer to the EVS Log.

Definition at line 216 of file cfe_error.h.

37.1.2.52 CFE_EVS_UNKNOWN_FILTER

#define CFE_EVS_UNKNOWN_FILTER ((int32)0xc2000001)

Unknown Filter.

CFE_EVS_Register FilterScheme parameter was illegal

Definition at line 181 of file cfe_error.h.

37.1.2.53 CFE_FS_BAD_ARGUMENT

#define CFE_FS_BAD_ARGUMENT ((int32)0xc6000001)

Bad Argument.

A parameter given by a caller to a File Services API did not pass validation checks.

Definition at line 659 of file cfe_error.h.

37.1.2.54 CFE_FS_FNAME_TOO_LONG

#define CFE_FS_FNAME_TOO_LONG ((int32)0xc6000003)

Filename Too Long.

FS filename string is too long

Definition at line 675 of file cfe_error.h.

37.1.2.55 CFE_FS_GZIP_BAD_CODE_BLOCK

```
#define CFE_FS_GZIP_BAD_CODE_BLOCK ((int32)0xc6000005)
```

DEPRECATED: GZIP File Bad Code Block.

Deprecated

The GZIP file codeblock is bad, which means the file is most likely corrupted

Definition at line 693 of file cfe_error.h.

37.1.2.56 CFE_FS_GZIP_BAD_DATA

```
#define CFE_FS_GZIP_BAD_DATA ((int32)0xc6000004)
```

DEPRECATED: GZIP File Bad Data.

Deprecated

The GZIP file contains invalid data and cannot be read

Definition at line 684 of file cfe_error.h.

37.1.2.57 CFE_FS_GZIP_CRC_ERROR

```
#define CFE_FS_GZIP_CRC_ERROR ((int32)0xc6000007)
```

DEPRECATED: GZIP CRC Error.

Deprecated

There is a CRC error in the GZIP file, which means the file is most likely corrupted.

Definition at line 711 of file cfe_error.h.

37.1.2.58 CFE_FS_GZIP_INDEX_ERROR

```
#define CFE_FS_GZIP_INDEX_ERROR ((int32)0xc600000E)
```

DEPRECATED: GZIP Index Error.

Deprecated

An error occurred trying to read the GZIP index, which means the file is most likely corrupted.

Definition at line 778 of file cfe_error.h.

37.1.2.59 CFE_FS_GZIP_LENGTH_ERROR

```
#define CFE_FS_GZIP_LENGTH_ERROR ((int32)0xc6000008)
```

DEPRECATED: GZIP Length Error.

Deprecated

There is a length error in the GZIP internal data structures, which means the file is most likely corrupted.

Definition at line 720 of file cfe_error.h.

37.1.2.60 CFE_FS_GZIP_NO_MEMORY

```
#define CFE_FS_GZIP_NO_MEMORY ((int32)0xc6000006)
```

DEPRECATED: GZIP Memory Buffer Exhausted.

Deprecated

The memory buffer used by the decompression routine is exhausted.

Definition at line 702 of file cfe_error.h.

37.1.2.61 CFE_FS_GZIP_NON_ZIP_FILE

#define CFE_FS_GZIP_NON_ZIP_FILE (([int32](int32))0xc600000F)

DEPRECATED: GZIP Not Zip File.

Deprecated

The file to be decompressed is not a valid GZIP file

Definition at line 786 of file cfe_error.h.

37.1.2.62 CFE_FS_GZIP_OPEN_INPUT

#define CFE_FS_GZIP_OPEN_INPUT (([int32](int32))0xc600000C)

DEPRECATED: GZIP Open Input Error.

Deprecated

An error occurred trying to open the GZIP file to be decompressed. The function must be able to open the GZIP file as read-only in order to decompress it to a new file (most likely in a RAM disk)

Definition at line 759 of file cfe_error.h.

37.1.2.63 CFE_FS_GZIP_OPEN_OUTPUT

#define CFE_FS_GZIP_OPEN_OUTPUT (([int32](int32))0xc600000B)

DEPRECATED: GZIP Open Output Error.

Deprecated

An error occurred trying to open the DestinationFile where the GZIP file will be uncompressed. The function must be able to open a new write-only file to store the uncompressed file in.

Definition at line 748 of file cfe_error.h.

37.1.2.64 CFE_FS_GZIP_READ_ERROR

```
#define CFE_FS_GZIP_READ_ERROR ((int32)0xc600000A)
```

DEPRECATED: GZIP Read Error.

Deprecated

An error occurred trying to read the GZIP file

Definition at line 737 of file cfe_error.h.

37.1.2.65 CFE_FS_GZIP_READ_ERROR_HEADER

```
#define CFE_FS_GZIP_READ_ERROR_HEADER ((int32)0xc600000D)
```

DEPRECATED: GZIP Read Header Error.

Deprecated

An error occured trying to read the GZIP file header, which means the file is most likely corrupted or not a valid GZIP file.

Definition at line 769 of file cfe_error.h.

37.1.2.66 CFE_FS_GZIP_WRITE_ERROR

```
#define CFE_FS_GZIP_WRITE_ERROR ((int32)0xc6000009)
```

DEPRECATED: GZIP Write Error.

Deprecated

An error occurred trying to write the uncompressed file.

Definition at line 729 of file cfe_error.h.

37.1.2.67   CFE_FS_INVALID_PATH

#define CFE_FS_INVALID_PATH (([int32](int32))0xc6000002)

Invalid Path.

FS was unable to extract a filename from a path string

Definition at line 667 of file cfe_error.h.

37.1.2.68   CFE_FS_NOT_IMPLEMENTED

#define CFE_FS_NOT_IMPLEMENTED (([int32](int32))0xc600ffff)

Not Implemented.

Current version of cFE does not have the function or the feature of the function implemented. This could be due to either an early build of the cFE for this platform or the platform does not support the specified feature.

Definition at line 799 of file cfe_error.h.

37.1.2.69   CFE_OS_ERR_INVALID_ID

#define CFE_OS_ERR_INVALID_ID (OS_ERR_INVALID_ID)

DEPRECATED.

Deprecated

Definition at line 821 of file cfe_error.h.

37.1.2.70   CFE_OS_ERR_INVALID_PRIORITY

#define CFE_OS_ERR_INVALID_PRIORITY (OS_ERR_INVALID_PRIORITY)

DEPRECATED.

Deprecated

Definition at line 824 of file cfe_error.h.

37.1.2.71   CFE_OS_ERR_NAME_NOT_FOUND

#define CFE_OS_ERR_NAME_NOT_FOUND (OS_ERR_NAME_NOT_FOUND)

DEPRECATED.

Deprecated

Definition at line 822 of file cfe_error.h.

37.1.2.72   CFE_OS_ERR_NAME_TAKEN

#define CFE_OS_ERR_NAME_TAKEN (OS_ERR_NAME_TAKEN)

DEPRECATED.

Deprecated

Definition at line 820 of file cfe_error.h.

37.1.2.73   CFE_OS_ERR_NAME_TOO_LONG

#define CFE_OS_ERR_NAME_TOO_LONG (OS_ERR_NAME_TOO_LONG)

DEPRECATED.

Deprecated

Definition at line 818 of file cfe_error.h.

37.1.2.74   CFE_OS_ERR_NO_FREE_IDS

#define CFE_OS_ERR_NO_FREE_IDS (OS_ERR_NO_FREE_IDS)

DEPRECATED.

Deprecated

Definition at line 819 of file cfe_error.h.

37.1.2.75   CFE_OS_ERR_SEM_NOT_FULL

#define CFE_OS_ERR_SEM_NOT_FULL (OS_ERR_SEM_NOT_FULL)

DEPRECATED.

Deprecated

Definition at line 823 of file cfe_error.h.

37.1.2.76   CFE_OS_ERROR

#define CFE_OS_ERROR (OS_ERROR)

DEPRECATED.

Deprecated

Definition at line 806 of file cfe_error.h.

37.1.2.77   CFE_OS_ERROR_ADDRESS_MISALIGNED

#define CFE_OS_ERROR_ADDRESS_MISALIGNED (OS_ERROR_ADDRESS_MISALIGNED)

DEPRECATED.

Deprecated

Definition at line 808 of file cfe_error.h.

37.1.2.78   CFE_OS_ERROR_TIMEOUT

#define CFE_OS_ERROR_TIMEOUT (OS_ERROR_TIMEOUT)

DEPRECATED.

Deprecated

Definition at line 809 of file cfe_error.h.

37.1.2.79 CFE_OS_FS_ERR_DRIVE_NOT_CREATED

#define CFE_OS_FS_ERR_DRIVE_NOT_CREATED (OS_FS_ERR_DRIVE_NOT_CREATED)

DEPRECATED.

Deprecated

Definition at line 829 of file cfe_error.h.

37.1.2.80 CFE_OS_FS_ERR_INVALID_POINTER

#define CFE_OS_FS_ERR_INVALID_POINTER (OS_INVALID_POINTER)

DEPRECATED.

Deprecated

Definition at line 826 of file cfe_error.h.

37.1.2.81 CFE_OS_FS_ERR_NAME_TOO_LONG

#define CFE_OS_FS_ERR_NAME_TOO_LONG (OS_FS_ERR_NAME_TOO_LONG)

DEPRECATED.

Deprecated

Definition at line 828 of file cfe_error.h.

37.1.2.82 CFE_OS_FS_ERR_PATH_TOO_LONG

#define CFE_OS_FS_ERR_PATH_TOO_LONG (OS_FS_ERR_PATH_TOO_LONG)

DEPRECATED.

Deprecated

Definition at line 827 of file cfe_error.h.

37.1.2.83 CFE_OS_FS_ERROR

#define CFE_OS_FS_ERROR (OS_ERROR)

DEPRECATED.

Deprecated

Definition at line 825 of file cfe_error.h.

37.1.2.84 CFE_OS_INVALID_INT_NUM

#define CFE_OS_INVALID_INT_NUM (OS_INVALID_INT_NUM)

DEPRECATED.

Deprecated

Definition at line 810 of file cfe_error.h.

37.1.2.85 CFE_OS_INVALID_POINTER

#define CFE_OS_INVALID_POINTER (OS_INVALID_POINTER)

DEPRECATED.

Deprecated

Definition at line 807 of file cfe_error.h.

37.1.2.86 CFE_OS_QUEUE_EMPTY

#define CFE_OS_QUEUE_EMPTY (OS_QUEUE_EMPTY)

DEPRECATED.

Deprecated

Definition at line 813 of file cfe_error.h.

37.1.2.87 CFE_OS_QUEUE_FULL

#define CFE_OS_QUEUE_FULL (OS_QUEUE_FULL)

DEPRECATED.

Deprecated

Definition at line 814 of file cfe_error.h.

37.1.2.88 CFE_OS_QUEUE_ID_ERROR

#define CFE_OS_QUEUE_ID_ERROR (OS_QUEUE_ID_ERROR)

DEPRECATED.

Deprecated

Definition at line 817 of file cfe_error.h.

37.1.2.89 CFE_OS_QUEUE_INVALID_SIZE

#define CFE_OS_QUEUE_INVALID_SIZE (OS_QUEUE_INVALID_SIZE)

DEPRECATED.

Deprecated

Definition at line 816 of file cfe_error.h.

37.1.2.90 CFE_OS_QUEUE_TIMEOUT

#define CFE_OS_QUEUE_TIMEOUT (OS_QUEUE_TIMEOUT)

DEPRECATED.

Deprecated

Definition at line 815 of file cfe_error.h.

37.1.2.91 CFE_OS_SEM_FAILURE

#define CFE_OS_SEM_FAILURE ([OS_SEM_FAILURE](#))

DEPRECATED.

[Deprecated](#)

Definition at line 811 of file cfe_error.h.

37.1.2.92 CFE_OS_SEM_TIMEOUT

#define CFE_OS_SEM_TIMEOUT ([OS_SEM_TIMEOUT](#))

DEPRECATED.

[Deprecated](#)

Definition at line 812 of file cfe_error.h.

37.1.2.93 CFE_OSAPI_NOT_IMPLEMENTED

#define CFE_OSAPI_NOT_IMPLEMENTED ([OS_ERR_NOT_IMPLEMENTED](#))

DEPRECATED.

[Deprecated](#)

Definition at line 830 of file cfe_error.h.

37.1.2.94 CFE_SB_BAD_ARGUMENT

#define CFE_SB_BAD_ARGUMENT (([int32](#))0xca000003)

Bad Argument.

A parameter given by a caller to a Software Bus API did not pass validation checks.

Definition at line 865 of file cfe_error.h.

37.1.2.95 CFE_SB_BUF_ALOC_ERR

```
#define CFE_SB_BUF_ALOC_ERR ((int32)0xca000008)
```

Buffer Allocation Error.

This error code will be returned from CFE_SB_SendMsg when the memory in the SB message buffer pool has been depleted. The amount of memory in the pool is dictated by the configuration parameter CFE_PLATFORM_SB_BU↩ F_MEMORY_BYTES specified in the cfe_platform_cfg.h file. Also the memory statistics, including current utilization figures and high water marks for the SB Buffer memory pool can be monitored by sending a Software Bus command to send the SB statistics packet.

Definition at line 929 of file cfe_error.h.

37.1.2.96 CFE_SB_BUFFER_INVALID

```
#define CFE_SB_BUFFER_INVALID ((int32)0xca00000e)
```

Buffer Invalid.

This error code will be returned when a request to release or send a zero copy buffer is invalid, such as if the handle or buffer is not correct or the buffer was previously released.

Definition at line 995 of file cfe_error.h.

37.1.2.97 CFE_SB_INTERNAL_ERR

```
#define CFE_SB_INTERNAL_ERR ((int32)0xca00000c)
```

Internal Error.

This error code will be returned by the CFE_SB_Subscribe API if the code detects an internal index is out of range. The most likely cause would be a Single Event Upset.

Definition at line 974 of file cfe_error.h.

37.1.2.98 CFE_SB_MAX_DESTS_MET

```
#define CFE_SB_MAX_DESTS_MET ((int32)0xca00000a)
```

Max Destinations Met.

Will be returned when calling one of the SB subscription API's if the SB routing table cannot accomodate another destination for a particular the given message ID. This occurs when the number of destinations in use meets the platform configuration parameter CFE_PLATFORM_SB_MAX_DEST_PER_PKT.

Definition at line 953 of file cfe_error.h.

37.1.2.99   CFE_SB_MAX_MSGS_MET

```
#define CFE_SB_MAX_MSGS_MET ((int32)0xca000009)
```

Max Messages Met.

Will be returned when calling one of the SB subscription API's if the SB routing table cannot accomodate another unique message ID because the platform configuration parameter CFE_PLATFORM_SB_MAX_MSG_IDS has been met.

Definition at line 940 of file cfe_error.h.

37.1.2.100   CFE_SB_MAX_PIPES_MET

```
#define CFE_SB_MAX_PIPES_MET ((int32)0xca000004)
```

Max Pipes Met.

This error code will be returned from CFE_SB_CreatePipe when the SB cannot accomodate the request to create a pipe because the maximum number of pipes (CFE_PLATFORM_SB_MAX_PIPES) are in use. This configuration parameter is defined in the cfe_platform_cfg.h file.

Definition at line 877 of file cfe_error.h.

37.1.2.101   CFE_SB_MSG_TOO_BIG

```
#define CFE_SB_MSG_TOO_BIG ((int32)0xca000007)
```

Message Too Big.

The size field in the message header indicates the message exceeds the max Software Bus message size. The max size is defined by configuration parameter CFE_MISSION_SB_MAX_SB_MSG_SIZE in cfe_mission_cfg.h

Definition at line 914 of file cfe_error.h.

37.1.2.102   CFE_SB_NO_MESSAGE

```
#define CFE_SB_NO_MESSAGE ((int32)0xca000002)
```

No Message.

When "Polling" a pipe for a message in CFE_SB_RcvMsg, this return value indicates that there was not a message on the pipe.

Definition at line 855 of file cfe_error.h.

37.1.2.103   CFE_SB_NO_MSG_RECV

```
#define CFE_SB_NO_MSG_RECV ((int32)0xca00000f)
```

No Message Recieved.

When trying to determine the last senders ID, this return value indicates that there was not a message recived on the pipe.

Definition at line 1005 of file cfe_error.h.

37.1.2.104   CFE_SB_NO_SUBSCRIBERS

```
#define CFE_SB_NO_SUBSCRIBERS ((int32)0xca00000b)
```

No Subscribers.

This error code is returned by the CFE_SB_Unsubscribe API if there has not been an entry in the routing tables for the MsgId/PipeId given as parameters.

Definition at line 963 of file cfe_error.h.

37.1.2.105   CFE_SB_NOT_IMPLEMENTED

```
#define CFE_SB_NOT_IMPLEMENTED ((int32)0xca00ffff)
```

Not Implemented.

Current version of cFE does not have the function or the feature of the function implemented. This could be due to either an early build of the cFE for this platform or the platform does not support the specified feature.

Definition at line 1017 of file cfe_error.h.

37.1.2.106   CFE_SB_PIPE_CR_ERR

```
#define CFE_SB_PIPE_CR_ERR ((int32)0xca000005)
```

Pipe Create Error.

The maximum number of queues(OS_MAX_QUEUES) are in use. Or possibly a lower level problem with creating the underlying queue has occurred such as a lack of memory. If the latter is the problem, the status code displayed in the event must be tracked.

Definition at line 889 of file cfe_error.h.

37.1.2.107 CFE_SB_PIPE_RD_ERR

```
#define CFE_SB_PIPE_RD_ERR ((int32)0xca000006)
```

Pipe Read Error.

This return value indicates an error at the Queue read level. This error typically cannot be corrected by the caller. Some possible causes are: queue was not properly initialized or created, the number of bytes read from the queue was not the number of bytes requested in the read. The queue id is invalid. Similar errors regarding the pipe will be caught by higher level code in the Software Bus.

Definition at line 903 of file cfe_error.h.

37.1.2.108 CFE_SB_TIME_OUT

```
#define CFE_SB_TIME_OUT ((int32)0xca000001)
```

Time Out.

In CFE_SB_RcvMsg, this return value indicates that a packet has not been received in the time given in the "timeout" parameter.

Definition at line 845 of file cfe_error.h.

37.1.2.109 CFE_SB_WRONG_MSG_TYPE

```
#define CFE_SB_WRONG_MSG_TYPE ((int32)0xca00000d)
```

Wrong Message Type.

This error code will be returned when a request such as CFE_SB_SetMsgTime is made on a packet that does not include a field for msg time.

Definition at line 984 of file cfe_error.h.

37.1.2.110 CFE_STATUS_BAD_COMMAND_CODE

```
#define CFE_STATUS_BAD_COMMAND_CODE ((int32)0xc8000004)
```

Bad Command Code.

This error code will be returned when a message identification process determined that the command code is does not correspond to any known value

Definition at line 155 of file cfe_error.h.

37.1.2.111 CFE_STATUS_NO_COUNTER_INCREMENT

```
#define CFE_STATUS_NO_COUNTER_INCREMENT ((int32)0x48000001)
```

No Counter Increment.

Informational code indicating that a command was processed successfully but that the command counter should *not* be incremented.

Definition at line 128 of file cfe_error.h.

37.1.2.112 CFE_STATUS_NOT_IMPLEMENTED

```
#define CFE_STATUS_NOT_IMPLEMENTED ((int32)0xc800ffff)
```

Not Implemented.

Current version does not have the function or the feature of the function implemented. This could be due to either an early build for this platform or the platform does not support the specified feature.

Definition at line 166 of file cfe_error.h.

37.1.2.113 CFE_STATUS_UNKNOWN_MSG_ID

```
#define CFE_STATUS_UNKNOWN_MSG_ID ((int32)0xc8000003)
```

Unknown Message ID.

This error code will be returned when a message identification process determined that the message ID does not correspond to a known value

Definition at line 146 of file cfe_error.h.

37.1.2.114 CFE_STATUS_WRONG_MSG_LENGTH

```
#define CFE_STATUS_WRONG_MSG_LENGTH ((int32)0xc8000002)
```

Wrong Message Length.

This error code will be returned when a message validation process determined that the message length is incorrect

Definition at line 137 of file cfe_error.h.

37.1.2.115 CFE_SUCCESS

```
#define CFE_SUCCESS (0)
```

Sucessful execution.

Operation was performed successfully

Definition at line 120 of file cfe_error.h.

37.1.2.116 CFE_TBL_ERR_ACCESS

```
#define CFE_TBL_ERR_ACCESS ((int32)0xcc00002c)
```

Error code indicating that the TBL file could not be opened by the OS.

Definition at line 1448 of file cfe_error.h.

37.1.2.117 CFE_TBL_ERR_BAD_APP_ID

```
#define CFE_TBL_ERR_BAD_APP_ID ((int32)0xcc00000A)
```

Bad Application ID.

The calling application does not have a legitimate Application ID. Most likely cause is a failure to register with the cFE via the CFE_ES_RegisterApp function.

Definition at line 1115 of file cfe_error.h.

37.1.2.118 CFE_TBL_ERR_BAD_CONTENT_ID

```
#define CFE_TBL_ERR_BAD_CONTENT_ID ((int32)0xcc000016)
```

Bad Content ID.

The calling Application called CFE_TBL_Load with a filename that specified a file whose content ID was not that of a table image.

Definition at line 1229 of file cfe_error.h.

37.1.2.119 CFE_TBL_ERR_BAD_PROCESSOR_ID

#define CFE_TBL_ERR_BAD_PROCESSOR_ID ((int32)0xcc000029)

Bad Processor ID.

The selected table file failed validation for Processor ID. The platform configuration file has verification of table files enabled for Processor ID and an attempt was made to load a table with an invalid Processor ID in the table file header.

Definition at line 1428 of file cfe_error.h.

37.1.2.120 CFE_TBL_ERR_BAD_SPACECRAFT_ID

#define CFE_TBL_ERR_BAD_SPACECRAFT_ID ((int32)0xcc000028)

Bad Spacecraft ID.

The selected table file failed validation for Spacecraft ID. The platform configuration file has verification of table files enabled for Spacecraft ID and an attempt was made to load a table with an invalid Spacecraft ID in the table file header.

Definition at line 1416 of file cfe_error.h.

37.1.2.121 CFE_TBL_ERR_BAD_SUBTYPE_ID

#define CFE_TBL_ERR_BAD_SUBTYPE_ID ((int32)0xcc00001B)

Bad Subtype ID.

The calling Application tried to access a table file whose Subtype identifier indicated it was not a table image file.

Definition at line 1270 of file cfe_error.h.

37.1.2.122 CFE_TBL_ERR_DUMP_ONLY

#define CFE_TBL_ERR_DUMP_ONLY ((int32)0xcc000010)

Dump Only Error.

The calling Application has attempted to perform a load on a table that was created with "Dump Only" attributes.

Definition at line 1173 of file cfe_error.h.

37.1.2.123 CFE_TBL_ERR_DUPLICATE_DIFF_SIZE

#define CFE_TBL_ERR_DUPLICATE_DIFF_SIZE ((int32)0xcc00000C)

Duplicate Table With Different Size.

An application attempted to register a table with the same name as a table that is already in the registry. The size of the new table is different from the size already in the registry.

Definition at line 1134 of file cfe_error.h.

37.1.2.124 CFE_TBL_ERR_DUPLICATE_NOT_OWNED

#define CFE_TBL_ERR_DUPLICATE_NOT_OWNED ((int32)0xcc00000D)

Dupicate Table And Not Owned.

An application attempted to register a table with the same name as a table that is already in the registry. The previously registered table is owned by a different application.

Definition at line 1144 of file cfe_error.h.

37.1.2.125 CFE_TBL_ERR_FILE_FOR_WRONG_TABLE

#define CFE_TBL_ERR_FILE_FOR_WRONG_TABLE ((int32)0xcc000020)

File For Wrong Table.

The calling Application tried to load a table using a file whose header indicated that it was for a different table.

Definition at line 1316 of file cfe_error.h.

37.1.2.126 CFE_TBL_ERR_FILE_NOT_FOUND

#define CFE_TBL_ERR_FILE_NOT_FOUND ((int32)0xcc000013)

File Not Found.

The calling Application called CFE_TBL_Load with a bad filename.

Definition at line 1199 of file cfe_error.h.

37.1.2.127 CFE_TBL_ERR_FILE_SIZE_INCONSISTENT

```
#define CFE_TBL_ERR_FILE_SIZE_INCONSISTENT ((int32)0xcc00001C)
```

File Size Inconsistent.

The calling Application tried to access a table file whose Subtype identifier indicated it was not a table image file.

Definition at line 1279 of file cfe_error.h.

37.1.2.128 CFE_TBL_ERR_FILE_TOO_LARGE

```
#define CFE_TBL_ERR_FILE_TOO_LARGE ((int32)0xcc000014)
```

File Too Large.

The calling Application called CFE_TBL_Load with a filename that specified a file that contained more data than the size of the table OR which contained more data than specified in the table header.

Definition at line 1209 of file cfe_error.h.

37.1.2.129 CFE_TBL_ERR_FILENAME_TOO_LONG

```
#define CFE_TBL_ERR_FILENAME_TOO_LONG ((int32)0xcc00001F)
```

Filename Too Long.

The calling Application tried to load a table using a filename that was too long.

Definition at line 1306 of file cfe_error.h.

37.1.2.130 CFE_TBL_ERR_HANDLES_FULL

```
#define CFE_TBL_ERR_HANDLES_FULL ((int32)0xcc00000B)
```

Handles Full.

An application attempted to create a table and the Table Handle Array already used all CFE_PLATFORM_TBL_MAX↩
_NUM_HANDLES in it.

Definition at line 1124 of file cfe_error.h.

37.1.2.131   CFE_TBL_ERR_ILLEGAL_SRC_TYPE

#define CFE_TBL_ERR_ILLEGAL_SRC_TYPE ((int32)0xcc000011)

Illegal Source Type.

The calling Application called CFE_TBL_Load with an illegal value for the second parameter.

Definition at line 1182 of file cfe_error.h.

37.1.2.132   CFE_TBL_ERR_INVALID_HANDLE

#define CFE_TBL_ERR_INVALID_HANDLE ((int32)0xcc000001)

Invalid Handle.

The calling Application attempted to pass a Table handle that represented too large an index or identified a Table Access Descriptor that was not used.

Definition at line 1031 of file cfe_error.h.

37.1.2.133   CFE_TBL_ERR_INVALID_NAME

#define CFE_TBL_ERR_INVALID_NAME ((int32)0xcc000002)

Invalid Name.

The calling Application attempted to register a table whose name length exceeded the platform configuration value of CFE_MISSION_TBL_MAX_NAME_LENGTH or was zero characters long.

Definition at line 1041 of file cfe_error.h.

37.1.2.134   CFE_TBL_ERR_INVALID_OPTIONS

#define CFE_TBL_ERR_INVALID_OPTIONS ((int32)0xcc000025)

Invalid Options.

The calling Application has used an illegal combination of table options. A summary of the illegal combinations are as follows:

#CFE_TBL_OPT_USR_DEF_ADDR cannot be combined with any of the following:

1. CFE_TBL_OPT_DBL_BUFFER
2. CFE_TBL_OPT_LOAD_DUMP
3. CFE_TBL_OPT_CRITICAL

#CFE_TBL_OPT_DBL_BUFFER cannot be combined with the following:

1. CFE_TBL_OPT_USR_DEF_ADDR
2. CFE_TBL_OPT_DUMP_ONLY

Definition at line 1378 of file cfe_error.h.

37.1.2.135 CFE_TBL_ERR_INVALID_SIZE

`#define CFE_TBL_ERR_INVALID_SIZE ((int32)0xcc000003)`

Invalid Size.

The calling Application attempted to register a table: a) that was a double buffered table with size greater than CFE_↩
PLATFORM_TBL_MAX_DBL_TABLE_SIZE b) that was a single buffered table with size greater than CFE_PLATFO↩
RM_TBL_MAX_SNGL_TABLE_SIZE c) that had a size of zero

Definition at line 1052 of file cfe_error.h.

37.1.2.136 CFE_TBL_ERR_LOAD_IN_PROGRESS

`#define CFE_TBL_ERR_LOAD_IN_PROGRESS ((int32)0xcc000012)`

Load In Progress.

The calling Application called CFE_TBL_Load when another Application was trying to load the table.

Definition at line 1191 of file cfe_error.h.

37.1.2.137 CFE_TBL_ERR_LOAD_INCOMPLETE

`#define CFE_TBL_ERR_LOAD_INCOMPLETE ((int32)0xcc000021)`

Load Incomplete.

The calling Application tried to load a table file whose header claimed the load was larger than what was actually read
from the file.

Definition at line 1326 of file cfe_error.h.

37.1.2.138 CFE_TBL_ERR_NEVER_LOADED

`#define CFE_TBL_ERR_NEVER_LOADED ((int32)0xcc000005)`

Never Loaded.

Table has not been loaded with data.

Definition at line 1068 of file cfe_error.h.

37.1.2.139   CFE_TBL_ERR_NO_ACCESS

#define CFE_TBL_ERR_NO_ACCESS (([int32](int32))0xcc000008)

No Access.

The calling application either failed when calling CFE_TBL_Register, failed when calling CFE_TBL_Share or forgot to call either one.

Definition at line 1096 of file cfe_error.h.

37.1.2.140   CFE_TBL_ERR_NO_BUFFER_AVAIL

#define CFE_TBL_ERR_NO_BUFFER_AVAIL (([int32](int32))0xcc00000F)

No Buffer Available.

The calling Application has tried to allocate a working buffer but none were available.

Definition at line 1164 of file cfe_error.h.

37.1.2.141   CFE_TBL_ERR_NO_STD_HEADER

#define CFE_TBL_ERR_NO_STD_HEADER (([int32](int32))0xcc00001D)

No Standard Header.

The calling Application tried to access a table file whose standard cFE File Header was the wrong size, etc.

Definition at line 1287 of file cfe_error.h.

37.1.2.142   CFE_TBL_ERR_NO_TBL_HEADER

#define CFE_TBL_ERR_NO_TBL_HEADER (([int32](int32))0xcc00001E)

No Table Header.

The calling Application tried to access a table file whose standard cFE Table File Header was the wrong size, etc.

Definition at line 1296 of file cfe_error.h.

37.1.2.143 CFE_TBL_ERR_PARTIAL_LOAD

```
#define CFE_TBL_ERR_PARTIAL_LOAD ((int32)0xcc000023)
```

Partial Load Error.

The calling Application tried to load a table file whose header claimed the load did not start with the first byte and the table image had NEVER been loaded before. Partial loads are not allowed on uninitialized tables. It should be noted that CFE_TBL_WARN_SHORT_FILE also indicates a partial load.

Definition at line 1350 of file cfe_error.h.

37.1.2.144 CFE_TBL_ERR_REGISTRY_FULL

```
#define CFE_TBL_ERR_REGISTRY_FULL ((int32)0xcc000006)
```

Registry Full.

An application attempted to create a table and the Table registry already contained CFE_PLATFORM_TBL_MAX_N↩
UM_TABLES in it.

Definition at line 1077 of file cfe_error.h.

37.1.2.145 CFE_TBL_ERR_SHORT_FILE

```
#define CFE_TBL_ERR_SHORT_FILE ((int32)0xcc00002b)
```

Error code indicating that the TBL file is shorter than indicated in the file header.

Definition at line 1442 of file cfe_error.h.

37.1.2.146 CFE_TBL_ERR_UNREGISTERED

```
#define CFE_TBL_ERR_UNREGISTERED ((int32)0xcc000009)
```

Unregistered.

The calling application is trying to access a table that has been unregistered.

Definition at line 1105 of file cfe_error.h.

37.1.2.147   CFE_TBL_INFO_DUMP_PENDING

```
#define CFE_TBL_INFO_DUMP_PENDING ((int32)0x4c000024)
```

Dump Pending.

The calling Application should call CFE_TBL_Manage for the specified table. The ground has requested a dump of the Dump-Only table and needs to synchronize with the owning application.

Definition at line 1361 of file cfe_error.h.

37.1.2.148   CFE_TBL_INFO_NO_UPDATE_PENDING

```
#define CFE_TBL_INFO_NO_UPDATE_PENDING ((int32)0x4c000017)
```

No Update Pending.

The calling Application has attempted to update a table without a pending load.

Definition at line 1237 of file cfe_error.h.

37.1.2.149   CFE_TBL_INFO_NO_VALIDATION_PENDING

```
#define CFE_TBL_INFO_NO_VALIDATION_PENDING ((int32)0x4c00001A)
```

No Validation Pending

The calling Application tried to validate a table that did not have a validation request pending.

Definition at line 1261 of file cfe_error.h.

37.1.2.150   CFE_TBL_INFO_RECOVERED_TBL

```
#define CFE_TBL_INFO_RECOVERED_TBL ((int32)0x4c000027)
```

Recovered Table.

The calling Application registered a critical table whose previous contents were discovered in the Critical Data Store. The discovered contents were copied back into the newly registered table as the table's initial contents.
NOTE: In this situation, the contents of the table are **NOT** validated using the table's validation function.

Definition at line 1404 of file cfe_error.h.

37.1.2.151   CFE_TBL_INFO_TABLE_LOCKED

```
#define CFE_TBL_INFO_TABLE_LOCKED ((int32)0x4c000018)
```

Table Locked.

The calling Application tried to update a table that is locked by another user.

Definition at line 1245 of file cfe_error.h.

37.1.2.152   CFE_TBL_INFO_UPDATE_PENDING

```
#define CFE_TBL_INFO_UPDATE_PENDING ((int32)0x4c000004)
```

Update Pending.

The calling Application has identified a table that has a load pending.

Definition at line 1060 of file cfe_error.h.

37.1.2.153   CFE_TBL_INFO_UPDATED

```
#define CFE_TBL_INFO_UPDATED ((int32)0x4c00000E)
```

Updated.

The calling Application has identified a table that has been updated.
NOTE: This is a nominal return code informing the calling application that the table identified in the call has had its contents updated since the last time the application obtained its address or status.

Definition at line 1155 of file cfe_error.h.

37.1.2.154   CFE_TBL_INFO_VALIDATION_PENDING

```
#define CFE_TBL_INFO_VALIDATION_PENDING ((int32)0x4c000019)
```

Validation Pending

The calling Application should call CFE_TBL_Validate for the specified table.

Definition at line 1253 of file cfe_error.h.

37.1.2.155 CFE_TBL_MESSAGE_ERROR

```
#define CFE_TBL_MESSAGE_ERROR ((int32)0xcc00002a)
```

Message Error.

Error code indicating that the TBL command was not processed successfully and that the error counter should be incremented.

Definition at line 1436 of file cfe_error.h.

37.1.2.156 CFE_TBL_NOT_IMPLEMENTED

```
#define CFE_TBL_NOT_IMPLEMENTED ((int32)0xcc00ffff)
```

Not Implemented.

Current version of cFE does not have the function or the feature of the function implemented. This could be due to either an early build of the cFE for this platform or the platform does not support the specified feature.

Definition at line 1460 of file cfe_error.h.

37.1.2.157 CFE_TBL_WARN_DUPLICATE

```
#define CFE_TBL_WARN_DUPLICATE ((int32)0x4c000007)
```

Duplicate Warning.

This is an error that the registration is trying to replace an existing table with the same name. The previous table stays in place and the new table is rejected.

Definition at line 1087 of file cfe_error.h.

37.1.2.158 CFE_TBL_WARN_NOT_CRITICAL

```
#define CFE_TBL_WARN_NOT_CRITICAL ((int32)0x4c000026)
```

Not Critical Warning.

The calling Application attempted to register a table as "Critical". Table Services failed to create an appropriate Critical Data Store (See System Log for reason) to save the table contents. The table will be treated as a normal table from now on.

Definition at line 1390 of file cfe_error.h.

37.1.2.159 CFE_TBL_WARN_PARTIAL_LOAD

`#define CFE_TBL_WARN_PARTIAL_LOAD ((int32)0x4c000022)`

Partial Load Warning.

The calling Application tried to load a table file whose header claimed the load did not start with the first byteIt should be noted that CFE_TBL_WARN_SHORT_FILE also indicates a partial load.

Definition at line 1337 of file cfe_error.h.

37.1.2.160 CFE_TBL_WARN_SHORT_FILE

`#define CFE_TBL_WARN_SHORT_FILE ((int32)0x4c000015)`

Short File Warning.

The calling Application called CFE_TBL_Load with a filename that specified a file that started with the first byte of the table but contained less data than the size of the table. It should be noted that CFE_TBL_WARN_PARTIAL_LOAD also indicates a partial load (one that starts at a non-zero offset).

Definition at line 1220 of file cfe_error.h.

37.1.2.161 CFE_TIME_CALLBACK_NOT_REGISTERED

`#define CFE_TIME_CALLBACK_NOT_REGISTERED ((int32)0xce000004)`

Callback Not Registered.

An attempt to unregister a cFE Time Services Synchronization callback has failed because the specified callback function was not located in the Synchronization Callback Registry.

Definition at line 1524 of file cfe_error.h.

37.1.2.162 CFE_TIME_INTERNAL_ONLY

`#define CFE_TIME_INTERNAL_ONLY ((int32)0xce000001)`

Internal Only.

One of the TIME Services API functions to set the time with data from an external time source has been called, but TIME Services has been commanded to not accept external time data. However, the command is still a signal for the Time Server to generate a "time at the tone" command packet using internal data.

Definition at line 1488 of file cfe_error.h.

37.1.2.163   CFE_TIME_NOT_IMPLEMENTED

```
#define CFE_TIME_NOT_IMPLEMENTED ((int32)0xce00ffff)
```

Not Implemented.

Current version of cFE does not have the function or the feature of the function implemented. This could be due to either an early build of the cFE for this platform or the platform does not support the specified feature.

Definition at line 1476 of file cfe_error.h.

37.1.2.164   CFE_TIME_OUT_OF_RANGE

```
#define CFE_TIME_OUT_OF_RANGE ((int32)0xce000002)
```

Out Of Range.

One of the TIME Services API functions to set the time with data from an external time source has been called, but TIME Services has determined that the new time data is invalid. However, the command is still a signal for the Time Server to generate a "time at the tone" command packet using internal data.

Note that the test for invalid time update data only occurs if TIME Services has previously been commanded to set the clock state to "valid".

Definition at line 1503 of file cfe_error.h.

37.1.2.165   CFE_TIME_TOO_MANY_SYNCH_CALLBACKS

```
#define CFE_TIME_TOO_MANY_SYNCH_CALLBACKS ((int32)0xce000003)
```

Too Many Sync Callbacks.

An attempt to register too many cFE Time Services Synchronization callbacks has been made. Only one callback function is allowed per application. It is expected that the application itself will distribute the single callback to child threads as needed.

Definition at line 1514 of file cfe_error.h.

37.2 cFE Entry/Exit APIs

Functions

- void CFE_ES_Main (uint32 StartType, uint32 StartSubtype, uint32 ModeId, const char ∗StartFilePath)

    cFE Main Entry Point used by Board Support Package to start cFE
- int32 CFE_ES_ResetCFE (uint32 ResetType)

    Reset the cFE Core and all cFE Applications.

37.2.1 Detailed Description

37.2.2 Function Documentation

37.2.2.1 CFE_ES_Main()

```
void CFE_ES_Main (
            uint32 StartType,
            uint32 StartSubtype,
            uint32 ModeId,
            const char * StartFilePath )
```

cFE Main Entry Point used by Board Support Package to start cFE

Description

cFE main entry point. This is the entry point into the cFE software. It is called only by the Board Support Package software.

Assumptions, External Events, and Notes:

None

Parameters

in	*StartType*	Identifies whether this was a CFE_PSP_RST_TYPE_POWERON or CFE_PSP_RST_TYPE_PROCESSOR.
in	*StartSubtype*	Specifies, in more detail, what caused the `StartType` identified above. See CFE_PSP_RST_SUBTYPE_POWER_CYCLE for possible examples.
in	*ModeId*	Identifies the source of the Boot as determined by the BSP.
in	*StartFilePath*	Identifies the startup file to use to initialize the cFE apps.

See also

CFE_ES_ResetCFE

37.2.2.2   CFE_ES_ResetCFE()

`int32` CFE_ES_ResetCFE (
            `uint32` *ResetType*)

Reset the cFE Core and all cFE Applications.

Description

This API causes an immediate reset of the cFE Kernel and all cFE Applications. The caller can specify whether the
reset should clear all memory (CFE_PSP_RST_TYPE_POWERON) or try to retain volatile memory areas (CFE↩
_PSP_RST_TYPE_PROCESSOR).

Assumptions, External Events, and Notes:

None

Parameters

in	*ResetType*	Identifies the type of reset desired. Allowable settings are:
		• CFE_PSP_RST_TYPE_POWERON - Causes all memory to be cleared
		• CFE_PSP_RST_TYPE_PROCESSOR - Attempts to retain volatile disk, critical data store and user reserved memory.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.
CFE_ES_NOT_IMPLEMENTED	Not Implemented.

See also

CFE_ES_Main

37.3 cFE Application Control APIs

Functions

- int32 CFE_ES_RestartApp (uint32 AppID)

    Restart a single cFE Application.
- int32 CFE_ES_ReloadApp (uint32 AppID, const char ∗AppFileName)

    Reload a single cFE Application.
- int32 CFE_ES_DeleteApp (uint32 AppID)

    Delete a cFE Application.

37.3.1 Detailed Description

37.3.2 Function Documentation

37.3.2.1 CFE_ES_DeleteApp()

```
int32 CFE_ES_DeleteApp (
            uint32 AppID )
```

Delete a cFE Application.

Description

> This API causes a cFE Application to be stopped deleted.

Assumptions, External Events, and Notes:

> None

Parameters

in	*AppID*	Identifies the application to be reset.

Returns

> Execution status, see cFE Return Code Defines

See also

> CFE_ES_RestartApp, CFE_ES_ReloadApp

37.3.2.2   CFE_ES_ReloadApp()

```
int32 CFE_ES_ReloadApp (
            uint32 AppID,
            const char * AppFileName )
```

Reload a single cFE Application.

Description

This API causes a cFE Application to be stopped and restarted from the specified file.

Assumptions, External Events, and Notes:

The specified application will be deleted before it is reloaded from the specified file. In the event that an application cannot be reloaded due to a corrupt file, the application may no longer be reloaded when given a valid load file (it has been deleted and no longer exists). To recover, the application may be restarted by loading the application via the ES_STARTAPP command (CFE_ES_START_APP_CC).

Parameters

in	*AppID*	Identifies the application to be reset.
in	*AppFileName*	Identifies the new file to start.

Returns

Execution status, see cFE Return Code Defines

See also

CFE_ES_RestartApp, CFE_ES_DeleteApp, CFE_ES_START_APP_CC

37.3.2.3   CFE_ES_RestartApp()

```
int32 CFE_ES_RestartApp (
            uint32 AppID )
```

Restart a single cFE Application.

Description

This API causes a cFE Application to be stopped and restarted.

Assumptions, External Events, and Notes:

None

```
int32 CFE_ES_ReloadApp (
```

Parameters

in	*AppID*	Identifies the application to be reset.

Returns

Execution status, see cFE Return Code Defines

See also

CFE_ES_ReloadApp, CFE_ES_DeleteApp

37.4   cFE Application Behavior APIs

Functions

- void CFE_ES_ExitApp (uint32 ExitStatus)

    Exit a cFE Application.

- bool CFE_ES_RunLoop (uint32 ∗ExitStatus)

    Check for Exit, Restart, or Reload commands.

- int32 CFE_ES_WaitForSystemState (uint32 MinSystemState, uint32 TimeOutMilliseconds)

    Allow an Application to Wait for a minimum global system state.

- void CFE_ES_WaitForStartupSync (uint32 TimeOutMilliseconds)

    Allow an Application to Wait for the "OPERATIONAL" global system state.

- int32 CFE_ES_RegisterApp (void)

    Registers a cFE Application with the Executive Services.

- void CFE_ES_IncrementTaskCounter (void)

    Increments the execution counter for the calling task.

37.4.1   Detailed Description

37.4.2   Function Documentation

37.4.2.1   CFE_ES_ExitApp()

```
void CFE_ES_ExitApp (
            uint32 ExitStatus )
```

Exit a cFE Application.

Description

This API is the "Exit Point" for the cFE application

Assumptions, External Events, and Notes:

None

Parameters

in	*ExitStatus*	Acceptable values are:
		• CFE_ES_RunStatus_APP_EXIT - Indicates that the Application wants to exit normally.
		• CFE_ES_RunStatus_APP_ERROR - Indicates that the Application is quitting with an error.
		• CFE_ES_RunStatus_CORE_APP_INIT_ERROR - Indicates that the Core Application could not Init.
		• CFE_ES_RunStatus_CORE_APP_RUNTIME_ERROR - Indicates that the Core Application had a runtime failure.

See also

CFE_ES_RunLoop, CFE_ES_RegisterApp

37.4.2.2 CFE_ES_IncrementTaskCounter()

```
void CFE_ES_IncrementTaskCounter (
            void )
```

Increments the execution counter for the calling task.

Description

This routine increments the execution counter that is stored for the calling task. It can be called from cFE Application main tasks, child tasks, or cFE Core application main tasks. Normally, the call is not necessary from a cFE Application, since the CFE_ES_RunLoop call increments the counter for the Application.

Assumptions, External Events, and Notes:

NOTE: This API is not needed for Appplications that call the CFE_ES_RunLoop call.

See also

CFE_ES_RunLoop

37.4.2.3 CFE_ES_RegisterApp()

```
int32 CFE_ES_RegisterApp (
            void  )
```

Registers a cFE Application with the Executive Services.

Description

This API registers the calling Application with the cFE.

Assumptions, External Events, and Notes:

NOTE: This function **MUST** be called before any other cFE API functions are called.

Returns

Execution status, see cFE Return Code Defines

See also

CFE_ES_ExitApp, CFE_ES_RunLoop

37.4.2.4 CFE_ES_RunLoop()

```
bool CFE_ES_RunLoop (
            uint32 * ExitStatus )
```

Check for Exit, Restart, or Reload commands.

Description

This is the API that allows an app to check for exit requests from the system.

Assumptions, External Events, and Notes:

None

Parameters

in	*ExitStatus*	A pointer to a variable containing the Application's desired run status. Acceptable values are: • CFE_ES_RunStatus_APP_RUN - Indicates that the Application should continue to run. • CFE_ES_RunStatus_APP_EXIT - Indicates that the Application wants to exit normally. • CFE_ES_RunStatus_APP_ERROR - Indicates that the Application is quitting with an error.

```
int32 CFE_ES_RegisterApp (
```

Returns

     Boolean indicating application should continue running

Return values

true	Application should continue running
false	Application should not continue running

See also

     CFE_ES_ExitApp, CFE_ES_RegisterApp

37.4.2.5 CFE_ES_WaitForStartupSync()

```
void CFE_ES_WaitForStartupSync (
            uint32 TimeOutMilliseconds )
```

Allow an Application to Wait for the "OPERATIONAL" global system state.

Description

     This is the API that allows an app to wait for the rest of the apps to complete their entire initialization before continuing. It is most useful for applications such as Health and Safety or the Scheduler that need to wait until applications exist and are running before sending out packets to them.

This is a specialized wrapper for CFE_ES_WaitForSystemState for compatibility with applications using this API.

Assumptions, External Events, and Notes:

     This API should only be called as the last item of an Apps initialization. In addition, this API should only be called by an App that is started from the ES Startup file. It should not be used by an App that is started after the system is running. (Although it will cause no harm)

Parameters

in	*TimeOutMilliseconds*	The timeout value in Milliseconds. This parameter must be at least 1000. Lower values will be rounded up. There is not an option to wait indefinitely to avoid hanging a critical application because a non-critical app did not start.

See also

     CFE_ES_RunLoop

37.4.2.6   CFE_ES_WaitForSystemState()

```
int32 CFE_ES_WaitForSystemState (
          uint32 MinSystemState,
          uint32 TimeOutMilliseconds )
```

Allow an Application to Wait for a minimum global system state.

Description

This is the API that allows an app to wait for the rest of the apps to complete a given stage of initialization before continuing.

This gives finer grained control than CFE_ES_WaitForStartupSync

Assumptions, External Events, and Notes:

This API assumes that the caller has also been initialized sufficiently to satisfy the global system state it is waiting for, and the apps own state will be updated accordingly.

Parameters

in	TimeOutMilliseconds	The timeout value in Milliseconds. This parameter must be at least 1000. Lower values will be rounded up. There is not an option to wait indefinitely to avoid hanging a critical application because a non-critical app did not start.
in	MinSystemState	Determine the state of the App

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	State successfully achieved
CFE_ES_OPERATION_TIMED_OUT	Timeout was reached

See also

CFE_ES_RunLoop

37.5 cFE Information APIs

Functions

- int32 **CFE_ES_GetResetType** (uint32 ∗ResetSubtypePtr)

  Return the most recent Reset Type.

- int32 **CFE_ES_GetAppID** (uint32 ∗AppIdPtr)

  Get an Application ID for the calling Application.

- int32 **CFE_ES_GetAppIDByName** (uint32 ∗AppIdPtr, const char ∗AppName)

  Get an Application ID associated with a specified Application name.

- int32 **CFE_ES_GetAppName** (char ∗AppName, uint32 AppId, uint32 BufferLength)

  Get an Application name for a specified Application ID.

- int32 **CFE_ES_GetAppInfo** (CFE_ES_AppInfo_t ∗AppInfo, uint32 AppId)

  Get Application Information given a specified App ID.

- int32 **CFE_ES_GetTaskInfo** (CFE_ES_TaskInfo_t ∗TaskInfo, uint32 TaskId)

  Get Task Information given a specified Task ID.

37.5.1 Detailed Description

37.5.2 Function Documentation

37.5.2.1 CFE_ES_GetAppID()

```
int32 CFE_ES_GetAppID (
            uint32 * AppIdPtr )
```

Get an Application ID for the calling Application.

Description

This routine retrieves the cFE Application ID for the calling Application.

Assumptions, External Events, and Notes:

NOTE: **All** tasks associated with the Application would return the same Application ID.

Parameters

in	*AppIdPtr*	Pointer to variable that is to receive the Application's ID. ∗AppIdPtr is the application ID of the calling Application.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_APPID	Application ID Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

CFE_ES_GetResetType, CFE_ES_GetAppIDByName, CFE_ES_GetAppName, CFE_ES_GetTaskInfo

37.5.2.2   CFE_ES_GetAppIDByName()

```
int32 CFE_ES_GetAppIDByName (
        uint32 * AppIdPtr,
        const char * AppName )
```

Get an Application ID associated with a specified Application name.

Description

This routine retrieves the cFE Application ID associated with a specified Application name.

Assumptions, External Events, and Notes:

None

Parameters

in	*AppIdPtr*	Pointer to variable that is to receive the Application's ID. ∗AppIdPtr is the application ID of the calling Application.
in	*AppName*	Pointer to null terminated character string containing an Application name.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

CFE_ES_GetResetType, CFE_ES_GetAppID, CFE_ES_GetAppName, CFE_ES_GetTaskInfo

37.5.2.3   CFE_ES_GetAppInfo()

```
int32 CFE_ES_GetAppInfo (
            CFE_ES_AppInfo_t * AppInfo,
            uint32 AppId )
```

Get Application Information given a specified App ID.

Description

This routine retrieves the information about an App associated with a specified App ID. The information includes all of the information ES maintains for an application (documented in the CFE_ES_AppInfo_t type)

Assumptions, External Events, and Notes:

None

Parameters

| in,out | *AppInfo* | Pointer to a CFE_ES_AppInfo_t structure that holds the specific Application information. *AppInfo is the filled out CFE_ES_AppInfo_t structure containing the App Name, and application memory addresses among other fields. |
| in | *AppId* | Application ID of Application whose name is being requested. |

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_APPID	Application ID Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

CFE_ES_GetResetType, CFE_ES_GetAppID, CFE_ES_GetAppIDByName, CFE_ES_GetAppName

37.5.2.4   CFE_ES_GetAppName()

```
int32 CFE_ES_GetAppName (
          char * AppName,
          uint32 AppId,
          uint32 BufferLength )
```

Get an Application name for a specified Application ID.

Description

This routine retrieves the cFE Application name associated with a specified Application ID.

Assumptions, External Events, and Notes:

In the case of a failure (CFE_ES_ERR_APPID), an empty string is returned. CFE_ES_ERR_APPID will be returned if the specified Application ID (AppId) is invalid or not in use.

Parameters

in,out	*AppName*	Pointer to a character array of at least `BufferLength` in size that will be filled with the appropriate Application name. ∗AppName is the null terminated Application name of the Application associated with the specified Application ID
in	*AppId*	Application ID of Application whose name is being requested.
in	*BufferLength*	The maximum number of characters, including the null terminator, that can be put into the `AppName` buffer. This routine will truncate the name to this length, if necessary.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_APPID	Application ID Error.

See also

CFE_ES_GetResetType, CFE_ES_GetAppID, CFE_ES_GetAppIDByName, CFE_ES_GetTaskInfo

37.5.2.5   CFE_ES_GetResetType()

```
int32 CFE_ES_GetResetType (
          uint32 * ResetSubtypePtr )
```

Return the most recent Reset Type.

```
int32 CFE_ES_GetResetType (
```

Description

Provides the caller with codes that identifies the type of Reset the processor most recently underwent. The caller can also obtain information on what caused the reset by supplying a pointer to a variable that will be filled with the Reset Sub-Type.

Assumptions, External Events, and Notes:

None

Parameters

`in,out`	*ResetSubtypePtr*	Pointer to `uint32` type variable in which the Reset Sub-Type will be stored. The caller can set this pointer to NULL if the Sub-Type is of no interest. *ResetSubtypePtr If the provided pointer was not `NULL`, the Reset Sub-Type is stored at the given address. For a list of possible Sub-Type values, see "Reset Sub-Types" .

Returns

Processor reset type

Return values

CFE_PSP_RST_TYPE_POWERON	
CFE_PSP_RST_TYPE_PROCESSOR	

See also

CFE_ES_GetAppID, CFE_ES_GetAppIDByName, CFE_ES_GetAppName, CFE_ES_GetTaskInfo

37.5.2.6 CFE_ES_GetTaskInfo()

```
int32 CFE_ES_GetTaskInfo (
          CFE_ES_TaskInfo_t * TaskInfo,
          uint32 TaskId )
```

Get Task Information given a specified Task ID.

Description

This routine retrieves the information about a Task associated with a specified Task ID. The information includes Task Name, and Parent/Creator Application ID.

Assumptions, External Events, and Notes:

None

Parameters

in,out	*TaskInfo*	Pointer to a `CFE_ES_TaskInfo_t` structure that holds the specific task information. *TaskInfo is the filled out `CFE_ES_TaskInfo_t` structure containing the Task Name, Parent App Name, Parent App ID among other fields.
in	*TaskId*	Application ID of Application whose name is being requested.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_TASKID	Task ID Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

CFE_ES_GetResetType, CFE_ES_GetAppID, CFE_ES_GetAppIDByName, CFE_ES_GetAppName

37.6 cFE Child Task APIs

Functions

- int32 CFE_ES_RegisterChildTask (void)

    Registers a cFE Child task associated with a cFE Application.
- int32 CFE_ES_CreateChildTask (uint32 ∗TaskIdPtr, const char ∗TaskName, CFE_ES_ChildTaskMainFuncPtr_t FunctionPtr, uint32 ∗StackPtr, uint32 StackSize, uint32 Priority, uint32 Flags)

    Creates a new task under an existing Application.
- int32 CFE_ES_DeleteChildTask (uint32 TaskId)

    Deletes a task under an existing Application.
- void CFE_ES_ExitChildTask (void)

    Exits a child task.

37.6.1 Detailed Description

37.6.2 Function Documentation

37.6.2.1 CFE_ES_CreateChildTask()

```
int32 CFE_ES_CreateChildTask (
            uint32 * TaskIdPtr,
            const char * TaskName,
            CFE_ES_ChildTaskMainFuncPtr_t FunctionPtr,
            uint32 * StackPtr,
            uint32 StackSize,
            uint32 Priority,
            uint32 Flags )
```

Creates a new task under an existing Application.

Description

This routine creates a new task (a separate execution thread) owned by the calling Application.

Assumptions, External Events, and Notes:

None

Parameters

in,out	*TaskIdPtr*	A pointer to a variable that will be filled in with the new task's ID. ∗TaskIdPtr is the Task ID of the newly created child task.
in	*TaskName*	A pointer to a string containing the desired name of the new task. This can be up to OS_MAX_API_NAME characters, including the trailing null.

Parameters

in	*FunctionPtr*	A pointer to the function that will be spawned as a new task. This function must have the following signature: uint32 function(void). Input parameters for the new task are not supported.
in	*StackPtr*	A pointer to the location where the child task's stack pointer should start. NOTE: Not all underlying operating systems support this parameter.
in	*StackSize*	The number of bytes to allocate for the new task's stack.
in	*Priority*	The priority for the new task. Lower numbers are higher priority, with 0 being the highest priority. Applications cannot create tasks with a higher priority (lower number) than their own priority.
in	*Flags*	Reserved for future expansion.

Returns

Execution status, see [cFE Return Code Defines](#)

Return values

[*CFE_SUCCESS*](#)	Sucessful execution.
[*CFE_ES_ERR_CHILD_TASK_CREATE*](#)	Child Task Create Error.

See also

[CFE_ES_RegisterChildTask](#), [CFE_ES_DeleteChildTask](#), [CFE_ES_ExitChildTask](#)

37.6.2.2 CFE_ES_DeleteChildTask()

```
int32 CFE_ES_DeleteChildTask (
            uint32 TaskId )
```

Deletes a task under an existing Application.

Description

This routine deletes a task under an Application specified by the `TaskId` obtained when the child task was created using the [CFE_ES_CreateChildTask](#) API.

Assumptions, External Events, and Notes:

None

Parameters

in	*Task↩ Id*	The task ID previously obtained when the Child Task was created with the CFE_ES_CreateChildTask API.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_NOT_IMPLEMENTED	Not Implemented.

See also

CFE_ES_RegisterChildTask, CFE_ES_CreateChildTask, CFE_ES_ExitChildTask

37.6.2.3 CFE_ES_ExitChildTask()

```
void CFE_ES_ExitChildTask (
            void  )
```

Exits a child task.

Description

This routine allows the current executing child task to exit and be deleted by ES.

Assumptions, External Events, and Notes:

This function cannot be called from an Application's Main Task.

Note

This function does not return a value, but if it does return at all, it is assumed that the Task was either unregistered or this function was called from a cFE Application's main task.

See also

CFE_ES_RegisterChildTask, CFE_ES_CreateChildTask, CFE_ES_DeleteChildTask

37.6.2.4   CFE_ES_RegisterChildTask()

```
int32 CFE_ES_RegisterChildTask (
          void  )
```

Registers a cFE Child task associated with a cFE Application.

Description

This routine registers a cFE Child task and associates it with its parent cFE Application.

Assumptions, External Events, and Notes:

NOTE: This API **MUST** be called by the Child Task before any other cFE API calls are made.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_CHILD_TASK_REGISTER	Child Task Register Error.

See also

CFE_ES_CreateChildTask, CFE_ES_DeleteChildTask, CFE_ES_ExitChildTask

37.7 cFE Miscellaneous APIs

Functions

- int32 CFE_ES_WriteToSysLog (const char ∗SpecStringPtr,...) OS_PRINTF(1

    Write a string to the cFE System Log.
- int32 uint32 CFE_ES_CalculateCRC (const void ∗DataPtr, uint32 DataLength, uint32 InputCRC, uint32 TypeCRC)

    Calculate a CRC on a block of memory.
- void CFE_ES_ProcessAsyncEvent (void)

    Notification that an asynchronous event was detected by the underlying OS/PSP.

37.7.1 Detailed Description

37.7.2 Function Documentation

37.7.2.1 CFE_ES_CalculateCRC()

```
int32 uint32 CFE_ES_CalculateCRC (
            const void * DataPtr,
            uint32 DataLength,
            uint32 InputCRC,
            uint32 TypeCRC )
```

Calculate a CRC on a block of memory.

Description

This routine calculates a cyclic redundancy check (CRC) on a block of memory. The CRC algorithm used is determined by the last parameter.

Assumptions, External Events, and Notes:

None

Parameters

in	*DataPtr*	Pointer to the base of the memory block.
in	*DataLength*	The number of bytes in the memory block.
in	*InputCRC*	A starting value for use in the CRC calculation. This parameter allows the user to calculate the CRC of non-contiguous blocks as a single value. Nominally, the user should set this value to zero.
in	*TypeCRC*	One of the following CRC algorithm selections: • `CFE_MISSION_ES_CRC_8` - (Not currently implemented) • `CFE_MISSION_ES_CRC_16` - a CRC-16 algorithm • `CFE_MISSION_ES_CRC_32` - (not currently implemented)

Returns

The result of the CRC calculation on the specified memory block, or error code cFE Return Code Defines

37.7.2.2   CFE_ES_ProcessAsyncEvent()

```
void CFE_ES_ProcessAsyncEvent (
            void  )
```

Notification that an asynchronous event was detected by the underlying OS/PSP.

Description

This hook routine is called from the PSP when an exception or other asynchronous system event occurs

Assumptions, External Events, and Notes:

The PSP must guarantee that this function is only invoked from a context which may use OSAL primitives. In general this means that it shouldn't be *directly* invoked from an ISR/signal context.

37.7.2.3   CFE_ES_WriteToSysLog()

```
int32 CFE_ES_WriteToSysLog (
            const char * SpecStringPtr,
            ...  )
```

Write a string to the cFE System Log.

Description

This routine writes a formatted string to the cFE system log. This can be used to record very low-level errors that can't be reported using the Event Services. This function is used in place of printf for flight software. It should be used for significant startup events, critical errors, and conditionally compiled debug software.

Assumptions, External Events, and Notes:

None

Parameters

in	*SpecStringPtr*	The format string for the log message. This is similar to the format string for a printf() call.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_SYS_LOG_FULL	System Log Full.

37.8   cFE Critical Data Store APIs

Functions

- int32 CFE_ES_RegisterCDS (CFE_ES_CDSHandle_t ∗HandlePtr, int32 BlockSize, const char ∗Name)

    Reserve space (or re-obtain previously reserved space) in the Critical Data Store (CDS)
- int32 CFE_ES_CopyToCDS (CFE_ES_CDSHandle_t Handle, void ∗DataToCopy)

    Save a block of data in the Critical Data Store (CDS)
- int32 CFE_ES_RestoreFromCDS (void ∗RestoreToMemory, CFE_ES_CDSHandle_t Handle)

    Recover a block of data from the Critical Data Store (CDS)

37.8.1   Detailed Description

37.8.2   Function Documentation

37.8.2.1   CFE_ES_CopyToCDS()

```
int32 CFE_ES_CopyToCDS (
            CFE_ES_CDSHandle_t Handle,
            void * DataToCopy )
```

Save a block of data in the Critical Data Store (CDS)

Description

This routine copies a specified block of memory into the Critical Data Store that had been previously registered via CFE_ES_RegisterCDS. The block of memory to be copied must be at least as big as the size specified when registering the CDS.

Assumptions, External Events, and Notes:

None

Parameters

in	*Handle*	The handle of the CDS block that was previously obtained from CFE_ES_RegisterCDS.
in	*DataToCopy*	A Pointer to the block of memory to be copied into the CDS.

Returns

Execution status, see cFE Return Code Defines

Return values

OS_SUCCESS	Successful execution.
CFE_ES_ERR_MEM_HANDLE	Memory Handle Error.
OS_ERROR	Problem with handle or a size mismatch

See also

> CFE_ES_RegisterCDS, CFE_ES_RestoreFromCDS

37.8.2.2 CFE_ES_RegisterCDS()

```
int32 CFE_ES_RegisterCDS (
          CFE_ES_CDSHandle_t * HandlePtr,
          int32 BlockSize,
          const char * Name )
```

Reserve space (or re-obtain previously reserved space) in the Critical Data Store (CDS)

Description

> This routine allocates a block of memory in the Critical Data Store and associates it with the calling Application. The memory can survive an Application restart as well as a Processor Reset.

Assumptions, External Events, and Notes:

> None

Parameters

`in,out`	*HandlePtr*	Pointer Application's variable that will contain the CDS Memory Block Handle. *HandlePtr is the handle of the CDS block that can be used in CFE_ES_CopyToCDS and CFE_ES_RestoreFromCDS.
`in`	*BlockSize*	The number of bytes needed in the CDS.
`in`	*Name*	A pointer to a character string containing an application unique name of CFE_MISSION_ES_CDS_MAX_NAME_LENGTH characters or less.

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	The memory block was successfully created in the CDS.
CFE_ES_NOT_IMPLEMENTED	The processor does not support a Critical Data Store.

Return values

CFE_ES_CDS_ALREADY_EXISTS	CDS Already Exists.
CFE_ES_CDS_INVALID_SIZE	CDS Invalid Size.
CFE_ES_CDS_INVALID_NAME	CDS Invalid Name.
CFE_ES_CDS_REGISTRY_FULL	CDS Registry Full.

See also

CFE_ES_CopyToCDS, CFE_ES_RestoreFromCDS

37.8.2.3   CFE_ES_RestoreFromCDS()

```
int32 CFE_ES_RestoreFromCDS (
          void * RestoreToMemory,
          CFE_ES_CDSHandle_t Handle )
```

Recover a block of data from the Critical Data Store (CDS)

Description

This routine copies data from the Critical Data Store identified with the `Handle` into the area of memory pointed to by the `RestoreToMemory` pointer. The area of memory to be copied into must be at least as big as the size specified when registering the CDS. The recovery will indicate an error if the data integrity check maintained by the CDS indicates the contents of the CDS have changed. However, the contents will still be copied into the specified area of memory.

Assumptions, External Events, and Notes:

None

Parameters

in	*Handle*	The handle of the CDS block that was previously obtained from CFE_ES_RegisterCDS.
in,out	*RestoreToMemory*	A Pointer to the block of memory that is to be restored with the contents of the CDS. *RestoreToMemory is the contents of the specified CDS.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.

Return values

CFE_ES_CDS_BLOCK_CRC_ERR	CDS Block CRC Error.
OS_ERROR	Problem with handle or a size mismatch

See also

CFE_ES_RegisterCDS, CFE_ES_CopyToCDS

37.9 cFE Memory Manager APIs

Functions

- int32 CFE_ES_PoolCreateNoSem (CFE_ES_MemHandle_t *HandlePtr, uint8 *MemPtr, uint32 Size)

  Initializes a memory pool created by an application without using a semaphore during processing.

- int32 CFE_ES_PoolCreate (CFE_ES_MemHandle_t *HandlePtr, uint8 *MemPtr, uint32 Size)

  Initializes a memory pool created by an application while using a semaphore during processing.

- int32 CFE_ES_PoolCreateEx (CFE_ES_MemHandle_t *HandlePtr, uint8 *MemPtr, uint32 Size, uint32 Num↩
  BlockSizes, uint32 *BlockSizes, uint16 UseMutex)

  Initializes a memory pool created by an application with application specified block sizes.

- int32 CFE_ES_GetPoolBuf (uint32 **BufPtr, CFE_ES_MemHandle_t HandlePtr, uint32 Size)

  Gets a buffer from the memory pool created by CFE_ES_PoolCreate or CFE_ES_PoolCreateNoSem.

- int32 CFE_ES_GetPoolBufInfo (CFE_ES_MemHandle_t HandlePtr, uint32 *BufPtr)

  Gets info on a buffer previously allocated via CFE_ES_GetPoolBuf.

- int32 CFE_ES_PutPoolBuf (CFE_ES_MemHandle_t HandlePtr, uint32 *BufPtr)

  Releases a buffer from the memory pool that was previously allocated via CFE_ES_GetPoolBuf.

- int32 CFE_ES_GetMemPoolStats (CFE_ES_MemPoolStats_t *BufPtr, CFE_ES_MemHandle_t Handle)

  Extracts the statistics maintained by the memory pool software.

37.9.1 Detailed Description

37.9.2 Function Documentation

37.9.2.1 CFE_ES_GetMemPoolStats()

```
int32 CFE_ES_GetMemPoolStats (
            CFE_ES_MemPoolStats_t * BufPtr,
            CFE_ES_MemHandle_t Handle )
```

Extracts the statistics maintained by the memory pool software.

Description

This routine fills the CFE_ES_MemPoolStats_t data structure with the statistics maintained by the memory pool software. These statistics can then be telemetered by the calling Application.

Assumptions, External Events, and Notes:

None

Parameters

in,out	BufPtr	Pointer to CFE_ES_MemPoolStats_t data structure to be filled with memory statistics. *BufPtr is the Memory Pool Statistics stored in given data structure.
in	Handle	The handle to the memory pool whose statistics are desired.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_MEM_HANDLE	Memory Handle Error.

See also

CFE_ES_PoolCreate, CFE_ES_PoolCreateNoSem, CFE_ES_PoolCreateEx, CFE_ES_GetPoolBuf, CFE_ES_↩
PutPoolBuf

37.9.2.2 CFE_ES_GetPoolBuf()

```
int32 CFE_ES_GetPoolBuf (
        uint32 ** BufPtr,
        CFE_ES_MemHandle_t HandlePtr,
        uint32 Size )
```

Gets a buffer from the memory pool created by CFE_ES_PoolCreate or CFE_ES_PoolCreateNoSem.

Description

This routine obtains a block of memory from the memory pool supplied by the calling application.

Assumptions, External Events, and Notes:

1. The size allocated from the memory pool is, at a minimum, 12 bytes more than requested.

Parameters

in,out	*BufPtr*	A pointer to the Application's pointer in which will be stored the address of the allocated memory buffer. *BufPtr is the address of the requested buffer.
in	*HandlePtr*	The handle to the memory pool as returned by CFE_ES_PoolCreate or CFE_ES_PoolCreateNoSem.
in	*Size*	The size of the buffer requested. NOTE: The size allocated may be larger.

Returns

Bytes Allocated, or error code cFE Return Code Defines

Return values

CFE_ES_ERR_MEM_HANDLE	Memory Handle Error.
CFE_ES_ERR_MEM_BLOCK_SIZE	Memory Block Size Error.

See also

> CFE_ES_PoolCreate, CFE_ES_PoolCreateNoSem, CFE_ES_PoolCreateEx, CFE_ES_PutPoolBuf, CFE_ES_↩
> GetMemPoolStats, CFE_ES_GetPoolBufInfo

37.9.2.3   CFE_ES_GetPoolBufInfo()

```
int32 CFE_ES_GetPoolBufInfo (
            CFE_ES_MemHandle_t HandlePtr,
            uint32 * BufPtr )
```

Gets info on a buffer previously allocated via CFE_ES_GetPoolBuf.

Description

> This routine gets info on a buffer in the memory pool.

Assumptions, External Events, and Notes:

> None

Parameters

in	*HandlePtr*	The handle to the memory pool as returned by CFE_ES_PoolCreate or CFE_ES_PoolCreateNoSem.
in	*BufPtr*	A pointer to the memory buffer to provide status for.

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_MEM_HANDLE	Memory Handle Error.
CFE_ES_BUFFER_NOT_IN_POOL	Buffer Not In Pool.

See also

CFE_ES_PoolCreate, CFE_ES_PoolCreateNoSem, CFE_ES_PoolCreateEx, CFE_ES_GetPoolBuf, CFE_ES_↩
GetMemPoolStats, CFE_ES_PutPoolBuf

37.9.2.4　CFE_ES_PoolCreate()

```
int32 CFE_ES_PoolCreate (
            CFE_ES_MemHandle_t * HandlePtr,
            uint8 * MemPtr,
            uint32 Size )
```

Initializes a memory pool created by an application while using a semaphore during processing.

Description

This routine initializes a pool of memory supplied by the calling application. When a memory pool created by this routine is processed, mutex handling will be performed.

Assumptions, External Events, and Notes:

1. The size of the pool must be an integral number of 32-bit words

2. The start address of the pool must be 32-bit aligned

3. 168 bytes are used for internal bookkeeping, therefore, they will not be available for allocation.

Parameters

in,out	HandlePtr	A pointer to the variable the caller wishes to have the memory pool handle kept in. ∗HandlePtr is the memory pool handle.
in	MemPtr	A Pointer to the pool of memory created by the calling application. This address must be on a 32-bit boundary.
in	Size	The size of the pool of memory. Note that this must be an integral number of 32 bit words.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.

See also

> CFE_ES_PoolCreateNoSem, CFE_ES_PoolCreateEx, CFE_ES_GetPoolBuf, CFE_ES_PutPoolBuf, CFE_ES_↩
> GetMemPoolStats

37.9.2.5   CFE_ES_PoolCreateEx()

```
int32 CFE_ES_PoolCreateEx (
          CFE_ES_MemHandle_t * HandlePtr,
          uint8 * MemPtr,
          uint32 Size,
          uint32 NumBlockSizes,
          uint32 * BlockSizes,
          uint16 UseMutex )
```

Initializes a memory pool created by an application with application specified block sizes.

Description

> This routine initializes a pool of memory supplied by the calling application.

Assumptions, External Events, and Notes:

>   1. The size of the pool must be an integral number of 32-bit words
>   2. The start address of the pool must be 32-bit aligned
>   3. 168 bytes are used for internal bookkeeping, therefore, they will not be available for allocation.

Parameters

in,out	HandlePtr	A pointer to the variable the caller wishes to have the memory pool handle kept in. *HandlePtr is the memory pool handle.
in	MemPtr	A Pointer to the pool of memory created by the calling application. This address must be on a 32-bit boundary.
in	Size	The size of the pool of memory. Note that this must be an integral number of 32 bit words.
in	NumBlockSizes	The number of different block sizes specified in the `BlockSizes` array. If set equal to zero or if greater than 17, then default block sizes are used.
in	BlockSizes	Pointer to an array of sizes to be used instead of the default block sizes specified by CFE_PLATFORM_ES_MEM_BLOCK_SIZE_01 through CFE_PLATFORM_ES_MAX_BLOCK_SIZE. If the pointer is equal to NULL, the default block sizes are used.
in	UseMutex	Flag indicating whether the new memory pool will be processing with mutex handling or not. Valid parameter values are CFE_ES_USE_MUTEX and CFE_ES_NO_MUTEX

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.

See also

CFE_ES_PoolCreate, CFE_ES_PoolCreateNoSem, CFE_ES_GetPoolBuf, CFE_ES_PutPoolBuf, CFE_ES_↩
GetMemPoolStats

37.9.2.6 CFE_ES_PoolCreateNoSem()

```
int32 CFE_ES_PoolCreateNoSem (
            CFE_ES_MemHandle_t * HandlePtr,
            uint8 * MemPtr,
            uint32 Size )
```

Initializes a memory pool created by an application without using a semaphore during processing.

Description

This routine initializes a pool of memory supplied by the calling application. When a memory pool created by this routine is processed, no mutex handling is performed.

Assumptions, External Events, and Notes:

1. The size of the pool must be an integral number of 32-bit words
2. The start address of the pool must be 32-bit aligned
3. 168 bytes are used for internal bookkeeping, therefore, they will not be available for allocation.

Parameters

in,out	*HandlePtr*	A pointer to the variable the caller wishes to have the memory pool handle kept in. *HandlePtr is the memory pool handle.
in	*MemPtr*	A Pointer to the pool of memory created by the calling application. This address must be on a 32-bit boundary.
in	*Size*	The size of the pool of memory. Note that this must be an integral number of 32 bit words.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.

See also

CFE_ES_PoolCreate,   CFE_ES_PoolCreateEx,   CFE_ES_GetPoolBuf,   CFE_ES_PutPoolBuf,   CFE_ES_Get↩
MemPoolStats

37.9.2.7   CFE_ES_PutPoolBuf()

```
int32 CFE_ES_PutPoolBuf (
            CFE_ES_MemHandle_t HandlePtr,
            uint32 * BufPtr )
```

Releases a buffer from the memory pool that was previously allocated via CFE_ES_GetPoolBuf.

Description

This routine releases a buffer back into the memory pool.

Assumptions, External Events, and Notes:

None

Parameters

in	*HandlePtr*	The handle to the memory pool as returned by CFE_ES_PoolCreate or CFE_ES_PoolCreateNoSem.
in	*BufPtr*	A pointer to the memory buffer to be released.

Returns

Bytes released, or error code cFE Return Code Defines

Return values

CFE_ES_ERR_MEM_HANDLE	Memory Handle Error.

See also

CFE_ES_PoolCreate, CFE_ES_PoolCreateNoSem, CFE_ES_PoolCreateEx, CFE_ES_GetPoolBuf, CFE_ES_↩
GetMemPoolStats, CFE_ES_GetPoolBufInfo

37.10 cFE Performance Monitor APIs

Macros

- #define CFE_ES_PerfLogEntry(id) (CFE_ES_PerfLogAdd(id, 0))

  Entry marker for use with Software Performance Analysis Tool.
- #define CFE_ES_PerfLogExit(id) (CFE_ES_PerfLogAdd(id, 1))

  Exit marker for use with Software Performance Analysis Tool.

Functions

- void CFE_ES_PerfLogAdd (uint32 Marker, uint32 EntryExit)

  Function called by CFE_ES_PerfLogEntry and CFE_ES_PerfLogExit macros.

37.10.1 Detailed Description

37.10.2 Macro Definition Documentation

37.10.2.1 CFE_ES_PerfLogEntry

```
#define CFE_ES_PerfLogEntry(
            id ) (CFE_ES_PerfLogAdd(id, 0))
```

Entry marker for use with Software Performance Analysis Tool.

Description

This macro logs the entry or start event/marker for the specified entry `id`. This macro, in conjunction with the CFE_ES_PerfLogExit, is used by the Software Performance Analysis tool (see section 5.15).

Assumptions, External Events, and Notes:

None

Parameters

in	*id*	Identifier of the specific event or marker.

See also

CFE_ES_PerfLogExit, CFE_ES_PerfLogAdd

Definition at line 1306 of file cfe_es.h.

37.10.2.2   CFE_ES_PerfLogExit

```
#define CFE_ES_PerfLogExit(
            id ) (CFE_ES_PerfLogAdd(id, 1))
```

Exit marker for use with Software Performance Analysis Tool.

Description

>   This macro logs the exit or end event/marker for the specified entry `id`. This macro, in conjunction with the CFE↩
>   _ES_PerfLogEntry, is used by the Software Performance Analysis tool (see section 5.15).

Assumptions, External Events, and Notes:

>   None

Parameters

in	*id*	Identifier of the specific event or marker.

See also

>   CFE_ES_PerfLogEntry, CFE_ES_PerfLogAdd

Definition at line 1325 of file cfe_es.h.

37.10.3   Function Documentation

37.10.3.1   CFE_ES_PerfLogAdd()

```
void CFE_ES_PerfLogAdd (
            uint32 Marker,
            uint32 EntryExit )
```

Function called by CFE_ES_PerfLogEntry and CFE_ES_PerfLogExit macros.

Description

>   This function logs the entry and exit marker for the specified `id`. This function is used by the Software Performance
>   Analysis tool (see section 5.15).

Assumptions, External Events, and Notes:

>   None

Parameters

in	*Marker*	Identifier of the specific event or marker.
in	*EntryExit*	Used to specify Entry(0) or Exit(1)

See also

CFE_ES_PerfLogEntry, CFE_ES_PerfLogExit

37.11   cFE Generic Counter APIs

Functions

- int32 **CFE_ES_RegisterGenCounter** (uint32 ∗CounterIdPtr, const char ∗CounterName)

    Register a generic counter.
- int32 **CFE_ES_DeleteGenCounter** (uint32 CounterId)

    Delete a generic counter.
- int32 **CFE_ES_IncrementGenCounter** (uint32 CounterId)

    Increments the specified generic counter.
- int32 **CFE_ES_SetGenCount** (uint32 CounterId, uint32 Count)

    Set the specified generic counter.
- int32 **CFE_ES_GetGenCount** (uint32 CounterId, uint32 ∗Count)

    Get the specified generic counter count.
- int32 **CFE_ES_GetGenCounterIDByName** (uint32 ∗CounterIdPtr, const char ∗CounterName)

    Get the Id associated with a generic counter name.

37.11.1   Detailed Description

37.11.2   Function Documentation

37.11.2.1   CFE_ES_DeleteGenCounter()

```
int32 CFE_ES_DeleteGenCounter (
            uint32 CounterId )
```

Delete a generic counter.

Description

This routine deletes a previously registered generic counter.

Assumptions, External Events, and Notes:

None.

Parameters

in	*Counter↩ Id*	The Counter Id of the newly created counter.

Returns

Execution status, see [cFE Return Code Defines](#)

Return values

[CFE_SUCCESS](#)	Sucessful execution.
[CFE_ES_BAD_ARGUMENT](#)	Bad Argument.

See also

[CFE_ES_IncrementGenCounter](#), [CFE_ES_RegisterGenCounter](#), [CFE_ES_SetGenCount](#), [CFE_ES_GetGen↩](#)
[Count](#), [CFE_ES_GetGenCounterIDByName](#)

37.11.2.2 CFE_ES_GetGenCount()

```
int32 CFE_ES_GetGenCount (
            uint32 CounterId,
            uint32 * Count )
```

Get the specified generic counter count.

Description

This routine gets the value of a generic counter.

Assumptions, External Events, and Notes:

None.

Parameters

in	*Counter↩ Id*	The Counter to get the value from.
in	*∗Count*	The value of the Counter.

Returns

Execution status, see [cFE Return Code Defines](#)

Return values

[CFE_SUCCESS](#)	Sucessful execution.
[CFE_ES_BAD_ARGUMENT](#)	Bad Argument.

See also

CFE_ES_RegisterGenCounter, CFE_ES_DeleteGenCounter, CFE_ES_SetGenCount, CFE_ES_Increment↩
GenCounter, CFE_ES_GetGenCounterIDByName

37.11.2.3   CFE_ES_GetGenCounterIDByName()

```
int32 CFE_ES_GetGenCounterIDByName (
        uint32 * CounterIdPtr,
        const char * CounterName )
```

Get the Id associated with a generic counter name.

Description

This routine gets the Counter Id for a generic counter specified by name.

Assumptions, External Events, and Notes:

None.

Parameters

in	*CounterName	The name of the Counter.
out	*CounterIdPtr	The Counter Id for the given name.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.

See also

CFE_ES_RegisterGenCounter, CFE_ES_DeleteGenCounter, CFE_ES_SetGenCount, CFE_ES_Increment↩
GenCounter, CFE_ES_GetGenCount

37.11.2.4   CFE_ES_IncrementGenCounter()

```
int32 CFE_ES_IncrementGenCounter (
        uint32 CounterId )
```

Increments the specified generic counter.

Description

This routine increments the specified generic counter.

Assumptions, External Events, and Notes:

None.

Parameters

in	*Counter↩ Id*	The Counter to be incremented.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.

See also

CFE_ES_RegisterGenCounter, CFE_ES_DeleteGenCounter, CFE_ES_SetGenCount, CFE_ES_GetGenCount, CFE_ES_GetGenCounterIDByName

37.11.2.5 CFE_ES_RegisterGenCounter()

```
int32 CFE_ES_RegisterGenCounter (
            uint32 * CounterIdPtr,
            const char * CounterName )
```

Register a generic counter.

Description

This routine registers a generic counter.

Assumptions, External Events, and Notes:

None.

Parameters

in	*CounterName	The Name of the generic counter.
out	*CounterIdPtr	The Counter Id of the newly created counter.

Returns

Execution status, see [cFE Return Code Defines](#)

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.

See also

[CFE_ES_IncrementGenCounter](#), [CFE_ES_DeleteGenCounter](#), [CFE_ES_SetGenCount](#), [CFE_ES_GetGen↩](#) [Count](#), [CFE_ES_GetGenCounterIDByName](#)

37.11.2.6   CFE_ES_SetGenCount()

```
int32 CFE_ES_SetGenCount (
            uint32 CounterId,
            uint32 Count )
```

Set the specified generic counter.

Description

This routine sets the specified generic counter to the specified value.

Assumptions, External Events, and Notes:

None.

Parameters

in	*Counter↩ Id*	The Counter to be set.
in	*Count*	The new value of the Counter.

Returns

Execution status, see [cFE Return Code Defines](#)

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_BAD_ARGUMENT	Bad Argument.

See also

CFE_ES_RegisterGenCounter, CFE_ES_DeleteGenCounter, CFE_ES_IncrementGenCounter, CFE_ES_Get↩
GenCount, CFE_ES_GetGenCounterIDByName

37.12   cFE Registration APIs

Functions

- int32 CFE_EVS_Register (void ∗Filters, uint16 NumFilteredEvents, uint16 FilterScheme)

  Register an application for receiving event services.
- int32 CFE_EVS_Unregister (void)

  Cleanup internal structures used by the event manager for the calling Application.

37.12.1   Detailed Description

37.12.2   Function Documentation

37.12.2.1   CFE_EVS_Register()

```
int32 CFE_EVS_Register (
            void * Filters,
            uint16 NumFilteredEvents,
            uint16 FilterScheme )
```

Register an application for receiving event services.

Description

> This routine registers an application with event services and allocates/initializes the internal data structures used to support this application's events. An application may not send events unless it has called this routine. The routine also accepts a filter array structure for applications requiring event filtering. In the current implementation of the EVS, only the binary filtering scheme is supported. See section TBD of the cFE Application Programmer's Guide for a description of the behavior of binary filters. Applications may call CFE_EVS_Register more than once, but each call will wipe out all filters registered by previous calls (filter registration is NOT cumulative).

Assumptions, External Events, and Notes:

> Note: Event filters can be added, deleted or modified by ground commands. All filtering schemes include a default setting that results in no filtering (such as CFE_EVS_NO_FILTER for binary filters).

Filter Scheme: Binary
Code: CFE_EVS_EventFilter_BINARY
Filter Structure:

```
typedef struct {
     uint16  EventID,
     uint16  Mask ;
} CFE_EVS_BinFilter_t;
```

Parameters

in	*Filters*	Pointer to an array of event message filters, or NULL if no filtering is desired. The structure of an event message filter depends on the FilterScheme selected. (see Filter Schemes mentioned above)
in	*NumFilteredEvents*	The number of event message filters included in this call. This must be less than or equal to the maximum number of events allowed per application (CFE_PLATFORM_EVS_MAX_EVENT_FILTERS).
in	*FilterScheme*	The event filtering scheme that this application will use. For the first implementation of the event services, only filter type CFE_EVS_EventFilter_BINARY will be supported.

Returns

> Execution status below or from CFE_ES_GetAppID, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_EVS_APP_FILTER_OVERLOAD	Application Filter Overload.
CFE_EVS_UNKNOWN_FILTER	Unknown Filter.
CFE_EVS_APP_ILLEGAL_APP_ID	Illegal Application ID.

See also

> CFE_EVS_Unregister

37.12.2.2   CFE_EVS_Unregister()

```
int32 CFE_EVS_Unregister (
          void  )
```

Cleanup internal structures used by the event manager for the calling Application.

Description

> This routine un-registers the calling application from receiving event services and removes and deletes the calling applications filters and counters from the internal event service filter and counter tables if registered. Applications must call this routine as part of their orderly shutdown process.

Assumptions, External Events, and Notes:

> None

Returns

> Execution status below or from CFE_ES_GetAppID/CFE_ES_PutPoolBuf, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_EVS_APP_NOT_REGISTERED	Application Not Registered.
CFE_EVS_APP_ILLEGAL_APP_ID	Illegal Application ID.

See also

CFE_EVS_Register

37.13 cFE Send Event APIs

Functions

- int32 CFE_EVS_SendEvent (uint16 EventID, uint16 EventType, const char *Spec,...) OS_PRINTF(3

  Generate a software event.

- int32 int32 CFE_EVS_SendEventWithAppID (uint16 EventID, uint16 EventType, uint32 AppID, const char *Spec,...) OS_PRINTF(4

  Generate a software event given the specified Application ID.

- int32 int32 int32 CFE_EVS_SendTimedEvent (CFE_TIME_SysTime_t Time, uint16 EventID, uint16 EventType, const char *Spec,...) OS_PRINTF(4

  Generate a software event with a specific time tag.

37.13.1 Detailed Description

37.13.2 Function Documentation

37.13.2.1 CFE_EVS_SendEvent()

```
int32 CFE_EVS_SendEvent (
            uint16 EventID,
            uint16 EventType,
            const char * Spec,
             ...  )
```

Generate a software event.

Description

This routine generates a software event message. If the EventID is not filtered, the event will be sent as a software bus message, optionally logged in the local event log, and optionally sent as an ASCII text string out the enabled output port(s).

Assumptions, External Events, and Notes:

This API only works within the context of a registered application or core service. For messages outside the context of a registered appliction (for example early in app initialization or if registration fails) CFE_ES_WriteToSysLog can be used for reporting.

Parameters

in	*EventID*	A numeric literal used to uniquely identify an application event. The `EventID` is defined and supplied by the application sending the event.

Parameters

in	*EventType*	A numeric literal used to classify an event, one of: • CFE_EVS_EventType_DEBUG • CFE_EVS_EventType_INFORMATION • CFE_EVS_EventType_ERROR • CFE_EVS_EventType_CRITICAL
in	*Spec*	A pointer to a null terminated text string describing the output format for the event. This is the same type of format string used for the ANSI `printf` function. Nominally the post-conversion string is limited to 80 characters, but this limit is configurable through the parameter CFE_MISSION_EVS_MAX_MESSAGE_LENGTH. Characters beyond the limit will be truncated. Do not use floating point conversions (f, e, E, g, and G) in the format string unless your application will be running in a system that supports floating point arithmetic. Do not use non-printable characters (\t, \n, etc.) in the format string; they will mess up the formatting when the events are displayed on the ground system.

Returns

Execution status below or from CFE_ES_GetAppID/CFE_SB_SendMsg, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_EVS_APP_NOT_REGISTERED	Application Not Registered.
CFE_EVS_APP_ILLEGAL_APP_ID	Illegal Application ID.

See also

CFE_EVS_SendEventWithAppID, CFE_EVS_SendTimedEvent

37.13.2.2   CFE_EVS_SendEventWithAppID()

```
int32 int32 CFE_EVS_SendEventWithAppID (
        uint16 EventID,
        uint16 EventType,
        uint32 AppID,
        const char * Spec,
         ...  )
```

Generate a software event given the specified Application ID.

Description

This routine generates a software event message. If the EventID is not filtered, the event will be sent as a software bus message, optionally logged in the local event log, and optionally sent as an ASCII text string out the enabled output port(s). Note that this function should really only be used from within an API in order to preserve the context of an Application's event. In general, CFE_EVS_SendEvent should be used.

Assumptions, External Events, and Notes:

The Application ID must correspond to a registered application or core service. For messages outside the context of a registered appliction (for example early in app initialization or if registration fails) CFE_ES_WriteToSysLog can be used for reporting.

Parameters

in	*EventID*	A numeric literal used to uniquely identify an application event. The `EventID` is defined and supplied by the application sending the event.
in	*EventType*	A numeric literal used to classify an event, one of: • CFE_EVS_EventType_DEBUG • CFE_EVS_EventType_INFORMATION • CFE_EVS_EventType_ERROR • CFE_EVS_EventType_CRITICAL
in	*AppID*	The Application ID from which the event message should appear.
in	*Spec*	A pointer to a null terminated text string describing the output format for the event. This is the same type of format string used for the ANSI `printf` function. Nominally the post-conversion string is limited to 80 characters, but this limit is configurable through the parameter CFE_MISSION_EVS_MAX_MESSAGE_LENGTH. Characters beyond the limit will be truncated. Do not use floating point conversions (f, e, E, g, and G) in the format string unless your application will be running in a system that supports floating point arithmetic. Do not use non-printable characters (\t, \n, etc.) in the format string; they will mess up the formatting when the events are displayed on the ground system.

Returns

Execution status below or from CFE_ES_GetAppID/CFE_SB_SendMsg, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_EVS_APP_NOT_REGISTERED	Application Not Registered.
CFE_EVS_APP_ILLEGAL_APP_ID	Illegal Application ID.

See also

CFE_EVS_SendEvent, CFE_EVS_SendTimedEvent

37.13.2.3   CFE_EVS_SendTimedEvent()

```
int32 int32 int32 CFE_EVS_SendTimedEvent (
            CFE_TIME_SysTime_t Time,
            uint16 EventID,
            uint16 EventType,
            const char * Spec,
             ...  )
```

Generate a software event with a specific time tag.

Description

This routine is the same as CFE_EVS_SendEvent except that the caller specifies the event time instead of having the EVS use the current spacecraft time. This routine should be used in situations where an error condition is detected at one time, but the event message is reported at a later time.

Assumptions, External Events, and Notes:

This API only works within the context of a registered application or core service. For messages outside the context of a registered appliction (for example early in app initialization or if registration fails) CFE_ES_WriteToSysLog can be used for reporting.

Parameters

in	*Time*	The time to include in the event. This will usually be a time returned by the function CFE_TIME_GetTime.
in	*EventID*	A numeric literal used to uniquely identify an application event. The `EventID` is defined and supplied by the application sending the event.
in	*EventType*	A numeric literal used to classify an event, one of: • CFE_EVS_EventType_DEBUG • CFE_EVS_EventType_INFORMATION • CFE_EVS_EventType_ERROR • CFE_EVS_EventType_CRITICAL
in	*Spec*	A pointer to a null terminated text string describing the output format for the event. This is the same type of format string used for the ANSI `printf` function. Nominally the post-conversion string is limited to 80 characters, but this limit is configurable through the parameter CFE_MISSION_EVS_MAX_MESSAGE_LENGTH. Characters beyond the limit will be truncated. Do not use floating point conversions (f, e, E, g, and G) in the format string unless your application will be running in a system that supports floating point arithmetic. Do not use non-printable characters (\t, \n, etc.) in the format string; they will mess up the formatting when the events are displayed on the ground system.

Returns

Execution status below or from CFE_ES_GetAppID/CFE_SB_SendMsg, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_EVS_APP_NOT_REGISTERED	Application Not Registered.
CFE_EVS_APP_ILLEGAL_APP_ID	Illegal Application ID.

See also

CFE_EVS_SendEvent, CFE_EVS_SendEventWithAppID

37.14   cFE Reset Event Filter APIs

Functions

- int32 CFE_EVS_ResetFilter (int16 EventID)

    Resets the calling application's event filter for a single event ID.
- int32 CFE_EVS_ResetAllFilters (void)

    Resets all of the calling application's event filters.

37.14.1   Detailed Description

37.14.2   Function Documentation

37.14.2.1   CFE_EVS_ResetAllFilters()

```
int32 CFE_EVS_ResetAllFilters (
            void  )
```

Resets all of the calling application's event filters.

Description

This routine resets all the calling application's event filter counters to zero, providing a quick and convenient method for resetting event filters.

Assumptions, External Events, and Notes:

None

Returns

Execution status below or from CFE_ES_GetAppID, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_EVS_APP_NOT_REGISTERED	Application Not Registered.
CFE_EVS_APP_ILLEGAL_APP_ID	Illegal Application ID.

See also

CFE_EVS_ResetFilter

37.14.2.2   CFE_EVS_ResetFilter()

```
int32 CFE_EVS_ResetFilter (
             int16 EventID )
```

Resets the calling application's event filter for a single event ID.

Description

The effect of resetting an event filter depends on the filter scheme. The CFE_EVS_EventFilter_BINARY scheme resets the filter counter for the specified Event ID.

Assumptions, External Events, and Notes:

None

Parameters

| in | *EventID* | A numeric literal used to uniquely identify an application event. The `EventID` is defined and supplied by the application sending the event. |

Returns

Execution status below or from CFE_ES_GetAppID, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_EVS_APP_NOT_REGISTERED	Application Not Registered.
CFE_EVS_APP_ILLEGAL_APP_ID	Illegal Application ID.

See also

CFE_EVS_ResetAllFilters

37.15   cFE File Header Management APIs

Functions

- int32 CFE_FS_ReadHeader (CFE_FS_Header_t ∗Hdr, int32 FileDes)

    Read the contents of the Standard cFE File Header.
- void CFE_FS_InitHeader (CFE_FS_Header_t ∗Hdr, const char ∗Description, uint32 SubType)

    Initializes the contents of the Standard cFE File Header.
- int32 CFE_FS_WriteHeader (int32 FileDes, CFE_FS_Header_t ∗Hdr)

    Write the specified Standard cFE File Header to the specified file.
- int32 CFE_FS_SetTimestamp (int32 FileDes, CFE_TIME_SysTime_t NewTimestamp)

    Modifies the Time Stamp field in the Standard cFE File Header for the specified file.

37.15.1   Detailed Description

37.15.2   Function Documentation

37.15.2.1   CFE_FS_InitHeader()

```
void CFE_FS_InitHeader (
            CFE_FS_Header_t * Hdr,
            const char * Description,
            uint32 SubType )
```

Initializes the contents of the Standard cFE File Header.

Description

This API will clear the specified CFE_FS_Header_t variable and initialize the description field with the specified value

Parameters

in	*Hdr*	Pointer to a variable of type CFE_FS_Header_t that will be cleared and initialized
in	*∗Description*	Initializes Header's Description
in	*SubType*	Initializes Header's SubType

See also

CFE_FS_WriteHeader

37.15.2.2 CFE_FS_ReadHeader()

```
int32 CFE_FS_ReadHeader (
        CFE_FS_Header_t * Hdr,
        int32 FileDes )
```

Read the contents of the Standard cFE File Header.

Description

> This API will fill the specified CFE_FS_Header_t variable with the contents of the Standard cFE File Header of the file identified by the given File Descriptor.

Assumptions, External Events, and Notes:

> 1. The File has already been successfully opened using OS_open and the caller has a legitimate File Descriptor.

Parameters

in	*FileDes*	File Descriptor obtained from a previous call to OS_open that is associated with the file whose header is to be read.
in,out	*Hdr*	Pointer to a variable of type CFE_FS_Header_t that will be filled with the contents of the Standard cFE File Header. ∗Hdr is the contents of the Standard cFE File Header for the specified file.

Returns

> Execution status, see cFE Return Code Defines

See also

> CFE_FS_WriteHeader

37.15.2.3 CFE_FS_SetTimestamp()

```
int32 CFE_FS_SetTimestamp (
        int32 FileDes,
        CFE_TIME_SysTime_t NewTimestamp )
```

Modifies the Time Stamp field in the Standard cFE File Header for the specified file.

Description

> This API will modify the timestamp found in the Standard cFE File Header of the specified file. The timestamp will be replaced with the time specified by the caller.

Assumptions, External Events, and Notes:

> 1. The File has already been successfully opened using OS_open and the caller has a legitimate File Descriptor.
> 2. The `NewTimestamp` field has been filled appropriately by the Application.

Parameters

in	*FileDes*	File Descriptor obtained from a previous call to OS_open that is associated with the file whose header is to be read.
in	*NewTimestamp*	A CFE_TIME_SysTime_t data structure containing the desired time to be put into the file's Standard cFE File Header.

Returns

Execution status, see cFE Return Code Defines

37.15.2.4   CFE_FS_WriteHeader()

```
int32 CFE_FS_WriteHeader (
            int32 FileDes,
            CFE_FS_Header_t * Hdr )
```

Write the specified Standard cFE File Header to the specified file.

Description

This API will output the specified CFE_FS_Header_t variable, with some fields automatically updated, to the specified file as the Standard cFE File Header. This API will automatically populate the following fields in the specified CFE_FS_Header_t:

1. `ContentType` - Filled with 0x63464531 ('cFE1')

2. `Length` - Filled with the sizeof(CFE_FS_Header_t)

3. `SpacecraftID` - Filled with the Spacecraft ID

4. `ProcessorID` - Filled with the Processor ID

5. `ApplicationID` - Filled with the Application ID

6. `TimeSeconds` - Filled with the Time, in seconds, as obtained by CFE_TIME_GetTime

7. `TimeSubSeconds` - Filled with the Time, subseconds, as obtained by CFE_TIME_GetTime

Assumptions, External Events, and Notes:

1. The File has already been successfully opened using OS_open and the caller has a legitimate File Descriptor.
2. The `SubType` field has been filled appropriately by the Application.
3. The `Description` field has been filled appropriately by the Application.

Parameters

in	*FileDes*	File Descriptor obtained from a previous call to OS_open that is associated with the file whose header is to be read.
in,out	*Hdr*	Pointer to a variable of type CFE_FS_Header_t that will be filled with the contents of the Standard cFE File Header. *Hdr is the contents of the Standard cFE File Header for the specified file.

Returns

Execution status, see cFE Return Code Defines

See also

CFE_FS_ReadHeader

37.16   cFE Compressed File Management APIs

Functions

- bool CFE_FS_IsGzFile (const char ∗FileName)

  DEPRECATED; Determines if a file is a Gzip/compressed file.
- int32 CFE_FS_Decompress (const char ∗SourceFile, const char ∗DestinationFile)

  DEPRECATED; Decompresses the source file to the destination file.
- int32 CFE_FS_GetUncompressedFile (char ∗OutputNameBuffer, uint32 OutputNameBufferSize, const char ∗GzipFileName, const char ∗TempDir)

  DEPRECATED; Decompresses the source file to a temporary file created in the temp dir.

37.16.1   Detailed Description

37.16.2   Function Documentation

37.16.2.1   CFE_FS_Decompress()

```
int32 CFE_FS_Decompress (
            const char * SourceFile,
            const char * DestinationFile )
```

DEPRECATED; Decompresses the source file to the destination file.

Deprecated

Description

This API will decompress the source file to the file specified by the destination file. The file must be compressed using the "gzip" utility. This utility is available on most unix workstations, Mac OS X, Cygwin, and MinGW for Windows. More information can be found at http://www.gzip.org/

Uses a global state buffer but protects the global by a mutex, so it may block if more than one thread tries to do this at any given time.

Assumptions, External Events, and Notes:

1. The paths and filenames used here are cfe compliant file names.

2. The source file is compressed with the "gzip" utility.

3. The destination file does not exist, or can be overwritten.

Parameters

in	*SourceFile*	The "gzipped" file to decompress.
out	*DestinationFile*	The path/filename to write the decompressed or "gunzipped" file to.

Returns

Execution status, see cFE Return Code Defines

37.16.2.2 CFE_FS_GetUncompressedFile()

```
int32 CFE_FS_GetUncompressedFile (
            char * OutputNameBuffer,
            uint32 OutputNameBufferSize,
            const char * GzipFileName,
            const char * TempDir )
```

DEPRECATED; Decompresses the source file to a temporary file created in the temp dir.

Deprecated

Description

This is a wrapper around the CFE_FS_Decompress function that formulates a temporary file name based on the gzip file name, saving the caller from needing to do this. The temporary file name is created in the given temp directory.

Assumptions, External Events, and Notes:

The name passed in as "GzipFileName" is not checked again, it is assumed to have passed the criteria in CFE_↩ FS_IsGzFile. If this is not true then the conversion to a temporary file name may produce incorrect results.

Parameters

in	*OutputNameBuffer*	A caller-supplied buffer for storing the temp file name
in	*OutputNameBufferSize*	The size of OutputNameBuffer
in	*GzipFileName*	The "gzipped" file to decompress.
in	*TempDir*	The directory in which the temporary file should be created

Returns

Execution status, see cFE Return Code Defines

37.16.2.3 CFE_FS_IsGzFile()

```
bool CFE_FS_IsGzFile (
            const char * FileName )
```

DEPRECATED; Determines if a file is a Gzip/compressed file.

Deprecated

Description

    This API will check the filename and return true if the file is a gzip file. The check is currently based on the filename, so the zipped files should use the ".gz" extention.

Assumptions, External Events, and Notes:

    1. A gzipped file will use the ".gz" filename extention.

Parameters

in	*FileName*	The name of the file.

Returns

    Boolean for file has ".gz" extension

Return values

true	File has ".gz" extension
false	File does not have ".gz" extension

37.17 cFE File Utility APIs

Functions

- int32 CFE_FS_ExtractFilenameFromPath (const char ∗OriginalPath, char ∗FileNameOnly)

    Extracts the filename from a unix style path and filename string.

37.17.1 Detailed Description

37.17.2 Function Documentation

37.17.2.1 CFE_FS_ExtractFilenameFromPath()

```
int32 CFE_FS_ExtractFilenameFromPath (
          const char * OriginalPath,
          char * FileNameOnly )
```

Extracts the filename from a unix style path and filename string.

Description

This API will take the original unix path/filename combination and extract the base filename. Example: Given the path/filename : "/cf/apps/myapp.o.gz" this function will return the filename: "myapp.o.gz".

Assumptions, External Events, and Notes:

1. The paths and filenames used here are the standard unix style filenames separated by "/" characters.
2. The extracted filename (including terminator) is no longer than OS_MAX_PATH_LEN

Parameters

in	*OriginalPath*	The original path.
out	*FileNameOnly*	The filename that is extracted from the path.

Returns

Execution status, see cFE Return Code Defines

37.18   cFE SB Packet Type Defines

Macros

- #define CFE_SB_PKTTYPE_INVALID 0

    CFE_SB_GetPktType response if message type can not be determined
- #define CFE_SB_PKTTYPE_CMD 1

    CFE_SB_GetPktType response for command packets
- #define CFE_SB_PKTTYPE_TLM 2

    CFE_SB_GetPktType response for telemetry packets

37.18.1   Detailed Description

37.18.2   Macro Definition Documentation

37.18.2.1   CFE_SB_PKTTYPE_CMD

#define CFE_SB_PKTTYPE_CMD 1

CFE_SB_GetPktType response for command packets

Definition at line 110 of file cfe_sb.h.

37.18.2.2   CFE_SB_PKTTYPE_INVALID

#define CFE_SB_PKTTYPE_INVALID 0

CFE_SB_GetPktType response if message type can not be determined

Definition at line 109 of file cfe_sb.h.

37.18.2.3   CFE_SB_PKTTYPE_TLM

#define CFE_SB_PKTTYPE_TLM 2

CFE_SB_GetPktType response for telemetry packets

Definition at line 111 of file cfe_sb.h.

37.19 cFE Pipe Management APIs

Functions

- int32 CFE_SB_CreatePipe (CFE_SB_PipeId_t ∗PipeIdPtr, uint16 Depth, const char ∗PipeName)

    Creates a new software bus pipe.
- int32 CFE_SB_DeletePipe (CFE_SB_PipeId_t PipeId)

    Delete a software bus pipe.
- int32 CFE_SB_SetPipeOpts (CFE_SB_PipeId_t PipeId, uint8 Opts)

    Set options on a pipe.
- int32 CFE_SB_GetPipeOpts (CFE_SB_PipeId_t PipeId, uint8 ∗OptPtr)

    Get options on a pipe.
- int32 CFE_SB_GetPipeName (char ∗PipeNameBuf, size_t PipeNameSize, CFE_SB_PipeId_t PipeId)

    Get the pipe name for a given id.
- int32 CFE_SB_GetPipeIdByName (CFE_SB_PipeId_t ∗PipeIdPtr, const char ∗PipeName)

    Get pipe id by pipe name.

37.19.1 Detailed Description

37.19.2 Function Documentation

37.19.2.1 CFE_SB_CreatePipe()

```
int32 CFE_SB_CreatePipe (
            CFE_SB_PipeId_t * PipeIdPtr,
            uint16 Depth,
            const char * PipeName )
```

Creates a new software bus pipe.

Description

This routine creates and initializes an input pipe that the calling application can use to receive software bus messages. By default, no messages are routed to the new pipe. So, the application must use CFE_SB_Subscribe to specify which messages it wants to receive on this pipe.

Assumptions, External Events, and Notes:

None

Parameters

in,out	*PipeIdPtr*	A pointer to a variable of type CFE_SB_PipeId_t, which will be filled in with the pipe ID information by the CFE_SB_CreatePipe routine. ∗PipeIdPtr is the identifier for the created pipe.
in	*Depth*	The maximum number of messages that will be allowed on this pipe at one time.
in	*PipeName*	A string to be used to identify this pipe in error messages and routing information telemetry. The string must be no longer than OS_MAX_API_NAME (including terminator). Longer strings will be truncated.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_MAX_PIPES_MET	Max Pipes Met.
CFE_SB_PIPE_CR_ERR	Pipe Create Error.

See also

CFE_SB_DeletePipe CFE_SB_GetPipeOpts CFE_SB_SetPipeOpts CFE_SB_GetPipeIdByName

37.19.2.2   CFE_SB_DeletePipe()

```
int32 CFE_SB_DeletePipe (
            CFE_SB_PipeId_t PipeId )
```

Delete a software bus pipe.

Description

This routine deletes an input pipe and cleans up all data structures associated with the pipe. All subscriptions made for this pipe by calls to CFE_SB_Subscribe will be automatically removed from the SB routing tables. Any messages in the pipe will be discarded.

Applications should not call this routine for all of their SB pipes as part of their orderly shutdown process, as the pipe will be deleted by the support framework at the appropriate time.

Assumptions, External Events, and Notes:

None

Parameters

in	*Pipe↩ Id*	The pipe ID (obtained previously from CFE_SB_CreatePipe) of the pipe to be deleted.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.

See also

> CFE_SB_CreatePipe CFE_SB_GetPipeOpts CFE_SB_SetPipeOpts CFE_SB_GetPipeIdByName

37.19.2.3   CFE_SB_GetPipeIdByName()

```
int32 CFE_SB_GetPipeIdByName (
            CFE_SB_PipeId_t * PipeIdPtr,
            const char * PipeName )
```

Get pipe id by pipe name.

Description

> This routine finds the pipe id for a pipe name.

Parameters

in	*PipeName*	The name of the pipe.
out	*PipeIdPtr*	The PipeId for that name.

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.

See also

> CFE_SB_CreatePipe CFE_SB_DeletePipe CFE_SB_SetPipeOpts CFE_SB_PIPEOPTS_IGNOREMINE

37.19.2.4   CFE_SB_GetPipeName()

```
int32 CFE_SB_GetPipeName (
           char * PipeNameBuf,
           size_t PipeNameSize,
           CFE_SB_PipeId_t PipeId )
```

Get the pipe name for a given id.

Description

This routine finds the pipe name for a pipe id.

Parameters

out	*PipeNameBuf*	The buffer to receive the pipe name.
in	*PipeNameSize*	The size (in chars) of the PipeName buffer.
in	*PipeId*	The PipeId for that name.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.

See also

CFE_SB_CreatePipe CFE_SB_DeletePipe CFE_SB_SetPipeOpts CFE_SB_GetPipeIdByName

37.19.2.5   CFE_SB_GetPipeOpts()

```
int32 CFE_SB_GetPipeOpts (
           CFE_SB_PipeId_t PipeId,
           uint8 * OptPtr )
```

Get options on a pipe.

Description

This routine gets the current options on a pipe.

```
int32 CFE_SB_GetPipeName (
```

Parameters

in	*PipeId*	The pipe ID of the pipe to get options from.
out	*∗OptPtr*	A bit field of options.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.

See also

CFE_SB_CreatePipe CFE_SB_DeletePipe CFE_SB_SetPipeOpts CFE_SB_GetPipeIdByName CFE_SB_PIP←
EOPTS_IGNOREMINE

37.19.2.6   CFE_SB_SetPipeOpts()

```
int32 CFE_SB_SetPipeOpts (
          CFE_SB_PipeId_t PipeId,
          uint8 Opts )
```

Set options on a pipe.

Description

This routine sets (or clears) options to alter the pipe's behavior. Options are (re)set every call to this routine.

Parameters

in	*Pipe←* *Id*	The pipe ID of the pipe to set options on.
in	*Opts*	A bit field of options.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.

See also

CFE_SB_CreatePipe CFE_SB_DeletePipe CFE_SB_GetPipeOpts CFE_SB_GetPipeIdByName CFE_SB_PIP↩
EOPTS_IGNOREMINE

37.20 cFE Message Subscription Control APIs

Functions

- **int32 CFE_SB_SubscribeEx (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId, CFE_SB_Qos_t Quality, uint16 MsgLim)**

  Subscribe to a message on the software bus.
- **int32 CFE_SB_Subscribe (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId)**

  Subscribe to a message on the software bus with default parameters.
- **int32 CFE_SB_SubscribeLocal (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId, uint16 MsgLim)**

  Subscribe to a message while keeping the request local to a cpu.
- **int32 CFE_SB_Unsubscribe (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId)**

  Remove a subscription to a message on the software bus.
- **int32 CFE_SB_UnsubscribeLocal (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId)**

  Remove a subscription to a message on the software bus on the current CPU.

37.20.1 Detailed Description

37.20.2 Function Documentation

37.20.2.1 CFE_SB_Subscribe()

```
int32 CFE_SB_Subscribe (
            CFE_SB_MsgId_t MsgId,
            CFE_SB_PipeId_t PipeId )
```

Subscribe to a message on the software bus with default parameters.

Description

This routine adds the specified pipe to the destination list for the specified message ID. This is the same as CFE↩
_SB_SubscribeEx with the Quality field set to CFE_SB_Default_Qos and MsgLim set to CFE_PLATFORM_SB_↩
DEFAULT_MSG_LIMIT (4).

Assumptions, External Events, and Notes:

Note: As subscriptions are received, the destinations are added to the head of a linked list. During the sending of a message, the list is traversed beginning at the head of the list. Therefore the message will first be sent to the last subscriber. If an application has timing constraints and needs to receive a message in the shortest possible time, the developer may consider holding off its subscription until other applications have subscribed to the message.

Parameters

in	Msg↩ Id	The message ID of the message to be subscribed to.
in	Pipe↩ Id	The pipe ID of the pipe the subscribed message should be sent to.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_MAX_MSGS_MET	Max Messages Met.
CFE_SB_MAX_DESTS_MET	Max Destinations Met.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_BUF_ALOC_ERR	Buffer Allocation Error.

See also

CFE_SB_SubscribeEx, CFE_SB_SubscribeLocal, CFE_SB_Unsubscribe, CFE_SB_UnsubscribeLocal

37.20.2.2   CFE_SB_SubscribeEx()

```
int32 CFE_SB_SubscribeEx (
            CFE_SB_MsgId_t MsgId,
            CFE_SB_PipeId_t PipeId,
            CFE_SB_Qos_t Quality,
            uint16 MsgLim )
```

Subscribe to a message on the software bus.

Description

This routine adds the specified pipe to the destination list associated with the specified message ID.

Assumptions, External Events, and Notes:

Note: As subscriptions are received, the destinations are added to the head of a linked list. During the sending of a message, the list is traversed beginning at the head of the list. Therefore the message will first be sent to the last subscriber. If an application has timing constraints and needs to receive a message in the shortest possible time, the developer may consider holding off its subscription until other applications have subscribed to the message.

Parameters

in	*MsgId*	The message ID of the message to be subscribed to.
in	*PipeId*	The pipe ID of the pipe the subscribed message should be sent to.
in	*Quality*	The requested Quality of Service (QoS) required of the messages. Most callers will use CFE_SB_Default_Qos for this parameter.
in	*MsgLim*	The maximum number of messages with this Message ID to allow in this pipe at the same time.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_MAX_MSGS_MET	Max Messages Met.
CFE_SB_MAX_DESTS_MET	Max Destinations Met.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_BUF_ALOC_ERR	Buffer Allocation Error.

See also

CFE_SB_Subscribe, CFE_SB_SubscribeLocal, CFE_SB_Unsubscribe, CFE_SB_UnsubscribeLocal

37.20.2.3 CFE_SB_SubscribeLocal()

```
int32 CFE_SB_SubscribeLocal (
        CFE_SB_MsgId_t MsgId,
        CFE_SB_PipeId_t PipeId,
        uint16 MsgLim )
```

Subscribe to a message while keeping the request local to a cpu.

Description

This routine adds the specified pipe to the destination list for the specified message ID. This is similar to CFE_↩
SB_SubscribeEx with the Quality field set to CFE_SB_Default_Qos and MsgLim set to CFE_PLATFORM_SB_↩
DEFAULT_MSG_LIMIT, but will not report the subscription. Subscription Reporting is enabled for interprocessor
communication by way of the Software Bus Network (SBN) Application.

Assumptions, External Events, and Notes:

- This API is typically only used by Software Bus Network (SBN) Application

Parameters

in	*MsgId*	The message ID of the message to be subscribed to.
in	*PipeId*	The pipe ID of the pipe the subscribed message should be sent to.
in	*MsgLim*	The maximum number of messages with this Message ID to allow in this pipe at the same time.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_MAX_MSGS_MET	Max Messages Met.
CFE_SB_MAX_DESTS_MET	Max Destinations Met.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_BUF_ALOC_ERR	Buffer Allocation Error.

See also

> CFE_SB_Subscribe, CFE_SB_SubscribeEx, CFE_SB_Unsubscribe, CFE_SB_UnsubscribeLocal

37.20.2.4   CFE_SB_Unsubscribe()

```
int32 CFE_SB_Unsubscribe (
            CFE_SB_MsgId_t MsgId,
            CFE_SB_PipeId_t PipeId )
```

Remove a subscription to a message on the software bus.

Description

> This routine removes the specified pipe from the destination list for the specified message ID.

Assumptions, External Events, and Notes:

> None

Parameters

in	*Msg↩ Id*	The message ID of the message to be unsubscribed.
in	*Pipe↩ Id*	The pipe ID of the pipe the subscribed message should no longer be sent to.

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_NO_SUBSCRIBERS	No Subscribers.
CFE_SB_INTERNAL_ERR	Internal Error.

See also

> [CFE_SB_Subscribe](), [CFE_SB_SubscribeEx](), [CFE_SB_SubscribeLocal](), [CFE_SB_UnsubscribeLocal]()

37.20.2.5 CFE_SB_UnsubscribeLocal()

```
int32 CFE_SB_UnsubscribeLocal (
            CFE_SB_MsgId_t MsgId,
            CFE_SB_PipeId_t PipeId )
```

Remove a subscription to a message on the software bus on the current CPU.

Description

> This routine removes the specified pipe from the destination list for the specified message ID on the current CPU.

Assumptions, External Events, and Notes:

> - This API is typically only used by Software Bus Network (SBN) Application

Parameters

in	*Msg↩ Id*	The message ID of the message to be unsubscribed.
in	*Pipe↩ Id*	The pipe ID of the pipe the subscribed message should no longer be sent to.

Returns

> Execution status, see [cFE Return Code Defines]()

Return values

[CFE_SUCCESS]()	Sucessful execution.
[CFE_SB_NO_SUBSCRIBERS]()	No Subscribers.
[CFE_SB_INTERNAL_ERR]()	Internal Error.

See also

> [CFE_SB_Subscribe](), [CFE_SB_SubscribeEx](), [CFE_SB_SubscribeLocal](), [CFE_SB_Unsubscribe]()

37.21   cFE Send/Receive Message APIs

Functions

- int32 CFE_SB_SendMsg (CFE_SB_Msg_t ∗MsgPtr)

    Send a software bus message.
- int32 CFE_SB_PassMsg (CFE_SB_Msg_t ∗MsgPtr)

    Passes a software bus message.
- int32 CFE_SB_RcvMsg (CFE_SB_MsgPtr_t ∗BufPtr, CFE_SB_PipeId_t PipeId, int32 TimeOut)

    Receive a message from a software bus pipe.

37.21.1   Detailed Description

37.21.2   Function Documentation

37.21.2.1   CFE_SB_PassMsg()

```
int32 CFE_SB_PassMsg (
            CFE_SB_Msg_t * MsgPtr )
```

Passes a software bus message.

Description

This routine sends the specified message to all subscribers. The software bus will read the message ID from the message header to determine which pipes should receive the message. This routine is intended to pass messages not generated by the sending application.

Assumptions, External Events, and Notes:

- This routine will not normally wait for the receiver tasks to process the message before returning control to the caller's task.
- However, if a higher priority task is pending and subscribed to this message, that task may get to run before CFE_SB_PassMsg returns control to the caller.
- Unlike CFE_SB_SendMsg this routine will preserve the source sequence counter in a telemetry message.

Parameters

in	*MsgPtr*	A pointer to the message to be sent. This must point to the first byte of the software bus message header (CFE_SB_Msg_t).

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_MSG_TOO_BIG	Message Too Big.
CFE_SB_BUF_ALOC_ERR	Buffer Allocation Error.

See also

CFE_SB_RcvMsg, CFE_SB_ZeroCopySend, CFE_SB_SendMsg

37.21.2.2 CFE_SB_RcvMsg()

```
int32 CFE_SB_RcvMsg (
            CFE_SB_MsgPtr_t * BufPtr,
            CFE_SB_PipeId_t PipeId,
            int32 TimeOut )
```

Receive a message from a software bus pipe.

Description

This routine retrieves the next message from the specified pipe. If the pipe is empty, this routine will block until either a new message comes in or the timeout value is reached.

Assumptions, External Events, and Notes:

Note - If an error occurs in this API, the ∗BufPtr value may be NULL or random. Therefore, it is recommended that the return code be tested for CFE_SUCCESS before processing the message.

Parameters

in,out	*BufPtr*	A pointer to a local variable of type CFE_SB_MsgPtr_t. Typically a caller declares a ptr of type CFE_SB_Msg_t (i.e. CFE_SB_Msg_t ∗Ptr) then gives the address of that pointer (&Ptr) as this parmeter. After a successful receipt of a message, ∗BufPtr will point to the first byte of the software bus message header. This should be used as a read-only pointer (in systems with an MMU, writes to this pointer may cause a memory protection fault). The ∗BufPtr is valid only until the next call to CFE_SB_RcvMsg for the same pipe. ∗BufPtr is a pointer to the message obtained from the pipe. Valid only until the next call to CFE_SB_RcvMsg for the same pipe.
in	*PipeId*	The pipe ID of the pipe containing the message to be obtained.
in	*TimeOut*	The number of milliseconds to wait for a new message if the pipe is empty at the time of the call. This can also be set to CFE_SB_POLL for a non-blocking receive or CFE_SB_PEND_FOREVER to wait forever for a message to arrive.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_TIME_OUT	Time Out.
CFE_SB_PIPE_RD_ERR	Pipe Read Error.
CFE_SB_NO_MESSAGE	No Message.

See also

CFE_SB_SendMsg, CFE_SB_ZeroCopySend

37.21.2.3   CFE_SB_SendMsg()

```
int32 CFE_SB_SendMsg (
            CFE_SB_Msg_t * MsgPtr )
```

Send a software bus message.

Description

This routine sends the specified message to all subscribers. The software bus will read the message ID from the message header to determine which pipes should receive the message.

Assumptions, External Events, and Notes:

- This routine will not normally wait for the receiver tasks to process the message before returning control to the caller's task.
- However, if a higher priority task is pending and subscribed to this message, that task may get to run before CFE_SB_SendMsg returns control to the caller.
- This function tracks and increments the source sequence counter of a telemetry message.

Parameters

in	*MsgPtr*	A pointer to the message to be sent. This must point to the first byte of the software bus message header (CFE_SB_Msg_t).

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_MSG_TOO_BIG	Message Too Big.
CFE_SB_BUF_ALOC_ERR	Buffer Allocation Error.

See also

> CFE_SB_RcvMsg, CFE_SB_ZeroCopySend, CFE_SB_PassMsg

37.22   cFE Zero Copy Message APIs

Functions

- • CFE_SB_Msg_t ∗ CFE_SB_ZeroCopyGetPtr (uint16 MsgSize, CFE_SB_ZeroCopyHandle_t ∗BufferHandle)

    Get a buffer pointer to use for "zero copy" SB sends.
- • int32 CFE_SB_ZeroCopyReleasePtr (CFE_SB_Msg_t ∗Ptr2Release, CFE_SB_ZeroCopyHandle_t Buffer←
    Handle)

    Release an unused "zero copy" buffer pointer.
- • int32 CFE_SB_ZeroCopySend (CFE_SB_Msg_t ∗MsgPtr, CFE_SB_ZeroCopyHandle_t BufferHandle)

    Send an SB message in "zero copy" mode.
- • int32 CFE_SB_ZeroCopyPass (CFE_SB_Msg_t ∗MsgPtr, CFE_SB_ZeroCopyHandle_t BufferHandle)

    Pass an SB message in "zero copy" mode.

37.22.1   Detailed Description

37.22.2   Function Documentation

37.22.2.1   CFE_SB_ZeroCopyGetPtr()

```
CFE_SB_Msg_t* CFE_SB_ZeroCopyGetPtr (
            uint16 MsgSize,
            CFE_SB_ZeroCopyHandle_t * BufferHandle )
```

Get a buffer pointer to use for "zero copy" SB sends.

Description

This routine can be used to get a pointer to one of the software bus' internal memory buffers that are used for sending messages. The caller can use this memory buffer to build an SB message, then send it using the CFE_S←
B_ZeroCopySend function. This interface is more complicated than the normal CFE_SB_ZeroCopySend interface, but it avoids an extra copy of the message from the user's memory buffer to the software bus internal buffer. The "zero copy" interface can be used to improve performance in high-rate, high-volume software bus traffic.

Assumptions, External Events, and Notes:

1. The pointer returned by CFE_SB_ZeroCopyGetPtr is only good for one call to CFE_SB_ZeroCopySend.

2. Applications should be written as if CFE_SB_ZeroCopyGetPtr is equivalent to a `malloc()` and CFE_SB←
   _ZeroCopySend is equivalent to a `free()`.

3. Applications must not de-reference the message pointer (for reading or writing) after the call to CFE_SB_←
   ZeroCopySend.

Parameters

in	*MsgSize*	The size of the SB message buffer the caller wants (including the SB message header).
out	*BufferHandle*	A handle that must be supplied when sending or releasing in zero copy mode.

Returns

A pointer to a memory buffer that can be used to build one SB message for use with CFE_SB_ZeroCopySend.

See also

CFE_SB_ZeroCopyReleasePtr, CFE_SB_ZeroCopySend

37.22.2.2 CFE_SB_ZeroCopyPass()

```
int32 CFE_SB_ZeroCopyPass (
            CFE_SB_Msg_t * MsgPtr,
            CFE_SB_ZeroCopyHandle_t BufferHandle )
```

Pass an SB message in "zero copy" mode.

Description

This routine sends a message that has been created directly in an internal SB message buffer by an application (after a call to CFE_SB_ZeroCopyGetPtr). This interface is more complicated than the normal CFE_SB_SendMsg interface, but it avoids an extra copy of the message from the user's memory buffer to the software bus internal buffer. The "zero copy" interface can be used to improve performance in high-rate, high-volume software bus traffic. This version is intended to pass messages not generated by the caller (to preserve the source sequence count).

Assumptions, External Events, and Notes:

1. The pointer returned by CFE_SB_ZeroCopyGetPtr is only good for one call to CFE_SB_ZeroCopySend or CFE_SB_ZeroCopyPass.
2. Callers must not use the same SB message buffer for multiple sends.
3. Applications should be written as if CFE_SB_ZeroCopyGetPtr is equivalent to a `malloc()` and CFE_SB↩ _ZeroCopyPass is equivalent to a `free()`.
4. Applications must not de-reference the message pointer (for reading or writing) after the call to CFE_SB_↩ ZeroCopyPass.
5. Unlike CFE_SB_ZeroCopySend this routine will preserve the source sequence counter in a telemetry message.

Parameters

in	MsgPtr	A pointer to the SB message to be sent.
in	BufferHandle	The handle supplied with the CFE_SB_ZeroCopyGetPtr call.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_MSG_TOO_BIG	Message Too Big.
CFE_SB_BUF_ALOC_ERR	Buffer Allocation Error.
CFE_SB_BUFFER_INVALID	Buffer Invalid.

See also

> CFE_SB_PassMsg, CFE_SB_ZeroCopySend, CFE_SB_ZeroCopyReleasePtr, CFE_SB_ZeroCopyGetPtr

37.22.2.3   CFE_SB_ZeroCopyReleasePtr()

```
int32 CFE_SB_ZeroCopyReleasePtr (
            CFE_SB_Msg_t * Ptr2Release,
            CFE_SB_ZeroCopyHandle_t BufferHandle )
```

Release an unused "zero copy" buffer pointer.

Description

> This routine can be used to release a pointer to one of the software bus' internal memory buffers.

Assumptions, External Events, and Notes:

> 1. This function is not needed for normal "zero copy" transfers. It is needed only for cleanup when an application gets a pointer using CFE_SB_ZeroCopyGetPtr, but (due to some error condition) never uses that pointer for a CFE_SB_ZeroCopySend

Parameters

in	*Ptr2Release*	A pointer to the SB internal buffer. This must be a pointer returned by a call to CFE_SB_ZeroCopyGetPtr, but never used in a call to CFE_SB_ZeroCopySend.
in	*BufferHandle*	This must be the handle supplied with the pointer when CFE_SB_ZeroCopyGetPtr was called.

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BUFFER_INVALID	Buffer Invalid.

See also

[CFE_SB_ZeroCopyGetPtr](), [CFE_SB_ZeroCopySend]()

37.22.2.4 CFE_SB_ZeroCopySend()

```
int32 CFE_SB_ZeroCopySend (
            CFE_SB_Msg_t * MsgPtr,
            CFE_SB_ZeroCopyHandle_t BufferHandle )
```

Send an SB message in "zero copy" mode.

Description

This routine sends a message that has been created directly in an internal SB message buffer by an application (after a call to [CFE_SB_ZeroCopyGetPtr]()). This interface is more complicated than the normal [CFE_SB_SendMsg]() interface, but it avoids an extra copy of the message from the user's memory buffer to the software bus internal buffer. The "zero copy" interface can be used to improve performance in high-rate, high-volume software bus traffic.

Assumptions, External Events, and Notes:

1. The pointer returned by [CFE_SB_ZeroCopyGetPtr]() is only good for one call to [CFE_SB_ZeroCopySend]().
2. Callers must not use the same SB message buffer for multiple sends.
3. Applications should be written as if [CFE_SB_ZeroCopyGetPtr]() is equivalent to a `malloc()` and [CFE_SB↩ _ZeroCopySend]() is equivalent to a `free()`.
4. Applications must not de-reference the message pointer (for reading or writing) after the call to [CFE_SB_↩ ZeroCopySend]().
5. This function tracks and increments the source sequence counter of a telemetry message.

Parameters

in	*MsgPtr*	A pointer to the SB message to be sent.
in	*BufferHandle*	The handle supplied with the [CFE_SB_ZeroCopyGetPtr]() call.

Returns

Execution status, see [cFE Return Code Defines]()

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_BAD_ARGUMENT	Bad Argument.
CFE_SB_MSG_TOO_BIG	Message Too Big.
CFE_SB_BUF_ALOC_ERR	Buffer Allocation Error.
CFE_SB_BUFFER_INVALID	Buffer Invalid.

See also

CFE_SB_SendMsg, CFE_SB_RcvMsg, CFE_SB_ZeroCopyReleasePtr, CFE_SB_ZeroCopyGetPtr

37.23 cFE Setting Message Characteristics APIs

Functions

- void CFE_SB_InitMsg (void ∗MsgPtr, CFE_SB_MsgId_t MsgId, uint16 Length, bool Clear)

    Initialize a buffer for a software bus message.
- void CFE_SB_SetMsgId (CFE_SB_MsgPtr_t MsgPtr, CFE_SB_MsgId_t MsgId)

    Sets the message ID of a software bus message.
- void CFE_SB_SetUserDataLength (CFE_SB_MsgPtr_t MsgPtr, uint16 DataLength)

    Sets the length of user data in a software bus message.
- void CFE_SB_SetTotalMsgLength (CFE_SB_MsgPtr_t MsgPtr, uint16 TotalLength)

    Sets the total length of a software bus message.
- int32 CFE_SB_SetMsgTime (CFE_SB_MsgPtr_t MsgPtr, CFE_TIME_SysTime_t Time)

    Sets the time field in a software bus message.
- void CFE_SB_TimeStampMsg (CFE_SB_MsgPtr_t MsgPtr)

    Sets the time field in a software bus message with the current spacecraft time.
- int32 CFE_SB_SetCmdCode (CFE_SB_MsgPtr_t MsgPtr, uint16 CmdCode)

    Sets the command code field in a software bus message.
- int32 CFE_SB_MessageStringSet (char ∗DestStringPtr, const char ∗SourceStringPtr, uint32 DestMaxSize, uint32 SourceMaxSize)

    Copies a string into a software bus message.

37.23.1 Detailed Description

37.23.2 Function Documentation

37.23.2.1 CFE_SB_InitMsg()

```
void CFE_SB_InitMsg (
            void * MsgPtr,
            CFE_SB_MsgId_t MsgId,
            uint16 Length,
            bool Clear )
```

Initialize a buffer for a software bus message.

Description

This routine fills in the header information needed to create a valid software bus message.

Assumptions, External Events, and Notes:

None

Parameters

in	*MsgPtr*	A pointer to the buffer that will contain the message. This will point to the first byte of the message header. The `void*` data type allows the calling routine to use any data type when declaring its message buffer.
in	*MsgId*	The message ID to put in the message header.
in	*Length*	The total number of bytes of message data, including the SB message header .
in	*Clear*	A flag indicating whether to clear the rest of the message: • true - fill sequence count and packet data with zeroes. • false - leave sequence count and packet data unchanged.

See also

CFE_SB_SetMsgId, CFE_SB_SetUserDataLength, CFE_SB_SetTotalMsgLength, CFE_SB_SetMsgTime, CF↩
E_SB_TimeStampMsg, CFE_SB_SetCmdCode

37.23.2.2   CFE_SB_MessageStringSet()

```
int32 CFE_SB_MessageStringSet (
          char * DestStringPtr,
          const char * SourceStringPtr,
          uint32 DestMaxSize,
          uint32 SourceMaxSize )
```

Copies a string into a software bus message.

Description

Strings within software bus messages have a defined/fixed maximum length, and may not necessarily be null terminated within the message. This presents a possible issue when using the C library functions to copy strings out of a message.

This performs a very similar function to "strncpy()" except that the sizes of *both* buffers are passed in. Neither buffer is required to be null-terminated, but copying will stop after the first termination character is encountered.

If the destination buffer is not completely filled by the source data (such as if the supplied string was shorter than the allotted length) the destination buffer will be padded with NUL characters up to the size of the buffer, similar to what strncpy() does. This ensures that the entire destination buffer is set.

Note

If the source string buffer is already guaranteed to be null terminated, then there is no difference between the C library "strncpy()" function and this implementation. It is only necessary to use this when termination of the source buffer is not guaranteed.

Parameters

out	*DestStringPtr*	Pointer to destination buffer (component of SB message definition)
in	*SourceStringPtr*	Pointer to source buffer
in	*DestMaxSize*	Size of destination buffer as defined by the message definition
in	*SourceMaxSize*	Size of source buffer

Returns

Number of characters copied or error code, see cFE Return Code Defines

37.23.2.3 CFE_SB_SetCmdCode()

```
int32 CFE_SB_SetCmdCode (
        CFE_SB_MsgPtr_t MsgPtr,
        uint16 CmdCode )
```

Sets the command code field in a software bus message.

Description

This routine sets the command code of a software bus message (if SB messages are implemented as CCSDS packets, this will be the function code).

Assumptions, External Events, and Notes:

- If the underlying implementation of software bus messages does not include a command code field, then this routine will do nothing to the message contents and will return CFE_SB_WRONG_MSG_TYPE.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.
in	*CmdCode*	The command code to include in the message.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_WRONG_MSG_TYPE	Wrong Message Type.

See also

CFE_SB_SetMsgId, CFE_SB_SetUserDataLength, CFE_SB_SetTotalMsgLength, CFE_SB_SetMsgTime, CF↩
E_SB_TimeStampMsg, CFE_SB_GetCmdCode, CFE_SB_InitMsg

37.23.2.4   CFE_SB_SetMsgId()

```
void CFE_SB_SetMsgId (
            CFE_SB_MsgPtr_t MsgPtr,
            CFE_SB_MsgId_t MsgId )
```

Sets the message ID of a software bus message.

Description

This routine sets the Message ID in a software bus message header.

Assumptions, External Events, and Notes:

None

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.
in	*MsgId*	The message ID to put into the message header.

See also

CFE_SB_GetMsgId, CFE_SB_SetUserDataLength, CFE_SB_SetTotalMsgLength, CFE_SB_SetMsgTime, CF↩
E_SB_TimeStampMsg, CFE_SB_SetCmdCode, CFE_SB_InitMsg

37.23.2.5   CFE_SB_SetMsgTime()

```
int32 CFE_SB_SetMsgTime (
            CFE_SB_MsgPtr_t MsgPtr,
            CFE_TIME_SysTime_t Time )
```

Sets the time field in a software bus message.

Description

This routine sets the time of a software bus message. Most applications will want to use CFE_SB_TimeStampMsg instead of this function. But, when needed, CFE_SB_SetMsgTime can be used to send a group of SB messages with identical time stamps.

Assumptions, External Events, and Notes:

- If the underlying implementation of software bus messages does not include a time field, then this routine will do nothing to the message contents and will return CFE_SB_WRONG_MSG_TYPE.
- Note default implementation of command messages do not have a time field and will trigger the CFE_SB_↩ WRONG_MSG_TYPE error

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.
in	*Time*	The time to include in the message. This will usually be a time returned by the function CFE_TIME_GetTime.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_SB_WRONG_MSG_TYPE	Wrong Message Type.

See also

CFE_SB_SetMsgId, CFE_SB_SetUserDataLength, CFE_SB_SetTotalMsgLength, CFE_SB_GetMsgTime, CF↩ E_SB_TimeStampMsg, CFE_SB_SetCmdCode, CFE_SB_InitMsg

37.23.2.6 CFE_SB_SetTotalMsgLength()

```
void CFE_SB_SetTotalMsgLength (
            CFE_SB_MsgPtr_t MsgPtr,
            uint16 TotalLength )
```

Sets the total length of a software bus message.

Description

This routine sets the field in the SB message header that determines the total length of the message. SB message header formats can be different for each deployment of the cFE. So, applications should use this function rather than trying to poke a length value directly into their SB message buffers.

Assumptions, External Events, and Notes:

None

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.
in	*TotalLength*	The length to set (total size of the message, in bytes, including headers).

See also

> CFE_SB_SetMsgId, CFE_SB_SetUserDataLength, CFE_SB_GetTotalMsgLength, CFE_SB_SetMsgTime, CF←
> E_SB_TimeStampMsg, CFE_SB_SetCmdCode, CFE_SB_InitMsg

37.23.2.7   CFE_SB_SetUserDataLength()

```
void CFE_SB_SetUserDataLength (
            CFE_SB_MsgPtr_t MsgPtr,
            uint16 DataLength )
```

Sets the length of user data in a software bus message.

Description

> This routine sets the field in the SB message header that determines the size of the user data in a software bus
> message. SB message header formats can be different for each deployment of the cFE. So, applications should
> use this function rather than trying to poke a length value directly into their SB message buffers.

Assumptions, External Events, and Notes:

> • You must set a valid message ID in the SB message header before calling this function.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.
in	*DataLength*	The length to set (size of the user data, in bytes).

See also

> CFE_SB_SetMsgId, CFE_SB_GetUserDataLength, CFE_SB_SetTotalMsgLength, CFE_SB_SetMsgTime, CF←
> E_SB_TimeStampMsg, CFE_SB_SetCmdCode, CFE_SB_InitMsg

37.23.2.8   CFE_SB_TimeStampMsg()

```
void CFE_SB_TimeStampMsg (
            CFE_SB_MsgPtr_t MsgPtr )
```

Sets the time field in a software bus message with the current spacecraft time.

Description

This routine sets the time of a software bus message with the current spacecraft time. This will be the same time that is returned by the function CFE_TIME_GetTime.

Assumptions, External Events, and Notes:

- If the underlying implementation of software bus messages does not include a time field, then this routine will do nothing.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

See also

CFE_SB_SetMsgId, CFE_SB_SetUserDataLength, CFE_SB_SetTotalMsgLength, CFE_SB_SetMsgTime, CF←
E_SB_SetCmdCode, CFE_SB_InitMsg

37.24   cFE Getting Message Characteristics APIs

Functions

- void ∗ CFE_SB_GetUserData (CFE_SB_MsgPtr_t MsgPtr)

  Get a pointer to the user data portion of a software bus message.
- CFE_SB_MsgId_t CFE_SB_GetMsgId (const CFE_SB_Msg_t ∗MsgPtr)

  Get the message ID of a software bus message.
- uint16 CFE_SB_GetUserDataLength (const CFE_SB_Msg_t ∗MsgPtr)

  Gets the length of user data in a software bus message.
- uint16 CFE_SB_GetTotalMsgLength (const CFE_SB_Msg_t ∗MsgPtr)

  Gets the total length of a software bus message.
- uint16 CFE_SB_GetCmdCode (CFE_SB_MsgPtr_t MsgPtr)

  Gets the command code field from a software bus message.
- CFE_TIME_SysTime_t CFE_SB_GetMsgTime (CFE_SB_MsgPtr_t MsgPtr)

  Gets the time field from a software bus message.
- uint32 CFE_SB_GetLastSenderId (CFE_SB_SenderId_t ∗∗Ptr, CFE_SB_PipeId_t PipeId)

  Retrieve the application Info of the sender for the last message.
- int32 CFE_SB_MessageStringGet (char ∗DestStringPtr, const char ∗SourceStringPtr, const char ∗DefaultString,
  uint32 DestMaxSize, uint32 SourceMaxSize)

  Copies a string out of a software bus message.

37.24.1   Detailed Description

37.24.2   Function Documentation

37.24.2.1   CFE_SB_GetCmdCode()

```
uint16 CFE_SB_GetCmdCode (
            CFE_SB_MsgPtr_t MsgPtr )
```

Gets the command code field from a software bus message.

Description

This routine gets the command code from a software bus message (if SB messages are implemented as CCSDS packets, this will be the function code).

Assumptions, External Events, and Notes:

- If the underlying implementation of software bus messages does not include a command code field, then this routine will return a zero.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

Returns

The command code included in the software bus message header (if present). Otherwise, returns a command code value of zero.

See also

CFE_SB_GetUserData, CFE_SB_GetMsgId, CFE_SB_GetUserDataLength, CFE_SB_GetTotalMsgLength, CF↩
E_SB_GetMsgTime, CFE_SB_SetCmdCode, CFE_SB_GetChecksum

37.24.2.2 CFE_SB_GetLastSenderId()

```
uint32 CFE_SB_GetLastSenderId (
            CFE_SB_SenderId_t ** Ptr,
            CFE_SB_PipeId_t PipeId )
```

Retrieve the application Info of the sender for the last message.

Description

This routine can be used after a successful CFE_SB_RcvMsg call to find out which application sent the message that was received.

Assumptions, External Events, and Notes:

Note - If an error occurs in this API, the ∗Ptr value may be NULL or random. Therefore, it is recommended that the return code be tested for CFE_SUCCESS before reading the sender information.

Parameters

in	*Ptr*	A pointer to a local variable of type CFE_SB_SenderId_t. Typically a caller declares a ptr of type CFE_SB_SenderId_t (i.e. CFE_SB_SenderId_t ∗Ptr) then gives the address of that pointer (&Ptr) for this parameter. After a successful call to this API, ∗Ptr will point to the first byte of the CFE_SB_SenderId_t structure containing the sender information for the last message received on the given pipe. This should be used as a read-only pointer (in systems with an MMU, writes to this pointer may cause a memory protection fault). The ∗Ptr is valid only until the next call to CFE_SB_RcvMsg for the same pipe.
in	*Pipe↩ Id*	The pipe ID of the pipe the message was taken from.

Returns

   The last sender's application ID

37.24.2.3   CFE_SB_GetMsgId()

CFE_SB_MsgId_t CFE_SB_GetMsgId (
           const CFE_SB_Msg_t * *MsgPtr*)

Get the message ID of a software bus message.

Description

   This routine returns the message ID from a software bus message.

Assumptions, External Events, and Notes:

   None

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message.

Returns

   The software bus Message ID from the message header.

See also

   CFE_SB_GetUserData, CFE_SB_SetMsgId, CFE_SB_GetUserDataLength, CFE_SB_GetTotalMsgLength, CF←
   E_SB_GetMsgTime, CFE_SB_GetCmdCode, CFE_SB_GetChecksum

37.24.2.4   CFE_SB_GetMsgTime()

CFE_TIME_SysTime_t CFE_SB_GetMsgTime (
           CFE_SB_MsgPtr_t *MsgPtr*)

Gets the time field from a software bus message.

Description

   This routine gets the time from a software bus message.

Assumptions, External Events, and Notes:

   • If the underlying implementation of software bus messages does not include a time field, then this routine will
     return a zero time.
   • Note default implementation of command messages do not have a time field.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

Returns

The system time included in the software bus message header (if present), otherwise, returns a time value of zero.

See also

CFE_SB_GetUserData, CFE_SB_GetMsgId, CFE_SB_GetUserDataLength, CFE_SB_GetTotalMsgLength, CF↩
E_SB_SetMsgTime, CFE_SB_GetCmdCode, CFE_SB_GetChecksum

37.24.2.5   CFE_SB_GetTotalMsgLength()

```
uint16 CFE_SB_GetTotalMsgLength (
            const CFE_SB_Msg_t * MsgPtr )
```

Gets the total length of a software bus message.

Description

This routine returns the total size of the software bus message.

Assumptions, External Events, and Notes:

- For the CCSDS implementation of this API, the size is derived from the message header.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

Returns

The total size (in bytes) of the software bus message, including headers.

See also

CFE_SB_GetUserData, CFE_SB_GetMsgId, CFE_SB_GetUserDataLength, CFE_SB_SetTotalMsgLength, CF↩
E_SB_GetMsgTime, CFE_SB_GetCmdCode, CFE_SB_GetChecksum

37.24.2.6 CFE_SB_GetUserData()

```
void* CFE_SB_GetUserData (
            CFE_SB_MsgPtr_t MsgPtr )
```

Get a pointer to the user data portion of a software bus message.

Description

This routine returns a pointer to the user data portion of a software bus message. SB message header formats can be different for each deployment of the cFE. So, applications should use this function and avoid hard coding offsets into their SB message buffers.

Assumptions, External Events, and Notes:

None

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message.

Returns

A pointer to the first byte of user data within the software bus message.

See also

CFE_SB_GetMsgId, CFE_SB_GetUserDataLength, CFE_SB_GetTotalMsgLength, CFE_SB_GetMsgTime, CF↩
E_SB_GetCmdCode, CFE_SB_GetChecksum

37.24.2.7 CFE_SB_GetUserDataLength()

```
uint16 CFE_SB_GetUserDataLength (
            const CFE_SB_Msg_t * MsgPtr )
```

Gets the length of user data in a software bus message.

Description

This routine returns the size of the user data in a software bus message.

Assumptions, External Events, and Notes:

None

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

Returns

The size (in bytes) of the user data in the software bus message.

See also

CFE_SB_GetUserData, CFE_SB_GetMsgId, CFE_SB_SetUserDataLength, CFE_SB_GetTotalMsgLength, CF↩
E_SB_GetMsgTime, CFE_SB_GetCmdCode, CFE_SB_GetChecksum

37.24.2.8   CFE_SB_MessageStringGet()

```
int32 CFE_SB_MessageStringGet (
            char * DestStringPtr,
            const char * SourceStringPtr,
            const char * DefaultString,
            uint32 DestMaxSize,
            uint32 SourceMaxSize )
```

Copies a string out of a software bus message.

Description

Strings within software bus messages have a defined/fixed maximum length, and may not necessarily be null terminated within the message. This presents a possible issue when using the C library functions to copy strings out of a message.

This function should replace use of C library functions such as strcpy/strncpy when copying strings out of software bus messages to local storage buffers.

Up to [SourceMaxSize] or [DestMaxSize-1] (whichever is smaller) characters will be coped from the source buffer to the destination buffer, and a NUL termination character will be written to the destination buffer as the last character.

If the DefaultString pointer is non-NULL, it will be used in place of the source string if the source is an empty string. This is typically a string constant that comes from the platform configuration, allowing default values to be assumed for fields that are unspecified.

IMPORTANT - the default string, if specified, must be null terminated. This will be the case if a string literal is passed in (the typical/expected use case).

If the default is NULL, then only the source string will be copied, and the result will be an empty string if the source was empty.

If the destination buffer is too small to store the entire string, it will be truncated, but it will still be null terminated.

Parameters

out	*DestStringPtr*	Pointer to destination buffer
in	*SourceStringPtr*	Pointer to source buffer (component of SB message definition)
in	*DefaultString*	Default string to use if source is empty
in	*DestMaxSize*	Size of destination storage buffer (must be at least 2)
in	*SourceMaxSize*	Size of source buffer as defined by the message definition

Returns

Number of characters copied or error code, see cFE Return Code Defines

37.25 cFE Checksum Control APIs

Functions

- uint16 **CFE_SB_GetChecksum** (CFE_SB_MsgPtr_t MsgPtr)

  Gets the checksum field from a software bus message.
- void **CFE_SB_GenerateChecksum** (CFE_SB_MsgPtr_t MsgPtr)

  Calculates and sets the checksum of a software bus message.
- bool **CFE_SB_ValidateChecksum** (CFE_SB_MsgPtr_t MsgPtr)

  Validates the checksum of a software bus message.

37.25.1 Detailed Description

37.25.2 Function Documentation

37.25.2.1 CFE_SB_GenerateChecksum()

```
void CFE_SB_GenerateChecksum (
            CFE_SB_MsgPtr_t MsgPtr )
```

Calculates and sets the checksum of a software bus message.

Description

This routine calculates the checksum of a software bus message according to an implementation-defined algorithm. Then, it sets the checksum field in the message with the calculated value. The contents and location of this field will depend on the underlying implementation of software bus messages. It may be a checksum, a CRC, or some other algorithm.

Assumptions, External Events, and Notes:

- If the underlying implementation of software bus messages does not include a checksum field, then this routine will do nothing.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

See also

CFE_SB_ValidateChecksum, CFE_SB_GetChecksum

37.25.2.2 CFE_SB_GetChecksum()

```
uint16 CFE_SB_GetChecksum (
            CFE_SB_MsgPtr_t MsgPtr )
```

Gets the checksum field from a software bus message.

Description

This routine gets the checksum (or other message integrity check value) from a software bus message. The contents and location of this field will depend on the underlying implementation of software bus messages. It may be a checksum, a CRC, or some other algorithm. Users should not call this function as part of a message integrity check (call CFE_SB_ValidateChecksum instead).

Assumptions, External Events, and Notes:

- If the underlying implementation of software bus messages does not include a checksum field, then this routine will return a zero.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

Returns

The checksum included in the software bus message header (if present), otherwise, returns a checksum value of zero.

See also

CFE_SB_GetUserData, CFE_SB_GetMsgId, CFE_SB_GetUserDataLength, CFE_SB_GetTotalMsgLength, CF←
E_SB_GetMsgTime, CFE_SB_GetCmdCode, CFE_SB_GetChecksum CFE_SB_ValidateChecksum, CFE_SB←
_GenerateChecksum

37.25.2.3 CFE_SB_ValidateChecksum()

```
bool CFE_SB_ValidateChecksum (
            CFE_SB_MsgPtr_t MsgPtr )
```

Validates the checksum of a software bus message.

Description

This routine calculates the expected checksum of a software bus message according to an implementation-defined algorithm. Then, it checks the calculated value against the value in the message's checksum. If the checksums do not match, this routine will generate an event message reporting the error.

Assumptions, External Events, and Notes:

- If the underlying implementation of software bus messages does not include a checksum field, then this routine will always return `true`.

Parameters

in	*MsgPtr*	A pointer to the buffer that contains the software bus message. This must point to the first byte of the message header.

Returns

Boolean checksum result

Return values

true	The checksum field in the packet is valid.
false	The checksum field in the packet is not valid or the message type is wrong.

See also

CFE_SB_GenerateChecksum, CFE_SB_GetChecksum

37.26   cFE Message ID APIs

Functions

- bool CFE_SB_IsValidMsgId (CFE_SB_MsgId_t MsgId)

    Identifies whether a given CFE_SB_MsgId_t is valid.
- static bool CFE_SB_MsgId_Equal (CFE_SB_MsgId_t MsgId1, CFE_SB_MsgId_t MsgId2)

    Identifies whether two CFE_SB_MsgId_t values are equal.
- static CFE_SB_MsgId_Atom_t CFE_SB_MsgIdToValue (CFE_SB_MsgId_t MsgId)

    Converts a CFE_SB_MsgId_t to a normal integer.
- static CFE_SB_MsgId_t CFE_SB_ValueToMsgId (CFE_SB_MsgId_Atom_t MsgIdValue)

    Converts a normal integer into a CFE_SB_MsgId_t.
- uint32 CFE_SB_GetPktType (CFE_SB_MsgId_t MsgId)

    Identifies packet type given message ID.

37.26.1   Detailed Description

37.26.2   Function Documentation

37.26.2.1   CFE_SB_GetPktType()

```
uint32 CFE_SB_GetPktType (
            CFE_SB_MsgId_t MsgId )
```

Identifies packet type given message ID.

Provides the packet type associated with the given message ID

Returns

Packet type

Return values

CFE_SB_PKTTYPE_CMD	Command packet type
CFE_SB_PKTTYPE_TLM	Telemetry packet type
CFE_SB_PKTTYPE_INVALID	Invalid/unknown packet type

Referenced by CFE_SB_ValueToMsgId().

37.26.2.2 CFE_SB_IsValidMsgId()

```
bool CFE_SB_IsValidMsgId (
            CFE_SB_MsgId_t MsgId )
```

Identifies whether a given CFE_SB_MsgId_t is valid.

Description

Implements a basic sanity check on the value provided

Returns

Boolean message ID validity indicator

Return values

true	Message ID is within the valid range
false	Message ID is not within the valid range

37.26.2.3 CFE_SB_MsgId_Equal()

```
static bool CFE_SB_MsgId_Equal (
            CFE_SB_MsgId_t MsgId1,
            CFE_SB_MsgId_t MsgId2 )  [inline], [static]
```

Identifies whether two CFE_SB_MsgId_t values are equal.

Description

In cases where the CFE_SB_MsgId_t type is not a simple integer type, it may not be possible to do a direct equality check. This inline function provides an abstraction for the equality check between two CFE_SB_MsgId_t values.

Applications should transition to using this function to compare MsgId values for equality to remain compatible with future versions of cFE.

Returns

Boolean message ID equality indicator

Return values

true	Message IDs are Equal
false	Message IDs are not Equal

Definition at line 1366 of file cfe_sb.h.

References CFE_SB_MSGID_UNWRAP_VALUE.

37.26.2.4   CFE_SB_MsgIdToValue()

```
static CFE_SB_MsgId_Atom_t CFE_SB_MsgIdToValue (
            CFE_SB_MsgId_t MsgId )  [inline], [static]
```

Converts a CFE_SB_MsgId_t to a normal integer.

Description

In cases where the CFE_SB_MsgId_t type is not a simple integer type, it is not possible to directly display the value in a printf-style statement, use it in a switch() statement, or other similar use cases.

This inline function provides the ability to map a CFE_SB_MsgId_t type back into a simple integer value.

Applications should transition to using this function wherever a CFE_SB_MsgId_t type needs to be used as an integer.

Assumptions and Notes:

This negates the type safety that was gained by using a non- integer type for the CFE_SB_MsgId_t value. This should only be used in specific cases such as UI display (printf, events, etc) where the value is being sent externally. Any internal API calls should be updated to use the CFE_SB_MsgId_t type directly, rather than an integer type.

Returns

Integer representation of the CFE_SB_MsgId_t

Definition at line 1397 of file cfe_sb.h.

References CFE_SB_MSGID_UNWRAP_VALUE.

37.26.2.5 CFE_SB_ValueToMsgId()

```
static CFE_SB_MsgId_t CFE_SB_ValueToMsgId (
            CFE_SB_MsgId_Atom_t MsgIdValue ) [inline], [static]
```

Converts a normal integer into a CFE_SB_MsgId_t.

Description

In cases where the CFE_SB_MsgId_t type is not a simple integer type, it is not possible to directly use an integer value supplied via a define or similar method.

This inline function provides the ability to map an integer value into a corresponding CFE_SB_MsgId_t value.

Applications should transition to using this function wherever an integer needs to be used for a CFE_SB_MsgId_t.

Assumptions and Notes:

This negates the type safety that was gained by using a non- integer type for the CFE_SB_MsgId_t value. This should only be used in specific cases where the value is coming from an external source. Any internal API calls should be updated to return the CFE_SB_MsgId_t type directly, rather than an integer type.

Returns

CFE_SB_MsgId_t representation of the integer

Definition at line 1426 of file cfe_sb.h.

References CFE_SB_GetPktType(), and CFE_SB_MSGID_WRAP_VALUE.

Here is the call graph for this function:

37.27   cFE Table Type Defines

Macros

- #define CFE_TBL_OPT_BUFFER_MSK (0x0001)

    Table buffer mask.

- #define CFE_TBL_OPT_SNGL_BUFFER (0x0000)

    Single buffer table.

- #define CFE_TBL_OPT_DBL_BUFFER (0x0001)

    Double buffer table.

- #define CFE_TBL_OPT_LD_DMP_MSK (0x0002)

    Table load/dump mask.

- #define CFE_TBL_OPT_LOAD_DUMP (0x0000)

    Load/Dump table.

- #define CFE_TBL_OPT_DUMP_ONLY (0x0002)

    Dump only table.

- #define CFE_TBL_OPT_USR_DEF_MSK (0x0004)

    Table user defined mask.

- #define CFE_TBL_OPT_NOT_USR_DEF (0x0000)

    Not user defined table.

- #define CFE_TBL_OPT_USR_DEF_ADDR (0x0006)

    User Defined table,.

- #define CFE_TBL_OPT_CRITICAL_MSK (0x0008)

    Table critical mask.

- #define CFE_TBL_OPT_NOT_CRITICAL (0x0000)

    Not critical table.

- #define CFE_TBL_OPT_CRITICAL (0x0008)

    Critical table.

- #define CFE_TBL_OPT_DEFAULT (CFE_TBL_OPT_SNGL_BUFFER | CFE_TBL_OPT_LOAD_DUMP)

    Default table options.

37.27.1   Detailed Description

37.27.2   Macro Definition Documentation

37.27.2.1   CFE_TBL_OPT_BUFFER_MSK

```
#define CFE_TBL_OPT_BUFFER_MSK (0x0001)
```

Table buffer mask.

Definition at line 53 of file cfe_tbl.h.

37.27.2.2 CFE_TBL_OPT_CRITICAL

`#define CFE_TBL_OPT_CRITICAL (0x0008)`

Critical table.

Definition at line 67 of file cfe_tbl.h.

37.27.2.3 CFE_TBL_OPT_CRITICAL_MSK

`#define CFE_TBL_OPT_CRITICAL_MSK (0x0008)`

Table critical mask.

Definition at line 65 of file cfe_tbl.h.

37.27.2.4 CFE_TBL_OPT_DBL_BUFFER

`#define CFE_TBL_OPT_DBL_BUFFER (0x0001)`

Double buffer table.

Definition at line 55 of file cfe_tbl.h.

37.27.2.5 CFE_TBL_OPT_DEFAULT

`#define CFE_TBL_OPT_DEFAULT (`CFE_TBL_OPT_SNGL_BUFFER` | `CFE_TBL_OPT_LOAD_DUMP`)`

Default table options.

Definition at line 70 of file cfe_tbl.h.

37.27.2.6 CFE_TBL_OPT_DUMP_ONLY

`#define CFE_TBL_OPT_DUMP_ONLY (0x0002)`

Dump only table.

Definition at line 59 of file cfe_tbl.h.

37.27.2.7 CFE_TBL_OPT_LD_DMP_MSK

`#define CFE_TBL_OPT_LD_DMP_MSK (0x0002)`

Table load/dump mask.

Definition at line 57 of file cfe_tbl.h.

37.27.2.8 CFE_TBL_OPT_LOAD_DUMP

`#define CFE_TBL_OPT_LOAD_DUMP (0x0000)`

Load/Dump table.

Definition at line 58 of file cfe_tbl.h.

37.27.2.9 CFE_TBL_OPT_NOT_CRITICAL

`#define CFE_TBL_OPT_NOT_CRITICAL (0x0000)`

Not critical table.

Definition at line 66 of file cfe_tbl.h.

37.27.2.10 CFE_TBL_OPT_NOT_USR_DEF

`#define CFE_TBL_OPT_NOT_USR_DEF (0x0000)`

Not user defined table.

Definition at line 62 of file cfe_tbl.h.

37.27.2.11 CFE_TBL_OPT_SNGL_BUFFER

`#define CFE_TBL_OPT_SNGL_BUFFER (0x0000)`

Single buffer table.

Definition at line 54 of file cfe_tbl.h.

37.27.2.12 CFE_TBL_OPT_USR_DEF_ADDR

`#define CFE_TBL_OPT_USR_DEF_ADDR (0x0006)`

User Defined table,.

Note

> Automatically includes CFE_TBL_OPT_DUMP_ONLY option

Definition at line 63 of file cfe_tbl.h.

37.27.2.13 CFE_TBL_OPT_USR_DEF_MSK

`#define CFE_TBL_OPT_USR_DEF_MSK (0x0004)`

Table user defined mask.

Definition at line 61 of file cfe_tbl.h.

37.28 cFE Registration APIs

Functions

- int32 CFE_TBL_Register (CFE_TBL_Handle_t ∗TblHandlePtr, const char ∗Name, uint32 Size, uint16 TblOption↩
  Flags, CFE_TBL_CallbackFuncPtr_t TblValidationFuncPtr)

    Register a table with cFE to obtain Table Management Services.

- int32 CFE_TBL_Share (CFE_TBL_Handle_t ∗TblHandlePtr, const char ∗TblName)

    Obtain handle of table registered by another application.

- int32 CFE_TBL_Unregister (CFE_TBL_Handle_t TblHandle)

    Unregister a previously registered table and free associated resources.

37.28.1 Detailed Description

37.28.2 Function Documentation

37.28.2.1 CFE_TBL_Register()

```
int32 CFE_TBL_Register (
            CFE_TBL_Handle_t * TblHandlePtr,
            const char * Name,
            uint32 Size,
            uint16 TblOptionFlags,
            CFE_TBL_CallbackFuncPtr_t TblValidationFuncPtr )
```

Register a table with cFE to obtain Table Management Services.

Description

When an application is created and initialized, it is responsible for creating its table images via the TBL API. The application must inform the Table Service of the table name, table size and selection of optional table features.

Assumptions, External Events, and Notes:

Note: This function call can block. Therefore, interrupt service routines should NOT create their own tables. An application should create any table(s) and provide the handle(s) to the interrupt service routine.

Parameters

in,out	TblHandlePtr	a pointer to a CFE_TBL_Handle_t type variable that will be assigned the table's handle. The table handle is required for other API calls when accessing the data contained in the table. ∗TblHandlePtr is the handle used to identify table to cFE when performing Table operations. This value is returned at the address specified by TblHandlePtr.

Parameters

in	*Name*	The application-specific name. This name will be combined with the name of the application to produce a processor specific name of the form "ApplicationName.TableName". The processor specific name will be used in commands for modifying or viewing the contents of the table.
in	*Size*	The size, in bytes, of the table to be created. This is the size that will be allocated as a shared memory resource between the Table Management Service and the calling application.

Parameters

in	*TblOptionFlags*	Flag bits indicating selected options for table. A bitwise OR of the following option flags:
		• CFE_TBL_OPT_DEFAULT - The default setting for table options is a combination of CFE_TBL_OPT_SNGL_BUFFER and CFE_TBL_OPT_LOAD_DUMP. See below for a description of these two options. This option is mutually exclusive with the CFE_TBL_OPT_DBL_BUFFER, CFE_TBL_OPT_DUMP_ONLY and CFE_TBL_OPT_USR_DEF_ADDR options.
		• CFE_TBL_OPT_SNGL_BUFFER - When this option is selected, the table will use a shared session table for performing table modifications and a memory copy from the session table to the "active" table buffer will occur when the table is updated. This is the preferred option since it will minimize memory usage. This option is mutually exclusive with the CFE_TBL_OPT_DBL_BUFFER option
		• CFE_TBL_OPT_DBL_BUFFER - When this option is selected, two instances of the table are created. One is considered the "active" table and the other the "inactive" table. Whenever table modifications occur, they do not require the use of a common session table. Modifications occur in the "inactive" buffer. Then, when it is time to update the table, the pointer to the "active" table is changed to point to the "inactive" buffer thus making it the new "active" buffer. This feature is most useful for time critical applications (ie - interrupt service routines, etc). This option is mutually exclusive with the CFE_TBL_OPT_SNGL_BUFFER and CFE_TBL_OPT_DEFAULT option.
		• CFE_TBL_OPT_LOAD_DUMP - When this option is selected, the Table Service is allowed to perform all operations on the specified table. This option is mutually exclusive with the CFE_TBL_OPT_DUMP_ONLY option.
		• CFE_TBL_OPT_DUMP_ONLY - When this option is selected, the Table Service will not perform table loads to this table. This does not prevent, however, a task from writing to the table via an address obtained with the CFE_TBL_GetAddress API function. This option is mutually exclusive with the CFE_TBL_OPT_LOAD_DUMP and CFE_TBL_OPT_DEFAULT options. If the Application wishes to specify their own block of memory as the Dump Only table, they need to also include the CFE_TBL_OPT_USR_DEF_ADDR option explained below.
		• CFE_TBL_OPT_NOT_USR_DEF - When this option is selected, Table Services allocates memory for the table and, in the case of a double buffered table, it allocates the same amount of memory again for the second buffer. This option is mutually exclusive with the CFE_TBL_OPT_USR_DEF_ADDR option.
		• CFE_TBL_OPT_USR_DEF_ADDR- When this option is selected, the Table Service will not allocate memory for the table. Table Services will require the Application to identify the location of the active table buffer via the CFE_TBL_Load function. This option implies the CFE_TBL_OPT_DUMP_ONLY and the CFE_TBL_OPT_SNGL_BUFFER options and is mutually exclusive of the CFE_TBL_OPT_DBL_BUFFER option.
		• CFE_TBL_OPT_CRITICAL- When this option is selected, the Table Service will automatically allocate space in the Critical Data Store (CDS) for the table and insure that the contents in the CDS are the same as the contents of the currently active buffer for the table. This option is mutually exclusive of the CFE_TBL_OPT_USR_DEF_ADDR and CFE_TBL_OPT_DUMP_ONLY options. It should also be noted that the

Parameters

in	*TblValidationFuncPtr*	is a pointer to a function that will be executed in the context of the Table Management Service when the contents of a table need to be validated. If set to NULL, then the Table Management Service will assume any data is valid. If the value is not NULL, it must be a pointer to a function with the following prototype: **int32 CallbackFunc(void ∗TblPtr);** where **TblPtr** will be a pointer to the table data that is to be verified. When the function returns CFE_SUCCESS, the data is considered valid and ready for a commit. When the function returns a negative value, the data is considered invalid and an Event Message will be issued containing the returned value. If the function should return a positive number, the table is considered invalid and the return code is considered invalid. Validation functions **must** return either CFE_SUCCESS or a negative number (whose value is at the developer's discretion). The validation function will be executed in the Application's context so that Event Messages describing the validation failure are possible from within the function.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_INFO_RECOVERED_TBL	Recovered Table.
CFE_TBL_ERR_DUPLICATE_DIFF_SIZE	Duplicate Table With Different Size.
CFE_TBL_ERR_DUPLICATE_NOT_OWNED	Dupicate Table And Not Owned.
CFE_TBL_ERR_REGISTRY_FULL	Registry Full.
CFE_TBL_ERR_HANDLES_FULL	Handles Full.
CFE_TBL_ERR_INVALID_SIZE	Invalid Size.
CFE_TBL_ERR_INVALID_NAME	Invalid Name.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

CFE_TBL_Unregister, CFE_TBL_Share

37.28.2.2   CFE_TBL_Share()

```
int32 CFE_TBL_Share (
          CFE_TBL_Handle_t * TblHandlePtr,
          const char * TblName )
```

Obtain handle of table registered by another application.

Description

> After a table has been created, other applications can gain access to that table via the table handle. In order for two or more applications to share a table, the applications that do not create the table must obtain the handle using this function.

Assumptions, External Events, and Notes:

> None

Parameters

in,out	*TblHandlePtr*	A pointer to a CFE_TBL_Handle_t type variable that will be assigned the table's handle. The table handle is required for other API calls when accessing the data contained in the table. *TblHandlePtr is the handle used to identify table to cFE when performing Table operations. This value is returned at the address specified by TblHandlePtr.
in	*TblName*	The processor specific name of the table. It is important to note that the processor specific table name is different from the table name specified in the CFE_TBL_Register API call. The processor specific table name includes the name of the application that created the table. The name would be of the form "ApplicationName.TableName". An example of this would be "ACS.TamParams" for a table called "TamParams" that was registered by the application called "ACS".

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_ERR_HANDLES_FULL	Handles Full.
CFE_TBL_ERR_INVALID_NAME	Invalid Name.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

> CFE_TBL_Unregister, CFE_TBL_Register

37.28.2.3   CFE_TBL_Unregister()

```
int32 CFE_TBL_Unregister (
            CFE_TBL_Handle_t TblHandle )
```

Unregister a previously registered table and free associated resources.

Description

When an application is being removed from the system, it should unregister those tables that it created. The application should call this function as a part of its cleanup process. The table will be removed from memory once all table addresses referencing it have been released.

Assumptions, External Events, and Notes:

None

Parameters

in	*TblHandle*	Handle, previously obtained from CFE_TBL_Register or CFE_TBL_Share, that identifies the Table to be unregistered.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

CFE_TBL_Share, CFE_TBL_Register

37.29   cFE Manage Table Content APIs

Functions

- int32 CFE_TBL_Load (CFE_TBL_Handle_t TblHandle, CFE_TBL_SrcEnum_t SrcType, const void ∗SrcDataPtr)

    Load a specified table with data from specified source.
- int32 CFE_TBL_Update (CFE_TBL_Handle_t TblHandle)

    Update contents of a specified table, if an update is pending.
- int32 CFE_TBL_Validate (CFE_TBL_Handle_t TblHandle)

    Perform steps to validate the contents of a table image.
- int32 CFE_TBL_Manage (CFE_TBL_Handle_t TblHandle)

    Perform standard operations to maintain a table.
- int32 CFE_TBL_DumpToBuffer (CFE_TBL_Handle_t TblHandle)

    Copies the contents of a Dump Only Table to a shared buffer.
- int32 CFE_TBL_Modified (CFE_TBL_Handle_t TblHandle)

    Notify cFE Table Services that table contents have been modified by the Application.

37.29.1   Detailed Description

37.29.2   Function Documentation

37.29.2.1   CFE_TBL_DumpToBuffer()

```
int32 CFE_TBL_DumpToBuffer (
            CFE_TBL_Handle_t TblHandle )
```

Copies the contents of a Dump Only Table to a shared buffer.

Description

Copies contents of a Dump Only table to a shared buffer so that it can be written to a file by the Table Services routine. This function is called by the Application that owns the table in response to a CFE_TBL_INFO_DUMP_↩ PENDING status obtained via CFE_TBL_GetStatus.

Assumptions, External Events, and Notes:

1. If the table does not have a dump pending status, nothing will occur (no error, no dump)

2. Applications may wish to use this function in lieu of CFE_TBL_Manage for their Dump Only tables

Parameters

in	*TblHandle*	Handle of Table to be dumped.

Returns

Execution status, see [cFE Return Code Defines](#)

Return values

[CFE_SUCCESS](#)	Sucessful execution.
[CFE_ES_ERR_APPNAME](#)	Application Name Error.
[CFE_ES_ERR_BUFFER](#)	Invalid Pointer.
[CFE_TBL_ERR_BAD_APP_ID](#)	Bad Application ID.
[CFE_TBL_ERR_NO_ACCESS](#)	No Access.
[CFE_TBL_ERR_INVALID_HANDLE](#)	Invalid Handle.

See also

[CFE_TBL_Manage](#)

37.29.2.2   CFE_TBL_Load()

```
int32 CFE_TBL_Load (
            CFE_TBL_Handle_t TblHandle,
            CFE_TBL_SrcEnum_t SrcType,
            const void * SrcDataPtr )
```

Load a specified table with data from specified source.

Description

Once an application has created a table ([CFE_TBL_Register](#)), it must provide the values that initialize the contents of that table. The application accomplishes this with one of two different TBL API calls. This function call initializes the table with values that are held in a data structure.

Assumptions, External Events, and Notes:

This function call can block. Therefore, interrupt service routines should NOT initialize their own tables. An application should initialize any table(s) prior to providing the handle(s) to the interrupt service routine.

Parameters

in	*TblHandle*	Handle, previously obtained from [CFE_TBL_Register](#) or [CFE_TBL_Share](#), that identifies the Table to be loaded.
in	*SrcType*	Flag indicating the nature of the given `SrcDataPtr` below. This value can be any one of the following: • [CFE_TBL_SRC_FILE](#) - File source When this option is selected, the `SrcDataPtr` will be interpreted as a pointer to a null terminated character string. The string should specify the full path and filename of the file containing the initial data contents of the table. • [CFE_TBL_SRC_ADDRESS](#) - Address source When this option is selected, the `SrcDataPtr` will be interpreted as a pointer to a memory location that is the beginning of the initialization data for loading the table OR, in the case of a "user defined" dump only table, the address of the active table itself. The block of memory is assumed to be of the same size specified in the [CFE_TBL_Register](#) function Size parameter.

Parameters

in	*SrcDataPtr*	Pointer to either a character string specifying a filename or a memory address of a block of binary data to be loaded into a table or, if the table was registered with the CFE_TBL_OPT_USR_DEF_ADDR option, the address of the active table buffer.

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_WARN_SHORT_FILE	Short File Warning.
CFE_TBL_WARN_PARTIAL_LOAD	Partial Load Warning.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_DUMP_ONLY	Dump Only Error.
CFE_TBL_ERR_ILLEGAL_SRC_TYPE	Illegal Source Type.
CFE_TBL_ERR_LOAD_IN_PROGRESS	Load In Progress.
CFE_TBL_ERR_NO_BUFFER_AVAIL	No Buffer Available.
CFE_TBL_ERR_FILE_NOT_FOUND	File Not Found.
CFE_TBL_ERR_FILE_TOO_LARGE	File Too Large.
CFE_TBL_ERR_BAD_CONTENT_ID	Bad Content ID.
CFE_TBL_ERR_PARTIAL_LOAD	Partial Load Error.

See also

> CFE_TBL_Update, CFE_TBL_Validate, CFE_TBL_Manage

37.29.2.3 CFE_TBL_Manage()

```
int32 CFE_TBL_Manage (
            CFE_TBL_Handle_t TblHandle )
```

Perform standard operations to maintain a table.

Description

> An application is **required** to perform a periodic check for an update or a validation request for all the tables that it creates. Typically, the application that created the table would call this function at the start or conclusion of any routine processing cycle. If a table update or validation request is pending, this function would perform either or both before returning.

Assumptions, External Events, and Notes:

None

Parameters

in	*TblHandle*	Handle, previously obtained from [CFE_TBL_Register](#) or [CFE_TBL_Share](#), that identifies the Table to be managed.

Returns

Execution status, see [cFE Return Code Defines](#)

Return values

[CFE_SUCCESS](#)	Sucessful execution.
[CFE_TBL_INFO_UPDATED](#)	Updated.
[CFE_ES_ERR_APPNAME](#)	Application Name Error.
[CFE_ES_ERR_BUFFER](#)	Invalid Pointer.
[CFE_TBL_ERR_BAD_APP_ID](#)	Bad Application ID.
[CFE_TBL_ERR_NO_ACCESS](#)	No Access.
[CFE_TBL_ERR_INVALID_HANDLE](#)	Invalid Handle.

See also

[CFE_TBL_Update](#), [CFE_TBL_Validate](#), [CFE_TBL_Load](#), [CFE_TBL_DumpToBuffer](#)

37.29.2.4 CFE_TBL_Modified()

```
int32 CFE_TBL_Modified (
            CFE_TBL_Handle_t TblHandle )
```

Notify cFE Table Services that table contents have been modified by the Application.

Description

This API notifies Table Services that the contents of the specified table has been modified by the Application. This notification is important when a table has been registered as "Critical" because Table Services can then update the contents of the table kept in the Critical Data Store.

Assumptions, External Events, and Notes:

None

Parameters

in	*TblHandle*	Handle of Table that was modified.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.

See also

CFE_TBL_Manage

37.29.2.5   CFE_TBL_Update()

```
int32 CFE_TBL_Update (
            CFE_TBL_Handle_t TblHandle )
```

Update contents of a specified table, if an update is pending.

Description

An application is **required** to perform a periodic check for an update for all the tables that it creates. Typically, the application that created the table would call this function at the start or conclusion of any routine processing cycle or at regular intervals. To determine whether an update is pending prior to making this call, the Application can use the CFE_TBL_GetStatus API first. If a table update is pending, it will take place during this function call.

Assumptions, External Events, and Notes:

None

Parameters

in	*TblHandle*	Handle, previously obtained from CFE_TBL_Register or CFE_TBL_Share, that identifies the Table to be updated.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_INFO_NO_UPDATE_PENDING	No Update Pending.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.

See also

CFE_TBL_Load, CFE_TBL_Validate, CFE_TBL_Manage

37.29.2.6 CFE_TBL_Validate()

```
int32 CFE_TBL_Validate (
          CFE_TBL_Handle_t TblHandle )
```

Perform steps to validate the contents of a table image.

Description

An application is **required** to perform a periodic check for an update or a validation request for all the tables that it creates. Typically, the application that created the table would call this function at the start or conclusion of any routine processing cycle. To determine whether a validation request is pending prior to making this call, the Application can use the CFE_TBL_GetStatus API first. If a table validation is pending, the Application would call this function to perform the necessary actions.

Assumptions, External Events, and Notes:

None

Parameters

in	*TblHandle*	Handle, previously obtained from CFE_TBL_Register or CFE_TBL_Share, that identifies the Table to be managed.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.

Return values

CFE_TBL_INFO_NO_VALIDATION_PENDING	
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.

See also

CFE_TBL_Update, CFE_TBL_Manage, CFE_TBL_Load

37.30 cFE Access Table Content APIs

Functions

- **int32 CFE_TBL_GetAddress** (void ∗∗TblPtr, CFE_TBL_Handle_t TblHandle)

  Obtain the current address of the contents of the specified table.

- **int32 CFE_TBL_ReleaseAddress** (CFE_TBL_Handle_t TblHandle)

  Release previously obtained pointer to the contents of the specified table.

- **int32 CFE_TBL_GetAddresses** (void ∗∗TblPtrs[ ], uint16 NumTables, const CFE_TBL_Handle_t TblHandles[ ])

  Obtain the current addresses of an array of specified tables.

- **int32 CFE_TBL_ReleaseAddresses** (uint16 NumTables, const CFE_TBL_Handle_t TblHandles[ ])

  Release the addresses of an array of specified tables.

37.30.1 Detailed Description

37.30.2 Function Documentation

37.30.2.1 CFE_TBL_GetAddress()

```
int32 CFE_TBL_GetAddress (
          void ** TblPtr,
          CFE_TBL_Handle_t TblHandle )
```

Obtain the current address of the contents of the specified table.

Description

When a table has been created and initialized, it is available to any application that can identify it with its unique handle. In order to view the data contained in the table, an application must call this function or CFE_TBL_Get↩ Addresses.

Assumptions, External Events, and Notes:

1. This call can be a blocking call when the table is not double buffered and is shared with another application of lower priority that just happens to be in the middle of a table update of the specific table. If this occurs, the application performing the table update will automatically have its priority elevated in order to release the resource as soon as possible.

2. An application must always release the returned table address using the CFE_TBL_ReleaseAddress or CF↩ E_TBL_ReleaseAddresses function prior to either a CFE_TBL_Update call or any blocking call (e.g. - pending on software bus message, etc). Table updates cannot occur while table addresses have not been released.

3. CFE_TBL_ERR_NEVER_LOADED will be returned if the table has never been loaded (either from file or from a block of memory), but the function will still return a valid table pointer to a table with all zero content. This pointer mush be released with the CFE_TBL_ReleaseAddress API before the table can be loaded with data.

Parameters

in,out	*TblPtr*	The address of a pointer that will be loaded with the address of the first byte of the table. This pointer can then be typecast by the calling application to the appropriate table data structure. *TblPtr is the address of the first byte of data associated with the specified table.
in	*TblHandle*	Handle, previously obtained from CFE_TBL_Register or CFE_TBL_Share, that identifies the Table whose address is to be returned.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_INFO_UPDATED	Updated.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_UNREGISTERED	Unregistered.
CFE_TBL_ERR_NEVER_LOADED	Never Loaded.

See also

CFE_TBL_ReleaseAddress, CFE_TBL_GetAddresses, CFE_TBL_ReleaseAddresses

37.30.2.2   CFE_TBL_GetAddresses()

```
int32 CFE_TBL_GetAddresses (
            void ** TblPtrs[],
            uint16 NumTables,
            const CFE_TBL_Handle_t TblHandles[] )
```

Obtain the current addresses of an array of specified tables.

Description

When a table has been created and initialized, it is available to any application that can identify it with its unique handle. In order to view the data contained in the table, an application must call this function or CFE_TBL_Get↩
Addresses.

Assumptions, External Events, and Notes:

1. This call can be a blocking call when the table is not double buffered and is shared with another application of lower priority that just happens to be in the middle of a table update of the specific table. If this occurs, the application performing the table update will automatically have its priority elevated in order to release the resource as soon as possible.

2. An application must always release the returned table address using the CFE_TBL_ReleaseAddress or CF↩
E_TBL_ReleaseAddresses function prior to either a CFE_TBL_Update call or any blocking call (e.g. - pending
on software bus message, etc). Table updates cannot occur while table addresses have not been released.

3. CFE_TBL_ERR_NEVER_LOADED will be returned if the table has never been loaded (either from file or from
a block of memory), but the function will still return a valid table pointer to a table with all zero content. This
pointer mush be released with the CFE_TBL_ReleaseAddress API before the table can be loaded with data.

Parameters

in,out	*TblPtrs*	Array of Pointers to variables that calling Application wishes to hold the start addresses of the Tables. *TblPtrs is an array of addresses of the first byte of data associated with the specified tables.
in	*NumTables*	Size of TblPtrs and TblHandles arrays.
in	*TblHandles*	Array of Table Handles, previously obtained from CFE_TBL_Register or CFE_TBL_Share, of those tables whose start addresses are to be obtained.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_INFO_UPDATED	Updated.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_UNREGISTERED	Unregistered.
CFE_TBL_ERR_NEVER_LOADED	Never Loaded.

See also

CFE_TBL_GetAddress, CFE_TBL_ReleaseAddress, CFE_TBL_ReleaseAddresses

37.30.2.3 CFE_TBL_ReleaseAddress()

```
int32 CFE_TBL_ReleaseAddress (
            CFE_TBL_Handle_t TblHandle )
```

Release previously obtained pointer to the contents of the specified table.

Description

Each application is **required** to release a table address obtained through the CFE_TBL_GetAddress function.

Assumptions, External Events, and Notes:

> An application must always release the returned table address using the CFE_TBL_ReleaseAddress function prior
> to either a CFE_TBL_Update call or any blocking call (e.g. - pending on software bus message, etc). Table updates
> cannot occur while table addresses have not been released.

Parameters

in	*TblHandle*	Handle, previously obtained from CFE_TBL_Register or CFE_TBL_Share, that identifies the Table whose address is to be released.

Returns

> Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_INFO_UPDATED	Updated.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_NEVER_LOADED	Never Loaded.

See also

> CFE_TBL_GetAddress, CFE_TBL_GetAddresses, CFE_TBL_ReleaseAddresses

37.30.2.4   CFE_TBL_ReleaseAddresses()

```
int32 CFE_TBL_ReleaseAddresses (
          uint16 NumTables,
          const CFE_TBL_Handle_t TblHandles[] )
```

Release the addresses of an array of specified tables.

Description

> Each application is **required** to release a table address obtained through the CFE_TBL_GetAddress function.

Assumptions, External Events, and Notes:

> An application must always release the returned table address using the CFE_TBL_ReleaseAddress function prior
> to either a CFE_TBL_Update call or any blocking call (e.g. - pending on software bus message, etc). Table updates
> cannot occur while table addresses have not been released.

Parameters

in	*NumTables*	Size of TblHandles array.
in	*TblHandles*	Array of Table Handles, previously obtained from CFE_TBL_Register or CFE_TBL_Share, of those tables whose start addresses are to be released.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_INFO_UPDATED	Updated.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_NEVER_LOADED	Never Loaded.

See also

CFE_TBL_GetAddress, CFE_TBL_ReleaseAddress, CFE_TBL_GetAddresses

37.31   cFE Get Table Information APIs

Functions

- int32 CFE_TBL_GetStatus (CFE_TBL_Handle_t TblHandle)

    Obtain current status of pending actions for a table.

- int32 CFE_TBL_GetInfo (CFE_TBL_Info_t ∗TblInfoPtr, const char ∗TblName)

    Obtain characteristics/information of/about a specified table.

- int32   CFE_TBL_NotifyByMessage   (CFE_TBL_Handle_t   TblHandle,   CFE_SB_MsgId_t   MsgId,   uint16
    CommandCode, uint32 Parameter)

    Instruct cFE Table Services to notify Application via message when table requires management.

37.31.1   Detailed Description

37.31.2   Function Documentation

37.31.2.1   CFE_TBL_GetInfo()

```
int32 CFE_TBL_GetInfo (
            CFE_TBL_Info_t * TblInfoPtr,
            const char * TblName )
```

Obtain characteristics/information of/about a specified table.

Description

This API provides the registry information associated with the specified table. The function fills the given data
structure with the data found in the Table Registry.

Assumptions, External Events, and Notes:

None

Parameters

in,out	*TblInfoPtr*	A pointer to a CFE_TBL_Info_t data structure that is to be populated with table characteristics and information. ∗TblInfoPtr is the description of the tables characteristics and registry information stored in the CFE_TBL_Info_t data structure format.
in	*TblName*	The processor specific name of the table. It is important to note that the processor specific table name is different from the table name specified in the CFE_TBL_Register API call. The processor specific table name includes the name of the application that created the table. The name would be of the form "ApplicationName.TableName". An example of this would be "ACS.TamParams" for a table called "TamParams" that was registered by the application called "ACS".

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_ERR_INVALID_NAME	Invalid Name.

See also

CFE_TBL_GetStatus

37.31.2.2   CFE_TBL_GetStatus()

```
int32 CFE_TBL_GetStatus (
            CFE_TBL_Handle_t TblHandle )
```

Obtain current status of pending actions for a table.

Description

An application is **required** to perform a periodic check for an update or a validation request for all the tables that it creates. Typically, the application that created the table would call this function at the start or conclusion of any routine processing cycle. If a table update or validation request is pending, the Application should follow up with a call to CFE_TBL_Update or CFE_TBL_Validate respectively.

Assumptions, External Events, and Notes:

None

Parameters

in	*TblHandle*	Handle, previously obtained from CFE_TBL_Register or CFE_TBL_Share, that identifies the Table to be managed.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TBL_INFO_UPDATE_PENDING	Update Pending.
CFE_TBL_INFO_VALIDATION_PENDING	

Return values

CFE_TBL_INFO_DUMP_PENDING	Dump Pending.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.

See also

> CFE_TBL_Manage, CFE_TBL_Update, CFE_TBL_Validate, CFE_TBL_GetInfo

37.31.2.3 CFE_TBL_NotifyByMessage()

```
int32 CFE_TBL_NotifyByMessage (
          CFE_TBL_Handle_t TblHandle,
          CFE_SB_MsgId_t MsgId,
          uint16 CommandCode,
          uint32 Parameter )
```

Instruct cFE Table Services to notify Application via message when table requires management.

Description

> This API instructs Table Services to send a message to the calling Application whenever the specified table requires management by the application. This feature allows applications to avoid polling table services via the CFE_TB←
> L_Manage call to determine whether a table requires updates, validation, etc. This API should be called following the CFE_TBL_Register API whenever the owning application requires this feature.

Assumptions, External Events, and Notes:

> • Only the application that owns the table is allowed to register a notification message
>
> • Recommend **NOT** using the ground command MID which typically impacts command counters. The typical approach is to use a unique MID for inter-task communications similar to how schedulers typically trigger application housekeeping messages.

Parameters

in	*TblHandle*	Handle of Table with which the message should be associated.
in	*MsgId*	Message ID to be used in notification message sent by Table Services.
in	*CommandCode*	Command Code value to be placed in secondary header of message sent by Table Services.
in	*Parameter*	Application defined value to be passed as a parameter in the message sent by Table Services. Suggested use includes an application's table index that allows the same MsgId and Command Code to be used for all table management notifications.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_ES_ERR_APPNAME	Application Name Error.
CFE_ES_ERR_BUFFER	Invalid Pointer.
CFE_TBL_ERR_BAD_APP_ID	Bad Application ID.
CFE_TBL_ERR_NO_ACCESS	No Access.
CFE_TBL_ERR_INVALID_HANDLE	Invalid Handle.

See also

CFE_TBL_Register

37.32   cFE Get Current Time APIs

Functions

- CFE_TIME_SysTime_t CFE_TIME_GetTime (void)

  Get the current spacecraft time.
- CFE_TIME_SysTime_t CFE_TIME_GetTAI (void)

  Get the current TAI (MET + SCTF) time.
- CFE_TIME_SysTime_t CFE_TIME_GetUTC (void)

  Get the current UTC (MET + SCTF - Leap Seconds) time.
- CFE_TIME_SysTime_t CFE_TIME_GetMET (void)

  Get the current value of the Mission Elapsed Time (MET).
- uint32 CFE_TIME_GetMETseconds (void)

  Get the current seconds count of the mission-elapsed time.
- uint32 CFE_TIME_GetMETsubsecs (void)

  Get the current sub-seconds count of the mission-elapsed time.

37.32.1   Detailed Description

37.32.2   Function Documentation

37.32.2.1   CFE_TIME_GetMET()

```
CFE_TIME_SysTime_t CFE_TIME_GetMET (
            void  )
```

Get the current value of the Mission Elapsed Time (MET).

Description

This routine returns the current mission-elapsed time (MET). MET is usually derived from a hardware-based clock that is not adjusted during normal operations. Callers of this routine should not assume that the MET return value has any specific relationship to any ground-based time standard.

Assumptions, External Events, and Notes:

None

Returns

The current MET

See also

CFE_TIME_GetTime, CFE_TIME_GetTAI, CFE_TIME_GetUTC, CFE_TIME_GetMETseconds, CFE_TIME_↩
GetMETsubsecs, CFE_TIME_MET2SCTime

37.32.2.2   CFE_TIME_GetMETseconds()

```
uint32 CFE_TIME_GetMETseconds (
            void  )
```

Get the current seconds count of the mission-elapsed time.

Description

This routine is the same as CFE_TIME_GetMET, except that it returns only the integer seconds portion of the MET time.

Assumptions, External Events, and Notes:

None

Returns

The current MET seconds

See also

CFE_TIME_GetTime, CFE_TIME_GetTAI, CFE_TIME_GetUTC, CFE_TIME_GetMET, CFE_TIME_GetME←↩
Tsubsecs, CFE_TIME_MET2SCTime

37.32.2.3   CFE_TIME_GetMETsubsecs()

```
uint32 CFE_TIME_GetMETsubsecs (
            void  )
```

Get the current sub-seconds count of the mission-elapsed time.

Description

This routine is the same as CFE_TIME_GetMET, except that it returns only the integer sub-seconds portion of the MET time. Each count is equal to $2^{(-32)}$ seconds.

Assumptions, External Events, and Notes:

None

Returns

The current MET sub-seconds

See also

CFE_TIME_GetTime, CFE_TIME_GetTAI, CFE_TIME_GetUTC, CFE_TIME_GetMET, CFE_TIME_GetME←↩
Tseconds, CFE_TIME_MET2SCTime

37.32.2.4 CFE_TIME_GetTAI()

```
CFE_TIME_SysTime_t CFE_TIME_GetTAI (
            void )
```

Get the current TAI (MET + SCTF) time.

Description

This routine returns the current TAI time to the caller. TAI is an international time standard that does not include leap seconds. This routine should only be used in situations where TAI is absolutely required. Applications that call CFE_TIME_GetTAI may not be portable to all missions. Maintenance of correct TAI in flight is not guaranteed under all mission operations scenarios. To maintain re-usability across missions, most applications should be using CFE_TIME_GetTime, rather than the specific routines for getting UTC/TAI directly.

Assumptions, External Events, and Notes:

1. The "TAI" time returned is referenced to the mission-defined time epoch, which may or may not be the same as the standard TAI epoch.
2. Even though TAI does not include leap seconds, the time returned by this function can still jump forward or backward without warning when the spacecraft clock is set or adjusted by operators. Applications using this function must be able to handle these time discontinuities gracefully.

Returns

The current spacecraft time in TAI

See also

CFE_TIME_GetTime, CFE_TIME_GetUTC, CFE_TIME_GetMET, CFE_TIME_GetMETseconds, CFE_TIME_↩
GetMETsubsecs

37.32.2.5 CFE_TIME_GetTime()

```
CFE_TIME_SysTime_t CFE_TIME_GetTime (
            void )
```

Get the current spacecraft time.

Description

This routine returns the current spacecraft time. The time returned is either TAI (no leap seconds) or UTC (including leap seconds). This choice is made in the mission configuration file by defining either CFE_MISSION_TIME_CF↩
G_DEFAULT_TAI or CFE_MISSION_TIME_CFG_DEFAULT_UTC as true at compile time. To maintain re-usability across missions, most applications should be using this function (or CFE_TIME_GetTime) rather than the specific routines for getting UTC/TAI directly.

Assumptions, External Events, and Notes:

None

Returns

The current spacecraft time in default format

See also

CFE_TIME_GetTAI, CFE_TIME_GetUTC, CFE_TIME_GetMET, CFE_TIME_GetMETseconds, CFE_TIME_↩
GetMETsubsecs

37.32.2.6 CFE_TIME_GetUTC()

```
CFE_TIME_SysTime_t CFE_TIME_GetUTC (
            void  )
```

Get the current UTC (MET + SCTF - Leap Seconds) time.

Description

This routine returns the current UTC time to the caller. This routine should only be used in situations where UTC is absolutely required. Applications that call CFE_TIME_GetUTC may not be portable to all missions. Maintenance of correct UTC in flight is not guaranteed under all mission operations scenarios. If UTC is maintained in flight, it will jump backwards occasionally due to leap second adjustments. To maintain re-usability across missions, most applications should be using CFE_TIME_GetTime, rather than the specific routines for getting UTC/TAI directly.

Assumptions, External Events, and Notes:

Note: The "UTC" time returned is referenced to the mission-defined time epoch, which may or may not be the same as the standard UTC epoch.

Returns

The current spacecraft time in UTC

See also

CFE_TIME_GetTime, CFE_TIME_GetTAI, CFE_TIME_GetMET, CFE_TIME_GetMETseconds, CFE_TIME_↩
GetMETsubsecs

37.33   cFE Get Time Information APIs

Functions

- **CFE_TIME_SysTime_t CFE_TIME_GetSTCF** (void)

    Get the current value of the spacecraft time correction factor (STCF).
- **int16 CFE_TIME_GetLeapSeconds** (void)

    Get the current value of the leap seconds counter.
- **CFE_TIME_ClockState_Enum_t CFE_TIME_GetClockState** (void)

    Get the current state of the spacecraft clock.
- **uint16 CFE_TIME_GetClockInfo** (void)

    Provides information about the spacecraft clock.

37.33.1   Detailed Description

37.33.2   Function Documentation

37.33.2.1   CFE_TIME_GetClockInfo()

```
uint16 CFE_TIME_GetClockInfo (
            void  )
```

Provides information about the spacecraft clock.

Description

This routine returns information on the spacecraft clock in a bit mask.

Assumptions, External Events, and Notes:

None

Returns

Spacecraft clock information, cFE Clock State Flag Defines. To extract the information from the returned value, the flags can be used as in the following:
```
if ((ReturnValue & CFE_TIME_FLAG_xxxxxx) == CFE_TIME_FLAG_xxxxxx)
```
then the following definition of the `CFE_TIME_FLAG_xxxxxx` is true.

See also

CFE_TIME_GetSTCF, CFE_TIME_GetLeapSeconds, CFE_TIME_GetClockState

37.33.2.2   CFE_TIME_GetClockState()

CFE_TIME_ClockState_Enum_t CFE_TIME_GetClockState (
            void)

Get the current state of the spacecraft clock.

Description

This routine returns the spacecraft clock state. Applications that are highly dependent on valid time may want to call this routine before taking actions based on the times returned by the various clock routines

Assumptions, External Events, and Notes:

None

Returns

The current spacecraft clock state

See also

CFE_TIME_GetSTCF, CFE_TIME_GetLeapSeconds, CFE_TIME_GetClockInfo

37.33.2.3   CFE_TIME_GetLeapSeconds()

int16 CFE_TIME_GetLeapSeconds (
            void)

Get the current value of the leap seconds counter.

Description

This routine returns the current value of the leap seconds counter. This is the delta seconds between international atomic time (TAI) and universal coordinated time (UTC). Applications cannot set or adjust the leap seconds; that can only be done through ground commands. However, science applications may want to include the leap seconds counter in their data products to aid in time correlation during downstream science data processing. Note that some mission operations teams do not maintain the leap seconds count, preferring to adjust the STCF instead. Users of this function should check with their mission ops team to see how they are planning to handle leap seconds.

Assumptions, External Events, and Notes:

None

Returns

The current spacecraft leap seconds.

See also

CFE_TIME_GetSTCF, CFE_TIME_GetClockState, CFE_TIME_GetClockInfo

37.33.2.4   CFE_TIME_GetSTCF()

CFE_TIME_SysTime_t CFE_TIME_GetSTCF (
            void)

Get the current value of the spacecraft time correction factor (STCF).

Description

This routine returns the current value of the spacecraft time correction factor. This is the delta time between the MET and the TAI time. Applications cannot set or adjust the STCF; that can only be done through ground commands. However, science applications may want to include the STCF in their data products to aid in time correlation during downstream science data processing.

Assumptions, External Events, and Notes:

Does not include leap seconds

Returns

The current SCTF

See also

CFE_TIME_GetLeapSeconds, CFE_TIME_GetClockState, CFE_TIME_GetClockInfo

37.34 cFE Time Arithmetic APIs

Functions

- CFE_TIME_SysTime_t CFE_TIME_Add (CFE_TIME_SysTime_t Time1, CFE_TIME_SysTime_t Time2)

  Adds two time values.
- CFE_TIME_SysTime_t CFE_TIME_Subtract (CFE_TIME_SysTime_t Time1, CFE_TIME_SysTime_t Time2)

  Subtracts two time values.
- CFE_TIME_Compare_t CFE_TIME_Compare (CFE_TIME_SysTime_t TimeA, CFE_TIME_SysTime_t TimeB)

  Compares two time values.

37.34.1 Detailed Description

37.34.2 Function Documentation

37.34.2.1 CFE_TIME_Add()

```
CFE_TIME_SysTime_t CFE_TIME_Add (
            CFE_TIME_SysTime_t Time1,
            CFE_TIME_SysTime_t Time2 )
```

Adds two time values.

Description

> This routine adds the two specified times and returns the result. Normally, at least one of the input times should be a value representing a delta time. Adding two absolute times together will not cause an error, but the result will probably be meaningless.

Assumptions, External Events, and Notes:

> None

Parameters

in	*Time1*	The first time to be added.
in	*Time2*	The second time to be added.

Returns

> The sum of the two times. If the sum is greater than the maximum value that can be stored in a CFE_TIME_Sys←
> Time_t, the result will roll over (this is not considered an error).

See also

CFE_TIME_Subtract, CFE_TIME_Compare

37.34.2.2   CFE_TIME_Compare()

CFE_TIME_Compare_t CFE_TIME_Compare (
            CFE_TIME_SysTime_t *TimeA,*
            CFE_TIME_SysTime_t *TimeB*)

Compares two time values.

Description

This routine compares two time values to see which is "greater". It is important that applications use this function rather than trying to directly compare the component pieces of times. This function will handle roll-over cases seamlessly, which may not be intuitively obvious. The cFE's internal representation of time "rolls over" when the 32 bit seconds count reaches 0xFFFFFFFF. Also, subtracting a delta time from an absolute time close to the epoch could result in "roll under". The strange cases that result from these situations can be handled by defining the comparison function for times as follows: Plot the two times on the circumference of a circle where 0 is at the top and 0x80000000 is at the bottom. If the shortest arc from time A to time B runs clockwise around the circle, then time A is less than time B. If the shortest arc from A to B runs counter-clockwise, then time A is greater than time B.

Assumptions, External Events, and Notes:

None

Parameters

in	*TimeA*	The first time to compare.
in	*TimeB*	The second time to compare.

Returns

The result of comparing the two times.

Return values

CFE_TIME_EQUAL	The two specified times are considered to be equal.
CFE_TIME_A_GT↩ _B	The first specified time is considered to be after the second specified time.
CFE_TIME_A_LT↩ _B	The first specified time is considered to be before the second specified time.

See also

CFE_TIME_Add, CFE_TIME_Subtract

37.34.2.3 CFE_TIME_Subtract()

```
CFE_TIME_SysTime_t CFE_TIME_Subtract (
            CFE_TIME_SysTime_t Time1,
            CFE_TIME_SysTime_t Time2 )
```

Subtracts two time values.

Description

This routine subtracts time2 from time1 and returns the result. The time values can represent either absolute or delta times, but not all combinations make sense.

- AbsTime - AbsTime = DeltaTime
- AbsTime - DeltaTime = AbsTime
- DeltaTime - DeltaTime = DeltaTime
- DeltaTime - AbsTime = garbage

Assumptions, External Events, and Notes:

None

Parameters

in	*Time1*	The base time.
in	*Time2*	The time to be subtracted from the base time.

Returns

The result of subtracting the two times. If the subtraction results in an underflow, the result will roll over (this is not considered an error).

See also

CFE_TIME_Add, CFE_TIME_Compare

37.35   cFE Time Conversion APIs

Functions

- CFE_TIME_SysTime_t CFE_TIME_MET2SCTime (CFE_TIME_SysTime_t METTime)

    Convert specified MET into Spacecraft Time.
- uint32 CFE_TIME_Sub2MicroSecs (uint32 SubSeconds)

    Converts a sub-seconds count to an equivalent number of microseconds.
- uint32 CFE_TIME_Micro2SubSecs (uint32 MicroSeconds)

    Converts a number of microseconds to an equivalent sub-seconds count.
- uint32 CFE_TIME_CFE2FSSeconds (uint32 SecondsCFE)

    DEPRECATED: Converts cFE seconds into the File System's seconds.
- uint32 CFE_TIME_FS2CFESeconds (uint32 SecondsFS)

    DEPRECATED: Converts a file system's seconds into cFE seconds.

37.35.1   Detailed Description

37.35.2   Function Documentation

37.35.2.1   CFE_TIME_CFE2FSSeconds()

```
uint32 CFE_TIME_CFE2FSSeconds (
            uint32 SecondsCFE )
```

DEPRECATED: Converts cFE seconds into the File System's seconds.

Deprecated   Utilize CFE_FS_Header_t time fields for the creation time in mission format, or syncronize local OS time with mission time for use with stat command.

Description

File systems use specific time epochs for their time tagging of files. Since spacecraft systems rarely use an epoch that matches a particular file system, this function provides a mechanism to translate a given spacecraft time (in seconds) to the file system's time. The conversion is controlled by the configuration parameter CFE_MISSIO←
N_TIME_FS_FACTOR which is set equal to the number of seconds between the spacecraft's epoch and the file system's epoch.

Assumptions, External Events, and Notes:

None

Parameters

in	*SecondsCFE*	The spacecraft time, in seconds, to be converted.

Returns

The equivalent time, in seconds, for the file system.

See also

CFE_TIME_MET2SCTime, CFE_TIME_Sub2MicroSecs, CFE_TIME_Micro2SubSecs, CFE_TIME_FS2CFE↩
Seconds

37.35.2.2 CFE_TIME_FS2CFESeconds()

```
uint32 CFE_TIME_FS2CFESeconds (
            uint32 SecondsFS )
```

DEPRECATED: Converts a file system's seconds into cFE seconds.

Deprecated Utilize CFE_FS_Header_t time fields for the creation time in mission format, or syncronize local OS time with mission time for use with stat command.

Description

File systems use specific time epochs for their time tagging of files. Since spacecraft systems rarely use an epoch that matches a particular file system, this function provides a mechanism to translate a file system time (in seconds) into the spacecraft time (in seconds). The conversion is controlled by the configuration parameter CFE_MISSI↩
ON_TIME_FS_FACTOR which is set equal to the number of seconds between the spacecraft's epoch and the file system's epoch.

Assumptions, External Events, and Notes:

None

Parameters

in	*SecondsFS*	The file system time, in seconds, to be converted.

Returns

The equivalent time, in seconds, for the spacecraft.

See also

CFE_TIME_MET2SCTime, CFE_TIME_Sub2MicroSecs, CFE_TIME_Micro2SubSecs, CFE_TIME_CFE2FS↩
Seconds

37.35.2.3   CFE_TIME_MET2SCTime()

CFE_TIME_SysTime_t CFE_TIME_MET2SCTime (
            CFE_TIME_SysTime_t *METTime*)

Convert specified MET into Spacecraft Time.

Description

This function returns Spacecraft Time given MET. Note that Spacecraft Time is returned as either UTC or T←˒
AI depeneding on whether the mission configuration parameter CFE_MISSION_TIME_CFG_DEFAULT_UTC or
CFE_MISSION_TIME_CFG_DEFAULT_TAI was set to true at compile time.

Assumptions, External Events, and Notes:

None

Parameters

in	*METTime*	The MET to be converted.

Returns

Spacecraft Time (UTC or TAI) corresponding to the specified MET

See also

CFE_TIME_GetMET, CFE_TIME_GetMETseconds, CFE_TIME_GetMETsubsecs, CFE_TIME_Sub2MicroSecs,
CFE_TIME_Micro2SubSecs

37.35.2.4   CFE_TIME_Micro2SubSecs()

uint32 CFE_TIME_Micro2SubSecs (
            uint32 *MicroSeconds*)

Converts a number of microseconds to an equivalent sub-seconds count.

Description

This routine converts from microseconds (each tick is 1e-06 seconds) to a subseconds count (each tick is $1 / 2^{32}$
seconds).

Assumptions, External Events, and Notes:

None

Parameters

in	*MicroSeconds*	The sub-seconds count to convert.

Returns

The equivalent number of subseconds. If the number of microseconds passed in is greater than one second, (i.e. $>$ 999,999), the return value is equal to $\mathtt{0xffffffff}$.

See also

CFE_TIME_MET2SCTime, CFE_TIME_Sub2MicroSecs,

37.35.2.5   CFE_TIME_Sub2MicroSecs()

```
uint32 CFE_TIME_Sub2MicroSecs (
            uint32 SubSeconds )
```

Converts a sub-seconds count to an equivalent number of microseconds.

Description

This routine converts from a sub-seconds count (each tick is 1 / 2$^\wedge$32 seconds) to microseconds (each tick is 1e-06 seconds).

Assumptions, External Events, and Notes:

None

Parameters

in	*SubSeconds*	The sub-seconds count to convert.

Returns

The equivalent number of microseconds.

See also

CFE_TIME_MET2SCTime, CFE_TIME_Micro2SubSecs,

37.36   cFE External Time Source APIs

Functions

- void CFE_TIME_ExternalTone (void)

    Provides the 1 Hz signal from an external source.
- void CFE_TIME_ExternalMET (CFE_TIME_SysTime_t NewMET)

    Provides the Mission Elapsed Time from an external source.
- void CFE_TIME_ExternalGPS (CFE_TIME_SysTime_t NewTime, int16 NewLeaps)

    Provide the time from an external source that has data common to GPS receivers.
- void CFE_TIME_ExternalTime (CFE_TIME_SysTime_t NewTime)

    Provide the time from an external source that measures time relative to a known epoch.
- int32 CFE_TIME_RegisterSynchCallback (CFE_TIME_SynchCallbackPtr_t CallbackFuncPtr)

    Registers a callback function that is called whenever time synchronization occurs.
- int32 CFE_TIME_UnregisterSynchCallback (CFE_TIME_SynchCallbackPtr_t CallbackFuncPtr)

    Unregisters a callback function that is called whenever time synchronization occurs.

37.36.1   Detailed Description

37.36.2   Function Documentation

37.36.2.1   CFE_TIME_ExternalGPS()

```
void CFE_TIME_ExternalGPS (
            CFE_TIME_SysTime_t NewTime,
            int16 NewLeaps )
```

Provide the time from an external source that has data common to GPS receivers.

Description

> This routine provides a method to provide cFE TIME with current time data acquired from an external source. There is a presumption that this function will be called at the appropriate time (relative to the tone) such that this call may be used by cFE TIME as the signal to generate the "time at the tone" data command. The "time at the tone" data command must arrive within the configuration parameter specified window for tone signal and data packet verification.

> Internally, cFE TIME will calculate a new STCF as the difference between this new time value and the spacecraft MET value at the tone. This allows cFE TIME to always calculate time as the sum of MET and STCF. The value of STCF will change only as much as the drift factor between spacecraft MET and the external time source.

Assumptions, External Events, and Notes:

> - This routine is included in the API only when 3 specific configuration parameters are set to true. The first is CFE_PLATFORM_TIME_CFG_SERVER which defines this instantiation of cFE TIME as a time server (not a client). The second required configuration parameter is CFE_PLATFORM_TIME_CFG_SOURCE which enables time source selection commands to the cFE TIME task, and further enables configuration definitions for the selected type of external time data. The third configuration parameter required for this routine is C↩FE_PLATFORM_TIME_CFG_SRC_GPS, which indicates that the external time data consists of a time value relative to a known epoch, plus a leap seconds value.

Parameters

in	*NewTime*	The MET value at the next (or previous) 1 Hz tone signal.
in	*NewLeaps*	The Leap Seconds value used to calculate time as UTC.

See also

CFE_TIME_ExternalTone, CFE_TIME_ExternalMET, CFE_TIME_ExternalTime

37.36.2.2 CFE_TIME_ExternalMET()

```
void CFE_TIME_ExternalMET (
            CFE_TIME_SysTime_t NewMET )
```

Provides the Mission Elapsed Time from an external source.

Description

This routine provides a method to provide cFE TIME with MET acquired from an external source. There is a presumption that this function will be called at the appropriate time (relative to the tone) such that this call may be used by cFE TIME as the signal to generate the "time at the tone" data command. The "time at the tone" data command must arrive within the configuration parameter specified window for tone signal and data packet verification.

The MET value at the tone "should" have zero subseconds. Although the interface accepts non-zero values for sub-seconds, it may be harmful to other applications that expect zero subseconds at the moment of the tone. Any decision to use non-zero subseconds should be carefully considered.

Assumptions, External Events, and Notes:

- This routine is included in the API only when 3 specific configuration parameters are set to true. The first is CFE_PLATFORM_TIME_CFG_SERVER which defines this instantiation of cFE TIME as a time server (not a client). The second required configuration parameter is CFE_PLATFORM_TIME_CFG_SOURCE which enables time source selection commands to the cFE TIME task, and further enables configuration definitions for the selected type of external time data. The third configuration parameter required for this routine is CF↩ E_PLATFORM_TIME_CFG_SRC_MET, which indicates that the external time data consists of MET.

Parameters

in	*NewMET*	The MET value at the next (or previous) 1 Hz tone signal.

See also

CFE_TIME_ExternalTone, CFE_TIME_ExternalGPS, CFE_TIME_ExternalTime

37.36.2.3   CFE_TIME_ExternalTime()

```
void CFE_TIME_ExternalTime (
            CFE_TIME_SysTime_t NewTime )
```

Provide the time from an external source that measures time relative to a known epoch.

Description

This routine provides a method to provide cFE TIME with current time data acquired from an external source. There is a presumption that this function will be called at the appropriate time (relative to the tone) such that this call may be used by cFE TIME as the signal to generate the "time at the tone" data command. The "time at the tone" data command must arrive within the configuration specified window for tone signal and data packet verification.

Internally, cFE TIME will calculate a new STCF as the difference between this new time value and the space-craft MET value at the tone. This allows cFE TIME to always calculate time as the sum of MET and STCF. The value of STCF will change only as much as the drift factor between spacecraft MET and the external time source.

Assumptions, External Events, and Notes:

- This routine is included in the API only when 3 specific configuration parameters are set to true. The first is CFE_PLATFORM_TIME_CFG_SERVER which defines this instanciation of cFE TIME as a time server (not a client). The second required configuration parameter is CFE_PLATFORM_TIME_CFG_SOURCE which enables time source selection commands to the cFE TIME task, and further enables configuration definitions for the selected type of external time data. The third configuration parameter required for this routine is CF↩ E_PLATFORM_TIME_CFG_SRC_TIME, which indicates that the external time data consists of a time value relative to a known epoch.

Parameters

in	*NewTime*	The MET value at the next (or previous) 1 Hz tone signal.

See also

> CFE_TIME_ExternalTone, CFE_TIME_ExternalMET, CFE_TIME_ExternalGPS

37.36.2.4   CFE_TIME_ExternalTone()

```
void CFE_TIME_ExternalTone (
            void )
```

Provides the 1 Hz signal from an external source.

Description

This routine provides a method for cFE TIME software to be notified of the occurance of the 1Hz tone signal without knowledge of the specific hardware design. Regardless of the source of the tone, this routine should be called as soon as possible after detection to allow cFE TIME software the opportunity to latch the local clock as close as possible to the instant of the tone.

Assumptions, External Events, and Notes:

- This routine may be called directly from within the context of an interrupt handler.

See also

CFE_TIME_ExternalMET, CFE_TIME_ExternalGPS, CFE_TIME_ExternalTime

37.36.2.5 CFE_TIME_RegisterSynchCallback()

```
int32 CFE_TIME_RegisterSynchCallback (
            CFE_TIME_SynchCallbackPtr_t CallbackFuncPtr )
```

Registers a callback function that is called whenever time synchronization occurs.

Description

This routine passes a callback function pointer for an Application that wishes to be notified whenever a legitimate time synchronization signal (typically a 1 Hz) is received.

Assumptions, External Events, and Notes:

Only a single callback per application is supported, and this function should only be called from a single thread within each application (typically the apps main thread). If an application requires triggering multiple child tasks at 1Hz, it should distribute the timing signal internally, rather than registering for multiple callbacks.

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TIME_TOO_MANY_SYNCH_CALLBACKS	Too Many Sync Callbacks.
CFE_ES_ERR_APPID	Application ID Error.

See also

CFE_TIME_UnregisterSynchCallback

37.36.2.6 CFE_TIME_UnregisterSynchCallback()

```
int32 CFE_TIME_UnregisterSynchCallback (
            CFE_TIME_SynchCallbackPtr_t CallbackFuncPtr )
```

Unregisters a callback function that is called whenever time synchronization occurs.

Description

This routine removes the specified callback function pointer from the list of Callback functions that are called whenever a time synchronization (typically the 1Hz signal) is received.

Assumptions, External Events, and Notes:

Only a single callback per application is supported, and this function should only be called from a single thread within each application (typically the apps main thread).

Returns

Execution status, see cFE Return Code Defines

Return values

CFE_SUCCESS	Sucessful execution.
CFE_TIME_CALLBACK_NOT_REGISTERED	Callback Not Registered.
CFE_ES_ERR_APPID	Application ID Error.

See also

CFE_TIME_RegisterSynchCallback

37.37 cFE Miscellaneous Time APIs

Functions

- void CFE_TIME_Print (char ∗PrintBuffer, CFE_TIME_SysTime_t TimeToPrint)

    Print a time value as a string.
- void CFE_TIME_Local1HzISR (void)

    This function should be called from the system PSP layer once per second.

37.37.1 Detailed Description

37.37.2 Function Documentation

37.37.2.1 CFE_TIME_Local1HzISR()

```
void CFE_TIME_Local1HzISR (
            void  )
```

This function should be called from the system PSP layer once per second.

Description

Drives the time processing logic from the system PSP layer. This must be called once per second based on a hardware interrupt or OS kernel signal.

Assumptions, External Events, and Notes:

This will update the global data structures accordingly, incrementing each by the 1Hz amount.

37.37.2.2 CFE_TIME_Print()

```
void CFE_TIME_Print (
            char ∗ PrintBuffer,
            CFE_TIME_SysTime_t TimeToPrint )
```

Print a time value as a string.

Description

This routine prints the specified time to the specified string buffer in the following format:

`yyyy-ddd-hh:mm:ss.xxxxx\0`

where:

- `yyyy` = year

- `ddd` = Julian day of the year

- `hh` = hour of the day (0 to 23)

- `mm` = minute (0 to 59)

- `ss` = second (0 to 59)

- `xxxxx` = subsecond formatted as a decimal fraction (1/4 second = 0.25000)

- `\0` = trailing null

Assumptions, External Events, and Notes:

- The value of the time argument is simply added to the configuration definitions for the ground epoch and converted into a fixed length string in the buffer provided by the caller.

- A loss of data during the string conversion will occur if the computed year exceeds 9999. However, a year that large would require an unrealistic definition for the ground epoch since the maximum amount of time represented by a CFE_TIME_SysTime structure is approximately 136 years.

Parameters

`in,out`	*PrintBuffer*	Pointer to a character array of at least CFE_TIME_PRINTED_STRING_SIZE characters in length. ∗PrintBuffer is the time as a character string as described above.
`in`	*TimeToPrint*	The time to print into the character array.

37.38 cFE Clock State Flag Defines

Macros

- #define CFE_TIME_FLAG_CLKSET 0x8000

    The spacecraft time has been set.
- #define CFE_TIME_FLAG_FLYING 0x4000

    This instance of Time Services is flywheeling.
- #define CFE_TIME_FLAG_SRCINT 0x2000

    The clock source is set to "internal".
- #define CFE_TIME_FLAG_SIGPRI 0x1000

    The clock signal is set to "primary".
- #define CFE_TIME_FLAG_SRVFLY 0x0800

    The Time Server is in flywheel mode.
- #define CFE_TIME_FLAG_CMDFLY 0x0400

    This instance of Time Services was commanded into flywheel mode.
- #define CFE_TIME_FLAG_ADDADJ 0x0200

    One time STCF Adjustment is to be done in positive direction.
- #define CFE_TIME_FLAG_ADD1HZ 0x0100

    1 Hz STCF Adjustment is to be done in a positive direction
- #define CFE_TIME_FLAG_ADDTCL 0x0080

    Time Client Latency is applied in a positive direction.
- #define CFE_TIME_FLAG_SERVER 0x0040

    This instance of Time Services is a Time Server.
- #define CFE_TIME_FLAG_GDTONE 0x0020

    The tone received is good compared to the last tone received.
- #define CFE_TIME_FLAG_UNUSED 0x001F

    Reserved flags - should be zero.

37.38.1 Detailed Description

37.38.2 Macro Definition Documentation

37.38.2.1 CFE_TIME_FLAG_ADD1HZ

```
#define CFE_TIME_FLAG_ADD1HZ 0x0100
```

1 Hz STCF Adjustment is to be done in a positive direction

Definition at line 716 of file cfe_time_msg.h.

37.38.2.2   CFE_TIME_FLAG_ADDADJ

`#define CFE_TIME_FLAG_ADDADJ 0x0200`

One time STCF Adjustment is to be done in positive direction.

Definition at line 715 of file cfe_time_msg.h.

37.38.2.3   CFE_TIME_FLAG_ADDTCL

`#define CFE_TIME_FLAG_ADDTCL 0x0080`

Time Client Latency is applied in a positive direction.

Definition at line 717 of file cfe_time_msg.h.

37.38.2.4   CFE_TIME_FLAG_CLKSET

`#define CFE_TIME_FLAG_CLKSET 0x8000`

The spacecraft time has been set.

Definition at line 709 of file cfe_time_msg.h.

37.38.2.5   CFE_TIME_FLAG_CMDFLY

`#define CFE_TIME_FLAG_CMDFLY 0x0400`

This instance of Time Services was commanded into flywheel mode.

Definition at line 714 of file cfe_time_msg.h.

37.38.2.6   CFE_TIME_FLAG_FLYING

`#define CFE_TIME_FLAG_FLYING 0x4000`

This instance of Time Services is flywheeling.

Definition at line 710 of file cfe_time_msg.h.

37.38.2.7   CFE_TIME_FLAG_GDTONE

```
#define CFE_TIME_FLAG_GDTONE 0x0020
```

The tone received is good compared to the last tone received.

Definition at line 719 of file cfe_time_msg.h.

37.38.2.8   CFE_TIME_FLAG_SERVER

```
#define CFE_TIME_FLAG_SERVER 0x0040
```

This instance of Time Services is a Time Server.

Definition at line 718 of file cfe_time_msg.h.

37.38.2.9   CFE_TIME_FLAG_SIGPRI

```
#define CFE_TIME_FLAG_SIGPRI 0x1000
```

The clock signal is set to "primary".

Definition at line 712 of file cfe_time_msg.h.

37.38.2.10   CFE_TIME_FLAG_SRCINT

```
#define CFE_TIME_FLAG_SRCINT 0x2000
```

The clock source is set to "internal".

Definition at line 711 of file cfe_time_msg.h.

37.38.2.11   CFE_TIME_FLAG_SRVFLY

```
#define CFE_TIME_FLAG_SRVFLY 0x0800
```

The Time Server is in flywheel mode.

Definition at line 713 of file cfe_time_msg.h.

37.38.2.12   CFE_TIME_FLAG_UNUSED

```
#define CFE_TIME_FLAG_UNUSED 0x001F
```

Reserved flags - should be zero.

Definition at line 720 of file cfe_time_msg.h.

37.39   OSAL Object Type Defines

Macros

- #define OS_OBJECT_TYPE_UNDEFINED 0x00

  Object type undefined.
- #define OS_OBJECT_TYPE_OS_TASK 0x01

  Object task type.
- #define OS_OBJECT_TYPE_OS_QUEUE 0x02

  Object queue type.
- #define OS_OBJECT_TYPE_OS_COUNTSEM 0x03

  Object counting semaphore type.
- #define OS_OBJECT_TYPE_OS_BINSEM 0x04

  Object binary semaphore type.
- #define OS_OBJECT_TYPE_OS_MUTEX 0x05

  Object mutex type.
- #define OS_OBJECT_TYPE_OS_STREAM 0x06

  Object stream type.
- #define OS_OBJECT_TYPE_OS_DIR 0x07

  Object directory type.
- #define OS_OBJECT_TYPE_OS_TIMEBASE 0x08

  Object timebase type.
- #define OS_OBJECT_TYPE_OS_TIMECB 0x09

  Object timer callback type.
- #define OS_OBJECT_TYPE_OS_MODULE 0x0A

  Object module type.
- #define OS_OBJECT_TYPE_OS_FILESYS 0x0B

  Object file system type.
- #define OS_OBJECT_TYPE_OS_CONSOLE 0x0C

  Object console type.
- #define OS_OBJECT_TYPE_USER 0x10

  Object user type.

37.39.1   Detailed Description

37.39.2   Macro Definition Documentation

37.39.2.1   OS_OBJECT_TYPE_OS_BINSEM

```
#define OS_OBJECT_TYPE_OS_BINSEM 0x04
```

Object binary semaphore type.

Definition at line 46 of file osapi-os-core.h.

37.39.2.2 OS_OBJECT_TYPE_OS_CONSOLE

```
#define OS_OBJECT_TYPE_OS_CONSOLE 0x0C
```

Object console type.

Definition at line 54 of file osapi-os-core.h.

37.39.2.3 OS_OBJECT_TYPE_OS_COUNTSEM

```
#define OS_OBJECT_TYPE_OS_COUNTSEM 0x03
```

Object counting semaphore type.

Definition at line 45 of file osapi-os-core.h.

37.39.2.4 OS_OBJECT_TYPE_OS_DIR

```
#define OS_OBJECT_TYPE_OS_DIR 0x07
```

Object directory type.

Definition at line 49 of file osapi-os-core.h.

37.39.2.5 OS_OBJECT_TYPE_OS_FILESYS

```
#define OS_OBJECT_TYPE_OS_FILESYS 0x0B
```

Object file system type.

Definition at line 53 of file osapi-os-core.h.

37.39.2.6 OS_OBJECT_TYPE_OS_MODULE

```
#define OS_OBJECT_TYPE_OS_MODULE 0x0A
```

Object module type.

Definition at line 52 of file osapi-os-core.h.

37.39.2.7 OS_OBJECT_TYPE_OS_MUTEX

`#define OS_OBJECT_TYPE_OS_MUTEX 0x05`

Object mutex type.

Definition at line 47 of file osapi-os-core.h.

37.39.2.8 OS_OBJECT_TYPE_OS_QUEUE

`#define OS_OBJECT_TYPE_OS_QUEUE 0x02`

Object queue type.

Definition at line 44 of file osapi-os-core.h.

37.39.2.9 OS_OBJECT_TYPE_OS_STREAM

`#define OS_OBJECT_TYPE_OS_STREAM 0x06`

Object stream type.

Definition at line 48 of file osapi-os-core.h.

37.39.2.10 OS_OBJECT_TYPE_OS_TASK

`#define OS_OBJECT_TYPE_OS_TASK 0x01`

Object task type.

Definition at line 43 of file osapi-os-core.h.

37.39.2.11 OS_OBJECT_TYPE_OS_TIMEBASE

`#define OS_OBJECT_TYPE_OS_TIMEBASE 0x08`

Object timebase type.

Definition at line 50 of file osapi-os-core.h.

37.39.2.12 OS_OBJECT_TYPE_OS_TIMECB

```
#define OS_OBJECT_TYPE_OS_TIMECB 0x09
```

Object timer callback type.

Definition at line 51 of file osapi-os-core.h.

37.39.2.13 OS_OBJECT_TYPE_UNDEFINED

```
#define OS_OBJECT_TYPE_UNDEFINED 0x00
```

Object type undefined.

Definition at line 42 of file osapi-os-core.h.

37.39.2.14 OS_OBJECT_TYPE_USER

```
#define OS_OBJECT_TYPE_USER 0x10
```

Object user type.

Definition at line 55 of file osapi-os-core.h.

37.40   OSAL Semaphore State Defines

Macros

- #define OS_SEM_FULL 1

    Semaphore full state.
- #define OS_SEM_EMPTY 0

    Semaphore empty state.

37.40.1   Detailed Description

37.40.2   Macro Definition Documentation

37.40.2.1   OS_SEM_EMPTY

```
#define OS_SEM_EMPTY 0
```

Semaphore empty state.

Definition at line 72 of file osapi-os-core.h.

37.40.2.2   OS_SEM_FULL

```
#define OS_SEM_FULL 1
```

Semaphore full state.

Definition at line 71 of file osapi-os-core.h.

37.41 OSAL Core Operation APIs

Functions

- void OS_Application_Startup (void)

    Application startup.
- void OS_Application_Run (void)

    Application run.
- int32 OS_API_Init (void)

    Initialization of API.
- void OS_IdleLoop (void)

    Background thread implementation - waits forever for events to occur.
- void OS_DeleteAllObjects (void)

    delete all resources created in OSAL.
- void OS_ApplicationShutdown (uint8 flag)

    Initiate orderly shutdown.
- void OS_ApplicationExit (int32 Status)

    Exit/Abort the application.

37.41.1 Detailed Description

These are for OSAL core operations for startup/initialization, running, and shutdown. Typically only used in bsps, unit tests, psps, etc.

Not intended for user application use

37.41.2 Function Documentation

37.41.2.1 OS_API_Init()

```
int32 OS_API_Init (
            void )
```

Initialization of API.

This function returns initializes the internal data structures of the OS Abstraction Layer. It must be called in the application startup code before calling any other OS routines.

Returns

Execution status, see OSAL Return Code Defines. Any error code (negative) means the OSAL can not be initialized. Typical platform specific response is to abort since additional OSAL calls will have undefined behavior.

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	Failed execution.

Referenced by OS_Application_Startup().

37.41.2.2   OS_Application_Run()

```
void OS_Application_Run (
            void  )
```

Application run.

Run abstraction such that the same BSP can be used for operations and testing.

Definition at line 414 of file cfe_psp_start.c.

References CFE_PSP_IdleTaskState, NULL, OS_DeleteAllObjects(), OS_printf(), and OS_TaskDelay().

Here is the call graph for this function:
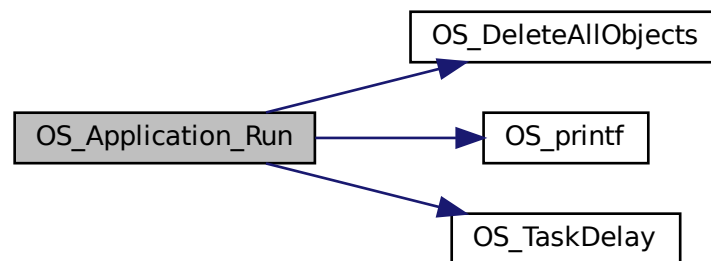
37.41.2.3 OS_Application_Startup()

```
void OS_Application_Startup (
            void  )
```

Application startup.

Startup abstraction such that the same BSP can be used for operations and testing.

Definition at line 157 of file cfe_psp_start.c.

References CFE_PSP_CPU_NAME_LENGTH, CFE_PSP_CpuId, CFE_PSP_CpuName, CFE_PSP_DisplayUsage(), CFE_PSP_IdleTaskState, CFE_PSP_InitProcessorReservedMemory(), CFE_PSP_MAIN_FUNCTION, CFE_PS↩ P_NONVOL_STARTUP_FILE, CFE_PSP_Panic(), CFE_PSP_ProcessArgumentDefaults(), CFE_PSP_Reserved↩ MemoryMap, CFE_PSP_RESET_NAME_LENGTH, CFE_PSP_RST_TYPE_POWERON, CFE_PSP_RST_TYPE↩ _PROCESSOR, CFE_PSP_SetupLocal1Hz(), CFE_PSP_SetupReservedMemoryMap(), CFE_PSP_SpacecraftId, CFE_PSP_SUCCESS, CFE_PSP_CommandData_t::CpuId, CFE_PSP_CommandData_t::CpuName, CFE_PSP_↩ CommandData_t::GotCpuId, CFE_PSP_CommandData_t::GotCpuName, CFE_PSP_CommandData_t::GotReset↩ Type, CFE_PSP_CommandData_t::GotSpacecraftId, CFE_PSP_CommandData_t::GotSubType, longOpts, NULL, optString, OS_API_Init(), OS_BSP_GetArgC(), OS_BSP_GetArgV(), OS_FileSysAddFixedMap(), OS_printf(), O↩ S_SUCCESS, OS_TimeBaseCreate(), OS_TimeBaseSet(), CFE_PSP_CommandData_t::ResetType, CFE_PSP_↩ CommandData_t::SpacecraftId, and CFE_PSP_CommandData_t::SubType.

Here is the call graph for this function:
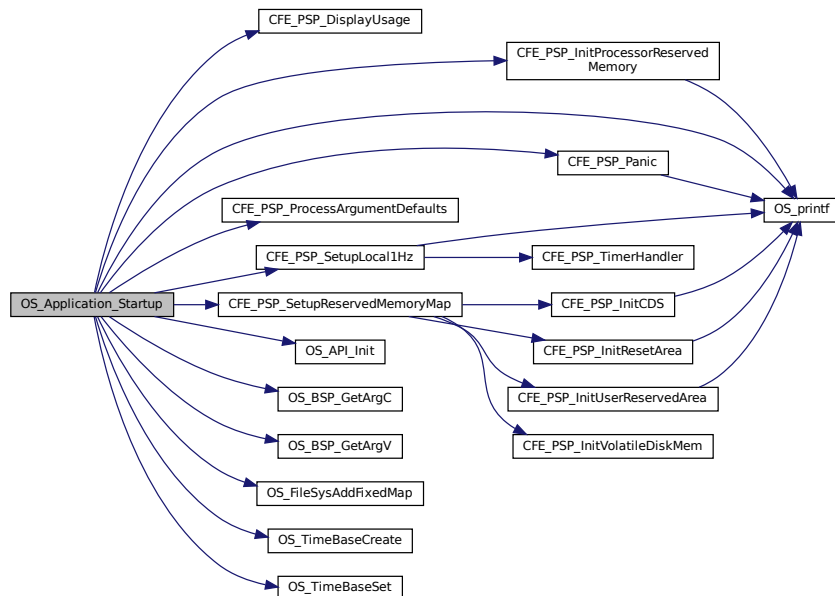
37.41.2.4   OS_ApplicationExit()

```
void OS_ApplicationExit (
            int32 Status )
```

Exit/Abort the application.

Indicates that the OSAL application should exit and return control to the OS This is intended for e.g. scripted unit testing where the test needs to end without user intervention.

This function does not return. Production code typically should not ever call this.

Note

> This exits the entire process including tasks that have been created.

37.41.2.5   OS_ApplicationShutdown()

```
void OS_ApplicationShutdown (
            uint8 flag )
```

Initiate orderly shutdown.

Indicates that the OSAL application should perform an orderly shutdown of ALL tasks, clean up all resources, and exit the application.

This allows the task currently blocked in OS_IdleLoop() to wake up, and for that function to return to its caller.

This is preferred over e.g. OS_ApplicationExit() which exits immediately and does not provide for any means to clean up first.

Parameters

in	*flag*	set to true to initiate shutdown, false to cancel

37.41.2.6   OS_DeleteAllObjects()

```
void OS_DeleteAllObjects (
            void  )
```

delete all resources created in OSAL.

provides a means to clean up all resources allocated by this instance of OSAL. It would typically be used during an orderly shutdown but may also be helpful for testing purposes.

Referenced by OS_Application_Run().

37.41.2.7 OS_IdleLoop()

```
void OS_IdleLoop (
            void  )
```

Background thread implementation - waits forever for events to occur.

This should be called from the BSP main routine or initial thread after all other board and application initialization has taken place and all other tasks are running.

Typically just waits forever until "OS_shutdown" flag becomes true.

37.42   OSAL Object Utility APIs

Functions

- int32 OS_GetResourceName (uint32 object_id, char ∗buffer, uint32 buffer_size)

    Obtain the name of an object given an arbitrary object ID.

- uint32 OS_IdentifyObject (uint32 object_id)

    Obtain the type of an object given an arbitrary object ID.

- int32 OS_ConvertToArrayIndex (uint32 object_id, uint32 ∗ArrayIndex)

    Converts an abstract ID into a number suitable for use as an array index.

- void OS_ForEachObject (uint32 creator_id, OS_ArgCallback_t callback_ptr, void ∗callback_arg)

    call the supplied callback function for all valid object IDs

37.42.1   Detailed Description

37.42.2   Function Documentation

37.42.2.1   OS_ConvertToArrayIndex()

```
int32 OS_ConvertToArrayIndex (
            uint32 object_id,
            uint32 * ArrayIndex )
```

Converts an abstract ID into a number suitable for use as an array index.

This will return a unique zero-based integer number in the range of [0,MAX) for any valid object ID. This may be used by application code as an array index for indexing into local tables.

Note

This does NOT verify the validity of the ID, that is left to the caller. This is only the conversion logic.

Parameters

in	*object_id*	The object ID to operate on
out	∗*ArrayIndex*	The Index to return

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INCORRECT_OBJ_TYPE	Incorrect object type.

37.42.2.2 OS_ForEachObject()

```
void OS_ForEachObject (
            uint32 creator_id,
            OS_ArgCallback_t callback_ptr,
            void * callback_arg )
```

call the supplied callback function for all valid object IDs

Loops through all defined OSAL objects of all types and calls callback_ptr on each one If creator_id is nonzero then only objects with matching creator id are processed.

Parameters

in	*creator_id*	Filter objects to those created by a specific task This may be passed as OS_OBJECT_CREATOR_ANY to return all objects
in	*callback_ptr*	Function to invoke for each matching object ID
in	*callback_arg*	Opaque Argument to pass to callback function

37.42.2.3 OS_GetResourceName()

```
int32 OS_GetResourceName (
            uint32 object_id,
            char * buffer,
            uint32 buffer_size )
```

Obtain the name of an object given an arbitrary object ID.

All OSAL resources generally have a name associated with them. This allows application code to retrieve the name of any valid OSAL object ID.

Parameters

in	*object_id*	The object ID to operate on
out	*buffer*	Buffer in which to store the name
in	*buffer_size*	Size of the output storage buffer

Returns

> OS_SUCCESS if successful OS_ERR_INVALID_ID if the passed-in ID is not a valid OSAL ID OS_INVALID↩
> _POINTER if the passed-in buffer is invalid OS_ERR_NAME_TOO_LONG if the name will not fit in the buffer
> provided

37.42.2.4 OS_IdentifyObject()

```
uint32 OS_IdentifyObject (
            uint32 object_id )
```

Obtain the type of an object given an arbitrary object ID.

Given an arbitrary object ID, get the type of the object

Parameters

in	*object↩*	The object ID to operate on
	_id	

Returns

The object type portion of the object_id, see OSAL Object Type Defines for expected values

```
uint32 OS_IdentifyObject (
```

37.43 OSAL Task APIs

Functions

- int32 OS_TaskCreate (uint32 ∗task_id, const char ∗task_name, osal_task_entry function_pointer, uint32 ∗stack↩
  _pointer, uint32 stack_size, uint32 priority, uint32 flags)

    Creates a task and starts running it.
- int32 OS_TaskDelete (uint32 task_id)

    Deletes the specified Task.
- void OS_TaskExit (void)

    Exits the calling task.
- int32 OS_TaskInstallDeleteHandler (osal_task_entry function_pointer)

    Installs a handler for when the task is deleted.
- int32 OS_TaskDelay (uint32 millisecond)

    Delay a task for specified amount of milliseconds.
- int32 OS_TaskSetPriority (uint32 task_id, uint32 new_priority)

    Sets the given task to a new priority.
- int32 OS_TaskRegister (void)

    Obsolete.
- uint32 OS_TaskGetId (void)

    Obtain the task id of the calling task.
- int32 OS_TaskGetIdByName (uint32 ∗task_id, const char ∗task_name)

    Find an existing task ID by name.
- int32 OS_TaskGetInfo (uint32 task_id, OS_task_prop_t ∗task_prop)

    Fill a property object buffer with details regarding the resource.
- int32 OS_TaskFindIdBySystemData (uint32 ∗task_id, const void ∗sysdata, size_t sysdata_size)

    Reverse-lookup the OSAL task ID from an operating system ID.

37.43.1 Detailed Description

37.43.2 Function Documentation

37.43.2.1 OS_TaskCreate()

```
int32 OS_TaskCreate (
            uint32 * task_id,
            const char * task_name,
            osal_task_entry function_pointer,
            uint32 * stack_pointer,
            uint32 stack_size,
            uint32 priority,
            uint32 flags )
```

Creates a task and starts running it.

Creates a task and passes back the id of the task created. Task names must be unique; if the name already exists this function fails. Names cannot be NULL.

Parameters

out	*task_id*	will be set to the non-zero ID of the newly-created resource
in	*task_name*	the name of the new resource to create
in	*function_pointer*	the entry point of the new task
in	*stack_pointer*	pointer to the stack for the task, or NULL to allocate a stack from the system memory heap
in	*stack_size*	the size of the stack, or 0 to use a default stack size.
in	*priority*	initial priority of the new task
in	*flags*	initial options for the new task

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if any of the necessary pointers are NULL
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_INVALID_PRIORITY	if the priority is bad
OS_ERR_NO_FREE_IDS	if there can be no more tasks created
OS_ERR_NAME_TAKEN	if the name specified is already used by a task
OS_ERROR	if an unspecified/other error occurs

37.43.2.2   OS_TaskDelay()

```
int32 OS_TaskDelay (
            uint32 millisecond )
```

Delay a task for specified amount of milliseconds.

Causes the current thread to be suspended from execution for the period of millisecond.

Parameters

in	*millisecond*	Amount of time to delay

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if sleep fails or millisecond = 0

Referenced by CFE_PSP_Restart(), and OS_Application_Run().

37.43.2.3 OS_TaskDelete()

```
int32 OS_TaskDelete (
            uint32 task_id )
```

Deletes the specified Task.

The task will be removed from the local tables. and the OS will be configured to stop executing the task at the next opportunity.

Parameters

in	task← _id	The object ID to operate on

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the ID given to it is invalid
OS_ERROR	if the OS delete call fails

37.43.2.4 OS_TaskExit()

```
void OS_TaskExit (
            void  )
```

Exits the calling task.

The calling thread is terminated. This function does not return.

37.43.2.5 OS_TaskFindIdBySystemData()

```
int32 OS_TaskFindIdBySystemData (
            uint32 * task_id,
            const void * sysdata,
            size_t sysdata_size )
```

Reverse-lookup the OSAL task ID from an operating system ID.

This provides a method by which an external entity may find the OSAL task ID corresponding to a system-defined identifier (e.g. TASK_ID, pthread_t, rtems_id, etc).

Normally OSAL does not expose the underlying OS-specific values to the application, but in some circumstances, such as exception handling, the OS may provide this information directly to handler outside of the normal OSAL API.

Parameters

out	*task_id*	The buffer where the task id output is stored
in	*sysdata*	Pointer to the system-provided identification data
in	*sysdata_size*	Size of the system-provided identification data

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.

37.43.2.6 OS_TaskGetId()

```
uint32 OS_TaskGetId (
            void  )
```

Obtain the task id of the calling task.

This function returns the task id of the calling task

Returns

Task ID, or zero if the operation failed (zero is never a valid task ID)

37.43.2.7 OS_TaskGetIdByName()

```
int32 OS_TaskGetIdByName (
            uint32 * task_id,
            const char * task_name )
```

Find an existing task ID by name.

This function tries to find a task Id given the name of a task

Parameters

out	*task_id*	will be set to the ID of the existing resource
in	*task_name*	the name of the existing resource to find

Returns

>   Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if the pointers passed in are NULL
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NAME_NOT_FOUND	if the name wasn't found in the table

37.43.2.8   OS_TaskGetInfo()

```
int32 OS_TaskGetInfo (
          uint32 task_id,
          OS_task_prop_t * task_prop )
```

Fill a property object buffer with details regarding the resource.

This function will pass back a pointer to structure that contains all of the relevant info (creator, stack size, priority, name) about the specified task.

Parameters

in	*task_id*	The object ID to operate on
out	*task_prop*	The property object buffer to fill

Returns

>   Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the ID passed to it is invalid
OS_INVALID_POINTER	if the task_prop pointer is NULL

37.43.2.9   OS_TaskInstallDeleteHandler()

```
int32 OS_TaskInstallDeleteHandler (
          osal_task_entry function_pointer )
```

Installs a handler for when the task is deleted.

This function is used to install a callback that is called when the task is deleted. The callback is called when OS_Task↩
Delete is called with the task ID. A task delete handler is useful for cleaning up resources that a task creates, before the task is removed from the system.

Parameters

in	*function_pointer*	function to be called when task exits

Returns

    Execution status, see OSAL Return Code Defines

37.43.2.10 OS_TaskRegister()

```
int32 OS_TaskRegister (
            void  )
```

Obsolete.

Deprecated Explicit registration call no longer needed

Obsolete function retained for compatibility purposes. Does Nothing in the current implementation.

Returns

    OS_SUCCESS (always), see OSAL Return Code Defines

37.43.2.11 OS_TaskSetPriority()

```
int32 OS_TaskSetPriority (
            uint32 task_id,
            uint32 new_priority )
```

Sets the given task to a new priority.

Parameters

in	*task_id*	The object ID to operate on
in	*new_priority*	Set the new priority

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the ID passed to it is invalid
OS_ERR_INVALID_PRIORITY	if the priority is greater than the max allowed
OS_ERROR	if the OS call to change the priority fails

37.44 OSAL Message Queue APIs

Functions

- int32 OS_QueueCreate (uint32 ∗queue_id, const char ∗queue_name, uint32 queue_depth, uint32 data_size, uint32 flags)

    Create a message queue.
- int32 OS_QueueDelete (uint32 queue_id)

    Deletes the specified message queue.
- int32 OS_QueueGet (uint32 queue_id, void ∗data, uint32 size, uint32 ∗size_copied, int32 timeout)

    Receive a message on a message queue.
- int32 OS_QueuePut (uint32 queue_id, const void ∗data, uint32 size, uint32 flags)

    Put a message on a message queue.
- int32 OS_QueueGetIdByName (uint32 ∗queue_id, const char ∗queue_name)

    Find an existing queue ID by name.
- int32 OS_QueueGetInfo (uint32 queue_id, OS_queue_prop_t ∗queue_prop)

    Fill a property object buffer with details regarding the resource.

37.44.1 Detailed Description

37.44.2 Function Documentation

37.44.2.1 OS_QueueCreate()

```
int32 OS_QueueCreate (
            uint32 * queue_id,
            const char * queue_name,
            uint32 queue_depth,
            uint32 data_size,
            uint32 flags )
```

Create a message queue.

This is the function used to create a queue in the operating system. Depending on the underlying operating system, the memory for the queue will be allocated automatically or allocated by the code that sets up the queue. Queue names must be unique; if the name already exists this function fails. Names cannot be NULL.

Parameters

out	*queue_id*	will be set to the non-zero ID of the newly-created resource
in	*queue_name*	the name of the new resource to create
in	*queue_depth*	the maximum depth of the queue
in	*data_size*	the size of each entry in the queue
in	*flags*	options for the queue (reserved for future use, pass as 0)

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if a pointer passed in is NULL
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NO_FREE_IDS	if there are already the max queues created
OS_ERR_NAME_TAKEN	if the name is already being used on another queue
OS_QUEUE_INVALID_SIZE	if the queue depth exceeds the limit
OS_ERROR	if the OS create call fails

37.44.2.2   OS_QueueDelete()

```
int32 OS_QueueDelete (
            uint32 queue_id )
```

Deletes the specified message queue.

This is the function used to delete a queue in the operating system. This also frees the respective queue_id to be used again when another queue is created.

Note

If There are messages on the queue, they will be lost and any subsequent calls to QueueGet or QueuePut to this queue will result in errors

Parameters

in	*queue↵ _id*	The object ID to delete

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in does not exist
OS_ERROR	if the OS call to delete the queue fails

37.44.2.3   OS_QueueGet()

```
int32 OS_QueueGet (
            uint32 queue_id,
            void * data,
            uint32 size,
            uint32 * size_copied,
            int32 timeout )
```

Receive a message on a message queue.

If a message is pending, it is returned immediately. Otherwise the calling task will block until a message arrives or the timeout expires.

Parameters

in	*queue_id*	The object ID to operate on
out	*data*	The buffer to store the received message
in	*size*	The size of the data buffer
out	*size_copied*	Set to the actual size of the message
in	*timeout*	The maximum amount of time to block, or OS_PEND to wait forever

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the given ID does not exist
OS_INVALID_POINTER	if a pointer passed in is NULL
OS_QUEUE_EMPTY	if the Queue has no messages on it to be recieved
OS_QUEUE_TIMEOUT	if the timeout was OS_PEND and the time expired
OS_QUEUE_INVALID_SIZE	if the size copied from the queue was not correct

37.44.2.4   OS_QueueGetIdByName()

```
int32 OS_QueueGetIdByName (
            uint32 * queue_id,
            const char * queue_name )
```

Find an existing queue ID by name.

This function tries to find a queue Id given the name of the queue. The id of the queue is passed back in queue_id.

Parameters

out	*queue_id*	will be set to the ID of the existing resource
in	*queue_name*	the name of the existing resource to find

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if the name or id pointers are NULL
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NAME_NOT_FOUND	the name was not found in the table

37.44.2.5   OS_QueueGetInfo()

```
int32 OS_QueueGetInfo (
           uint32 queue_id,
           OS_queue_prop_t * queue_prop )
```

Fill a property object buffer with details regarding the resource.

This function will pass back a pointer to structure that contains all of the relevant info (name and creator) about the specified queue.

Parameters

in	*queue_id*	The object ID to operate on
out	*queue_prop*	The property object buffer to fill

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if queue_prop is NULL
OS_ERR_INVALID_ID	if the ID given is not a valid queue

37.44.2.6 OS_QueuePut()

```
int32 OS_QueuePut (
            uint32 queue_id,
            const void * data,
            uint32 size,
            uint32 flags )
```

Put a message on a message queue.

Parameters

in	*queue←* *_id*	The object ID to operate on
in	*data*	The buffer containing the message to put
in	*size*	The size of the data buffer
in	*flags*	Currently reserved/unused, should be passed as 0

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the queue id passed in is not a valid queue
OS_INVALID_POINTER	if the data pointer is NULL
OS_QUEUE_FULL	if the queue cannot accept another message
OS_ERROR	if the OS call returns an error

37.45   OSAL Semaphore APIs

Functions

- int32 OS_BinSemCreate (uint32 ∗sem_id, const char ∗sem_name, uint32 sem_initial_value, uint32 options)

    Creates a binary semaphore.
- int32 OS_BinSemFlush (uint32 sem_id)

    Unblock all tasks pending on the specified semaphore.
- int32 OS_BinSemGive (uint32 sem_id)

    Increment the semaphore value.
- int32 OS_BinSemTake (uint32 sem_id)

    Decrement the semaphore value.
- int32 OS_BinSemTimedWait (uint32 sem_id, uint32 msecs)

    Decrement the semaphore value with a timeout.
- int32 OS_BinSemDelete (uint32 sem_id)

    Deletes the specified Binary Semaphore.
- int32 OS_BinSemGetIdByName (uint32 ∗sem_id, const char ∗sem_name)

    Find an existing semaphore ID by name.
- int32 OS_BinSemGetInfo (uint32 sem_id, OS_bin_sem_prop_t ∗bin_prop)

    Fill a property object buffer with details regarding the resource.
- int32 OS_CountSemCreate (uint32 ∗sem_id, const char ∗sem_name, uint32 sem_initial_value, uint32 options)

    Creates a counting semaphore.
- int32 OS_CountSemGive (uint32 sem_id)

    Increment the semaphore value.
- int32 OS_CountSemTake (uint32 sem_id)

    Decrement the semaphore value.
- int32 OS_CountSemTimedWait (uint32 sem_id, uint32 msecs)

    Decrement the semaphore value with timeout.
- int32 OS_CountSemDelete (uint32 sem_id)

    Deletes the specified counting Semaphore.
- int32 OS_CountSemGetIdByName (uint32 ∗sem_id, const char ∗sem_name)

    Find an existing semaphore ID by name.
- int32 OS_CountSemGetInfo (uint32 sem_id, OS_count_sem_prop_t ∗count_prop)

    Fill a property object buffer with details regarding the resource.
- int32 OS_MutSemCreate (uint32 ∗sem_id, const char ∗sem_name, uint32 options)

    Creates a mutex semaphore.
- int32 OS_MutSemGive (uint32 sem_id)

    Releases the mutex object referenced by sem_id.
- int32 OS_MutSemTake (uint32 sem_id)

    Acquire the mutex object referenced by sem_id.
- int32 OS_MutSemDelete (uint32 sem_id)

    Deletes the specified Mutex Semaphore.
- int32 OS_MutSemGetIdByName (uint32 ∗sem_id, const char ∗sem_name)

    Find an existing mutex ID by name.
- int32 OS_MutSemGetInfo (uint32 sem_id, OS_mut_sem_prop_t ∗mut_prop)

    Fill a property object buffer with details regarding the resource.

37.45.1 Detailed Description

37.45.2 Function Documentation

37.45.2.1 OS_BinSemCreate()

```
int32 OS_BinSemCreate (
            uint32 * sem_id,
            const char * sem_name,
            uint32 sem_initial_value,
            uint32 options )
```

Creates a binary semaphore.

Creates a binary semaphore with initial value specified by sem_initial_value and name specified by sem_name. sem_id will be returned to the caller

Parameters

out	*sem_id*	will be set to the non-zero ID of the newly-created resource
in	*sem_name*	the name of the new resource to create
in	*sem_initial_value*	the initial value of the binary semaphore
in	*options*	Reserved for future use, should be passed as 0.

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if sen name or sem_id are NULL
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NO_FREE_IDS	if all of the semaphore ids are taken
OS_ERR_NAME_TAKEN	if this is already the name of a binary semaphore
OS_SEM_FAILURE	if the OS call failed

37.45.2.2 OS_BinSemDelete()

```
int32 OS_BinSemDelete (
            uint32 sem_id )
```

Deletes the specified Binary Semaphore.

This is the function used to delete a binary semaphore in the operating system. This also frees the respective sem_id to be used again when another semaphore is created.

Parameters

in	*sem↵ _id*	The object ID to delete

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid binary semaphore
OS_SEM_FAILURE	the OS call failed

37.45.2.3 OS_BinSemFlush()

```
int32 OS_BinSemFlush (
            uint32 sem_id )
```

Unblock all tasks pending on the specified semaphore.

The function unblocks all tasks pending on the specified semaphore. However, this function does not change the state of the semaphore.

Parameters

in	*sem↵ _id*	The object ID to operate on

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a binary semaphore
OS_SEM_FAILURE	if an unspecified failure occurs

37.45.2.4 OS_BinSemGetIdByName()

```
int32 OS_BinSemGetIdByName (
```

```
        uint32 * sem_id,
        const char * sem_name )
```

Find an existing semaphore ID by name.

This function tries to find a binary sem Id given the name of a bin_sem The id is returned through sem_id

Parameters

out	*sem_id*	will be set to the ID of the existing resource
in	*sem_name*	the name of the existing resource to find

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	is semid or sem_name are NULL pointers
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NAME_NOT_FOUND	if the name was not found in the table

37.45.2.5   OS_BinSemGetInfo()

```
int32 OS_BinSemGetInfo (
        uint32 sem_id,
        OS_bin_sem_prop_t * bin_prop )
```

Fill a property object buffer with details regarding the resource.

This function will pass back a pointer to structure that contains all of the relevant info(name and creator) about the specified binary semaphore.

Parameters

in	*sem_id*	The object ID to operate on
out	*bin_prop*	The property object buffer to fill

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid semaphore
OS_INVALID_POINTER	if the bin_prop pointer is null

37.45.2.6 OS_BinSemGive()

```
int32 OS_BinSemGive (
            uint32 sem_id )
```

Increment the semaphore value.

The function unlocks the semaphore referenced by sem_id by performing a semaphore unlock operation on that semaphore. If the semaphore value resulting from this operation is positive, then no threads were blocked waiting for the semaphore to become unlocked; the semaphore value is simply incremented for this semaphore.

Parameters

in	*sem↩ _id*	The object ID to operate on

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_SEM_FAILURE	the semaphore was not previously initialized or is not in the array of semaphores defined by the system
OS_ERR_INVALID_ID	if the id passed in is not a binary semaphore

37.45.2.7 OS_BinSemTake()

```
int32 OS_BinSemTake (
            uint32 sem_id )
```

Decrement the semaphore value.

The locks the semaphore referenced by sem_id by performing a semaphore lock operation on that semaphore. If the semaphore value is currently zero, then the calling thread shall not return from the call until it either locks the semaphore or the call is interrupted.

Parameters

in	*sem↩*	The object ID to operate on
	_id	

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	the Id passed in is not a valid binary semaphore
OS_SEM_FAILURE	if the OS call failed

37.45.2.8   OS_BinSemTimedWait()

```
int32 OS_BinSemTimedWait (
            uint32 sem_id,
            uint32 msecs )
```

Decrement the semaphore value with a timeout.

The function locks the semaphore referenced by sem_id. However, if the semaphore cannot be locked without waiting for another process or thread to unlock the semaphore, this wait shall be terminated when the specified timeout, msecs, expires.

Parameters

in	*sem↩*	The object ID to operate on
	_id	
in	*msecs*	The maximum amount of time to block, in milliseconds

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_SEM_TIMEOUT	if semaphore was not relinquished in time
OS_SEM_FAILURE	the semaphore was not previously initialized or is not in the array of semaphores defined by the system
OS_ERR_INVALID_ID	if the ID passed in is not a valid semaphore ID

37.45.2.9 OS_CountSemCreate()

```
int32 OS_CountSemCreate (
            uint32 * sem_id,
            const char * sem_name,
            uint32 sem_initial_value,
            uint32 options )
```

Creates a counting semaphore.

Creates a counting semaphore with initial value specified by sem_initial_value and name specified by sem_name. sem_id will be returned to the caller

Parameters

out	*sem_id*	will be set to the non-zero ID of the newly-created resource
in	*sem_name*	the name of the new resource to create
in	*sem_initial_value*	the initial value of the counting semaphore
in	*options*	Reserved for future use, should be passed as 0.

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if sen name or sem_id are NULL
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NO_FREE_IDS	if all of the semaphore ids are taken
OS_ERR_NAME_TAKEN	if this is already the name of a counting semaphore
OS_SEM_FAILURE	if the OS call failed
OS_INVALID_SEM_VALUE	if the semaphore value is too high

37.45.2.10 OS_CountSemDelete()

```
int32 OS_CountSemDelete (
            uint32 sem_id )
```

Deletes the specified counting Semaphore.

Parameters

in	*sem↩_id*	The object ID to delete

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid counting semaphore
OS_SEM_FAILURE	the OS call failed

37.45.2.11   OS_CountSemGetIdByName()

```
int32 OS_CountSemGetIdByName (
        uint32 * sem_id,
        const char * sem_name )
```

Find an existing semaphore ID by name.

This function tries to find a counting sem Id given the name of a count_sem The id is returned through sem_id

Parameters

out	*sem_id*	will be set to the ID of the existing resource
in	*sem_name*	the name of the existing resource to find

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	is semid or sem_name are NULL pointers
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NAME_NOT_FOUND	if the name was not found in the table

37.45.2.12 OS_CountSemGetInfo()

```
int32 OS_CountSemGetInfo (
            uint32 sem_id,
            OS_count_sem_prop_t * count_prop )
```

Fill a property object buffer with details regarding the resource.

This function will pass back a pointer to structure that contains all of the relevant info(name and creator) about the specified counting semaphore.

Parameters

in	*sem_id*	The object ID to operate on
out	*count_prop*	The property object buffer to fill

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid semaphore
OS_INVALID_POINTER	if the count_prop pointer is null

37.45.2.13 OS_CountSemGive()

```
int32 OS_CountSemGive (
            uint32 sem_id )
```

Increment the semaphore value.

The function unlocks the semaphore referenced by sem_id by performing a semaphore unlock operation on that semaphore. If the semaphore value resulting from this operation is positive, then no threads were blocked waiting for the semaphore to become unlocked; the semaphore value is simply incremented for this semaphore.

Parameters

in	*sem↩_id*	The object ID to operate on

Returns

Execution status, see OSAL Return Code Defines

```
int32 OS_CountSemGetInfo (
```

Return values

OS_SUCCESS	Successful execution.
OS_SEM_FAILURE	the semaphore was not previously initialized or is not in the array of semaphores defined by the system
OS_ERR_INVALID_ID	if the id passed in is not a counting semaphore

37.45.2.14   OS_CountSemTake()

```
int32 OS_CountSemTake (
            uint32 sem_id )
```

Decrement the semaphore value.

The locks the semaphore referenced by sem_id by performing a semaphore lock operation on that semaphore. If the semaphore value is currently zero, then the calling thread shall not return from the call until it either locks the semaphore or the call is interrupted.

Parameters

in	*sem↩_id*	The object ID to operate on

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	the Id passed in is not a valid counting semaphore
OS_SEM_FAILURE	if the OS call failed

37.45.2.15   OS_CountSemTimedWait()

```
int32 OS_CountSemTimedWait (
            uint32 sem_id,
            uint32 msecs )
```

Decrement the semaphore value with timeout.

The function locks the semaphore referenced by sem_id. However, if the semaphore cannot be locked without waiting for another process or thread to unlock the semaphore, this wait shall be terminated when the specified timeout, msecs, expires.

Parameters

in	*sem←* *_id*	The object ID to operate on
in	*msecs*	The maximum amount of time to block, in milliseconds

Returns

Execution status, see [OSAL Return Code Defines](#)

Return values

[*OS_SUCCESS*](#)	Successful execution.
[*OS_SEM_TIMEOUT*](#)	if semaphore was not relinquished in time
[*OS_SEM_FAILURE*](#)	the semaphore was not previously initialized or is not in the array of semaphores defined by the system
[*OS_ERR_INVALID_ID*](#)	if the ID passed in is not a valid semaphore ID

37.45.2.16   OS_MutSemCreate()

```
int32 OS_MutSemCreate (
          uint32 * sem_id,
          const char * sem_name,
          uint32 options )
```

Creates a mutex semaphore.

Mutex semaphores are always created in the unlocked (full) state.

Parameters

out	*sem_id*	will be set to the non-zero ID of the newly-created resource
in	*sem_name*	the name of the new resource to create
in	*options*	reserved for future use. Should be passed as 0.

Returns

Execution status, see [OSAL Return Code Defines](#)

Return values

[*OS_SUCCESS*](#)	Successful execution.
[*OS_INVALID_POINTER*](#)	if sem_id or sem_name are NULL
[*OS_ERR_NAME_TOO_LONG*](#)	name length including null terminator greater than [OS_MAX_API_NAME](#)

Return values

OS_ERR_NO_FREE_IDS	if there are no more free mutex Ids
OS_ERR_NAME_TAKEN	if there is already a mutex with the same name
OS_SEM_FAILURE	if the OS call failed

37.45.2.17   OS_MutSemDelete()

```
int32 OS_MutSemDelete (
            uint32 sem_id )
```

Deletes the specified Mutex Semaphore.

Delete the semaphore. This also frees the respective sem_id such that it can be used again when another is created.

Parameters

in	*sem↩ _id*	The object ID to delete

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid mutex
OS_SEM_FAILURE	if the OS call failed

37.45.2.18   OS_MutSemGetIdByName()

```
int32 OS_MutSemGetIdByName (
            uint32 * sem_id,
            const char * sem_name )
```

Find an existing mutex ID by name.

This function tries to find a mutex sem Id given the name of a mut_sem. The id is returned through sem_id

Parameters

out	*sem_id*	will be set to the ID of the existing resource
in	*sem_name*	the name of the existing resource to find

Returns

Execution status, see [OSAL Return Code Defines](#)

Return values

[*OS_SUCCESS*](#)	Successful execution.
[*OS_INVALID_POINTER*](#)	is semid or sem_name are NULL pointers
[*OS_ERR_NAME_TOO_LONG*](#)	name length including null terminator greater than [OS_MAX_API_NAME](#)
[*OS_ERR_NAME_NOT_FOUND*](#)	if the name was not found in the table

37.45.2.19 OS_MutSemGetInfo()

```
int32 OS_MutSemGetInfo (
          uint32 sem_id,
          OS_mut_sem_prop_t * mut_prop )
```

Fill a property object buffer with details regarding the resource.

This function will pass back a pointer to structure that contains all of the relevant info(name and creator) about the specified mutex semaphore.

Parameters

in	*sem_id*	The object ID to operate on
out	*mut_prop*	The property object buffer to fill

Returns

Execution status, see [OSAL Return Code Defines](#)

Return values

[*OS_SUCCESS*](#)	Successful execution.
[*OS_ERR_INVALID_ID*](#)	if the id passed in is not a valid semaphore
[*OS_INVALID_POINTER*](#)	if the mut_prop pointer is null

37.45.2.20 OS_MutSemGive()

```
int32 OS_MutSemGive (
          uint32 sem_id )
```

Releases the mutex object referenced by sem_id.

If there are threads blocked on the mutex object referenced by mutex when this function is called, resulting in the mutex becoming available, the scheduling policy shall determine which thread shall acquire the mutex.

Parameters

in	*sem↩ _id*	The object ID to operate on

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid mutex
OS_SEM_FAILURE	if an unspecified error occurs

37.45.2.21 OS_MutSemTake()

```
int32 OS_MutSemTake (
            uint32 sem_id )
```

Acquire the mutex object referenced by sem_id.

If the mutex is already locked, the calling thread shall block until the mutex becomes available. This operation shall return with the mutex object referenced by mutex in the locked state with the calling thread as its owner.

Parameters

in	*sem↩ _id*	The object ID to operate on

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_SEM_FAILURE	if the semaphore was not previously initialized or is not in the array of semaphores defined by the system
OS_ERR_INVALID_ID	the id passed in is not a valid mutex

37.46 OSAL Time/Tick APIs

Functions

- int32 OS_Milli2Ticks (uint32 milli_seconds)

    Convert time units from milliseconds to system ticks.
- int32 OS_Tick2Micros (void)

    Get the system tick size, in microseconds.
- int32 OS_GetLocalTime (OS_time_t ∗time_struct)

    Get the local time.
- int32 OS_SetLocalTime (OS_time_t ∗time_struct)

    Set the local time.

37.46.1 Detailed Description

37.46.2 Function Documentation

37.46.2.1 OS_GetLocalTime()

```
int32 OS_GetLocalTime (
            OS_time_t * time_struct )
```

Get the local time.

This function gets the local time from the underlying OS.

Note

    Mission time management typically uses the cFE Time Service

Parameters

out	*time_struct*	An OS_time_t that will be set to the current time

Returns

    Get local time status, see OSAL Return Code Defines

Referenced by CFE_PSP_Get_Timebase(), and CFE_PSP_GetTime().

37.46.2.2 OS_Milli2Ticks()

```
int32 OS_Milli2Ticks (
            uint32 milli_seconds )
```

Convert time units from milliseconds to system ticks.

This function accepts a time interval in milliseconds and returns the tick equivalent. If the result is not an exact number of system ticks, the result will be rounded up to the nearest tick.

Parameters

in	*milli_seconds*	the number of milliseconds

Returns

The number of ticks

37.46.2.3 OS_SetLocalTime()

```
int32 OS_SetLocalTime (
            OS_time_t * time_struct )
```

Set the local time.

This function sets the local time on the underlying OS.

Note

Mission time management typically uses the cFE Time Services

Parameters

in	*time_struct*	An OS_time_t containing the current time

Returns

Set local time status, see OSAL Return Code Defines

37.46.2.4 OS_Tick2Micros()

```
int32 OS_Tick2Micros (
            void  )
```

Get the system tick size, in microseconds.

This function returns the duration of a system tick in micro seconds

```
int32 OS_Milli2Ticks (
```

Note

care is taken to ensure this does not return "0" since it is often used as the divisor in mathematical operations

Returns

Duration of a system tick in microseconds

37.47 OSAL Exception APIs

Functions

- int32 OS_ExcAttachHandler (uint32 ExceptionNumber, void(∗ExceptionHandler)(uint32, const void ∗, uint32), int32 parameter)

    placeholder; not currently implemented

- int32 OS_ExcEnable (int32 ExceptionNumber)

    placeholder; not currently implemented

- int32 OS_ExcDisable (int32 ExceptionNumber)

    placeholder; not currently implemented

37.47.1 Detailed Description

Note

Not implemented in current OSAL version

Deprecated Planning move to PSP due to platform dependencies

37.47.2 Function Documentation

37.47.2.1 OS_ExcAttachHandler()

```
int32 OS_ExcAttachHandler (
            uint32 ExceptionNumber,
            void(*)(uint32, const void *, uint32) ExceptionHandler,
            int32 parameter )
```

placeholder; not currently implemented

Deprecated Planning move to PSP due to platform dependencies

37.47.2.2 OS_ExcDisable()

```
int32 OS_ExcDisable (
            int32 ExceptionNumber )
```

placeholder; not currently implemented

Deprecated Planning move to PSP due to platform dependencies

37.47.2.3 OS_ExcEnable()

```
int32 OS_ExcEnable (
            int32 ExceptionNumber )
```

placeholder; not currently implemented

Deprecated Planning move to PSP due to platform dependencies

37.48   OSAL Floating Point Unit Exception APIs

Functions

- int32 OS_FPUExcAttachHandler (uint32 ExceptionNumber, osal_task_entry ExceptionHandler, int32 parameter)

    Set an FPU exception handler function.
- int32 OS_FPUExcEnable (int32 ExceptionNumber)

    Enable FPU exceptions.
- int32 OS_FPUExcDisable (int32 ExceptionNumber)

    Disable FPU exceptions.
- int32 OS_FPUExcSetMask (uint32 mask)

    Sets the FPU exception mask.
- int32 OS_FPUExcGetMask (uint32 *mask)

    Gets the FPU exception mask.

37.48.1   Detailed Description

Deprecated Planning move to PSP due to platform dependencies

37.48.2   Function Documentation

37.48.2.1   OS_FPUExcAttachHandler()

```
int32 OS_FPUExcAttachHandler (
          uint32 ExceptionNumber,
          osal_task_entry ExceptionHandler,
          int32 parameter )
```

Set an FPU exception handler function.

The call associates a specified C routine to a specified FPU exception number. When the specified FPU Exception occurs , the ExceptionHandler routine will be called and passed the parameter.

Deprecated Planning move to PSP due to platform dependencies

Parameters

in	*ExceptionNumber*	The exception number to attach to
in	*ExceptionHandler*	Pointer to handler function
in	*parameter*	Argument to pass to handler

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.48.2.2 OS_FPUExcDisable()

```
int32 OS_FPUExcDisable (
            int32 ExceptionNumber )
```

Disable FPU exceptions.

Deprecated Planning move to PSP due to platform dependencies

Parameters

in	*ExceptionNumber*	The exception number to disable

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.48.2.3 OS_FPUExcEnable()

```
int32 OS_FPUExcEnable (
            int32 ExceptionNumber )
```

Enable FPU exceptions.

Deprecated Planning move to PSP due to platform dependencies

Parameters

in	*ExceptionNumber*	The exception number to enable

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.48.2.4   OS_FPUExcGetMask()

```
int32 OS_FPUExcGetMask (
            uint32 * mask )
```

Gets the FPU exception mask.

Deprecated Planning move to PSP due to platform dependencies

This function gets the FPU exception mask

Note

The exception environment is local to each task Therefore this must be called for each task that that wants to do floating point and catch exceptions.

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.48.2.5   OS_FPUExcSetMask()

```
int32 OS_FPUExcSetMask (
```

Generated by Doxygen

```
        uint32 mask )
```

Sets the FPU exception mask.

Deprecated Planning move to PSP due to platform dependencies

This function sets the FPU exception mask

Note

> The exception environment is local to each task Therefore this must be called for each task that that wants to do floating point and catch exceptions.

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49   OSAL Interrupt APIs

Functions

- int32 OS_IntAttachHandler (uint32 InterruptNumber, osal_task_entry InterruptHandler, int32 parameter)

    DEPRECATED; Associate an interrupt number to a specified handler routine.
- int32 OS_IntUnlock (int32 IntLevel)

    DEPRECATED; Enable interrupts.
- int32 OS_IntLock (void)

    DEPRECATED; Disable interrupts.
- int32 OS_IntEnable (int32 Level)

    DEPRECATED; Enables interrupts through Level.
- int32 OS_IntDisable (int32 Level)

    DEPRECATED; Disable interrupts through Level.
- int32 OS_IntSetMask (uint32 mask)

    DEPRECATED; Set the CPU interrupt mask register.
- int32 OS_IntGetMask (uint32 ∗mask)

    DEPRECATED; Get the CPU interrupt mask register.
- int32 OS_IntAck (int32 InterruptNumber)

    DEPRECATED; Acknowledge the corresponding interrupt number.

37.49.1   Detailed Description

Deprecated Platform dependencies

37.49.2   Function Documentation

37.49.2.1   OS_IntAck()

```
int32 OS_IntAck (
            int32 InterruptNumber )
```

DEPRECATED; Acknowledge the corresponding interrupt number.

Deprecated platform dependencies, removing from OSAL

Note

: placeholder; not currently implemented in sample implementations

Parameters

in	*InterruptNumber*	The interrupt number to be acknowledged.

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_INT_NUM	Invalid Interrupt number.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49.2.2 OS_IntAttachHandler()

```
int32 OS_IntAttachHandler (
            uint32 InterruptNumber,
            osal_task_entry InterruptHandler,
            int32 parameter )
```

DEPRECATED; Associate an interrupt number to a specified handler routine.

Deprecated platform dependencies, removing from OSAL

The call associates a specified C routine to a specified interrupt number. Upon occurring of the InterruptNumber, the InerruptHandler routine will be called and passed the parameter.

Parameters

in	*InterruptNumber*	The Interrupt Number that will cause the start of the ISR
in	*InterruptHandler*	The ISR associated with this interrupt
in	*parameter*	Argument that is passed to the ISR

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	The Interrupt handler pointer is NULL
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49.2.3   OS_IntDisable()

```
int32 OS_IntDisable (
            int32 Level )
```

DEPRECATED; Disable interrupts through Level.

Deprecated platform dependencies, removing from OSAL

Parameters

in	*Level*	the interrupts to disable

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49.2.4   OS_IntEnable()

```
int32 OS_IntEnable (
            int32 Level )
```

DEPRECATED; Enables interrupts through Level.

Deprecated platform dependencies, removing from OSAL

Parameters

in	*Level*	the interrupts to enable

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49.2.5 OS_IntGetMask()

```
int32 OS_IntGetMask (
            uint32 * mask )
```

DEPRECATED; Get the CPU interrupt mask register.

Deprecated platform dependencies, removing from OSAL

Note

> The interrupt bits are architecture-specific.

Parameters

out	*mask*	The register value will be stored to this location

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49.2.6 OS_IntLock()

```
int32 OS_IntLock (
            void )
```

DEPRECATED; Disable interrupts.

Deprecated platform dependencies, removing from OSAL

Returns

> An key value to be passed to OS_IntUnlock() to restore interrupts or error status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49.2.7   OS_IntSetMask()

```
int32 OS_IntSetMask (
            uint32 mask )
```

DEPRECATED; Set the CPU interrupt mask register.

Deprecated platform dependencies, removing from OSAL

Note

> The interrupt bits are architecture-specific.

Parameters

in	*mask*	The value to set in the register

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.49.2.8   OS_IntUnlock()

```
int32 OS_IntUnlock (
            int32 IntLevel )
```

DEPRECATED; Enable interrupts.

Deprecated platform dependencies, removing from OSAL

Parameters

in	*IntLevel*	value from previous call to OS_IntLock()

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.

37.50   OSAL Shared memory APIs

Functions

- int32 OS_ShMemInit (void)

  DEPRECATED - platform dependent, never implemented in framework OSALs.
- int32 OS_ShMemCreate (uint32 ∗Id, uint32 NBytes, const char ∗SegName)

  DEPRECATED - platform dependent, never implemented in framework OSALs.
- int32 OS_ShMemSemTake (uint32 Id)

  DEPRECATED - platform dependent, never implemented in framework OSALs.
- int32 OS_ShMemSemGive (uint32 Id)

  DEPRECATED - platform dependent, never implemented in framework OSALs.
- int32 OS_ShMemAttach (cpuaddr ∗Address, uint32 Id)

  DEPRECATED - platform dependent, never implemented in framework OSALs.
- int32 OS_ShMemGetIdByName (uint32 ∗ShMemId, const char ∗SegName)

  DEPRECATED - platform dependent, never implemented in framework OSALs.

37.50.1   Detailed Description

Deprecated   Not in current implementations

37.50.2   Function Documentation

37.50.2.1   OS_ShMemAttach()

```
int32 OS_ShMemAttach (
            cpuaddr * Address,
            uint32 Id )
```

DEPRECATED - platform dependent, never implemented in framework OSALs.

Deprecated   Never implemented

37.50.2.2   OS_ShMemCreate()

```
int32 OS_ShMemCreate (
            uint32 * Id,
            uint32 NBytes,
            const char * SegName )
```

DEPRECATED - platform dependent, never implemented in framework OSALs.

Deprecated   Never implemented

37.50.2.3 OS_ShMemGetIdByName()

```
int32 OS_ShMemGetIdByName (
            uint32 * ShMemId,
            const char * SegName )
```

DEPRECATED - platform dependent, never implemented in framework OSALs.

Deprecated Never implemented

37.50.2.4 OS_ShMemInit()

```
int32 OS_ShMemInit (
            void  )
```

DEPRECATED - platform dependent, never implemented in framework OSALs.

Deprecated Never implemented

37.50.2.5 OS_ShMemSemGive()

```
int32 OS_ShMemSemGive (
            uint32 Id )
```

DEPRECATED - platform dependent, never implemented in framework OSALs.

Deprecated Never implemented

37.50.2.6 OS_ShMemSemTake()

```
int32 OS_ShMemSemTake (
            uint32 Id )
```

DEPRECATED - platform dependent, never implemented in framework OSALs.

Deprecated Never implemented

37.51   OSAL Heap APIs

Functions

- int32 OS_HeapGetInfo (OS_heap_prop_t ∗heap_prop)

    Return current info on the heap.

37.51.1   Detailed Description

37.51.2   Function Documentation

37.51.2.1   OS_HeapGetInfo()

```
int32 OS_HeapGetInfo (
            OS_heap_prop_t * heap_prop )
```

Return current info on the heap.

Parameters

out	*heap_prop*	Storage buffer for heap info

Returns

Execution status, see OSAL Return Code Defines

37.52 OSAL Error Info APIs

Functions

- int32 OS_GetErrorName (int32 error_num, os_err_name_t ∗err_name)

    Convert an error number to a string.

37.52.1 Detailed Description

37.52.2 Function Documentation

37.52.2.1 OS_GetErrorName()

```
int32 OS_GetErrorName (
        int32 error_num,
        os_err_name_t * err_name )
```

Convert an error number to a string.

Parameters

in	*error_num*	Error number to convert
out	*err_name*	Buffer to store error string

Returns

Execution status, see OSAL Return Code Defines

37.53   OSAL Select APIs

Functions

- int32 OS_SelectMultiple (OS_FdSet ∗ReadSet, OS_FdSet ∗WriteSet, int32 msecs)

  Wait for events across multiple file handles.
- int32 OS_SelectSingle (uint32 objid, uint32 ∗StateFlags, int32 msecs)

  Wait for events on a single file handle.
- int32 OS_SelectFdZero (OS_FdSet ∗Set)

  Clear a FdSet structure.
- int32 OS_SelectFdAdd (OS_FdSet ∗Set, uint32 objid)

  Add an ID to an FdSet structure.
- int32 OS_SelectFdClear (OS_FdSet ∗Set, uint32 objid)

  Clear an ID from an FdSet structure.
- bool OS_SelectFdIsSet (OS_FdSet ∗Set, uint32 objid)

  Check if an FdSet structure contains a given ID.

37.53.1   Detailed Description

37.53.2   Function Documentation

37.53.2.1   OS_SelectFdAdd()

```
int32 OS_SelectFdAdd (
          OS_FdSet * Set,
          uint32 objid )
```

Add an ID to an FdSet structure.

After this call the set will contain the given OSAL ID

Returns

Execution status, see OSAL Return Code Defines

37.53.2.2   OS_SelectFdClear()

```
int32 OS_SelectFdClear (
          OS_FdSet * Set,
          uint32 objid )
```

Clear an ID from an FdSet structure.

After this call the set will no longer contain the given OSAL ID

Returns

Execution status, see OSAL Return Code Defines

37.53.2.3 OS_SelectFdIsSet()

```
bool OS_SelectFdIsSet (
            OS_FdSet * Set,
            uint32 objid )
```

Check if an FdSet structure contains a given ID.

Returns

      Boolean set status

Return values

true	FdSet structure contains ID
false	FDSet structure does not contain ID

37.53.2.4 OS_SelectFdZero()

```
int32 OS_SelectFdZero (
            OS_FdSet * Set )
```

Clear a FdSet structure.

After this call the set will contain no OSAL IDs

Returns

      Execution status, see OSAL Return Code Defines

37.53.2.5 OS_SelectMultiple()

```
int32 OS_SelectMultiple (
            OS_FdSet * ReadSet,
            OS_FdSet * WriteSet,
            int32 msecs )
```

Wait for events across multiple file handles.

Wait for any of the given sets of IDs to be become readable or writable

This function will block until any of the following occurs:

- At least one OSAL ID in the ReadSet is readable

- At least one OSAL ID in the WriteSet is writable

- The timeout has elapsed

The sets are input/output parameters. On entry, these indicate the file handle(s) to wait for. On exit, these are set to the actual file handle(s) that have activity.

If the timeout occurs this returns an error code and all output sets should be empty.

Note

> This does not lock or otherwise protect the file handles in the given sets. If a filehandle supplied via one of the FdSet arguments is closed or modified by another while this function is in progress, the results are undefined. Because of this limitation, it is recommended to use OS_SelectSingle() whenever possible.

Returns

> Execution status, see OSAL Return Code Defines

37.53.2.6 OS_SelectSingle()

```
int32 OS_SelectSingle (
            uint32 objid,
            uint32 * StateFlags,
            int32 msecs )
```

Wait for events on a single file handle.

Wait for a single OSAL filehandle to change state

This function can be used to wait for a single OSAL stream ID to become readable or writable. On entry, the "StateFlags" parameter should be set to the desired state (OS_STREAM_STATE_READABLE and/or OS_STREAM_STATE_WR↩ ITABLE) and upon return the flags will be set to the state actually detected.

As this operates on a single ID, the filehandle is protected during this call, such that another thread accessing the same handle will return an error. However, it is important to note that once the call returns then other threads may then also read/write and affect the state before the current thread can service it.

To mitigate this risk the application may prefer to use the OS_TimedRead/OS_TimedWrite calls.

Returns

> Execution status, see OSAL Return Code Defines

37.54 OSAL Printf APIs

Functions

- void OS_printf (const char ∗string,...) OS_PRINTF(1

    Abstraction for the system printf() call.
- void void OS_printf_disable (void)

    This function disables the output from OS_printf.
- void OS_printf_enable (void)

    This function enables the output from OS_printf.

37.54.1 Detailed Description

37.54.2 Function Documentation

37.54.2.1 OS_printf()

```
void OS_printf (
            const char * string,
             ... )
```

Abstraction for the system printf() call.

This function abstracts out the printf type statements. This is useful for using OS- specific thats that will allow non-polled print statements for the real time systems.

Operates in a manner similar to the printf() call defined by the standard C library and takes all the parameters and formatting options of printf. This abstraction may implement additional buffering, if necessary, to improve the real-time performance of the call.

Strings (including terminator) longer than OS_BUFFER_SIZE will be truncated.

The output of this routine also may be dynamically enabled or disabled by the OS_printf_enable() and OS_printf_↩ disable() calls, respectively.

Parameters

| in | *string* | Format string, followed by additional arguments |

Referenced by CFE_PSP_AttachExceptions(), CFE_PSP_DeleteCDS(), CFE_PSP_DeleteResetArea(), CFE_PSP_↩ DeleteUserReservedArea(), CFE_PSP_InitCDS(), CFE_PSP_InitProcessorReservedMemory(), CFE_PSP_InitReset↩ Area(), CFE_PSP_InitUserReservedArea(), CFE_PSP_Panic(), CFE_PSP_Restart(), CFE_PSP_SetupLocal1Hz(), OS_Application_Run(), and OS_Application_Startup().

37.54.2.2   OS_printf_disable()

```
void void OS_printf_disable (
            void  )
```

This function disables the output from OS_printf.

37.54.2.3   OS_printf_enable()

```
void OS_printf_enable (
            void  )
```

This function enables the output from OS_printf.

37.55   OSAL File Access Option Defines

Macros

- #define OS_READ_ONLY 0
- #define OS_WRITE_ONLY 1
- #define OS_READ_WRITE 2

37.55.1   Detailed Description

37.55.2   Macro Definition Documentation

37.55.2.1   OS_READ_ONLY

```
#define OS_READ_ONLY 0
```

Read only file access

Definition at line 36 of file osapi-os-filesys.h.

37.55.2.2   OS_READ_WRITE

```
#define OS_READ_WRITE 2
```

Read write file access

Definition at line 38 of file osapi-os-filesys.h.

37.55.2.3   OS_WRITE_ONLY

```
#define OS_WRITE_ONLY 1
```

Write only file access

Definition at line 37 of file osapi-os-filesys.h.

37.56   OSAL Refernce Point For Seek Offset Defines

Macros

- #define OS_SEEK_SET 0
- #define OS_SEEK_CUR 1
- #define OS_SEEK_END 2

37.56.1   Detailed Description

37.56.2   Macro Definition Documentation

37.56.2.1   OS_SEEK_CUR

```
#define OS_SEEK_CUR 1
```

Seek offset current

Definition at line 45 of file osapi-os-filesys.h.

37.56.2.2   OS_SEEK_END

```
#define OS_SEEK_END 2
```

Seek offset end

Definition at line 46 of file osapi-os-filesys.h.

37.56.2.3   OS_SEEK_SET

```
#define OS_SEEK_SET 0
```

Seek offset set

Definition at line 44 of file osapi-os-filesys.h.

37.57 OSAL Volume Type Defines

Macros

- #define FS_BASED 0
- #define RAM_DISK 1
- #define EEPROM_DISK 2
- #define ATA_DISK 3

37.57.1 Detailed Description

37.57.2 Macro Definition Documentation

37.57.2.1 ATA_DISK

```
#define ATA_DISK 3
```

Deprecated Volume type ATA disk

Definition at line 60 of file osapi-os-filesys.h.

37.57.2.2 EEPROM_DISK

```
#define EEPROM_DISK 2
```

Deprecated Volume type EEPROM disk

Definition at line 59 of file osapi-os-filesys.h.

37.57.2.3 FS_BASED

```
#define FS_BASED 0
```

Deprecated Volume type FS based

Definition at line 57 of file osapi-os-filesys.h.

37.57.2.4 RAM_DISK

```
#define RAM_DISK 1
```

Deprecated Volume type RAM disk

Definition at line 58 of file osapi-os-filesys.h.

37.58   OSAL Standard File APIs

Functions

- int32 OS_creat (const char ∗path, int32 access)

    Creates a file specified by path.
- int32 OS_open (const char ∗path, int32 access, uint32 mode)

    Opens a file.
- int32 OS_close (uint32 filedes)

    Closes an open file handle.
- int32 OS_read (uint32 filedes, void ∗buffer, uint32 nbytes)

    Read from a file handle.
- int32 OS_write (uint32 filedes, const void ∗buffer, uint32 nbytes)

    Write to a file handle.
- int32 OS_TimedRead (uint32 filedes, void ∗buffer, uint32 nbytes, int32 timeout)

    File/Stream input read with a timeout.
- int32 OS_TimedWrite (uint32 filedes, const void ∗buffer, uint32 nbytes, int32 timeout)

    File/Stream output write with a timeout.
- int32 OS_chmod (const char ∗path, uint32 access)

    Changes the permissions of a file.
- int32 OS_stat (const char ∗path, os_fstat_t ∗filestats)

    Obtain information about a file or directory.
- int32 OS_lseek (uint32 filedes, int32 offset, uint32 whence)

    Seeks to the specified position of an open file.
- int32 OS_remove (const char ∗path)

    Removes a file from the file system.
- int32 OS_rename (const char ∗old_filename, const char ∗new_filename)

    Renames a file.
- int32 OS_cp (const char ∗src, const char ∗dest)

    Copies a single file from src to dest.
- int32 OS_mv (const char ∗src, const char ∗dest)

    Move a single file from src to dest.
- int32 OS_FDGetInfo (uint32 filedes, OS_file_prop_t ∗fd_prop)

    Obtain information about an open file.
- int32 OS_FileOpenCheck (const char ∗Filename)

    Checks to see if a file is open.
- int32 OS_CloseAllFiles (void)

    Close all open files.
- int32 OS_CloseFileByName (const char ∗Filename)

    Close a file by filename.

37.58.1   Detailed Description

37.58.2   Function Documentation

37.58.2.1 OS_chmod()

```
int32 OS_chmod (
            const char * path,
            uint32 access )
```

Changes the permissions of a file.

Parameters

in	*path*	File to change
in	*access*	Desired access mode - see OSAL File Access Option Defines

Note

> Some file systems do not implement permissions

Returns

> Execution status, see OSAL Return Code Defines

37.58.2.2 OS_close()

```
int32 OS_close (
            uint32 filedes )
```

Closes an open file handle.

This closes regular file handles and any other file-like resource, such as network streams or pipes.

Parameters

in	*filedes*	The handle ID to operate on

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if file descriptor could not be closed
OS_ERR_INVALID_ID	if the file descriptor passed in is invalid

37.58.2.3   OS_CloseAllFiles()

```
int32 OS_CloseAllFiles (
            void  )
```

Close all open files.

Closes All open files that were opened through the OSAL

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if one or more file close returned an error

37.58.2.4   OS_CloseFileByName()

```
int32 OS_CloseFileByName (
            const char * Filename )
```

Close a file by filename.

Allows a file to be closed by name. This will only work if the name passed in is the same name used to open the file.

Parameters

in	*Filename*	The file to close

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_FS_ERR_PATH_INVALID	if the file is not found
OS_ERROR	if the file close returned an error

37.58.2.5 OS_cp()

```
int32 OS_cp (
            const char * src,
            const char * dest )
```

Copies a single file from src to dest.

Note

> The behvior of this API on an open file is not defined at the OSAL level due to dependencies on the underlying OS which may or may not allow the related operation based on a varierty of potential configurations. For portability, it is recommended that applications ensure the file is closed prior to removal.

Parameters

in	*src*	The source file to operate on
in	*dest*	The destination file

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if the file could not be accessed
OS_INVALID_POINTER	if src or dest are NULL
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_FS_ERR_PATH_TOO_LONG	if the paths given are too long to be stored locally
OS_FS_ERR_NAME_TOO_LONG	if the dest name is too long to be stored locally

37.58.2.6 OS_creat()

```
int32 OS_creat (
            const char * path,
            int32 access )
```

Creates a file specified by path.

Creates a file specified by const char ∗path, with read/write permissions by access. The file is also automatically opened by the create call.

Parameters

in	*path*	File name to create
in	*access*	Intended access mode - see OSAL File Access Option Defines

Note

> Valid handle IDs are never negative. Failure of this call can be checked by testing if the result is less than 0.

Returns

> A file handle ID or appropriate error code, see OSAL Return Code Defines

Return values

OS_INVALID_POINTER	if path is NULL
OS_FS_ERR_PATH_TOO_LONG	if path exceeds the maximum number of chars
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_FS_ERR_NAME_TOO_LONG	if the name of the file is too long
OS_ERROR	if permissions are unknown or OS call fails
OS_ERR_NO_FREE_IDS	if there are no free file descriptors left

37.58.2.7 OS_FDGetInfo()

```
int32 OS_FDGetInfo (
          uint32 filedes,
          OS_file_prop_t * fd_prop )
```

Obtain information about an open file.

Copies the information of the given file descriptor into a structure passed in

Parameters

in	*filedes*	The handle ID to operate on
out	*fd_prop*	Storage buffer for file information

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the file descriptor passed in is invalid

37.58.2.8   OS_FileOpenCheck()

```
int32 OS_FileOpenCheck (
            const char * Filename )
```

Checks to see if a file is open.

This function takes a filename and determines if the file is open. The function will return success if the file is open.

Parameters

in	*Filename*	The file to operate on

Returns

>   OS_SUCCESS if the file is open, or appropriate error code

Return values

OS_ERROR	if the file is not open

37.58.2.9   OS_lseek()

```
int32 OS_lseek (
            uint32 filedes,
            int32 offset,
            uint32 whence )
```

Seeks to the specified position of an open file.

Sets the read/write pointer to a specific offset in a specific file.

Parameters

in	*filedes*	The handle ID to operate on
in	*offset*	The file offset to seek to
in	*whence*	The reference point for offset, see OSAL Refernce Point For Seek Offset Defines

Returns

>   Byte offset from the beginning of the file or appropriate error code, see OSAL Return Code Defines

Return values

OS_ERR_INVALID_ID	if the file descriptor passed in is invalid
OS_ERROR	if OS call failed

37.58.2.10 OS_mv()

```
int32 OS_mv (
            const char * src,
            const char * dest )
```

Move a single file from src to dest.

This first attempts to rename the file, which is faster if the source and destination reside on the same file system.

If this fails, it falls back to copying the file and removing the original.

Note

> The behvior of this API on an open file is not defined at the OSAL level due to dependencies on the underlying OS which may or may not allow the related operation based on a varienty of potential configurations. For portability, it is recommended that applications ensure the file is closed prior to removal.

Parameters

in	*src*	The source file to operate on
in	*dest*	The destination file

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if the file could not be renamed.
OS_INVALID_POINTER	if src or dest are NULL
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_FS_ERR_PATH_TOO_LONG	if the paths given are too long to be stored locally
OS_FS_ERR_NAME_TOO_LONG	if the dest name is too long to be stored locally

37.58.2.11 OS_open()

```
int32 OS_open (
            const char * path,
            int32 access,
            uint32 mode )
```

Opens a file.

Opens a file.

Parameters

in	*path*	File name to create
in	*access*	Intended access mode - see OSAL File Access Option Defines
in	*mode*	The file permissions. This parameter is passed through to the native open call, but will be ignored. The file mode (or permissions) are ignored by the POSIX open call when the O_CREAT access flag is not passed in.

Note

> Valid handle IDs are never negative. Failure of this call can be checked by testing if the result is less than 0.

Returns

> A file handle ID or appropriate error code, see OSAL Return Code Defines

Return values

OS_INVALID_POINTER	if path is NULL
OS_FS_ERR_PATH_TOO_LONG	if path exceeds the maximum number of chars
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_FS_ERR_NAME_TOO_LONG	if the name of the file is too long
OS_ERROR	if permissions are unknown or OS call fails
OS_ERR_NO_FREE_IDS	if there are no free file descriptors left

37.58.2.12   OS_read()

```
int32 OS_read (
        uint32 filedes,
        void * buffer,
        uint32 nbytes )
```

Read from a file handle.

Reads up to nbytes from a file, and puts them into buffer.

Parameters

in	*filedes*	The handle ID to operate on
out	*buffer*	Storage location for file data
in	*nbytes*	Maximum number of bytes to read

Note

> All OSAL error codes are negative int32 values. Failure of this call can be checked by testing if the result is less than 0.

Returns

> A non-negative byte count or appropriate error code, see OSAL Return Code Defines

Return values

OS_INVALID_POINTER	if buffer is a null pointer
OS_ERROR	if OS call failed
OS_ERR_INVALID_ID	if the file descriptor passed in is invalid

37.58.2.13 OS_remove()

```
int32 OS_remove (
            const char * path )
```

Removes a file from the file system.

Removes a given filename from the drive

Note

> The behvior of this API on an open file is not defined at the OSAL level due to dependencies on the underlying OS which may or may not allow the related operation based on a variety of potential configurations. For portability, it is recommended that applications ensure the file is closed prior to removal.

Parameters

in	*path*	The file to operate on

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if there is no device or the driver returns error
OS_INVALID_POINTER	if path is NULL
OS_FS_ERR_PATH_TOO_LONG	if path is too long to be stored locally
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_FS_ERR_NAME_TOO_LONG	if the name of the file to remove is too long

37.58.2.14   OS_rename()

```
int32 OS_rename (
            const char * old_filename,
            const char * new_filename )
```

Renames a file.

Changes the name of a file, where the source and destination reside on the same file system.

Note

> The behvior of this API on an open file is not defined at the OSAL level due to dependencies on the underlying OS which may or may not allow the related operation based on a variety of potential configurations. For portability, it is recommended that applications ensure the file is closed prior to removal.

Parameters

in	*old_filename*	The original filename
in	*new_filename*	The desired filename

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if the file could not be opened or renamed.
OS_INVALID_POINTER	if old or new are NULL
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_FS_ERR_PATH_TOO_LONG	if the paths given are too long to be stored locally
OS_FS_ERR_NAME_TOO_LONG	if the new name is too long to be stored locally

37.58.2.15   OS_stat()

```
int32 OS_stat (
            const char * path,
            os_fstat_t * filestats )
```

Obtain information about a file or directory.

Returns information about a file or directory in a os_fstat_t structure

Parameters

in	*path*	The file to operate on
out	*filestats*	Buffer to store file information

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if path or filestats is NULL
OS_FS_ERR_PATH_TOO_LONG	if the path is too long to be stored locally
OS_FS_ERR_NAME_TOO_LONG	if the name of the file is too long to be stored
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_ERROR	if the OS call failed

37.58.2.16 OS_TimedRead()

```
int32 OS_TimedRead (
        uint32 filedes,
        void * buffer,
        uint32 nbytes,
        int32 timeout )
```

File/Stream input read with a timeout.

This implements a time-limited read and is primarily intended for use with sockets but may also work with any other stream-like resource that the underlying OS supports.

If data is immediately available on the file/socket, this will return that data along with the actual number of bytes that were immediately available. It will not block.

If no data is immediately available, this will wait up to the given timeout for data to appear. If no data appears within the timeout period, then this returns an error code (not zero).

In all cases this will return successfully as soon as at least 1 byte of actual data is available. It will not attempt to read the entire input buffer.

If an EOF condition occurs prior to timeout, this function returns zero.

Parameters

in	*filedes*	The handle ID to operate on
in	*buffer*	Source location for file data
in	*nbytes*	Maximum number of bytes to read
in	*timeout*	Maximum time to wait, in milliseconds (OS_PEND = forever)

Returns

Byte count on success, zero for timeout, or appropriate error code, see OSAL Return Code Defines

37.58.2.17   OS_TimedWrite()

```
int32 OS_TimedWrite (
          uint32 filedes,
          const void * buffer,
          uint32 nbytes,
          int32 timeout )
```

File/Stream output write with a timeout.

This implements a time-limited write and is primarily intended for use with sockets but may also work with any other stream-like resource that the underlying OS supports.

If output buffer space is immediately available on the file/socket, this will place data into the buffer and return the actual number of bytes that were queued for output. It will not block.

If no output buffer space is immediately available, this will wait up to the given timeout for space to become available. If no space becomes available within the timeout period, then this returns an error code (not zero).

In all cases this will return successfully as soon as at least 1 byte of actual data is output. It will *not* attempt to write the entire output buffer.

If an EOF condition occurs prior to timeout, this function returns zero.

Parameters

in	*filedes*	The handle ID to operate on
in	*buffer*	Source location for file data
in	*nbytes*	Maximum number of bytes to read
in	*timeout*	Maximum time to wait, in milliseconds (OS_PEND = forever)

Returns

Byte count on success, zero for timeout, or appropriate error code, see OSAL Return Code Defines

37.58.2.18   OS_write()

```
int32 OS_write (
          uint32 filedes,
          const void * buffer,
          uint32 nbytes )
```

Write to a file handle.

Writes to a file. copies up to a maximum of nbytes of buffer to the file described in filedes

Parameters

in	*filedes*	The handle ID to operate on
in	*buffer*	Source location for file data
in	*nbytes*	Maximum number of bytes to read

Note

All OSAL error codes are negative int32 values. Failure of this call can be checked by testing if the result is less than 0.

Returns

A non-negative byte count or appropriate error code, see OSAL Return Code Defines

Return values

OS_INVALID_POINTER	if buffer is NULL
OS_ERROR	if OS call failed
OS_ERR_INVALID_ID	if the file descriptor passed in is invalid

37.59   OSAL Directory APIs

Functions

- os_dirp_t OS_opendir (const char ∗path)

     Opens a directory for searching.
- int32 OS_closedir (os_dirp_t directory)
- void OS_rewinddir (os_dirp_t directory)
- os_dirent_t ∗ OS_readdir (os_dirp_t directory)
- int32 OS_DirectoryOpen (uint32 ∗dir_id, const char ∗path)

     Opens a directory.
- int32 OS_DirectoryClose (uint32 dir_id)

     Closes an open directory.
- int32 OS_DirectoryRewind (uint32 dir_id)

     Rewinds an open directory.
- int32 OS_DirectoryRead (uint32 dir_id, os_dirent_t ∗dirent)

     Reads the next name in the directory.
- int32 OS_mkdir (const char ∗path, uint32 access)

     Makes a new directory.
- int32 OS_rmdir (const char ∗path)

     Removes a directory from the file system.

37.59.1   Detailed Description

37.59.2   Function Documentation

37.59.2.1   OS_closedir()

```
int32 OS_closedir (
          os_dirp_t directory )
```

37.59.2.2   OS_DirectoryClose()

```
int32 OS_DirectoryClose (
          uint32 dir_id )
```

Closes an open directory.

The directory referred to by dir_id will be closed

Parameters

in	*dir↩* *_id*	The handle ID of the directory

Returns

Execution status, see OSAL Return Code Defines

37.59.2.3 OS_DirectoryOpen()

```
int32 OS_DirectoryOpen (
            uint32 * dir_id,
            const char * path )
```

Opens a directory.

Prepares for reading the files within a directory

Parameters

out	*dir↩* *_id*	The non-zero handle ID of the directory
in	*path*	The directory to open

Returns

Execution status, see OSAL Return Code Defines

37.59.2.4 OS_DirectoryRead()

```
int32 OS_DirectoryRead (
            uint32 dir_id,
            os_dirent_t * dirent )
```

Reads the next name in the directory.

Obtains directory entry data for the next file from an open directory

Parameters

in	*dir↩* *_id*	The handle ID of the directory
out	*dirent*	Buffer to store directory entry information

Returns

Execution status, see OSAL Return Code Defines

37.59.2.5   OS_DirectoryRewind()

```
int32 OS_DirectoryRewind (
            uint32 dir_id )
```

Rewinds an open directory.

Resets a directory read handle back to the first file.

Parameters

in	*dir↩* *_id*	The handle ID of the directory

Returns

Execution status, see OSAL Return Code Defines

37.59.2.6   OS_mkdir()

```
int32 OS_mkdir (
            const char * path,
            uint32 access )
```

Makes a new directory.

Makes a directory specified by path.

Parameters

in	*path*	The new directory name
in	*access*	The permissions for the directory (reserved for future use)

Note

Current implementations do not utilize the "access" parameter. Applications should still pass the intended value (OS_READ_WRITE or OS_READ_ONLY) to be compatible with future implementations.

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if path is NULL
OS_FS_ERR_PATH_TOO_LONG	if the path is too long to be stored locally
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_ERROR	if the OS call fails

37.59.2.7 OS_opendir()

```
os_dirp_t OS_opendir (
            const char * path )
```

Opens a directory for searching.

Deprecated Replaced by OS_DirectoryOpen()

37.59.2.8 OS_readdir()

```
os_dirent_t* OS_readdir (
            os_dirp_t directory )
```

37.59.2.9 OS_rewinddir()

```
void OS_rewinddir (
            os_dirp_t directory )
```

37.59.2.10 OS_rmdir()

```
int32 OS_rmdir (
            const char * path )
```

Removes a directory from the file system.

Removes a directory from the structure. The directory must be empty prior to this operation.

Parameters

in	*path*	The directory to remove

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if path is NULL
OS_FS_ERR_PATH_INVALID	if path cannot be parsed
OS_FS_ERR_PATH_TOO_LONG	
OS_ERROR	if the directory remove operation failed

37.60 OSAL File System Level APIs

Functions

- int32 OS_FileSysAddFixedMap (uint32 ∗filesys_id, const char ∗phys_path, const char ∗virt_path)

  Create a fixed mapping between an existing directory and a virtual OSAL mount point.
- int32 OS_mkfs (char ∗address, const char ∗devname, const char ∗volname, uint32 blocksize, uint32 numblocks)

  Makes a file system on the target.
- int32 OS_mount (const char ∗devname, const char ∗mountpoint)

  Mounts a file system.
- int32 OS_initfs (char ∗address, const char ∗devname, const char ∗volname, uint32 blocksize, uint32 numblocks)

  Initializes an existing file system.
- int32 OS_rmfs (const char ∗devname)

  Removes a file system.
- int32 OS_unmount (const char ∗mountpoint)

  Unmounts a mounted file system.
- int32 OS_fsBlocksFree (const char ∗name)

  Obtain number of blocks free.
- int32 OS_fsBytesFree (const char ∗name, uint64 ∗bytes_free)

  Obtains the number of free bytes in a volume.
- int32 OS_chkfs (const char ∗name, bool repair)

  Checks the health of a file system and repairs it if necessary.
- int32 OS_FS_GetPhysDriveName (char ∗PhysDriveName, const char ∗MountPoint)

  Obtains the physical drive name associated with a mount point.
- int32 OS_TranslatePath (const char ∗VirtualPath, char ∗LocalPath)

  Translates a OSAL Virtual file system path to a host Local path.
- int32 OS_GetFsInfo (os_fsinfo_t ∗filesys_info)

  Returns information about the file system.

37.60.1 Detailed Description

37.60.2 Function Documentation

37.60.2.1 OS_chkfs()

```
int32 OS_chkfs (
          const char * name,
          bool repair )
```

Checks the health of a file system and repairs it if necessary.

Checks the drives for inconsistencies and optionally also repairs it

Note

not all operating systems implement this function

Parameters

in	*name*	The device/path to operate on
in	*repair*	Whether to also repair inconsistencies

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	Name is NULL
OS_ERR_NOT_IMPLEMENTED	Not implemented.
OS_ERROR	Failed execution.

37.60.2.2   OS_FileSysAddFixedMap()

```
int32 OS_FileSysAddFixedMap (
            uint32 * filesys_id,
            const char * phys_path,
            const char * virt_path )
```

Create a fixed mapping between an existing directory and a virtual OSAL mount point.

This mimics the behavior of a "FS_BASED" entry in the VolumeTable but is registered at runtime. It is intended to be called by the PSP/BSP prior to starting the application.

Parameters

out	*filesys_id*	A non-zero OSAL ID reflecting the file system
in	*phys_path*	The native system directory (an existing mount point)
in	*virt_path*	The virtual mount point of this filesystem

Returns

Execution status, see OSAL Return Code Defines

Referenced by OS_Application_Startup().

37.60.2.3 OS_FS_GetPhysDriveName()

```
int32 OS_FS_GetPhysDriveName (
          char * PhysDriveName,
          const char * MountPoint )
```

Obtains the physical drive name associated with a mount point.

Returns the name of the physical volume associated with the drive, when given the OSAL mount point of the drive

Parameters

out	*PhysDriveName*	Buffer to store physical drive name
in	*MountPoint*	OSAL mount point

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if either parameter is NULL
OS_ERROR	if the mountpoint could not be found

37.60.2.4 OS_fsBlocksFree()

```
int32 OS_fsBlocksFree (
          const char * name )
```

Obtain number of blocks free.

Returns the number of free blocks in a volume

Parameters

in	*name*	The device/path to operate on

Returns

Block count or appropriate error code, see OSAL Return Code Defines

Return values

OS_INVALID_POINTER	if name is NULL

Return values

OS_FS_ERR_PATH_TOO_LONG	if the name is too long
OS_ERROR	if the OS call failed

37.60.2.5   OS_fsBytesFree()

```
int32 OS_fsBytesFree (
            const char * name,
            uint64 * bytes_free )
```

Obtains the number of free bytes in a volume.

Returns the number of free bytes in a volume

Note

uses a 64 bit data type to support filesystems that are greater than 4 Gigabytes

Parameters

in	*name*	The device/path to operate on
out	*bytes_free*	The number of free bytes

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if name is NULL
OS_FS_ERR_PATH_TOO_LONG	if the name is too long
OS_ERROR	if the OS call failed

37.60.2.6   OS_GetFsInfo()

```
int32 OS_GetFsInfo (
            os_fsinfo_t * filesys_info )
```

Returns information about the file system.

Returns information about the file system in an os_fsinfo_t. This includes the number of open files and file systems

Parameters

out	*filesys_info*	Buffer to store filesystem information

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if filesys_info is NULL

37.60.2.7 OS_initfs()

```
int32 OS_initfs (
            char * address,
            const char * devname,
            const char * volname,
            uint32 blocksize,
            uint32 numblocks )
```

Initializes an existing file system.

Initializes a file system on the target.

Note

The "volname" parameter of RAM disks should always begin with the string "RAM", e.g. "RAMDISK" or "RA↩
M0","RAM1", etc if multiple devices are created. The underlying implementation uses this to select the correct
filesystem type/format, and this may also be used to differentiate between RAM disks and real physical disks.

Parameters

in	*address*	The address at which to start the new disk. If address == 0, then space will be allocated by the OS
in	*devname*	The underlying kernel device to use, if applicable.
in	*volname*	The name of the volume (see note)
in	*blocksize*	The size of a single block on the drive
in	*numblocks*	The number of blocks to allocate for the drive

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if devname or volname are NULL
OS_FS_ERR_PATH_TOO_LONG	if the name is too long
OS_FS_ERR_DEVICE_NOT_FREE	if the volume table is full
OS_FS_ERR_DRIVE_NOT_CREATED	on error

37.60.2.8   OS_mkfs()

```
int32 OS_mkfs (
            char * address,
            const char * devname,
            const char * volname,
            uint32 blocksize,
            uint32 numblocks )
```

Makes a file system on the target.

Makes a file system on the target. Highly dependent on underlying OS and dependent on OS volume table definition.

Note

The "volname" parameter of RAM disks should always begin with the string "RAM", e.g. "RAMDISK" or "RA↩ M0","RAM1", etc if multiple devices are created. The underlying implementation uses this to select the correct filesystem type/format, and this may also be used to differentiate between RAM disks and real physical disks.

Parameters

in	*address*	The address at which to start the new disk. If address == 0 space will be allocated by the OS.
in	*devname*	The underlying kernel device to use, if applicable.
in	*volname*	The name of the volume (see note)
in	*blocksize*	The size of a single block on the drive
in	*numblocks*	The number of blocks to allocate for the drive

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_INVALID_POINTER	if devname is NULL
OS_FS_ERR_DRIVE_NOT_CREATED	if the OS calls to create the the drive failed
OS_FS_ERR_DEVICE_NOT_FREE	if the volume table is full
OS_SUCCESS	on creating the disk

37.60.2.9 OS_mount()

```
int32 OS_mount (
            const char * devname,
            const char * mountpoint )
```

Mounts a file system.

Mounts a file system / block device at the given mount point.

Parameters

in	*devname*	The name of the drive to mount. devname is the same from OS_mkfs
in	*mountpoint*	The name to call this disk from now on

Returns

Execution status, see OSAL Return Code Defines

37.60.2.10 OS_rmfs()

```
int32 OS_rmfs (
            const char * devname )
```

Removes a file system.

This function will remove or un-map the target file system. Note that this is not the same as un-mounting the file system.

Parameters

in	*devname*	The name of the "generic" drive

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if devname is NULL
OS_ERROR	is the drive specified cannot be located

37.60.2.11   OS_TranslatePath()

```
int32 OS_TranslatePath (
            const char * VirtualPath,
            char * LocalPath )
```

Translates a OSAL Virtual file system path to a host Local path.

Translates a virtual path to an actual system path name

Parameters

in	*VirtualPath*	OSAL virtual path name
out	*LocalPath*	Buffer to store native/translated path name

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if either parameter is NULL

37.60.2.12   OS_unmount()

```
int32 OS_unmount (
            const char * mountpoint )
```

Unmounts a mounted file system.

This function will unmount a drive from the file system and make all open file descriptors useless.

Note

Any open file descriptors referencing this file system should be closed prior to unmounting a drive

Parameters

in	*mountpoint*	The mount point to remove from OS_mount

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if name is NULL
OS_FS_ERR_PATH_TOO_LONG	if the absolute path given is too long
OS_ERROR	if the OS calls failed

37.61 OSAL Shell APIs

Functions

- int32 OS_ShellOutputToFile (const char ∗Cmd, uint32 filedes)

    Executes the command and sends output to a file.

37.61.1 Detailed Description

37.61.2 Function Documentation

37.61.2.1 OS_ShellOutputToFile()

```
int32 OS_ShellOutputToFile (
            const char * Cmd,
            uint32 filedes )
```

Executes the command and sends output to a file.

Takes a shell command in and writes the output of that command to the specified file The output file must be opened previously with write access (OS_WRITE_ONLY or OS_READ_WRITE).

Parameters

in	*Cmd*	Command to pass to shell
in	*filedes*	File to send output to.

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if the command was not executed properly
OS_ERR_INVALID_ID	if the file descriptor passed in is invalid

37.62 OSAL Dynamic Loader and Symbol APIs

Functions

- int32 OS_SymbolLookup (cpuaddr *symbol_address, const char *symbol_name)

     Find the Address of a Symbol.
- int32 OS_SymbolTableDump (const char *filename, uint32 size_limit)

     Dumps the system symbol table to a file.
- int32 OS_ModuleLoad (uint32 *module_id, const char *module_name, const char *filename)

     Loads an object file.
- int32 OS_ModuleUnload (uint32 module_id)

     Unloads the module file.
- int32 OS_ModuleInfo (uint32 module_id, OS_module_prop_t *module_info)

     Obtain information about a module.

37.62.1 Detailed Description

37.62.2 Function Documentation

37.62.2.1 OS_ModuleInfo()

```
int32 OS_ModuleInfo (
          uint32 module_id,
          OS_module_prop_t * module_info )
```

Obtain information about a module.

Returns information about the loadable module

Parameters

in	*module_id*	OSAL ID of the previously the loaded module
out	*module_info*	Buffer to store module information

Returns

     Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the module id invalid
OS_INVALID_POINTER	if the pointer to the ModuleInfo structure is invalid

37.62.2.2   OS_ModuleLoad()

```
int32 OS_ModuleLoad (
            uint32 * module_id,
            const char * module_name,
            const char * filename )
```

Loads an object file.

Loads an object file into the running operating system

Parameters

out	*module_id*	Non-zero OSAL ID corresponding to the loaded module
in	*module_name*	Name of module
in	*filename*	File containing the object code to load

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if the module cannot be loaded
OS_INVALID_POINTER	if one of the parameters is NULL
OS_ERR_NO_FREE_IDS	if the module table is full
OS_ERR_NAME_TAKEN	if the name is in use

37.62.2.3   OS_ModuleUnload()

```
int32 OS_ModuleUnload (
            uint32 module_id )
```

Unloads the module file.

Unloads the module file from the running operating system

Parameters

in	*module↩ _id*	OSAL ID of the previously the loaded module

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if the module is invalid or cannot be unloaded

37.62.2.4 OS_SymbolLookup()

```
int32 OS_SymbolLookup (
            cpuaddr * symbol_address,
            const char * symbol_name )
```

Find the Address of a Symbol.

This calls to the OS dynamic symbol lookup implementation, and/or checks a static symbol table for a matching symbol name.

The static table is intended to support embedded targets that do not have module loading capability or have it disabled.

Parameters

out	*symbol_address*	Set to the address of the symbol
in	*symbol_name*	Name of the symbol to look up

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERROR	if the symbol could not be found
OS_INVALID_POINTER	if one of the pointers passed in are NULL

37.62.2.5 OS_SymbolTableDump()

```
int32 OS_SymbolTableDump (
          const char * filename,
          uint32 size_limit )
```

Dumps the system symbol table to a file.

Dumps the system symbol table to the specified filename

Parameters

`in`	*filename*	File to write to
`in`	*size_limit*	Maximum number of bytes to write

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_NOT_IMPLEMENTED	Not implemented.
OS_ERROR	if the symbol table could not be read or dumped

37.63   OSAL Socket Address APIs

Functions

- • int32 OS_SocketAddrInit (OS_SockAddr_t ∗Addr, OS_SocketDomain_t Domain)

  Initialize a socket address structure to hold an address of the given family.
- • int32 OS_SocketAddrToString (char ∗buffer, uint32 buflen, const OS_SockAddr_t ∗Addr)

  Get a string representation of a network host address.
- • int32 OS_SocketAddrFromString (OS_SockAddr_t ∗Addr, const char ∗string)

  Set a network host address from a string representation.
- • int32 OS_SocketAddrGetPort (uint16 ∗PortNum, const OS_SockAddr_t ∗Addr)

  Get the port number of a network address.
- • int32 OS_SocketAddrSetPort (OS_SockAddr_t ∗Addr, uint16 PortNum)

  Set the port number of a network address.

37.63.1   Detailed Description

These functions provide a means to manipulate network addresses in a manner that is (mostly) agnostic to the actual network address type.

Every network address should be representable as a string (i.e. dotted decimal IP, etc). This can serve as a the "common denominator" to all address types.

37.63.2   Function Documentation

37.63.2.1   OS_SocketAddrFromString()

```
int32 OS_SocketAddrFromString (
            OS_SockAddr_t * Addr,
            const char * string )
```

Set a network host address from a string representation.

The specific format of the output string depends on the address family.

The address structure should have been previously initialized using OS_SocketAddrInit() to set the address family type.

Note

> For IPv4, this would typically be the dotted-decimal format (X.X.X.X). It is up to the discretion of the underlying implementation whether to accept hostnames, as this depends on the availability of DNS services. Since many embedded deployments do not have name services, this should not be relied upon.

Parameters

out	*Addr*	The address buffer to initialize
in	*string*	The string to initialize the address from.

Returns

Execution status, see OSAL Return Code Defines

37.63.2.2 OS_SocketAddrGetPort()

```
int32 OS_SocketAddrGetPort (
            uint16 * PortNum,
            const OS_SockAddr_t * Addr )
```

Get the port number of a network address.

For network prototcols that have the concept of a port number (such as TCP/IP and UDP/IP) this function gets the port number from the address structure.

Parameters

out	*PortNum*	Buffer to store the port number
in	*Addr*	The network address buffer

Returns

Execution status, see OSAL Return Code Defines

37.63.2.3 OS_SocketAddrInit()

```
int32 OS_SocketAddrInit (
            OS_SockAddr_t * Addr,
            OS_SocketDomain_t Domain )
```

Initialize a socket address structure to hold an address of the given family.

The address is set to a suitable default value for the family.

Parameters

out	*Addr*	The address buffer to initialize
in	*Domain*	The address family

Returns

Execution status, see OSAL Return Code Defines

37.63.2.4   OS_SocketAddrSetPort()

```
int32 OS_SocketAddrSetPort (
            OS_SockAddr_t * Addr,
            uint16 PortNum )
```

Set the port number of a network address.

For network prototcols that have the concept of a port number (such as TCP/IP and UDP/IP) this function sets the port number from the address structure.

Parameters

in	*PortNum*	The port number to set
out	*Addr*	The network address buffer

Returns

Execution status, see OSAL Return Code Defines

37.63.2.5   OS_SocketAddrToString()

```
int32 OS_SocketAddrToString (
            char * buffer,
            uint32 buflen,
            const OS_SockAddr_t * Addr )
```

Get a string representation of a network host address.

The specific format of the output string depends on the address family.

This string should be suitable to pass back into OS_SocketAddrFromString() which should recreate the same network address, and it should also be meaningful to a user of printed or logged as a C string.

Note

For IPv4, this would typically be the dotted-decimal format (X.X.X.X).

Parameters

out	*buffer*	Buffer to hold the output string
in	*buflen*	Maximum length of the output string
in	*Addr*	The network address buffer to convert

Returns

Execution status, see OSAL Return Code Defines

37.64   OSAL Socket Management APIs

Functions

- int32 OS_SocketOpen (uint32 *sock_id, OS_SocketDomain_t Domain, OS_SocketType_t Type)

    Opens a socket.
- int32 OS_SocketBind (uint32 sock_id, const OS_SockAddr_t *Addr)

    Binds a socket to a given local address.
- int32 OS_SocketConnect (uint32 sock_id, const OS_SockAddr_t *Addr, int32 timeout)

    Connects a socket to a given remote address.
- int32 OS_SocketAccept (uint32 sock_id, uint32 *connsock_id, OS_SockAddr_t *Addr, int32 timeout)

    Waits for and accept the next incoming connection on the given socket.
- int32 OS_SocketRecvFrom (uint32 sock_id, void *buffer, uint32 buflen, OS_SockAddr_t *RemoteAddr, int32 timeout)

    Reads data from a message-oriented (datagram) socket.
- int32 OS_SocketSendTo (uint32 sock_id, const void *buffer, uint32 buflen, const OS_SockAddr_t *RemoteAddr)

    Sends data to a message-oriented (datagram) socket.
- int32 OS_SocketGetIdByName (uint32 *sock_id, const char *sock_name)

    Gets an OSAL ID from a given name.
- int32 OS_SocketGetInfo (uint32 sock_id, OS_socket_prop_t *sock_prop)

    Gets information about an OSAL Socket ID.
- int32 OS_NetworkGetID (void)

    Gets the network ID of the local machine.
- int32 OS_NetworkGetHostName (char *host_name, uint32 name_len)

    Gets the local machine network host name.

37.64.1   Detailed Description

These functions are loosely related to the BSD Sockets API but made to be more consistent with other OSAL API functions. That is, they operate on OSAL IDs (32-bit opaque number values) and return an OSAL error code.

OSAL Socket IDs are very closely related to File IDs and share the same ID number space. Additionally, the file OS_↩read() / OS_write() / OS_close() calls also work on sockets.

Note that all of functions may return OS_ERR_NOT_IMPLEMENTED if network support is not configured at compile time.

37.64.2   Function Documentation

37.64.2.1   OS_NetworkGetHostName()

```
int32 OS_NetworkGetHostName (
          char * host_name,
          uint32 name_len )
```

Gets the local machine network host name.

If configured in the underlying network stack, this function retrieves the local hostname of the system.

Parameters

out	*host_name*	Buffer to hold name information
in	*name_len*	Maximum length of host name buffer

Returns

Execution status, see OSAL Return Code Defines

37.64.2.2   OS_NetworkGetID()

int32 OS_NetworkGetID (
            void)

Gets the network ID of the local machine.

The ID is an implementation-defined value and may not be consistent in meaning across different platform types.

Note

This API may be removed in a future version of OSAL due to inconsistencies between platforms.

Returns

The ID or fixed value of -1 if the host id could not be found. Note it is not possible to differentiate between error codes and valid network IDs here. It is assumed, however, that -1 is never a valid ID.

37.64.2.3   OS_SocketAccept()

int32 OS_SocketAccept (
            uint32 *sock_id,*
            uint32 * *connsock_id,*
            OS_SockAddr_t * *Addr,*
            int32 *timeout*)

Waits for and accept the next incoming connection on the given socket.

This is used for sockets operating in a "server" role. The socket must be a stream type (connection-oriented) and previously bound to a local address using OS_SocketBind(). This will block the caller up to the given timeout or until an incoming connection request occurs, whichever happens first.

The new stream connection is then returned to the caller and the original server socket ID can be reused for the next connection.

Parameters

in	*sock_id*	The server socket ID, previously bound using OS_SocketBind()
out	*connsock↩_id*	The connection socket, a new ID that can be read/written
in	*Addr*	The remote address of the incoming connection
in	*timeout*	The maximum amount of time to wait, or OS_PEND to wait forever

Returns

Execution status, see OSAL Return Code Defines

37.64.2.4   OS_SocketBind()

```
int32 OS_SocketBind (
          uint32 sock_id,
          const OS_SockAddr_t * Addr )
```

Binds a socket to a given local address.

The specified socket will be bound to the local address and port, if available.

If the socket is connectionless, then it only binds to the local address.

If the socket is connection-oriented (stream), then this will also put the socket into a listening state for incoming connections at the local address.

Parameters

in	*sock↩_id*	The socket ID
in	*Addr*	The local address to bind to

Returns

Execution status, see OSAL Return Code Defines

37.64.2.5   OS_SocketConnect()

```
int32 OS_SocketConnect (
          uint32 sock_id,
          const OS_SockAddr_t * Addr,
          int32 timeout )
```

Connects a socket to a given remote address.

The socket will be connected to the remote address and port, if available. This only applies to stream-oriented sockets. Calling this on a datagram socket will return an error (these sockets should use SendTo/RecvFrom).

Parameters

in	*sock↩ _id*	The socket ID
in	*Addr*	The remote address to connect to
in	*timeout*	The maximum amount of time to wait, or OS_PEND to wait forever

Returns

Execution status, see OSAL Return Code Defines

37.64.2.6   OS_SocketGetIdByName()

```
int32 OS_SocketGetIdByName (
            uint32 * sock_id,
            const char * sock_name )
```

Gets an OSAL ID from a given name.

Note

OSAL Sockets use generated names according to the address and type.

See also

OS_SocketGetInfo()

Parameters

out	*sock_id*	Buffer to hold result
in	*sock_name*	Name of socket to find

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	is id or name are NULL pointers
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NAME_NOT_FOUND	if the name was not found in the table

37.64.2.7 OS_SocketGetInfo()

```
int32 OS_SocketGetInfo (
            uint32 sock_id,
            OS_socket_prop_t * sock_prop )
```

Gets information about an OSAL Socket ID.

OSAL Sockets use generated names according to the address and type. This allows applications to find the name of a given socket.

Parameters

in	*sock_id*	The socket ID
out	*sock_prop*	Buffer to hold socket information

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid semaphore
OS_INVALID_POINTER	if the count_prop pointer is null

37.64.2.8 OS_SocketOpen()

```
int32 OS_SocketOpen (
            uint32 * sock_id,
            OS_SocketDomain_t Domain,
            OS_SocketType_t Type )
```

Opens a socket.

A new, unconnected and unbound socket is allocated of the given domain and type.

Parameters

out	*sock↩_id*	Buffer to hold the non-zero OSAL ID
in	*Domain*	The domain / address family of the socket (INET or INET6, etc)
in	*Type*	The type of the socket (STREAM or DATAGRAM)

Returns

Execution status, see OSAL Return Code Defines

37.64.2.9   OS_SocketRecvFrom()

```
int32 OS_SocketRecvFrom (
            uint32 sock_id,
            void * buffer,
            uint32 buflen,
            OS_SockAddr_t * RemoteAddr,
            int32 timeout )
```

Reads data from a message-oriented (datagram) socket.

If a message is already available on the socket, this should immediately return that data without blocking. Otherwise, it may block up to the given timeout.

Parameters

in	*sock_id*	The socket ID, previously bound using OS_SocketBind()
out	*buffer*	Pointer to message data receive buffer
in	*buflen*	The maximum length of the message data to receive
out	*RemoteAddr*	Buffer to store the remote network address (may be NULL)
in	*timeout*	The maximum amount of time to wait, or OS_PEND to wait forever

Returns

Count of actual bytes received or error status, see OSAL Return Code Defines

37.64.2.10   OS_SocketSendTo()

```
int32 OS_SocketSendTo (
            uint32 sock_id,
            const void * buffer,
            uint32 buflen,
            const OS_SockAddr_t * RemoteAddr )
```

Sends data to a message-oriented (datagram) socket.

This sends data in a non-blocking mode. If the socket is not currently able to queue the message, such as if its outbound buffer is full, then this returns an error code.

Parameters

in	*sock_id*	The socket ID, which must be of the datagram type
in	*buffer*	Pointer to message data to send
in	*buflen*	The length of the message data to send
in	*RemoteAddr*	Buffer containing the remote network address to send to

Returns

Count of actual bytes sent or error status, see OSAL Return Code Defines

37.65 OSAL Timer APIs

Functions

- int32 OS_TimeBaseCreate (uint32 ∗timebase_id, const char ∗timebase_name, OS_TimerSync_t external_sync)

  Create an abstract Time Base resource.

- int32 OS_TimeBaseSet (uint32 timebase_id, uint32 start_time, uint32 interval_time)

  Sets the tick period for simulated time base objects.

- int32 OS_TimeBaseDelete (uint32 timebase_id)

  Deletes a time base object.

- int32 OS_TimeBaseGetIdByName (uint32 ∗timebase_id, const char ∗timebase_name)

  Find the ID of an existing time base resource.

- int32 OS_TimeBaseGetInfo (uint32 timebase_id, OS_timebase_prop_t ∗timebase_prop)

  Obtain information about a timebase resource.

- int32 OS_TimeBaseGetFreeRun (uint32 timebase_id, uint32 ∗freerun_val)

  Read the value of the timebase free run counter.

- int32 OS_TimerCreate (uint32 ∗timer_id, const char ∗timer_name, uint32 ∗clock_accuracy, OS_TimerCallback←↩
  _t callback_ptr)

  Create a timer object.

- int32 OS_TimerAdd (uint32 ∗timer_id, const char ∗timer_name, uint32 timebase_id, OS_ArgCallback_←↩
  t callback_ptr, void ∗callback_arg)

  Add a timer object based on an existing TimeBase resource.

- int32 OS_TimerSet (uint32 timer_id, uint32 start_time, uint32 interval_time)

  Configures a periodic or one shot timer.

- int32 OS_TimerDelete (uint32 timer_id)

  Deletes a timer resource.

- int32 OS_TimerGetIdByName (uint32 ∗timer_id, const char ∗timer_name)

  Locate an existing timer resource by name.

- int32 OS_TimerGetInfo (uint32 timer_id, OS_timer_prop_t ∗timer_prop)

  Gets information about an existing timer.

37.65.1 Detailed Description

37.65.2 Function Documentation

37.65.2.1 OS_TimeBaseCreate()

```
int32 OS_TimeBaseCreate (
            uint32 * timebase_id,
            const char * timebase_name,
            OS_TimerSync_t external_sync )
```

Create an abstract Time Base resource.

An OSAL time base is an abstraction of a "timer tick" that can, in turn, be used for measurement of elapsed time between events.

Time bases can be simulated by the operating system using the OS kernel-provided timing facilities, or based on a hardware timing source if provided by the BSP.

A time base object has a servicing task associated with it, that runs at elevated priority and will thereby interrupt user-level tasks when timing ticks occur.

If the external_sync function is passed as NULL, the operating system kernel timing resources will be utilized for a simulated timer tick.

If the external_sync function is not NULL, this should point to a BSP-provided function that will block the calling task until the next tick occurs. This can be used for synchronizing with hardware events.

Note

When provisioning a tunable RTOS kernel, such as RTEMS, the kernel should be configured to support at least (OS_MAX_TASKS + OS_MAX_TIMEBASES) threads, to account for the helper threads associated with time base objects.

Parameters

out	*timebase_id*	A non-zero ID corresponding to the timebase resource
in	*timebase_name*	The name of the time base
in	*external_sync*	A synchronization function for BSP hardware-based timer ticks

Returns

Execution status, see OSAL Return Code Defines

Referenced by OS_Application_Startup().

37.65.2.2 OS_TimeBaseDelete()

```
int32 OS_TimeBaseDelete (
            uint32 timebase_id )
```

Deletes a time base object.

The helper task and any other resources associated with the time base abstraction will be freed.

```
int32 OS_TimeBaseCreate (
```

Parameters

in	*timebase↩ _id*	The timebase resource to delete

Returns

Execution status, see OSAL Return Code Defines

37.65.2.3   OS_TimeBaseGetFreeRun()

```
int32 OS_TimeBaseGetFreeRun (
            uint32 timebase_id,
            uint32 * freerun_val )
```

Read the value of the timebase free run counter.

Poll the timer free-running time counter in a lightweight fashion.

The free run count is a monotonically increasing value reflecting the total time elapsed since the timebase inception. Units are the same as the timebase itself, usually microseconds.

Applications may quickly and efficiently calculate relative time differences by polling this value and subtracting the previous counter value.

The absolute value of this counter is not relevant, because it will "roll over" after 2^{32} units of time. For a timebase with microsecond units, this occurs approximately every 4294 seconds, or about 1.2 hours.

Note

To ensure consistency of results, the application should sample the value at a minimum of two times the roll over frequency, and calculate the difference between the consecutive samples.

Parameters

in	*timebase↩ _id*	The timebase to operate on
out	*freerun_val*	Buffer to store the free run counter

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid timebase

37.65.2.4   OS_TimeBaseGetIdByName()

```
int32 OS_TimeBaseGetIdByName (
            uint32 * timebase_id,
            const char * timebase_name )
```

Find the ID of an existing time base resource.

Given a time base name, find and output the ID associated with it.

Parameters

out	*timebase_id*	The timebase resource ID
in	*timebase_name*	The name of the timebase resource to find

Returns

Execution status, see [OSAL Return Code Defines](#)

Return values

[OS_SUCCESS](#)	Successful execution.
[OS_INVALID_POINTER](#)	if timebase_id or timebase_name are NULL pointers
[OS_ERR_NAME_TOO_LONG](#)	name length including null terminator greater than [OS_MAX_API_NAME](#)
[OS_ERR_NAME_NOT_FOUND](#)	if the name was not found in the table

37.65.2.5   OS_TimeBaseGetInfo()

```
int32 OS_TimeBaseGetInfo (
            uint32 timebase_id,
            OS_timebase_prop_t * timebase_prop )
```

Obtain information about a timebase resource.

Fills the buffer referred to by the timebase_prop parameter with relevant information about the time base resource.

This function will pass back a pointer to structure that contains all of the relevant info(name and creator) about the specified timebase.

Parameters

in	*timebase_id*	The timebase resource ID
out	*timebase_prop*	Buffer to store timebase properties

Returns

> Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid timebase
OS_INVALID_POINTER	if the timebase_prop pointer is null

37.65.2.6 OS_TimeBaseSet()

```
int32 OS_TimeBaseSet (
            uint32 timebase_id,
            uint32 start_time,
            uint32 interval_time )
```

Sets the tick period for simulated time base objects.

This sets the actual tick period for timing ticks that are simulated by the RTOS kernel (i.e. the "external_sync" parameter on the call to OS_TimeBaseCreate() is NULL).

The RTOS will be configured to wake up the helper thread at the requested interval.

This function has no effect for time bases that are using a BSP-provided external_sync function.

Parameters

in	*timebase_id*	The timebase resource to configure
in	*start_time*	The amount of delay for the first tick, in microseconds.
in	*interval_time*	The amount of delay between ticks, in microseconds.

Returns

> Execution status, see OSAL Return Code Defines

Referenced by OS_Application_Startup().

37.65.2.7 OS_TimerAdd()

```
int32 OS_TimerAdd (
            uint32 * timer_id,
            const char * timer_name,
            uint32 timebase_id,
```

```
        OS_ArgCallback_t callback_ptr,
        void * callback_arg )
```

Add a timer object based on an existing TimeBase resource.

A timer object is a resource that invokes the specified application-provided function upon timer expiration. Timers may be one-shot or periodic in nature.

This function uses an existing time base object to service this timer, which must exist prior to adding the timer. The precision of the timer is the same as that of the underlying time base object. Multiple timer objects can be created referring to a single time base object.

This routine also uses a different callback function prototype from OS_TimerCreate(), allowing a single opaque argument to be passed to the callback routine. The OSAL implementation does not use this parameter, and may be set NULL.

Warning

> Depending on the OS, the callback_ptr function may be similar to an interrupt service routine. Calls that cause the code to block or require an application context (like sending events) are generally not supported.

Parameters

out	*timer_id*	The non-zero resource ID of the timer object
in	*timer_name*	Name of the timer object
in	*timebase↩ _id*	The time base resource to use as a reference
in	*callback_ptr*	Application-provided function to invoke
in	*callback_arg*	Opaque argument to pass to callback function

Returns

> Execution status, see OSAL Return Code Defines

37.65.2.8   OS_TimerCreate()

```
int32 OS_TimerCreate (
        uint32 * timer_id,
        const char * timer_name,
        uint32 * clock_accuracy,
        OS_TimerCallback_t callback_ptr )
```

Create a timer object.

A timer object is a resource that invokes the specified application-provided function upon timer expiration. Timers may be one-shot or periodic in nature.

This function creates a dedicated (hidden) time base object to service this timer, which is created and deleted with the timer object itself. The internal time base is configured for an OS simulated timer tick at the same interval as the timer.

Note

clock_accuracy comes from the underlying OS tick value. The nearest integer microsecond value is returned, so may not be exact.

Warning

Depending on the OS, the callback_ptr function may be similar to an interrupt service routine. Calls that cause the code to block or require an application context (like sending events) are generally not supported.

Parameters

out	*timer_id*	The non-zero resource ID of the timer object
in	*timer_name*	Name of the timer object
out	*clock_accuracy*	Expected precision of the timer, in microseconds. This is the underlying tick value rounded to the nearest microsecond integer.
in	*callback_ptr*	The function pointer of the timer callback or ISR that will be called by the timer. The user's function is declared as follows: `void timer_callback(uint32 timer_id)` Where the timer_id is passed in to the function by the OSAL

Returns

Execution status, see [OSAL Return Code Defines](#)

Return values

[*OS_SUCCESS*](#)	Successful execution.
[*OS_INVALID_POINTER*](#)	if any parameters are NULL
[*OS_ERR_NAME_TOO_LONG*](#)	name length including null terminator greater than [OS_MAX_API_NAME](#)
[*OS_ERR_NAME_TAKEN*](#)	if the name is already in use by another timer.
[*OS_ERR_NO_FREE_IDS*](#)	if all of the timers are already allocated.
[*OS_TIMER_ERR_INVALID_ARGS*](#)	if the callback pointer is zero.
[*OS_TIMER_ERR_UNAVAILABLE*](#)	if the timer cannot be created.

37.65.2.9   OS_TimerDelete()

```
int32 OS_TimerDelete (
          uint32 timer_id )
```

Deletes a timer resource.

The application callback associated with the timer will be stopped, and the resources freed for future use.

Parameters

in	*timer↩ _id*	The timer ID to operate on

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the timer_id is invalid.
OS_TIMER_ERR_INTERNAL	if there was a problem deleting the timer in the host OS.

37.65.2.10   OS_TimerGetIdByName()

```
int32 OS_TimerGetIdByName (
          uint32 * timer_id,
          const char * timer_name )
```

Locate an existing timer resource by name.

Outputs the ID associated with the given timer, if it exists.

Parameters

out	*timer_id*	The timer ID corresponding to the name
in	*timer_name*	The timer name to find

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_INVALID_POINTER	if timer_id or timer_name are NULL pointers
OS_ERR_NAME_TOO_LONG	name length including null terminator greater than OS_MAX_API_NAME
OS_ERR_NAME_NOT_FOUND	if the name was not found in the table

37.65.2.11   OS_TimerGetInfo()

```
int32 OS_TimerGetInfo (
            uint32 timer_id,
            OS_timer_prop_t * timer_prop )
```

Gets information about an existing timer.

This function takes timer_id, and looks it up in the OS table. It puts all of the information known about that timer into a structure pointer to by timer_prop.

Parameters

in	*timer_id*	The timer ID to operate on
out	*timer_prop*	Buffer containing timer properties • creator: the OS task ID of the task that created this timer • name: the string name of the timer • start_time: the start time in microseconds, if any • interval_time: the interval time in microseconds, if any • accuracy: the accuracy of the timer in microseconds

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the id passed in is not a valid timer
OS_INVALID_POINTER	if the timer_prop pointer is null

37.65.2.12   OS_TimerSet()

```
int32 OS_TimerSet (
            uint32 timer_id,
            uint32 start_time,
            uint32 interval_time )
```

Configures a periodic or one shot timer.

This function programs the timer with a start time and an optional interval time. The start time is the time in microseconds when the user callback function will be called. If the interval time is non-zero, the timer will be reprogrammed with that interval in microseconds to call the user callback function periodically. If the start time and interval time are zero, the function will return an error.

For a "one-shot" timer, the start_time configures the expiration time, and the interval_time should be passed as zero to indicate the timer is not to be automatically reset.

Note

The resolution of the times specified is limited to the clock accuracy returned in the OS_TimerCreate call. If the times specified in the start_msec or interval_msec parameters are less than the accuracy, they will be rounded up to the accuracy of the timer.

Parameters

in	*timer_id*	The timer ID to operate on
in	*start_time*	Time in microseconds to the first expiration
in	*interval_time*	Time in microseconds between subsequent intervals, value of zero will only call the user callback function once after the start_msec time.

Returns

Execution status, see OSAL Return Code Defines

Return values

OS_SUCCESS	Successful execution.
OS_ERR_INVALID_ID	if the timer_id is not valid.
OS_TIMER_ERR_INTERNAL	if there was an error programming the OS timer.
OS_ERROR	if both start time and interval time are zero.

37.66   OSAL Return Code Defines

Macros

- #define OS_FS_ERR_PATH_TOO_LONG (-103)

    FS path too long.
- #define OS_FS_ERR_NAME_TOO_LONG (-104)

    FS name too long.
- #define OS_FS_ERR_DRIVE_NOT_CREATED (-106)

    FS drive not created.
- #define OS_FS_ERR_DEVICE_NOT_FREE (-107)

    FS device not free.
- #define OS_FS_ERR_PATH_INVALID (-108)

    FS path invalid.
- #define OS_FS_SUCCESS OS_SUCCESS
- #define OS_FS_ERROR OS_ERROR
- #define OS_FS_ERR_INVALID_POINTER OS_INVALID_POINTER
- #define OS_FS_ERR_NO_FREE_FDS OS_ERR_NO_FREE_IDS
- #define OS_FS_ERR_INVALID_FD OS_ERR_INVALID_ID
- #define OS_FS_UNIMPLEMENTED OS_ERR_NOT_IMPLEMENTED
- #define OS_SUCCESS (0)

    Successful execution.
- #define OS_ERROR (-1)

    Failed execution.
- #define OS_INVALID_POINTER (-2)

    Invalid pointer.
- #define OS_ERROR_ADDRESS_MISALIGNED (-3)

    Address misalignment.
- #define OS_ERROR_TIMEOUT (-4)

    Error timeout.
- #define OS_INVALID_INT_NUM (-5)

    Invalid Interrupt number.
- #define OS_SEM_FAILURE (-6)

    Semaphore failure.
- #define OS_SEM_TIMEOUT (-7)

    Semaphore timeout.
- #define OS_QUEUE_EMPTY (-8)

    Queue empty.
- #define OS_QUEUE_FULL (-9)

    Queue full.
- #define OS_QUEUE_TIMEOUT (-10)

    Queue timeout.
- #define OS_QUEUE_INVALID_SIZE (-11)

    Queue invalid size.
- #define OS_QUEUE_ID_ERROR (-12)

    Queue ID error.
- #define OS_ERR_NAME_TOO_LONG (-13)

> *name length including null terminator greater than OS_MAX_API_NAME*

- #define OS_ERR_NO_FREE_IDS (-14)

  No free IDs.

- #define OS_ERR_NAME_TAKEN (-15)

  Name taken.

- #define OS_ERR_INVALID_ID (-16)

  Invalid ID.

- #define OS_ERR_NAME_NOT_FOUND (-17)

  Name not found.

- #define OS_ERR_SEM_NOT_FULL (-18)

  Semaphore not full.

- #define OS_ERR_INVALID_PRIORITY (-19)

  Invalid priority.

- #define OS_INVALID_SEM_VALUE (-20)

  Invalid semaphore value.

- #define OS_ERR_FILE (-27)

  File error.

- #define OS_ERR_NOT_IMPLEMENTED (-28)

  Not implemented.

- #define OS_TIMER_ERR_INVALID_ARGS (-29)

  Timer invalid arguments.

- #define OS_TIMER_ERR_TIMER_ID (-30)

  Timer ID error.

- #define OS_TIMER_ERR_UNAVAILABLE (-31)

  Timer unavailable.

- #define OS_TIMER_ERR_INTERNAL (-32)

  Timer internal error.

- #define OS_ERR_OBJECT_IN_USE (-33)

  Object in use.

- #define OS_ERR_BAD_ADDRESS (-34)

  Bad address.

- #define OS_ERR_INCORRECT_OBJ_STATE (-35)

  Incorrect object state.

- #define OS_ERR_INCORRECT_OBJ_TYPE (-36)

  Incorrect object type.

- #define OS_ERR_STREAM_DISCONNECTED (-37)

  Stream disconnected.

- #define OS_ERR_OPERATION_NOT_SUPPORTED (-38)

  Requested operation is not support on the supplied object(s)

37.66.1 Detailed Description

37.66.2 Macro Definition Documentation

37.66.2.1   OS_ERR_BAD_ADDRESS

```
#define OS_ERR_BAD_ADDRESS (-34)
```

Bad address.

Definition at line 87 of file osapi.h.

37.66.2.2   OS_ERR_FILE

```
#define OS_ERR_FILE (-27)
```

File error.

Definition at line 80 of file osapi.h.

37.66.2.3   OS_ERR_INCORRECT_OBJ_STATE

```
#define OS_ERR_INCORRECT_OBJ_STATE (-35)
```

Incorrect object state.

Definition at line 88 of file osapi.h.

37.66.2.4   OS_ERR_INCORRECT_OBJ_TYPE

```
#define OS_ERR_INCORRECT_OBJ_TYPE (-36)
```

Incorrect object type.

Definition at line 89 of file osapi.h.

37.66.2.5   OS_ERR_INVALID_ID

```
#define OS_ERR_INVALID_ID (-16)
```

Invalid ID.

Definition at line 75 of file osapi.h.

37.66.2.6   OS_ERR_INVALID_PRIORITY

```
#define OS_ERR_INVALID_PRIORITY (-19)
```

Invalid priority.

Definition at line 78 of file osapi.h.

37.66.2.7   OS_ERR_NAME_NOT_FOUND

```
#define OS_ERR_NAME_NOT_FOUND (-17)
```

Name not found.

Definition at line 76 of file osapi.h.

37.66.2.8   OS_ERR_NAME_TAKEN

```
#define OS_ERR_NAME_TAKEN (-15)
```

Name taken.

Definition at line 74 of file osapi.h.

37.66.2.9   OS_ERR_NAME_TOO_LONG

```
#define OS_ERR_NAME_TOO_LONG (-13)
```

name length including null terminator greater than OS_MAX_API_NAME

Definition at line 72 of file osapi.h.

37.66.2.10   OS_ERR_NO_FREE_IDS

```
#define OS_ERR_NO_FREE_IDS (-14)
```

No free IDs.

Definition at line 73 of file osapi.h.

37.66.2.11   OS_ERR_NOT_IMPLEMENTED

```
#define OS_ERR_NOT_IMPLEMENTED (-28)
```

Not implemented.

Definition at line 81 of file osapi.h.

37.66.2.12   OS_ERR_OBJECT_IN_USE

```
#define OS_ERR_OBJECT_IN_USE (-33)
```

Object in use.

Definition at line 86 of file osapi.h.

37.66.2.13   OS_ERR_OPERATION_NOT_SUPPORTED

```
#define OS_ERR_OPERATION_NOT_SUPPORTED (-38)
```

Requested operation is not support on the supplied object(s)

Definition at line 91 of file osapi.h.

37.66.2.14   OS_ERR_SEM_NOT_FULL

```
#define OS_ERR_SEM_NOT_FULL (-18)
```

Semaphore not full.

Definition at line 77 of file osapi.h.

37.66.2.15   OS_ERR_STREAM_DISCONNECTED

```
#define OS_ERR_STREAM_DISCONNECTED (-37)
```

Stream disconnected.

Definition at line 90 of file osapi.h.

```
#define OS_ERR_NOT_IMPLEMENTED (-28)
```

37.66.2.16 OS_ERROR

```
#define OS_ERROR (-1)
```

Failed execution.

Definition at line 60 of file osapi.h.

37.66.2.17 OS_ERROR_ADDRESS_MISALIGNED

```
#define OS_ERROR_ADDRESS_MISALIGNED (-3)
```

Address misalignment.

Definition at line 62 of file osapi.h.

37.66.2.18 OS_ERROR_TIMEOUT

```
#define OS_ERROR_TIMEOUT (-4)
```

Error timeout.

Definition at line 63 of file osapi.h.

37.66.2.19 OS_FS_ERR_DEVICE_NOT_FREE

```
#define OS_FS_ERR_DEVICE_NOT_FREE (-107)
```

FS device not free.

Definition at line 100 of file osapi-os-filesys.h.

37.66.2.20 OS_FS_ERR_DRIVE_NOT_CREATED

```
#define OS_FS_ERR_DRIVE_NOT_CREATED (-106)
```

FS drive not created.

Definition at line 99 of file osapi-os-filesys.h.

37.66.2.21   OS_FS_ERR_INVALID_FD

`#define OS_FS_ERR_INVALID_FD OS_ERR_INVALID_ID`

Deprecated Invalid ID

Definition at line 112 of file osapi-os-filesys.h.

37.66.2.22   OS_FS_ERR_INVALID_POINTER

`#define OS_FS_ERR_INVALID_POINTER OS_INVALID_POINTER`

Deprecated Invalid pointer

Definition at line 110 of file osapi-os-filesys.h.

37.66.2.23   OS_FS_ERR_NAME_TOO_LONG

`#define OS_FS_ERR_NAME_TOO_LONG (-104)`

FS name too long.

Definition at line 98 of file osapi-os-filesys.h.

37.66.2.24   OS_FS_ERR_NO_FREE_FDS

`#define OS_FS_ERR_NO_FREE_FDS OS_ERR_NO_FREE_IDS`

Deprecated No free IDs

Definition at line 111 of file osapi-os-filesys.h.

37.66.2.25   OS_FS_ERR_PATH_INVALID

`#define OS_FS_ERR_PATH_INVALID (-108)`

FS path invalid.

Definition at line 101 of file osapi-os-filesys.h.

37.66.2.26   OS_FS_ERR_PATH_TOO_LONG

```
#define OS_FS_ERR_PATH_TOO_LONG (-103)
```

FS path too long.

Definition at line 97 of file osapi-os-filesys.h.

37.66.2.27   OS_FS_ERROR

```
#define OS_FS_ERROR OS_ERROR
```

Deprecated Failed execution

Definition at line 109 of file osapi-os-filesys.h.

37.66.2.28   OS_FS_SUCCESS

```
#define OS_FS_SUCCESS OS_SUCCESS
```

Deprecated Successful execution

Definition at line 108 of file osapi-os-filesys.h.

37.66.2.29   OS_FS_UNIMPLEMENTED

```
#define OS_FS_UNIMPLEMENTED OS_ERR_NOT_IMPLEMENTED
```

Deprecated Not implemented

Definition at line 113 of file osapi-os-filesys.h.

37.66.2.30   OS_INVALID_INT_NUM

```
#define OS_INVALID_INT_NUM (-5)
```

Invalid Interrupt number.

Definition at line 64 of file osapi.h.

37.66.2.31   OS_INVALID_POINTER

```
#define OS_INVALID_POINTER (-2)
```

Invalid pointer.

Definition at line 61 of file osapi.h.

37.66.2.32   OS_INVALID_SEM_VALUE

```
#define OS_INVALID_SEM_VALUE (-20)
```

Invalid semaphore value.

Definition at line 79 of file osapi.h.

37.66.2.33   OS_QUEUE_EMPTY

```
#define OS_QUEUE_EMPTY (-8)
```

Queue empty.

Definition at line 67 of file osapi.h.

37.66.2.34   OS_QUEUE_FULL

```
#define OS_QUEUE_FULL (-9)
```

Queue full.

Definition at line 68 of file osapi.h.

37.66.2.35   OS_QUEUE_ID_ERROR

```
#define OS_QUEUE_ID_ERROR (-12)
```

Queue ID error.

Definition at line 71 of file osapi.h.

37.66.2.36 OS_QUEUE_INVALID_SIZE

`#define OS_QUEUE_INVALID_SIZE (-11)`

Queue invalid size.

Definition at line 70 of file osapi.h.

37.66.2.37 OS_QUEUE_TIMEOUT

`#define OS_QUEUE_TIMEOUT (-10)`

Queue timeout.

Definition at line 69 of file osapi.h.

37.66.2.38 OS_SEM_FAILURE

`#define OS_SEM_FAILURE (-6)`

Semaphore failure.

Definition at line 65 of file osapi.h.

37.66.2.39 OS_SEM_TIMEOUT

`#define OS_SEM_TIMEOUT (-7)`

Semaphore timeout.

Definition at line 66 of file osapi.h.

37.66.2.40 OS_SUCCESS

`#define OS_SUCCESS (0)`

Successful execution.

Definition at line 59 of file osapi.h.

Referenced by OS_Application_Startup().

37.66.2.41   OS_TIMER_ERR_INTERNAL

#define OS_TIMER_ERR_INTERNAL (-32)

Timer internal error.

Definition at line 85 of file osapi.h.

37.66.2.42   OS_TIMER_ERR_INVALID_ARGS

#define OS_TIMER_ERR_INVALID_ARGS (-29)

Timer invalid arguments.

Definition at line 82 of file osapi.h.

37.66.2.43   OS_TIMER_ERR_TIMER_ID

#define OS_TIMER_ERR_TIMER_ID (-30)

Timer ID error.

Definition at line 83 of file osapi.h.

37.66.2.44   OS_TIMER_ERR_UNAVAILABLE

#define OS_TIMER_ERR_UNAVAILABLE (-31)

Timer unavailable.

Definition at line 84 of file osapi.h.

38 Data Structure Documentation

38.1 CCSDS_APIDQHdr_t Struct Reference

CCSDS Primary with APID Qualifier Header Type Definition.

```
#include <ccsds.h>
```

Data Fields

- CCSDS_PriHdr_t Pri

    CCSDS Primary Header CCSDS_PriHdr_t.
- CCSDS_APIDqualifiers_t ApidQ

    CCSDS APID Qualifier Secondary Header CCSDS_APIDqualifiers_t.

38.1.1 Detailed Description

CCSDS Primary with APID Qualifier Header Type Definition.

Definition at line 162 of file ccsds.h.

38.1.2 Field Documentation

38.1.2.1 ApidQ

CCSDS_APIDqualifiers_t CCSDS_APIDQHdr_t::ApidQ

CCSDS APID Qualifier Secondary Header CCSDS_APIDqualifiers_t.

Definition at line 164 of file ccsds.h.

38.1.2.2 Pri

CCSDS_PriHdr_t CCSDS_APIDQHdr_t::Pri

CCSDS Primary Header CCSDS_PriHdr_t.

Definition at line 163 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.2   CCSDS_APIDqualifiers_t Struct Reference

```
#include <ccsds.h>
```

Data Fields

- uint8 APIDQSubsystem [2]
- uint8 APIDQSystemId [2]

38.2.1   Detailed Description

Definition at line 144 of file ccsds.h.

38.2.2   Field Documentation

38.2.2.1   APIDQSubsystem

```
uint8 CCSDS_APIDqualifiers_t::APIDQSubsystem[2]
```

Definition at line 146 of file ccsds.h.

38.2.2.2   APIDQSystemId

```
uint8 CCSDS_APIDqualifiers_t::APIDQSystemId[2]
```

Definition at line 154 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.3   CCSDS_CmdSecHdr_t Struct Reference

```
#include <ccsds.h>
```

Data Fields

- uint8 FunctionCode
- uint8 Checksum

38.3.1 Detailed Description

Definition at line 108 of file ccsds.h.

38.3.2 Field Documentation

38.3.2.1 Checksum

`uint8` `CCSDS_CmdSecHdr_t::Checksum`

Definition at line 115 of file ccsds.h.

38.3.2.2 FunctionCode

`uint8` `CCSDS_CmdSecHdr_t::FunctionCode`

Definition at line 110 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.4 CCSDS_CommandPacket_t Struct Reference

`#include <ccsds.h>`

Data Fields

- CCSDS_SpacePacket_t SpacePacket
    Standard Header on all packets.
- CCSDS_CmdSecHdr_t Sec

38.4.1 Detailed Description

Definition at line 189 of file ccsds.h.

38.4.2 Field Documentation

38.4.2.1   Sec

CCSDS_CmdSecHdr_t CCSDS_CommandPacket_t::Sec

Definition at line 192 of file ccsds.h.

38.4.2.2   SpacePacket

CCSDS_SpacePacket_t CCSDS_CommandPacket_t::SpacePacket

Standard Header on all packets.

Definition at line 191 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.5   CCSDS_PriHdr_t Struct Reference

#include <ccsds.h>

Data Fields

- uint8 StreamId [2]
- uint8 Sequence [2]
- uint8 Length [2]

38.5.1   Detailed Description

Definition at line 86 of file ccsds.h.

38.5.2   Field Documentation

38.5.2.1   Length

uint8 CCSDS_PriHdr_t::Length[2]

Definition at line 100 of file ccsds.h.

38.5.2.2 Sequence

`uint8` `CCSDS_PriHdr_t::Sequence[2]`

Definition at line 95 of file ccsds.h.

38.5.2.3 StreamId

`uint8` `CCSDS_PriHdr_t::StreamId[2]`

Definition at line 88 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.6 CCSDS_SpacePacket_t Struct Reference

`#include <ccsds.h>`

Data Fields

- CCSDS_PriHdr_t Hdr

38.6.1 Detailed Description

Definition at line 167 of file ccsds.h.

38.6.2 Field Documentation

38.6.2.1 Hdr

`CCSDS_PriHdr_t` `CCSDS_SpacePacket_t::Hdr`

Complete "version 1" (standard) header

Definition at line 172 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.7   CCSDS_TelemetryPacket_t Struct Reference

```
#include <ccsds.h>
```

Data Fields

- CCSDS_SpacePacket_t SpacePacket

    Standard Header on all packets.
- CCSDS_TlmSecHdr_t Sec

38.7.1   Detailed Description

Definition at line 197 of file ccsds.h.

38.7.2   Field Documentation

38.7.2.1   Sec

CCSDS_TlmSecHdr_t CCSDS_TelemetryPacket_t::Sec

Definition at line 200 of file ccsds.h.

38.7.2.2   SpacePacket

CCSDS_SpacePacket_t CCSDS_TelemetryPacket_t::SpacePacket

Standard Header on all packets.

Definition at line 199 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.8   CCSDS_TlmSecHdr_t Struct Reference

```
#include <ccsds.h>
```

Data Fields

- uint8 Time [CCSDS_TIME_SIZE]

38.8.1 Detailed Description

Definition at line 121 of file ccsds.h.

38.8.2 Field Documentation

38.8.2.1 Time

uint8 CCSDS_TlmSecHdr_t::Time[CCSDS_TIME_SIZE]

Definition at line 123 of file ccsds.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/ccsds.h

38.9 CFE_ES_AppInfo_t Struct Reference

Application Information.

```
#include <cfe_es.h>
```

Data Fields

- uint32 AppId

  Application ID for this Application.
- uint32 Type

  The type of App: CORE or EXTERNAL.
- char Name [OS_MAX_API_NAME]

  The Registered Name of the Application.
- char EntryPoint [OS_MAX_API_NAME]

  The Entry Point label for the Application.
- char FileName [OS_MAX_PATH_LEN]

  The Filename of the file containing the Application.
- uint32 StackSize

  The Stack Size of the Application.
- uint32 ModuleId

  The ID of the Loadable Module for the Application.

- **uint32 AddressesAreValid**

    Indicates that the Code, Data, and BSS addresses/sizes are valid.

- **uint32 CodeAddress**

    The Address of the Application Code Segment.

- **uint32 CodeSize**

    The Code Size of the Application.

- **uint32 DataAddress**

    The Address of the Application Data Segment.

- **uint32 DataSize**

    The Data Size of the Application.

- **uint32 BSSAddress**

    The Address of the Application BSS Segment.

- **uint32 BSSSize**

    The BSS Size of the Application.

- **uint32 StartAddress**

    The Start Address of the Application.

- **uint16 ExceptionAction**

    What should occur if Application has an exception (Restart Application OR Restart Processor)

- **uint16 Priority**

    The Priority of the Application.

- **uint32 MainTaskId**

    The Application's Main Task ID.

- **uint32 ExecutionCounter**

    The Application's Main Task Execution Counter.

- char **MainTaskName** [OS_MAX_API_NAME]

    The Application's Main Task ID.

- **uint32 NumOfChildTasks**

    Number of Child tasks for an App.

38.9.1   Detailed Description

Application Information.

Structure that is used to provide information about an app. It is primarily used for the QueryOne and QueryAll Commands.

Definition at line 207 of file cfe_es.h.

38.9.2   Field Documentation

38.9.2.1 AddressesAreValid

`uint32` `CFE_ES_AppInfo_t::AddressesAreValid`

Indicates that the Code, Data, and BSS addresses/sizes are valid.

Telemetry Mnemonic(s) $sc_$cpu_ES_AddrsValid

Definition at line 225 of file cfe_es.h.

38.9.2.2 AppId

`uint32` `CFE_ES_AppInfo_t::AppId`

Application ID for this Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_AppID

Definition at line 209 of file cfe_es.h.

38.9.2.3 BSSAddress

`uint32` `CFE_ES_AppInfo_t::BSSAddress`

The Address of the Application BSS Segment.

Telemetry Mnemonic(s) $sc_$cpu_ES_BSSAddress

Definition at line 235 of file cfe_es.h.

38.9.2.4 BSSSize

`uint32` `CFE_ES_AppInfo_t::BSSSize`

The BSS Size of the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_BSSSize

Definition at line 237 of file cfe_es.h.

38.9.2.5 CodeAddress

`uint32` `CFE_ES_AppInfo_t::CodeAddress`

The Address of the Application Code Segment.

Telemetry Mnemonic(s) $sc_$cpu_ES_CodeAddress

Definition at line 227 of file cfe_es.h.

38.9.2.6 CodeSize

`uint32` `CFE_ES_AppInfo_t::CodeSize`

The Code Size of the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_CodeSize

Definition at line 229 of file cfe_es.h.

38.9.2.7 DataAddress

`uint32` `CFE_ES_AppInfo_t::DataAddress`

The Address of the Application Data Segment.

Telemetry Mnemonic(s) $sc_$cpu_ES_DataAddress

Definition at line 231 of file cfe_es.h.

38.9.2.8 DataSize

`uint32` `CFE_ES_AppInfo_t::DataSize`

The Data Size of the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_DataSize

Definition at line 233 of file cfe_es.h.

38.9.2.9 EntryPoint

```
char CFE_ES_AppInfo_t::EntryPoint[OS_MAX_API_NAME]
```

The Entry Point label for the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_AppEntryPt[OS_MAX_API_NAME]

Definition at line 216 of file cfe_es.h.

38.9.2.10 ExceptionAction

```
uint16 CFE_ES_AppInfo_t::ExceptionAction
```

What should occur if Application has an exception (Restart Application OR Restart Processor)

Telemetry Mnemonic(s) $sc_$cpu_ES_ExceptnActn

Definition at line 241 of file cfe_es.h.

38.9.2.11 ExecutionCounter

```
uint32 CFE_ES_AppInfo_t::ExecutionCounter
```

The Application's Main Task Execution Counter.

Telemetry Mnemonic(s) $sc_$cpu_ES_ExecutionCtr

Definition at line 248 of file cfe_es.h.

38.9.2.12 FileName

```
char CFE_ES_AppInfo_t::FileName[OS_MAX_PATH_LEN]
```

The Filename of the file containing the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_AppFilename[OS_MAX_PATH_LEN]

Definition at line 218 of file cfe_es.h.

38.9.2.13 MainTaskId

`uint32 CFE_ES_AppInfo_t::MainTaskId`

The Application's Main Task ID.

Telemetry Mnemonic(s) $sc_$cpu_ES_MainTaskId

Definition at line 246 of file cfe_es.h.

38.9.2.14 MainTaskName

`char CFE_ES_AppInfo_t::MainTaskName[OS_MAX_API_NAME]`

The Application's Main Task ID.

Telemetry Mnemonic(s) $sc_$cpu_ES_MainTaskName[OS_MAX_API_NAME]

Definition at line 250 of file cfe_es.h.

38.9.2.15 ModuleId

`uint32 CFE_ES_AppInfo_t::ModuleId`

The ID of the Loadable Module for the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_ModuleID

Definition at line 223 of file cfe_es.h.

38.9.2.16 Name

`char CFE_ES_AppInfo_t::Name[OS_MAX_API_NAME]`

The Registered Name of the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_AppName[OS_MAX_API_NAME]

Definition at line 214 of file cfe_es.h.

38.9.2.17   NumOfChildTasks

`uint32` `CFE_ES_AppInfo_t::NumOfChildTasks`

Number of Child tasks for an App.

Telemetry Mnemonic(s) $sc_$cpu_ES_ChildTasks

Definition at line 252 of file cfe_es.h.

38.9.2.18   Priority

`uint16` `CFE_ES_AppInfo_t::Priority`

The Priority of the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_Priority

Definition at line 244 of file cfe_es.h.

38.9.2.19   StackSize

`uint32` `CFE_ES_AppInfo_t::StackSize`

The Stack Size of the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_StackSize

Definition at line 221 of file cfe_es.h.

38.9.2.20   StartAddress

`uint32` `CFE_ES_AppInfo_t::StartAddress`

The Start Address of the Application.

Telemetry Mnemonic(s) $sc_$cpu_ES_StartAddr

Definition at line 239 of file cfe_es.h.

38.9.2.21   Type

uint32 CFE_ES_AppInfo_t::Type

The type of App: CORE or EXTERNAL.

Telemetry Mnemonic(s) $sc_$cpu_ES_AppType

Definition at line 211 of file cfe_es.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es.h

38.10   CFE_ES_AppNameCmd_Payload_t Struct Reference

Command Structure for Commands requiring just an Application Name.

#include <cfe_es_msg.h>

Data Fields

- char Application [CFE_MISSION_MAX_API_LEN]
    ASCII text string containing Application Name.

38.10.1   Detailed Description

Command Structure for Commands requiring just an Application Name.

For command details, see CFE_ES_STOP_APP_CC, CFE_ES_RESTART_APP_CC, CFE_ES_QUERY_ONE_CC

Definition at line 1268 of file cfe_es_msg.h.

38.10.2   Field Documentation

38.10.2.1   Application

char CFE_ES_AppNameCmd_Payload_t::Application[CFE_MISSION_MAX_API_LEN]

ASCII text string containing Application Name.

Definition at line 1270 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.11 CFE_ES_AppNameCmd_t Struct Reference

`#include <cfe_es_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

  cFE Software Bus Command Message Header
- CFE_ES_AppNameCmd_Payload_t Payload

38.11.1 Detailed Description

Definition at line 1273 of file cfe_es_msg.h.

38.11.2 Field Documentation

38.11.2.1 CmdHeader

`uint8 CFE_ES_AppNameCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]`

cFE Software Bus Command Message Header

Definition at line 1275 of file cfe_es_msg.h.

38.11.2.2 Payload

`CFE_ES_AppNameCmd_Payload_t CFE_ES_AppNameCmd_t::Payload`

Definition at line 1276 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.12 CFE_ES_AppReloadCmd_Payload_t Struct Reference

Reload Application Command.

`#include <cfe_es_msg.h>`

Data Fields

- char Application [CFE_MISSION_MAX_API_LEN]

    ASCII text string containing Application Name.
- char AppFileName [CFE_MISSION_MAX_PATH_LEN]

    Full path and filename of Application's executable image.

38.12.1   Detailed Description

Reload Application Command.

For command details, see CFE_ES_RELOAD_APP_CC

Definition at line 1294 of file cfe_es_msg.h.

38.12.2   Field Documentation

38.12.2.1   AppFileName

char CFE_ES_AppReloadCmd_Payload_t::AppFileName[CFE_MISSION_MAX_PATH_LEN]

Full path and filename of Application's executable image.

Definition at line 1297 of file cfe_es_msg.h.

38.12.2.2   Application

char CFE_ES_AppReloadCmd_Payload_t::Application[CFE_MISSION_MAX_API_LEN]

ASCII text string containing Application Name.

Definition at line 1296 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.13   CFE_ES_BlockStats_t Struct Reference

Block statistics.

```
#include <cfe_es.h>
```

Data Fields

- **uint32 BlockSize**

    Number of bytes in each of these blocks.

- **uint32 NumCreated**

    Number of Memory Blocks of this size created.

- **uint32 NumFree**

    Number of Memory Blocks of this size that are free.

38.13.1 Detailed Description

Block statistics.

Definition at line 273 of file cfe_es.h.

38.13.2 Field Documentation

38.13.2.1 BlockSize

`uint32 CFE_ES_BlockStats_t::BlockSize`

Number of bytes in each of these blocks.

Definition at line 275 of file cfe_es.h.

38.13.2.2 NumCreated

`uint32 CFE_ES_BlockStats_t::NumCreated`

Number of Memory Blocks of this size created.

Definition at line 276 of file cfe_es.h.

38.13.2.3 NumFree

`uint32 CFE_ES_BlockStats_t::NumFree`

Number of Memory Blocks of this size that are free.

Definition at line 277 of file cfe_es.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es.h

38.14   CFE_ES_CDSRegDumpRec_t Struct Reference

CDS Register Dump Record.

```
#include <cfe_es.h>
```

Data Fields

- CFE_ES_CDSHandle_t Handle

    Handle of CDS.
- uint32 Size

    Size, in bytes, of the CDS memory block.
- bool Table

    Flag that indicates whether CDS contains a Critical Table.
- char Name [CFE_ES_CDS_MAX_FULL_NAME_LEN]

    Processor Unique Name of CDS.
- uint8 ByteAlignSpare1

    Spare byte to insure structure size is multiple of 4 bytes.

38.14.1   Detailed Description

CDS Register Dump Record.

Definition at line 307 of file cfe_es.h.

38.14.2   Field Documentation

38.14.2.1   ByteAlignSpare1

uint8 CFE_ES_CDSRegDumpRec_t::ByteAlignSpare1

Spare byte to insure structure size is multiple of 4 bytes.

Definition at line 313 of file cfe_es.h.

38.14.2.2   Handle

CFE_ES_CDSHandle_t CFE_ES_CDSRegDumpRec_t::Handle

Handle of CDS.

Definition at line 309 of file cfe_es.h.

38.14.2.3 Name

```
char CFE_ES_CDSRegDumpRec_t::Name[CFE_ES_CDS_MAX_FULL_NAME_LEN]
```

Processor Unique Name of CDS.

Definition at line 312 of file cfe_es.h.

38.14.2.4 Size

```
uint32 CFE_ES_CDSRegDumpRec_t::Size
```

Size, in bytes, of the CDS memory block.

Definition at line 310 of file cfe_es.h.

38.14.2.5 Table

```
bool CFE_ES_CDSRegDumpRec_t::Table
```

Flag that indicates whether CDS contains a Critical Table.

Definition at line 311 of file cfe_es.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es.h

38.15 CFE_ES_DeleteCDS_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header
- CFE_ES_DeleteCDSCmd_Payload_t Payload

38.15.1 Detailed Description

Definition at line 1337 of file cfe_es_msg.h.

38.15.2 Field Documentation

38.15.2.1 CmdHeader

uint8 CFE_ES_DeleteCDS_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1339 of file cfe_es_msg.h.

38.15.2.2 Payload

CFE_ES_DeleteCDSCmd_Payload_t CFE_ES_DeleteCDS_t::Payload

Definition at line 1340 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.16 CFE_ES_DeleteCDSCmd_Payload_t Struct Reference

Delete Critical Data Store Command.

#include <cfe_es_msg.h>

Data Fields

- char CdsName [CFE_MISSION_ES_CDS_MAX_NAME_LEN]
  ASCII text string containing name of CDS to delete.

38.16.1 Detailed Description

Delete Critical Data Store Command.

For command details, see CFE_ES_DELETE_CDS_CC

Definition at line 1331 of file cfe_es_msg.h.

38.16.2 Field Documentation

38.16.2.1 CdsName

```
char CFE_ES_DeleteCDSCmd_Payload_t::CdsName[CFE_MISSION_ES_CDS_MAX_NAME_LEN]
```

ASCII text string containing name of CDS to delete.

Definition at line 1333 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.17 CFE_ES_DumpCDSRegistry_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header
- CFE_ES_DumpCDSRegistryCmd_Payload_t Payload

38.17.1 Detailed Description

Definition at line 1448 of file cfe_es_msg.h.

38.17.2 Field Documentation

38.17.2.1 CmdHeader

```
uint8 CFE_ES_DumpCDSRegistry_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]
```

cFE Software Bus Command Message Header

Definition at line 1450 of file cfe_es_msg.h.

38.17.2.2   Payload

CFE_ES_DumpCDSRegistryCmd_Payload_t CFE_ES_DumpCDSRegistry_t::Payload

Definition at line 1451 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.18   CFE_ES_DumpCDSRegistryCmd_Payload_t Struct Reference

Dump CDS Registry Command.

```
#include <cfe_es_msg.h>
```

Data Fields

- char DumpFilename [CFE_MISSION_MAX_PATH_LEN]

    ASCII text string of full path and filename of file CDS Registry is to be written.

38.18.1   Detailed Description

Dump CDS Registry Command.

For command details, see CFE_ES_DUMP_CDS_REGISTRY_CC

Definition at line 1442 of file cfe_es_msg.h.

38.18.2   Field Documentation

38.18.2.1   DumpFilename

char CFE_ES_DumpCDSRegistryCmd_Payload_t::DumpFilename[CFE_MISSION_MAX_PATH_LEN]

ASCII text string of full path and filename of file CDS Registry is to be written.

Definition at line 1444 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.19 CFE_ES_FileNameCmd_Payload_t Struct Reference

Payload format for commands which accept a single file name.

```
#include <cfe_es_msg.h>
```

Data Fields

- char FileName [CFE_MISSION_MAX_PATH_LEN]

    ASCII text string containing full path and filename of file in which Application data is to be dumped.

38.19.1 Detailed Description

Payload format for commands which accept a single file name.

This format is shared by several executive services commands. For command details, see CFE_ES_QUERY_ALL_CC, CFE_ES_QUERY_ALL_TASKS_CC, CFE_ES_WRITE_SYSLOG_CC, and CFE_ES_WRITE_ER_LOG_CC

Definition at line 1193 of file cfe_es_msg.h.

38.19.2 Field Documentation

38.19.2.1 FileName

```
char CFE_ES_FileNameCmd_Payload_t::FileName[CFE_MISSION_MAX_PATH_LEN]
```

ASCII text string containing full path and filename of file in which Application data is to be dumped.

Definition at line 1195 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.20 CFE_ES_FileNameCmd_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header
- CFE_ES_FileNameCmd_Payload_t Payload

38.20.1   Detailed Description

Definition at line 1199 of file cfe_es_msg.h.

38.20.2   Field Documentation

38.20.2.1   CmdHeader

uint8 CFE_ES_FileNameCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1201 of file cfe_es_msg.h.

38.20.2.2   Payload

CFE_ES_FileNameCmd_Payload_t CFE_ES_FileNameCmd_t::Payload

Definition at line 1202 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.21   CFE_ES_HousekeepingTlm_Payload_t Struct Reference

#include <cfe_es_msg.h>

Data Fields

- uint8 CommandCounter

    The ES Application Command Counter.
- uint8 CommandErrorCounter

    The ES Application Command Error Counter.
- uint16 CFECoreChecksum

    Checksum of cFE Core Code.
- uint8 CFEMajorVersion

    Major Version Number of cFE.
- uint8 CFEMinorVersion

    Minor Version Number of cFE.
- uint8 CFERevision

    Sub-Minor Version Number of cFE.
- uint8 CFEMissionRevision

    Mission Version Number of cFE.
- uint8 OSALMajorVersion

    OS Abstraction Layer Major Version Number.
- uint8 OSALMinorVersion

    OS Abstraction Layer Minor Version Number.
- uint8 OSALRevision

    OS Abstraction Layer Revision Number.
- uint8 OSALMissionRevision

    OS Abstraction Layer MissionRevision Number.
- uint32 SysLogBytesUsed

    Total number of bytes used in system log.
- uint32 SysLogSize

    Total size of the system log.
- uint32 SysLogEntries

    Number of entries in the system log.
- uint32 SysLogMode

    Write/Overwrite Mode.
- uint32 ERLogIndex

    Current index of the ER Log (wraps around)
- uint32 ERLogEntries

    Number of entries made in the ER Log since the power on.
- uint32 RegisteredCoreApps

    Number of Applications registered with ES.
- uint32 RegisteredExternalApps

    Number of Applications registered with ES.
- uint32 RegisteredTasks

    Number of Tasks (main AND child tasks) registered with ES.
- uint32 RegisteredLibs

    Number of Libraries registered with ES.
- uint32 ResetType

    Reset type (PROCESSOR or POWERON)
- uint32 ResetSubtype

      Reset Sub Type.

- **uint32 ProcessorResets**

      Number of processor resets since last power on.

- **uint32 MaxProcessorResets**

      Max processor resets before a power on is done.

- **uint32 BootSource**

      Boot source (as provided from BSP)

- **uint32 PerfState**

      Current state of Performance Analyzer.

- **uint32 PerfMode**

      Current mode of Performance Analyzer.

- **uint32 PerfTriggerCount**

      Number of Times Perfomance Analyzer has Triggered.

- **uint32 PerfFilterMask** [**CFE_MISSION_ES_PERF_MAX_IDS**/32]

      Current Setting of Performance Analyzer Filter Masks.

- **uint32 PerfTriggerMask** [**CFE_MISSION_ES_PERF_MAX_IDS**/32]

      Current Setting of Performance Analyzer Trigger Masks.

- **uint32 PerfDataStart**

      Identifies First Stored Entry in Performance Analyzer Log.

- **uint32 PerfDataEnd**

      Identifies Last Stored Entry in Performance Analyzer Log.

- **uint32 PerfDataCount**

      Number of Entries Put Into the Performance Analyzer Log.

- **uint32 PerfDataToWrite**

      Number of Performance Analyzer Log Entries Left to be Written to Log Dump File.

- **uint32 HeapBytesFree**

      Number of free bytes remaining in the OS heap.

- **uint32 HeapBlocksFree**

      Number of free blocks remaining in the OS heap.

- **uint32 HeapMaxBlockSize**

      Number of bytes in the largest free block.

38.21.1   Detailed Description

Name Executive Services Housekeeping Packet

Definition at line 1495 of file cfe_es_msg.h.

38.21.2   Field Documentation

38.21.2.1 BootSource

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::BootSource`

Boot source (as provided from BSP)

Telemetry Mnemonic(s) $sc_$cpu_ES_BootSource

Definition at line 1552 of file cfe_es_msg.h.

38.21.2.2 CFECoreChecksum

`uint16` `CFE_ES_HousekeepingTlm_Payload_t::CFECoreChecksum`

Checksum of cFE Core Code.

Telemetry Mnemonic(s) $sc_$cpu_ES_CKSUM

Definition at line 1502 of file cfe_es_msg.h.

38.21.2.3 CFEMajorVersion

`uint8` `CFE_ES_HousekeepingTlm_Payload_t::CFEMajorVersion`

Major Version Number of cFE.

Telemetry Mnemonic(s) $sc_$cpu_ES_CFEMAJORVER

Definition at line 1504 of file cfe_es_msg.h.

38.21.2.4 CFEMinorVersion

`uint8` `CFE_ES_HousekeepingTlm_Payload_t::CFEMinorVersion`

Minor Version Number of cFE.

Telemetry Mnemonic(s) $sc_$cpu_ES_CFEMINORVER

Definition at line 1506 of file cfe_es_msg.h.

38.21.2.5 CFEMissionRevision

uint8 CFE_ES_HousekeepingTlm_Payload_t::CFEMissionRevision

Mission Version Number of cFE.

Telemetry Mnemonic(s) $sc_$cpu_ES_CFEMISSIONREV

Definition at line 1510 of file cfe_es_msg.h.

38.21.2.6 CFERevision

uint8 CFE_ES_HousekeepingTlm_Payload_t::CFERevision

Sub-Minor Version Number of cFE.

Telemetry Mnemonic(s) $sc_$cpu_ES_CFEREVISION

Definition at line 1508 of file cfe_es_msg.h.

38.21.2.7 CommandCounter

uint8 CFE_ES_HousekeepingTlm_Payload_t::CommandCounter

The ES Application Command Counter.

Telemetry Mnemonic(s) $sc_$cpu_ES_CMDPC

Definition at line 1497 of file cfe_es_msg.h.

38.21.2.8 CommandErrorCounter

uint8 CFE_ES_HousekeepingTlm_Payload_t::CommandErrorCounter

The ES Application Command Error Counter.

Telemetry Mnemonic(s) $sc_$cpu_ES_CMDEC

Definition at line 1499 of file cfe_es_msg.h.

38.21.2.9 ERLogEntries

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::ERLogEntries`

Number of entries made in the ER Log since the power on.

Telemetry Mnemonic(s) $sc_$cpu_ES_ERLOGENTRIES

Definition at line 1532 of file cfe_es_msg.h.

38.21.2.10 ERLogIndex

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::ERLogIndex`

Current index of the ER Log (wraps around)

Telemetry Mnemonic(s) $sc_$cpu_ES_ERLOGINDEX

Definition at line 1530 of file cfe_es_msg.h.

38.21.2.11 HeapBlocksFree

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::HeapBlocksFree`

Number of free blocks remaining in the OS heap.

Telemetry Mnemonic(s) $sc_$cpu_ES_HeapBlocksFree

Definition at line 1575 of file cfe_es_msg.h.

38.21.2.12 HeapBytesFree

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::HeapBytesFree`

Number of free bytes remaining in the OS heap.

Telemetry Mnemonic(s) $sc_$cpu_ES_HeapBytesFree

Definition at line 1573 of file cfe_es_msg.h.

38.21.2.13   HeapMaxBlockSize

uint32 CFE_ES_HousekeepingTlm_Payload_t::HeapMaxBlockSize

Number of bytes in the largest free block.

Telemetry Mnemonic(s) $sc_$cpu_ES_HeapMaxBlkSize

Definition at line 1577 of file cfe_es_msg.h.

38.21.2.14   MaxProcessorResets

uint32 CFE_ES_HousekeepingTlm_Payload_t::MaxProcessorResets

Max processor resets before a power on is done.

Telemetry Mnemonic(s) $sc_$cpu_ES_MaxProcResets

Definition at line 1550 of file cfe_es_msg.h.

38.21.2.15   OSALMajorVersion

uint8 CFE_ES_HousekeepingTlm_Payload_t::OSALMajorVersion

OS Abstraction Layer Major Version Number.

Telemetry Mnemonic(s) $sc_$cpu_ES_OSMAJORVER

Definition at line 1512 of file cfe_es_msg.h.

38.21.2.16   OSALMinorVersion

uint8 CFE_ES_HousekeepingTlm_Payload_t::OSALMinorVersion

OS Abstraction Layer Minor Version Number.

Telemetry Mnemonic(s) $sc_$cpu_ES_OSMINORVER

Definition at line 1514 of file cfe_es_msg.h.

38.21.2.17 OSALMissionRevision

`uint8` `CFE_ES_HousekeepingTlm_Payload_t::OSALMissionRevision`

OS Abstraction Layer MissionRevision Number.

Telemetry Mnemonic(s) $sc_$cpu_ES_OSMISSIONREV

Definition at line 1518 of file cfe_es_msg.h.

38.21.2.18 OSALRevision

`uint8` `CFE_ES_HousekeepingTlm_Payload_t::OSALRevision`

OS Abstraction Layer Revision Number.

Telemetry Mnemonic(s) $sc_$cpu_ES_OSREVISION

Definition at line 1516 of file cfe_es_msg.h.

38.21.2.19 PerfDataCount

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::PerfDataCount`

Number of Entries Put Into the Performance Analyzer Log.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfDataCnt

Definition at line 1569 of file cfe_es_msg.h.

38.21.2.20 PerfDataEnd

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::PerfDataEnd`

Identifies Last Stored Entry in Performance Analyzer Log.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfDataEnd

Definition at line 1567 of file cfe_es_msg.h.

38.21.2.21   PerfDataStart

`uint32` CFE_ES_HousekeepingTlm_Payload_t::PerfDataStart

Identifies First Stored Entry in Performance Analyzer Log.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfDataStart

Definition at line 1565 of file cfe_es_msg.h.

38.21.2.22   PerfDataToWrite

`uint32` CFE_ES_HousekeepingTlm_Payload_t::PerfDataToWrite

Number of Performance Analyzer Log Entries Left to be Written to Log Dump File.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfData2Write

Definition at line 1571 of file cfe_es_msg.h.

38.21.2.23   PerfFilterMask

`uint32` CFE_ES_HousekeepingTlm_Payload_t::PerfFilterMask[CFE_MISSION_ES_PERF_MAX_IDS/32]

Current Setting of Performance Analyzer Filter Masks.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfFltrMask[MaskCnt]

Definition at line 1561 of file cfe_es_msg.h.

38.21.2.24   PerfMode

`uint32` CFE_ES_HousekeepingTlm_Payload_t::PerfMode

Current mode of Performance Analyzer.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfMode

Definition at line 1557 of file cfe_es_msg.h.

38.21.2.25 PerfState

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::PerfState`

Current state of Performance Analyzer.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfState

Definition at line 1555 of file cfe_es_msg.h.

38.21.2.26 PerfTriggerCount

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::PerfTriggerCount`

Number of Times Perfomance Analyzer has Triggered.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfTrigCnt

Definition at line 1559 of file cfe_es_msg.h.

38.21.2.27 PerfTriggerMask

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::PerfTriggerMask[`CFE_MISSION_ES_PERF_MAX_IDS`/32]`

Current Setting of Performance Analyzer Trigger Masks.

Telemetry Mnemonic(s) $sc_$cpu_ES_PerfTrigMask[MaskCnt]

Definition at line 1563 of file cfe_es_msg.h.

38.21.2.28 ProcessorResets

`uint32` `CFE_ES_HousekeepingTlm_Payload_t::ProcessorResets`

Number of processor resets since last power on.

Telemetry Mnemonic(s) $sc_$cpu_ES_ProcResetCnt

Definition at line 1548 of file cfe_es_msg.h.

38.21.2.29   RegisteredCoreApps

uint32 CFE_ES_HousekeepingTlm_Payload_t::RegisteredCoreApps

Number of Applications registered with ES.

Telemetry Mnemonic(s) $sc_$cpu_ES_RegCoreApps

Definition at line 1535 of file cfe_es_msg.h.

38.21.2.30   RegisteredExternalApps

uint32 CFE_ES_HousekeepingTlm_Payload_t::RegisteredExternalApps

Number of Applications registered with ES.

Telemetry Mnemonic(s) $sc_$cpu_ES_RegExtApps

Definition at line 1537 of file cfe_es_msg.h.

38.21.2.31   RegisteredLibs

uint32 CFE_ES_HousekeepingTlm_Payload_t::RegisteredLibs

Number of Libraries registered with ES.

Telemetry Mnemonic(s) $sc_$cpu_ES_RegLibs

Definition at line 1541 of file cfe_es_msg.h.

38.21.2.32   RegisteredTasks

uint32 CFE_ES_HousekeepingTlm_Payload_t::RegisteredTasks

Number of Tasks (main AND child tasks) registered with ES.

Telemetry Mnemonic(s) $sc_$cpu_ES_RegTasks

Definition at line 1539 of file cfe_es_msg.h.

38.21.2.33   ResetSubtype

uint32 CFE_ES_HousekeepingTlm_Payload_t::ResetSubtype

Reset Sub Type.

Telemetry Mnemonic(s) $sc_$cpu_ES_ResetSubtype

Definition at line 1546 of file cfe_es_msg.h.

38.21.2.34   ResetType

uint32 CFE_ES_HousekeepingTlm_Payload_t::ResetType

Reset type (PROCESSOR or POWERON)

Telemetry Mnemonic(s) $sc_$cpu_ES_ResetType

Definition at line 1544 of file cfe_es_msg.h.

38.21.2.35   SysLogBytesUsed

uint32 CFE_ES_HousekeepingTlm_Payload_t::SysLogBytesUsed

Total number of bytes used in system log.

Telemetry Mnemonic(s) $sc_$cpu_ES_SYSLOGBYTEUSED

Definition at line 1521 of file cfe_es_msg.h.

38.21.2.36   SysLogEntries

uint32 CFE_ES_HousekeepingTlm_Payload_t::SysLogEntries

Number of entries in the system log.

Telemetry Mnemonic(s) $sc_$cpu_ES_SYSLOGENTRIES

Definition at line 1525 of file cfe_es_msg.h.

38.21.2.37 SysLogMode

uint32 CFE_ES_HousekeepingTlm_Payload_t::SysLogMode

Write/Overwrite Mode.

Telemetry Mnemonic(s) $sc_$cpu_ES_SYSLOGMODE

Definition at line 1527 of file cfe_es_msg.h.

38.21.2.38 SysLogSize

uint32 CFE_ES_HousekeepingTlm_Payload_t::SysLogSize

Total size of the system log.

Telemetry Mnemonic(s) $sc_$cpu_ES_SYSLOGSIZE

Definition at line 1523 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.22 CFE_ES_HousekeepingTlm_t Struct Reference

#include <cfe_es_msg.h>

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]
    cFE Software Bus Telemetry Message Header
- CFE_ES_HousekeepingTlm_Payload_t Payload

38.22.1 Detailed Description

Definition at line 1581 of file cfe_es_msg.h.

38.22.2 Field Documentation

38.22.2.1 Payload

CFE_ES_HousekeepingTlm_Payload_t CFE_ES_HousekeepingTlm_t::Payload

Definition at line 1584 of file cfe_es_msg.h.

38.22.2.2 TlmHeader

uint8 CFE_ES_HousekeepingTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]

cFE Software Bus Telemetry Message Header

Definition at line 1583 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.23 CFE_ES_MemPoolStats_t Struct Reference

Memory Pool Statistics.

```
#include <cfe_es.h>
```

Data Fields

- uint32 **PoolSize**

    Size of Memory Pool (in bytes)
- uint32 **NumBlocksRequested**

    Number of times a memory block has been allocated.
- uint32 **CheckErrCtr**

    Number of errors detected when freeing a memory block.
- uint32 **NumFreeBytes**

    Number of bytes never allocated to a block.
- CFE_ES_BlockStats_t **BlockStats** [CFE_ES_MAX_MEMPOOL_BLOCK_SIZES]

    Contains stats on each block size.

38.23.1 Detailed Description

Memory Pool Statistics.

Definition at line 283 of file cfe_es.h.

38.23.2   Field Documentation

38.23.2.1   BlockStats

CFE_ES_BlockStats_t CFE_ES_MemPoolStats_t::BlockStats[CFE_ES_MAX_MEMPOOL_BLOCK_SIZES]

Contains stats on each block size.

Telemetry Mnemonic(s) $sc_$cpu_ES_BlkStats[BLK_SIZES]

Definition at line 293 of file cfe_es.h.

38.23.2.2   CheckErrCtr

uint32 CFE_ES_MemPoolStats_t::CheckErrCtr

Number of errors detected when freeing a memory block.

Telemetry Mnemonic(s) $sc_$cpu_ES_BlkErrCTR

Definition at line 289 of file cfe_es.h.

38.23.2.3   NumBlocksRequested

uint32 CFE_ES_MemPoolStats_t::NumBlocksRequested

Number of times a memory block has been allocated.

Telemetry Mnemonic(s) $sc_$cpu_ES_BlksREQ

Definition at line 287 of file cfe_es.h.

38.23.2.4   NumFreeBytes

uint32 CFE_ES_MemPoolStats_t::NumFreeBytes

Number of bytes never allocated to a block.

Telemetry Mnemonic(s) $sc_$cpu_ES_FreeBytes

Definition at line 291 of file cfe_es.h.

38.23.2.5 PoolSize

`uint32` `CFE_ES_MemPoolStats_t::PoolSize`

Size of Memory Pool (in bytes)

Telemetry Mnemonic(s) $sc_$cpu_ES_PoolSize

Definition at line 285 of file cfe_es.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es.h

38.24 CFE_ES_MemStatsTlm_t Struct Reference

`#include <cfe_es_msg.h>`

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]

  cFE Software Bus Telemetry Message Header
- CFE_ES_PoolStatsTlm_Payload_t Payload

38.24.1 Detailed Description

Definition at line 1484 of file cfe_es_msg.h.

38.24.2 Field Documentation

38.24.2.1 Payload

`CFE_ES_PoolStatsTlm_Payload_t` `CFE_ES_MemStatsTlm_t::Payload`

Definition at line 1487 of file cfe_es_msg.h.

38.24.2.2   TlmHeader

uint8 CFE_ES_MemStatsTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]

cFE Software Bus Telemetry Message Header

Definition at line 1486 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.25   CFE_ES_NoArgsCmd_t Struct Reference

Generic "no arguments" command.

#include <cfe_es_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header

38.25.1   Detailed Description

Generic "no arguments" command.

This command structure is used for commands that do not have any parameters. This includes:

1. The Housekeeping Request Message

2. The No-Op Command (For details, see CFE_ES_NOOP_CC)

3. The Reset Counters Command (For details, see CFE_ES_RESET_COUNTERS_CC)

Definition at line 1121 of file cfe_es_msg.h.

38.25.2   Field Documentation

38.25.2.1 CmdHeader

`uint8` CFE_ES_NoArgsCmd_t::CmdHeader[`CFE_SB_CMD_HDR_SIZE`]

cFE Software Bus Command Message Header

Definition at line 1123 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.26 CFE_ES_OneAppTlm_Payload_t Struct Reference

`#include <cfe_es_msg.h>`

Data Fields

- CFE_ES_AppInfo_t AppInfo
    For more information, see CFE_ES_AppInfo_t.

38.26.1 Detailed Description

Name Single Application Information Packet

Definition at line 1462 of file cfe_es_msg.h.

38.26.2 Field Documentation

38.26.2.1 AppInfo

`CFE_ES_AppInfo_t` CFE_ES_OneAppTlm_Payload_t::AppInfo

For more information, see CFE_ES_AppInfo_t.

Definition at line 1464 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.27   CFE_ES_OneAppTlm_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]
    cFE Software Bus Telemetry Message Header
- CFE_ES_OneAppTlm_Payload_t Payload

38.27.1   Detailed Description

Definition at line 1468 of file cfe_es_msg.h.

38.27.2   Field Documentation

38.27.2.1   Payload

```
CFE_ES_OneAppTlm_Payload_t CFE_ES_OneAppTlm_t::Payload
```

Definition at line 1471 of file cfe_es_msg.h.

38.27.2.2   TlmHeader

```
uint8 CFE_ES_OneAppTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]
```

cFE Software Bus Telemetry Message Header

Definition at line 1470 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.28   CFE_ES_OverWriteSyslog_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- **uint8 CmdHeader** [CFE_SB_CMD_HDR_SIZE]

  cFE Software Bus Command Message Header
- **CFE_ES_OverWriteSysLogCmd_Payload_t Payload**

38.28.1 Detailed Description

Definition at line 1227 of file cfe_es_msg.h.

38.28.2 Field Documentation

38.28.2.1 CmdHeader

uint8 CFE_ES_OverWriteSyslog_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1229 of file cfe_es_msg.h.

38.28.2.2 Payload

CFE_ES_OverWriteSysLogCmd_Payload_t CFE_ES_OverWriteSyslog_t::Payload

Definition at line 1230 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.29 CFE_ES_OverWriteSysLogCmd_Payload_t Struct Reference

Overwrite/Discard System Log Configuration Command.

#include <cfe_es_msg.h>

Data Fields

- **uint32 Mode**

  CFE_ES_LogMode_DISCARD=Throw away most recent messages, CFE_ES_LogMode_OVERWRITE=Overwrite oldest with most recent

38.29.1 Detailed Description

Overwrite/Discard System Log Configuration Command.

For command details, see CFE_ES_OVER_WRITE_SYSLOG_CC

Definition at line 1220 of file cfe_es_msg.h.

38.29.2 Field Documentation

38.29.2.1 Mode

uint32 CFE_ES_OverWriteSysLogCmd_Payload_t::Mode

CFE_ES_LogMode_DISCARD=Throw away most recent messages, CFE_ES_LogMode_OVERWRITE=Overwrite oldest with most recent

Definition at line 1222 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.30 CFE_ES_PoolAlign_t Union Reference

Pool Alignement.

```
#include <cfe_es.h>
```

Data Fields

- void ∗ Ptr
    Aligned pointer.
- long long int LongInt
    Aligned Long Integer.
- long double LongDouble
    Aligned Long Double.

38.30.1 Detailed Description

Pool Alignement.

Union that can be used for minimum memory alignment of ES memory pools on the target. It contains the longest native data types such that the alignment of this structure should reflect the largest possible alignment requirements for any data on this processor.

Definition at line 329 of file cfe_es.h.

38.30.2   Field Documentation

38.30.2.1   LongDouble

```
long double CFE_ES_PoolAlign_t::LongDouble
```

Aligned Long Double.

Definition at line 334 of file cfe_es.h.

38.30.2.2   LongInt

```
long long int CFE_ES_PoolAlign_t::LongInt
```

Aligned Long Integer.

Definition at line 333 of file cfe_es.h.

38.30.2.3   Ptr

```
void* CFE_ES_PoolAlign_t::Ptr
```

Aligned pointer.

Definition at line 331 of file cfe_es.h.

The documentation for this union was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es.h

38.31   CFE_ES_PoolStatsTlm_Payload_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- CFE_ES_MemHandle_t PoolHandle

    Handle of memory pool whose stats are being telemetered.
- CFE_ES_MemPoolStats_t PoolStats

    For more info, see CFE_ES_MemPoolStats_t.

38.31.1   Detailed Description

Name Memory Pool Statistics Packet

Definition at line 1477 of file cfe_es_msg.h.

38.31.2   Field Documentation

38.31.2.1   PoolHandle

CFE_ES_MemHandle_t CFE_ES_PoolStatsTlm_Payload_t::PoolHandle

Handle of memory pool whose stats are being telemetered.

Telemetry Mnemonic(s) $sc_$cpu_ES_PoolHandle

Definition at line 1479 of file cfe_es_msg.h.

38.31.2.2   PoolStats

CFE_ES_MemPoolStats_t CFE_ES_PoolStatsTlm_Payload_t::PoolStats

For more info, see CFE_ES_MemPoolStats_t.

Definition at line 1481 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.32   CFE_ES_ReloadApp_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header
- CFE_ES_AppReloadCmd_Payload_t Payload

38.32.1 Detailed Description

Definition at line 1301 of file cfe_es_msg.h.

38.32.2 Field Documentation

38.32.2.1 CmdHeader

`uint8` `CFE_ES_ReloadApp_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]`

cFE Software Bus Command Message Header

Definition at line 1303 of file cfe_es_msg.h.

38.32.2.2 Payload

`CFE_ES_AppReloadCmd_Payload_t` `CFE_ES_ReloadApp_t::Payload`

Definition at line 1304 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.33 CFE_ES_Restart_t Struct Reference

`#include <cfe_es_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header
- CFE_ES_RestartCmd_Payload_t Payload

38.33.1 Detailed Description

Definition at line 1152 of file cfe_es_msg.h.

38.33.2 Field Documentation

38.33.2.1 CmdHeader

uint8 CFE_ES_Restart_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1154 of file cfe_es_msg.h.

38.33.2.2 Payload

CFE_ES_RestartCmd_Payload_t CFE_ES_Restart_t::Payload

Definition at line 1155 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.34 CFE_ES_RestartCmd_Payload_t Struct Reference

Restart cFE Command.

#include <cfe_es_msg.h>

Data Fields

- uint16 RestartType
    - *CFE_PSP_RST_TYPE_PROCESSOR=Processor Reset or CFE_PSP_RST_TYPE_POWERON=Power-On Reset*

38.34.1 Detailed Description

Restart cFE Command.

For command details, see CFE_ES_RESTART_CC

Definition at line 1146 of file cfe_es_msg.h.

38.34.2 Field Documentation

38.34.2.1 RestartType

`uint16` CFE_ES_RestartCmd_Payload_t::RestartType

CFE_PSP_RST_TYPE_PROCESSOR=Processor Reset or CFE_PSP_RST_TYPE_POWERON=Power-On Reset

Definition at line 1148 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.35 CFE_ES_SendMemPoolStats_t Struct Reference

`#include <cfe_es_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header
- CFE_ES_SendMemPoolStatsCmd_Payload_t Payload

38.35.1 Detailed Description

Definition at line 1430 of file cfe_es_msg.h.

38.35.2 Field Documentation

38.35.2.1 CmdHeader

`uint8` CFE_ES_SendMemPoolStats_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1432 of file cfe_es_msg.h.

38.35.2.2   Payload

CFE_ES_SendMemPoolStatsCmd_Payload_t CFE_ES_SendMemPoolStats_t::Payload

Definition at line 1433 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.36   CFE_ES_SendMemPoolStatsCmd_Payload_t Struct Reference

Telemeter Memory Pool Statistics Command.

```
#include <cfe_es_msg.h>
```

Data Fields

- char Application [CFE_MISSION_MAX_API_LEN]
    - *RESERVED - should be all zeroes*
- CFE_ES_MemHandle_t PoolHandle
    Handle of Pool whose statistics are to be telemetered.

38.36.1   Detailed Description

Telemeter Memory Pool Statistics Command.

For command details, see CFE_ES_SEND_MEM_POOL_STATS_CC

Definition at line 1423 of file cfe_es_msg.h.

38.36.2   Field Documentation

38.36.2.1   Application

char CFE_ES_SendMemPoolStatsCmd_Payload_t::Application[CFE_MISSION_MAX_API_LEN]

- RESERVED - should be all zeroes

Definition at line 1425 of file cfe_es_msg.h.

38.36.2.2 PoolHandle

CFE_ES_MemHandle_t CFE_ES_SendMemPoolStatsCmd_Payload_t::PoolHandle

Handle of Pool whose statistics are to be telemetered.

Definition at line 1426 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.37 CFE_ES_SetMaxPRCount_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

  cFE Software Bus Command Message Header
- CFE_ES_SetMaxPRCountCmd_Payload_t Payload

38.37.1 Detailed Description

Definition at line 1319 of file cfe_es_msg.h.

38.37.2 Field Documentation

38.37.2.1 CmdHeader

uint8 CFE_ES_SetMaxPRCount_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1321 of file cfe_es_msg.h.

38.37.2.2   Payload

CFE_ES_SetMaxPRCountCmd_Payload_t CFE_ES_SetMaxPRCount_t::Payload

Definition at line 1322 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.38   CFE_ES_SetMaxPRCountCmd_Payload_t Struct Reference

Set Maximum Processor Reset Count Command.

```
#include <cfe_es_msg.h>
```

Data Fields

- uint16 MaxPRCount

    New maximum number of Processor Resets before an automatic Power-On Reset is performed.

38.38.1   Detailed Description

Set Maximum Processor Reset Count Command.

For command details, see CFE_ES_SET_MAX_PR_COUNT_CC

Definition at line 1313 of file cfe_es_msg.h.

38.38.2   Field Documentation

38.38.2.1   MaxPRCount

uint16 CFE_ES_SetMaxPRCountCmd_Payload_t::MaxPRCount

New maximum number of Processor Resets before an automatic Power-On Reset is performed.

Definition at line 1315 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.39 CFE_ES_SetPerfFilterMask_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header
- CFE_ES_SetPerfFilterMaskCmd_Payload_t Payload

38.39.1 Detailed Description

Definition at line 1392 of file cfe_es_msg.h.

38.39.2 Field Documentation

38.39.2.1 CmdHeader

```
uint8 CFE_ES_SetPerfFilterMask_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]
```

cFE Software Bus Command Message Header

Definition at line 1394 of file cfe_es_msg.h.

38.39.2.2 Payload

```
CFE_ES_SetPerfFilterMaskCmd_Payload_t CFE_ES_SetPerfFilterMask_t::Payload
```

Definition at line 1395 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.40 CFE_ES_SetPerfFilterMaskCmd_Payload_t Struct Reference

Set Performance Analyzer Filter Mask Command.

```
#include <cfe_es_msg.h>
```

Data Fields

- **uint32 FilterMaskNum**

    Index into array of Filter Masks.

- **uint32 FilterMask**

    New Mask for specified entry in array of Filter Masks.

38.40.1   Detailed Description

Set Performance Analyzer Filter Mask Command.

For command details, see CFE_ES_SET_PERF_FILTER_MASK_CC

Definition at line 1385 of file cfe_es_msg.h.

38.40.2   Field Documentation

38.40.2.1   FilterMask

uint32 CFE_ES_SetPerfFilterMaskCmd_Payload_t::FilterMask

New Mask for specified entry in array of Filter Masks.

Definition at line 1388 of file cfe_es_msg.h.

38.40.2.2   FilterMaskNum

uint32 CFE_ES_SetPerfFilterMaskCmd_Payload_t::FilterMaskNum

Index into array of Filter Masks.

Definition at line 1387 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.41   CFE_ES_SetPerfTriggerMask_t Struct Reference

#include <cfe_es_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

     cFE Software Bus Command Message Header

- CFE_ES_SetPerfTrigMaskCmd_Payload_t Payload

38.41.1   Detailed Description

Definition at line 1411 of file cfe_es_msg.h.

38.41.2   Field Documentation

38.41.2.1   CmdHeader

`uint8` CFE_ES_SetPerfTriggerMask_t::CmdHeader[`CFE_SB_CMD_HDR_SIZE`]

cFE Software Bus Command Message Header

Definition at line 1413 of file cfe_es_msg.h.

38.41.2.2   Payload

`CFE_ES_SetPerfTrigMaskCmd_Payload_t` CFE_ES_SetPerfTriggerMask_t::Payload

Definition at line 1414 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.42   CFE_ES_SetPerfTrigMaskCmd_Payload_t Struct Reference

Set Performance Analyzer Trigger Mask Command.

`#include <cfe_es_msg.h>`

Data Fields

- uint32 TriggerMaskNum

     Index into array of Trigger Masks.

- uint32 TriggerMask

     New Mask for specified entry in array of Trigger Masks.

38.42.1   Detailed Description

Set Performance Analyzer Trigger Mask Command.

For command details, see CFE_ES_SET_PERF_TRIGGER_MASK_CC

Definition at line 1404 of file cfe_es_msg.h.

38.42.2   Field Documentation

38.42.2.1   TriggerMask

`uint32 CFE_ES_SetPerfTrigMaskCmd_Payload_t::TriggerMask`

New Mask for specified entry in array of Trigger Masks.

Definition at line 1407 of file cfe_es_msg.h.

38.42.2.2   TriggerMaskNum

`uint32 CFE_ES_SetPerfTrigMaskCmd_Payload_t::TriggerMaskNum`

Index into array of Trigger Masks.

Definition at line 1406 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.43   CFE_ES_Shell_t Struct Reference

`#include <cfe_es_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    - *cFE Software Bus Command Message Header*
- CFE_ES_ShellCmd_Payload_t Payload

38.43.1 Detailed Description

Deprecated

Definition at line 1177 of file cfe_es_msg.h.

38.43.2 Field Documentation

38.43.2.1 CmdHeader

uint8 CFE_ES_Shell_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1179 of file cfe_es_msg.h.

38.43.2.2 Payload

CFE_ES_ShellCmd_Payload_t CFE_ES_Shell_t::Payload

Definition at line 1180 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.44 CFE_ES_ShellCmd_Payload_t Struct Reference

DEPRECATED: Shell Command.

#include <cfe_es_msg.h>

Data Fields

- char CmdString [CFE_MISSION_ES_MAX_SHELL_CMD]

    ASCII text string containing shell command to be executed.
- char OutputFilename [CFE_MISSION_MAX_PATH_LEN]

    Filename where shell command output is to be written.

38.44.1 Detailed Description

DEPRECATED: Shell Command.

[Deprecated]

For command details, see [CFE_ES_SHELL_CC](#)

Definition at line 1166 of file cfe_es_msg.h.

38.44.2 Field Documentation

38.44.2.1 CmdString

```
char CFE_ES_ShellCmd_Payload_t::CmdString[CFE_MISSION_ES_MAX_SHELL_CMD]
```

ASCII text string containing shell command to be executed.

Definition at line 1168 of file cfe_es_msg.h.

38.44.2.2 OutputFilename

```
char CFE_ES_ShellCmd_Payload_t::OutputFilename[CFE_MISSION_MAX_PATH_LEN]
```

Filename where shell command output is to be written.

Definition at line 1170 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/[cfe_es_msg.h](#)

38.45 CFE_ES_ShellPacket_Payload_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- char [ShellOutput](#) [[CFE_MISSION_ES_MAX_SHELL_PKT](#)]

  ASCII text string containing output from OS Shell that was received in response to an OS Shell Command.

38.45.1 Detailed Description

Name DEPRECATED: OS Shell Output Packet

Deprecated

Definition at line 1593 of file cfe_es_msg.h.

38.45.2 Field Documentation

38.45.2.1 ShellOutput

```
char CFE_ES_ShellPacket_Payload_t::ShellOutput[CFE_MISSION_ES_MAX_SHELL_PKT]
```

ASCII text string containing output from OS Shell that was received in response to an OS Shell Command.

Definition at line 1595 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.46 CFE_ES_ShellTlm_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- CFE_SB_TlmHdr_t TlmHeader
    cFE Software Bus Telemetry Message Header
- CFE_ES_ShellPacket_Payload_t Payload

38.46.1 Detailed Description

Deprecated

Definition at line 1602 of file cfe_es_msg.h.

38.46.2 Field Documentation

38.46.2.1   Payload

CFE_ES_ShellPacket_Payload_t CFE_ES_ShellTlm_t::Payload

Definition at line 1605 of file cfe_es_msg.h.

38.46.2.2   TlmHeader

CFE_SB_TlmHdr_t CFE_ES_ShellTlm_t::TlmHeader

cFE Software Bus Telemetry Message Header

Definition at line 1604 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.47   CFE_ES_StartApp_t Struct Reference

#include <cfe_es_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
  cFE Software Bus Command Message Header
- CFE_ES_StartAppCmd_Payload_t Payload

38.47.1   Detailed Description

Definition at line 1256 of file cfe_es_msg.h.

38.47.2   Field Documentation

38.47.2.1   CmdHeader

uint8 CFE_ES_StartApp_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1258 of file cfe_es_msg.h.

38.47.2.2   Payload

CFE_ES_StartAppCmd_Payload_t CFE_ES_StartApp_t::Payload

Definition at line 1259 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.48   CFE_ES_StartAppCmd_Payload_t Struct Reference

Start Application Command.

```
#include <cfe_es_msg.h>
```

Data Fields

- char Application [CFE_MISSION_MAX_API_LEN]

    Name of Application to be started.
- char AppEntryPoint [CFE_MISSION_MAX_API_LEN]

    Symbolic name of Application's entry point.
- char AppFileName [CFE_MISSION_MAX_PATH_LEN]

    Full path and filename of Application's executable image.
- uint32 StackSize

    Desired stack size for the new application.
- uint16 ExceptionAction

    CFE_ES_ExceptionAction_RESTART_APP=On exception, restart Application, CFE_ES_ExceptionAction_PROC_RE←
    START=On exception, perform a Processor Reset
- uint16 Priority

    The new Applications runtime priority.

38.48.1   Detailed Description

Start Application Command.

For command details, see CFE_ES_START_APP_CC

Definition at line 1239 of file cfe_es_msg.h.

38.48.2   Field Documentation

38.48.2.1 AppEntryPoint

char CFE_ES_StartAppCmd_Payload_t::AppEntryPoint[CFE_MISSION_MAX_API_LEN]

Symbolic name of Application's entry point.

Definition at line 1242 of file cfe_es_msg.h.

38.48.2.2 AppFileName

char CFE_ES_StartAppCmd_Payload_t::AppFileName[CFE_MISSION_MAX_PATH_LEN]

Full path and filename of Application's executable image.

Definition at line 1243 of file cfe_es_msg.h.

38.48.2.3 Application

char CFE_ES_StartAppCmd_Payload_t::Application[CFE_MISSION_MAX_API_LEN]

Name of Application to be started.

Definition at line 1241 of file cfe_es_msg.h.

38.48.2.4 ExceptionAction

uint16 CFE_ES_StartAppCmd_Payload_t::ExceptionAction

CFE_ES_ExceptionAction_RESTART_APP=On exception, restart Application, CFE_ES_ExceptionAction_PROC_R↩
ESTART=On exception, perform a Processor Reset

Definition at line 1248 of file cfe_es_msg.h.

38.48.2.5 Priority

uint16 CFE_ES_StartAppCmd_Payload_t::Priority

The new Applications runtime priority.

Definition at line 1252 of file cfe_es_msg.h.

38.48.2.6 StackSize

`uint32` `CFE_ES_StartAppCmd_Payload_t::StackSize`

Desired stack size for the new application.

Definition at line 1246 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.49 CFE_ES_StartPerfCmd_Payload_t Struct Reference

Start Performance Analyzer Command.

`#include <cfe_es_msg.h>`

Data Fields

- uint32 TriggerMode
    Desired trigger position (Start, Center, End)

38.49.1 Detailed Description

Start Performance Analyzer Command.

For command details, see CFE_ES_START_PERF_DATA_CC

Definition at line 1349 of file cfe_es_msg.h.

38.49.2 Field Documentation

38.49.2.1 TriggerMode

`uint32` `CFE_ES_StartPerfCmd_Payload_t::TriggerMode`

Desired trigger position (Start, Center, End)

Definition at line 1351 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.50   CFE_ES_StartPerfData_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header
- CFE_ES_StartPerfCmd_Payload_t Payload

38.50.1   Detailed Description

Definition at line 1354 of file cfe_es_msg.h.

38.50.2   Field Documentation

38.50.2.1   CmdHeader

```
uint8 CFE_ES_StartPerfData_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]
```

cFE Software Bus Command Message Header

Definition at line 1356 of file cfe_es_msg.h.

38.50.2.2   Payload

```
CFE_ES_StartPerfCmd_Payload_t CFE_ES_StartPerfData_t::Payload
```

Definition at line 1357 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.51   CFE_ES_StopPerfCmd_Payload_t Struct Reference

Stop Performance Analyzer Command.

```
#include <cfe_es_msg.h>
```

Data Fields

- char DataFileName [CFE_MISSION_MAX_PATH_LEN]

    ASCII text string of full path and filename of file Performance Analyzer data is to be written.

38.51.1 Detailed Description

Stop Performance Analyzer Command.

For command details, see CFE_ES_STOP_PERF_DATA_CC

Definition at line 1366 of file cfe_es_msg.h.

38.51.2 Field Documentation

38.51.2.1 DataFileName

```
char CFE_ES_StopPerfCmd_Payload_t::DataFileName[CFE_MISSION_MAX_PATH_LEN]
```

ASCII text string of full path and filename of file Performance Analyzer data is to be written.

Definition at line 1368 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.52 CFE_ES_StopPerfData_t Struct Reference

```
#include <cfe_es_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header
- CFE_ES_StopPerfCmd_Payload_t Payload

38.52.1 Detailed Description

Definition at line 1372 of file cfe_es_msg.h.

38.52.2   Field Documentation

38.52.2.1   CmdHeader

uint8 CFE_ES_StopPerfData_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 1374 of file cfe_es_msg.h.

38.52.2.2   Payload

CFE_ES_StopPerfCmd_Payload_t CFE_ES_StopPerfData_t::Payload

Definition at line 1375 of file cfe_es_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_es_msg.h

38.53   CFE_ES_TaskInfo_t Struct Reference

Task Info.

```
#include <cfe_es.h>
```

Data Fields

- uint32 TaskId
    Task Id.
- uint32 ExecutionCounter
    Task Execution Counter.
- uint8 TaskName [OS_MAX_API_NAME]
    Task Name.
- uint32 AppId
    Parent Application ID.
- uint8 AppName [OS_MAX_API_NAME]
    Parent Application Name.

38.53.1 Detailed Description

Task Info.

Definition at line 260 of file cfe_es.h.

38.53.2 Field Documentation

38.53.2.1 AppId

uint32 CFE_ES_TaskInfo_t::AppId

Parent Application ID.

Definition at line 265 of file cfe_es.h.

38.53.2.2 AppName

uint8 CFE_ES_TaskInfo_t::AppName[OS_MAX_API_NAME]

Parent Application Name.

Definition at line 266 of file cfe_es.h.

38.53.2.3 ExecutionCounter

uint32 CFE_ES_TaskInfo_t::ExecutionCounter

Task Execution Counter.

Definition at line 263 of file cfe_es.h.

38.53.2.4 TaskId

uint32 CFE_ES_TaskInfo_t::TaskId

Task Id.

Definition at line 262 of file cfe_es.h.

38.53.2.5   TaskName

`uint8` `CFE_ES_TaskInfo_t::TaskName[`OS_MAX_API_NAME`]`

Task Name.

Definition at line 264 of file cfe_es.h.

The documentation for this struct was generated from the following file:

  • cfe/fsw/cfe-core/src/inc/cfe_es.h

38.54   CFE_EVS_AppDataCmd_Payload_t Struct Reference

Write Event Services Application Information to File Command.

`#include <cfe_evs_msg.h>`

Data Fields

  • char AppDataFilename [CFE_MISSION_MAX_PATH_LEN]
      Filename where applicaton data is to be written.

38.54.1   Detailed Description

Write Event Services Application Information to File Command.

For command details, see CFE_EVS_WRITE_APP_DATA_FILE_CC

Definition at line 956 of file cfe_evs_msg.h.

38.54.2   Field Documentation

38.54.2.1   AppDataFilename

`char CFE_EVS_AppDataCmd_Payload_t::AppDataFilename[`CFE_MISSION_MAX_PATH_LEN`]`

Filename where applicaton data is to be written.

Definition at line 957 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

  • cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.55 CFE_EVS_AppNameBitMaskCmd_Payload_t Struct Reference

Enable/Disable an Event Type for an Application.

```
#include <cfe_evs_msg.h>
```

Data Fields

- char AppName [CFE_MISSION_MAX_API_LEN]

  Application name to use in the command.
- uint8 BitMask

  BitMask to use in the command.
- uint8 Spare

  Pad to even byte.

38.55.1 Detailed Description

Enable/Disable an Event Type for an Application.

For command details, see CFE_EVS_ENABLE_APP_EVENT_TYPE_CC and/or CFE_EVS_DISABLE_APP_EVENT←
_TYPE_CC

Definition at line 1080 of file cfe_evs_msg.h.

38.55.2 Field Documentation

38.55.2.1 AppName

```
char CFE_EVS_AppNameBitMaskCmd_Payload_t::AppName[CFE_MISSION_MAX_API_LEN]
```

Application name to use in the command.

Definition at line 1081 of file cfe_evs_msg.h.

38.55.2.2 BitMask

```
uint8 CFE_EVS_AppNameBitMaskCmd_Payload_t::BitMask
```

BitMask to use in the command.

Definition at line 1082 of file cfe_evs_msg.h.

38.55.2.3   Spare

uint8 CFE_EVS_AppNameBitMaskCmd_Payload_t::Spare

Pad to even byte.

Definition at line 1083 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.56   CFE_EVS_AppNameBitMaskCmd_t Struct Reference

#include <cfe_evs_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_AppNameBitMaskCmd_Payload_t Payload

38.56.1   Detailed Description

Definition at line 1086 of file cfe_evs_msg.h.

38.56.2   Field Documentation

38.56.2.1   CmdHeader

uint8 CFE_EVS_AppNameBitMaskCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 1087 of file cfe_evs_msg.h.

38.56.2.2   Payload

CFE_EVS_AppNameBitMaskCmd_Payload_t CFE_EVS_AppNameBitMaskCmd_t::Payload

Definition at line 1088 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.57 CFE_EVS_AppNameCmd_Payload_t Struct Reference

Enable/Disable Application Events or Reset One or All Filter Counters.

```
#include <cfe_evs_msg.h>
```

Data Fields

- char AppName [CFE_MISSION_MAX_API_LEN]

    Application name to use in the command.

38.57.1 Detailed Description

Enable/Disable Application Events or Reset One or All Filter Counters.

For command details, see CFE_EVS_ENABLE_APP_EVENTS_CC, CFE_EVS_DISABLE_APP_EVENTS_CC, CFE↩
_EVS_RESET_APP_COUNTER_CC and/or CFE_EVS_RESET_ALL_FILTERS_CC

Definition at line 1031 of file cfe_evs_msg.h.

38.57.2 Field Documentation

38.57.2.1 AppName

```
char CFE_EVS_AppNameCmd_Payload_t::AppName[CFE_MISSION_MAX_API_LEN]
```

Application name to use in the command.

Definition at line 1032 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.58 CFE_EVS_AppNameCmd_t Struct Reference

```
#include <cfe_evs_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_AppNameCmd_Payload_t Payload

38.58.1   Detailed Description

Definition at line 1035 of file cfe_evs_msg.h.

38.58.2   Field Documentation

38.58.2.1   CmdHeader

uint8 CFE_EVS_AppNameCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 1036 of file cfe_evs_msg.h.

38.58.2.2   Payload

CFE_EVS_AppNameCmd_Payload_t CFE_EVS_AppNameCmd_t::Payload

Definition at line 1037 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.59   CFE_EVS_AppNameEventIDCmd_Payload_t Struct Reference

Reset an Event Filter for an Application.

#include <cfe_evs_msg.h>

Data Fields

- char AppName [CFE_MISSION_MAX_API_LEN]

   Application name to use in the command.

- uint16 EventID

   Event ID to use in the command.

38.59.1   Detailed Description

Reset an Event Filter for an Application.

For command details, see CFE_EVS_RESET_FILTER_CC

Definition at line 1056 of file cfe_evs_msg.h.

38.59.2   Field Documentation

38.59.2.1   AppName

char CFE_EVS_AppNameEventIDCmd_Payload_t::AppName[CFE_MISSION_MAX_API_LEN]

Application name to use in the command.

Definition at line 1057 of file cfe_evs_msg.h.

38.59.2.2   EventID

uint16 CFE_EVS_AppNameEventIDCmd_Payload_t::EventID

Event ID to use in the command.

Definition at line 1058 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.60   CFE_EVS_AppNameEventIDCmd_t Struct Reference

#include <cfe_evs_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_AppNameEventIDCmd_Payload_t Payload

38.60.1   Detailed Description

Definition at line 1061 of file cfe_evs_msg.h.

38.60.2   Field Documentation

38.60.2.1 CmdHeader

uint8 CFE_EVS_AppNameEventIDCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 1062 of file cfe_evs_msg.h.

38.60.2.2 Payload

CFE_EVS_AppNameEventIDCmd_Payload_t CFE_EVS_AppNameEventIDCmd_t::Payload

Definition at line 1063 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.61 CFE_EVS_AppNameEventIDMaskCmd_Payload_t Struct Reference

Set, Add or Delete an Event Filter for an Application.

```
#include <cfe_evs_msg.h>
```

Data Fields

- char AppName [CFE_MISSION_MAX_API_LEN]

    Application name to use in the command.
- uint16 EventID

    Event ID to use in the command.
- uint16 Mask

    Mask to use in the command.

38.61.1 Detailed Description

Set, Add or Delete an Event Filter for an Application.

For command details, see CFE_EVS_SET_FILTER_CC, CFE_EVS_ADD_EVENT_FILTER_CC and/or CFE_EVS_←⟩
DELETE_EVENT_FILTER_CC

Definition at line 1106 of file cfe_evs_msg.h.

38.61.2 Field Documentation

38.61.2.1 AppName

char CFE_EVS_AppNameEventIDMaskCmd_Payload_t::AppName[CFE_MISSION_MAX_API_LEN]

Application name to use in the command.

Definition at line 1107 of file cfe_evs_msg.h.

38.61.2.2 EventID

uint16 CFE_EVS_AppNameEventIDMaskCmd_Payload_t::EventID

Event ID to use in the command.

Definition at line 1108 of file cfe_evs_msg.h.

38.61.2.3 Mask

uint16 CFE_EVS_AppNameEventIDMaskCmd_Payload_t::Mask

Mask to use in the command.

Definition at line 1109 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.62 CFE_EVS_AppNameEventIDMaskCmd_t Struct Reference

#include <cfe_evs_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_AppNameEventIDMaskCmd_Payload_t Payload

38.62.1 Detailed Description

Definition at line 1112 of file cfe_evs_msg.h.

38.62.2   Field Documentation

38.62.2.1   CmdHeader

uint8 CFE_EVS_AppNameEventIDMaskCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 1113 of file cfe_evs_msg.h.

38.62.2.2   Payload

CFE_EVS_AppNameEventIDMaskCmd_Payload_t CFE_EVS_AppNameEventIDMaskCmd_t::Payload

Definition at line 1114 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.63   CFE_EVS_AppTlmData_t Struct Reference

#include <cfe_evs_msg.h>

Data Fields

- uint32 AppID
    Numerical application identifier.
- uint16 AppMessageSentCounter
    Application message sent counter.
- uint8 AppEnableStatus
    Application event service enable status.
- uint8 Padding
    Padding for 32 bit boundary.

38.63.1   Detailed Description

Definition at line 1129 of file cfe_evs_msg.h.

38.63.2   Field Documentation

38.63.2.1 AppEnableStatus

uint8 CFE_EVS_AppTlmData_t::AppEnableStatus

Application event service enable status.

Telemetry Mnemonic(s) $sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].APPENASTAT

Definition at line 1134 of file cfe_evs_msg.h.

38.63.2.2 AppID

uint32 CFE_EVS_AppTlmData_t::AppID

Numerical application identifier.

Telemetry Mnemonic(s) $sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].APPID

Definition at line 1130 of file cfe_evs_msg.h.

38.63.2.3 AppMessageSentCounter

uint16 CFE_EVS_AppTlmData_t::AppMessageSentCounter

Application message sent counter.

Telemetry Mnemonic(s) $sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].APPMSGSENTC

Definition at line 1132 of file cfe_evs_msg.h.

38.63.2.4 Padding

uint8 CFE_EVS_AppTlmData_t::Padding

Padding for 32 bit boundary.

Telemetry Mnemonic(s) $sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS].SPARE2ALIGN3

Definition at line 1136 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.64   CFE_EVS_BinFilter_t Struct Reference

Event message filter defintion structure.

```
#include <cfe_evs.h>
```

Data Fields

- uint16 EventID
  - *Numerical event identifier.*
- uint16 Mask
  - *Binary filter mask value.*

38.64.1   Detailed Description

Event message filter defintion structure.

Definition at line 111 of file cfe_evs.h.

38.64.2   Field Documentation

38.64.2.1   EventID

uint16 CFE_EVS_BinFilter_t::EventID

Numerical event identifier.

Definition at line 112 of file cfe_evs.h.

38.64.2.2   Mask

uint16 CFE_EVS_BinFilter_t::Mask

Binary filter mask value.

Definition at line 113 of file cfe_evs.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs.h

38.65 CFE_EVS_BitMaskCmd_Payload_t Struct Reference

Enable/Disable Events or Ports Commands.

```
#include <cfe_evs_msg.h>
```

Data Fields

- uint8 BitMask

  BitMask to use in the command.
- uint8 Spare

  Pad to even byte.

38.65.1 Detailed Description

Enable/Disable Events or Ports Commands.

For command details, see CFE_EVS_ENABLE_EVENT_TYPE_CC, CFE_EVS_DISABLE_EVENT_TYPE_CC, CFE↩
_EVS_ENABLE_PORTS_CC and/or CFE_EVS_DISABLE_PORTS_CC

Definition at line 1004 of file cfe_evs_msg.h.

38.65.2 Field Documentation

38.65.2.1 BitMask

uint8 CFE_EVS_BitMaskCmd_Payload_t::BitMask

BitMask to use in the command.

Definition at line 1005 of file cfe_evs_msg.h.

38.65.2.2 Spare

uint8 CFE_EVS_BitMaskCmd_Payload_t::Spare

Pad to even byte.

Definition at line 1006 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.66   CFE_EVS_BitMaskCmd_t Struct Reference

`#include <cfe_evs_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_BitMaskCmd_Payload_t Payload

38.66.1   Detailed Description

Definition at line 1009 of file cfe_evs_msg.h.

38.66.2   Field Documentation

38.66.2.1   CmdHeader

`uint8 CFE_EVS_BitMaskCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]`

Definition at line 1010 of file cfe_evs_msg.h.

38.66.2.2   Payload

`CFE_EVS_BitMaskCmd_Payload_t CFE_EVS_BitMaskCmd_t::Payload`

Definition at line 1011 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.67   CFE_EVS_HousekeepingTlm_Payload_t Struct Reference

`#include <cfe_evs_msg.h>`

Data Fields

- **uint8 CommandCounter**

    EVS Command Counter.

- **uint8 CommandErrorCounter**

    EVS Command Error Counter.

- **uint8 MessageFormatMode**

    Event message format mode (short/long)

- **uint8 MessageTruncCounter**

    Event message truncation counter.

- **uint8 UnregisteredAppCounter**

    Unregistered application message send counter.

- **uint8 OutputPort**

    Output port mask.

- **uint8 LogFullFlag**

    Local event log full flag.

- **uint8 LogMode**

    Local event logging mode (overwrite/discard)

- **uint16 MessageSendCounter**

    Event message send counter.

- **uint16 LogOverflowCounter**

    Local event log overflow counter.

- **uint8 LogEnabled**

    Current event log enable/disable state.

- **uint8 Spare1**

    Padding for 32 bit boundary.

- **uint8 Spare2**

    Padding for 32 bit boundary.

- **uint8 Spare3**

    Padding for 32 bit boundary.

- **CFE_EVS_AppTlmData_t AppData [CFE_MISSION_ES_MAX_APPLICATIONS]**

    Array of registered application table data.

38.67.1 Detailed Description

Name Event Services Housekeeping Telemetry Packet

Definition at line 1145 of file cfe_evs_msg.h.

38.67.2 Field Documentation

38.67.2.1 AppData

CFE_EVS_AppTlmData_t CFE_EVS_HousekeepingTlm_Payload_t::AppData[CFE_MISSION_ES_MAX_APPLICATIONS]

Array of registered application table data.

Telemetry Mnemonic(s) $sc_$cpu_EVS_APP[CFE_ES_MAX_APPLICATIONS]

Definition at line 1178 of file cfe_evs_msg.h.

38.67.2.2 CommandCounter

uint8 CFE_EVS_HousekeepingTlm_Payload_t::CommandCounter

EVS Command Counter.

Telemetry Mnemonic(s) $sc_$cpu_EVS_CMDPC

Definition at line 1146 of file cfe_evs_msg.h.

38.67.2.3 CommandErrorCounter

uint8 CFE_EVS_HousekeepingTlm_Payload_t::CommandErrorCounter

EVS Command Error Counter.

Telemetry Mnemonic(s) $sc_$cpu_EVS_CMDEC

Definition at line 1148 of file cfe_evs_msg.h.

38.67.2.4 LogEnabled

uint8 CFE_EVS_HousekeepingTlm_Payload_t::LogEnabled

Current event log enable/disable state.

Telemetry Mnemonic(s) $sc_$cpu_EVS_LOGENABLED

Definition at line 1169 of file cfe_evs_msg.h.

38.67.2.5 LogFullFlag

`uint8` CFE_EVS_HousekeepingTlm_Payload_t::LogFullFlag

Local event log full flag.

Telemetry Mnemonic(s) $sc_$cpu_EVS_LOGFULL

Definition at line 1159 of file cfe_evs_msg.h.

38.67.2.6 LogMode

`uint8` CFE_EVS_HousekeepingTlm_Payload_t::LogMode

Local event logging mode (overwrite/discard)

Telemetry Mnemonic(s) $sc_$cpu_EVS_LOGMODE

Definition at line 1161 of file cfe_evs_msg.h.

38.67.2.7 LogOverflowCounter

`uint16` CFE_EVS_HousekeepingTlm_Payload_t::LogOverflowCounter

Local event log overflow counter.

Telemetry Mnemonic(s) $sc_$cpu_EVS_LOGOVERFLOWC

Definition at line 1166 of file cfe_evs_msg.h.

38.67.2.8 MessageFormatMode

`uint8` CFE_EVS_HousekeepingTlm_Payload_t::MessageFormatMode

Event message format mode (short/long)

Telemetry Mnemonic(s) $sc_$cpu_EVS_MSGFMTMODE

Definition at line 1150 of file cfe_evs_msg.h.

38.67.2.9 MessageSendCounter

uint16 CFE_EVS_HousekeepingTlm_Payload_t::MessageSendCounter

Event message send counter.

Telemetry Mnemonic(s) $sc_$cpu_EVS_MSGSENTC

Definition at line 1164 of file cfe_evs_msg.h.

38.67.2.10 MessageTruncCounter

uint8 CFE_EVS_HousekeepingTlm_Payload_t::MessageTruncCounter

Event message truncation counter.

Telemetry Mnemonic(s) $sc_$cpu_EVS_MSGTRUNC

Definition at line 1152 of file cfe_evs_msg.h.

38.67.2.11 OutputPort

uint8 CFE_EVS_HousekeepingTlm_Payload_t::OutputPort

Output port mask.

Telemetry Mnemonic(s) $sc_$cpu_EVS_OUTPUTPORT

Definition at line 1157 of file cfe_evs_msg.h.

38.67.2.12 Spare1

uint8 CFE_EVS_HousekeepingTlm_Payload_t::Spare1

Padding for 32 bit boundary.

Telemetry Mnemonic(s) $sc_$cpu_EVS_HK_SPARE1

Definition at line 1171 of file cfe_evs_msg.h.

38.67.2.13 Spare2

`uint8` CFE_EVS_HousekeepingTlm_Payload_t::Spare2

Padding for 32 bit boundary.

Telemetry Mnemonic(s) $sc_$cpu_EVS_HK_SPARE2

Definition at line 1173 of file cfe_evs_msg.h.

38.67.2.14 Spare3

`uint8` CFE_EVS_HousekeepingTlm_Payload_t::Spare3

Padding for 32 bit boundary.

Telemetry Mnemonic(s) $sc_$cpu_EVS_HK_SPARE3

Definition at line 1175 of file cfe_evs_msg.h.

38.67.2.15 UnregisteredAppCounter

`uint8` CFE_EVS_HousekeepingTlm_Payload_t::UnregisteredAppCounter

Unregistered application message send counter.

Telemetry Mnemonic(s) $sc_$cpu_EVS_UNREGAPPC

Definition at line 1155 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.68 CFE_EVS_HousekeepingTlm_t Struct Reference

`#include <cfe_evs_msg.h>`

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]
- CFE_EVS_HousekeepingTlm_Payload_t Payload

38.68.1   Detailed Description

Definition at line 1183 of file cfe_evs_msg.h.

38.68.2   Field Documentation

38.68.2.1   Payload

CFE_EVS_HousekeepingTlm_Payload_t CFE_EVS_HousekeepingTlm_t::Payload

Definition at line 1185 of file cfe_evs_msg.h.

38.68.2.2   TlmHeader

uint8 CFE_EVS_HousekeepingTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]

Definition at line 1184 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.69   CFE_EVS_LogFileCmd_Payload_t Struct Reference

Write Event Log to File Command.

```
#include <cfe_evs_msg.h>
```

Data Fields

- char LogFilename [CFE_MISSION_MAX_PATH_LEN]
  Filename where log data is to be written.

38.69.1 Detailed Description

Write Event Log to File Command.

For command details, see CFE_EVS_WRITE_LOG_DATA_FILE_CC

Definition at line 940 of file cfe_evs_msg.h.

38.69.2 Field Documentation

38.69.2.1 LogFilename

char CFE_EVS_LogFileCmd_Payload_t::LogFilename[CFE_MISSION_MAX_PATH_LEN]

Filename where log data is to be written.

Definition at line 941 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.70 CFE_EVS_LongEventTlm_Payload_t Struct Reference

#include <cfe_evs_msg.h>

Data Fields

- CFE_EVS_PacketID_t PacketID

  Event packet information.
- char Message [CFE_MISSION_EVS_MAX_MESSAGE_LENGTH]

  Event message string.
- uint8 Spare1

  Structure padding.
- uint8 Spare2

  Structure padding.

38.70.1 Detailed Description

Name Event Message Telemetry Packet (Long format)

Definition at line 1208 of file cfe_evs_msg.h.

38.70.2   Field Documentation

38.70.2.1   Message

```
char CFE_EVS_LongEventTlm_Payload_t::Message[CFE_MISSION_EVS_MAX_MESSAGE_LENGTH]
```

Event message string.

Telemetry Mnemonic(s) $sc_$cpu_EVS_EVENT[CFE_EVS_MAX_MESSAGE_LENGTH]

Definition at line 1210 of file cfe_evs_msg.h.

38.70.2.2   PacketID

```
CFE_EVS_PacketID_t CFE_EVS_LongEventTlm_Payload_t::PacketID
```

Event packet information.

Definition at line 1209 of file cfe_evs_msg.h.

38.70.2.3   Spare1

```
uint8 CFE_EVS_LongEventTlm_Payload_t::Spare1
```

Structure padding.

Telemetry Mnemonic(s) $sc_$cpu_EVS_SPARE1

Definition at line 1212 of file cfe_evs_msg.h.

38.70.2.4   Spare2

```
uint8 CFE_EVS_LongEventTlm_Payload_t::Spare2
```

Structure padding.

Telemetry Mnemonic(s) $sc_$cpu_EVS_SPARE2

Definition at line 1214 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.71 CFE_EVS_LongEventTlm_t Struct Reference

`#include <cfe_evs_msg.h>`

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]
- CFE_EVS_LongEventTlm_Payload_t Payload

38.71.1 Detailed Description

Definition at line 1226 of file cfe_evs_msg.h.

38.71.2 Field Documentation

38.71.2.1 Payload

`CFE_EVS_LongEventTlm_Payload_t CFE_EVS_LongEventTlm_t::Payload`

Definition at line 1228 of file cfe_evs_msg.h.

38.71.2.2 TlmHeader

`uint8 CFE_EVS_LongEventTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]`

Definition at line 1227 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.72 CFE_EVS_NoArgsCmd_t Struct Reference

Command with no additional arguments.

`#include <cfe_evs_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

38.72.1   Detailed Description

Command with no additional arguments.

Definition at line 921 of file cfe_evs_msg.h.

38.72.2   Field Documentation

38.72.2.1   CmdHeader

uint8 CFE_EVS_NoArgsCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 922 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.73   CFE_EVS_PacketID_t Struct Reference

```
#include <cfe_evs_msg.h>
```

Data Fields

- char AppName [CFE_MISSION_MAX_API_LEN]

    Application name.
- uint16 EventID

    Numerical event identifier.
- uint16 EventType

    Numerical event type identifier.
- uint32 SpacecraftID

    Spacecraft identifier.
- uint32 ProcessorID

    Numerical processor identifier.

38.73.1   Detailed Description

Telemetry packet structures

Definition at line 1190 of file cfe_evs_msg.h.

38.73.2 Field Documentation

38.73.2.1 AppName

```
char CFE_EVS_PacketID_t::AppName[CFE_MISSION_MAX_API_LEN]
```

Application name.

Telemetry Mnemonic(s) $sc_$cpu_EVS_APPNAME[OS_MAX_API_NAME]

Definition at line 1191 of file cfe_evs_msg.h.

38.73.2.2 EventID

```
uint16 CFE_EVS_PacketID_t::EventID
```

Numerical event identifier.

Telemetry Mnemonic(s) $sc_$cpu_EVS_EVENTID

Definition at line 1193 of file cfe_evs_msg.h.

38.73.2.3 EventType

```
uint16 CFE_EVS_PacketID_t::EventType
```

Numerical event type identifier.

Telemetry Mnemonic(s) $sc_$cpu_EVS_EVENTTYPE

Definition at line 1195 of file cfe_evs_msg.h.

38.73.2.4 ProcessorID

```
uint32 CFE_EVS_PacketID_t::ProcessorID
```

Numerical processor identifier.

Telemetry Mnemonic(s) $sc_$cpu_EVS_PROCESSORID

Definition at line 1199 of file cfe_evs_msg.h.

38.73.2.5   SpacecraftID

uint32 CFE_EVS_PacketID_t::SpacecraftID

Spacecraft identifier.

Telemetry Mnemonic(s) $sc_$cpu_EVS_SCID

Definition at line 1197 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.74   CFE_EVS_SetEventFormatMode_Payload_t Struct Reference

Set Event Format Mode or Set Log Mode Commands.

#include <cfe_evs_msg.h>

Data Fields

- **CFE_EVS_MsgFormat_Enum_t MsgFormat**

    Mode to use in the command.
- **uint8 Spare**

    Pad to even byte.

38.74.1   Detailed Description

Set Event Format Mode or Set Log Mode Commands.

For command details, see CFE_EVS_SET_EVENT_FORMAT_MODE_CC and/or CFE_EVS_SET_LOG_MODE_CC

Definition at line 987 of file cfe_evs_msg.h.

38.74.2   Field Documentation

38.74.2.1 MsgFormat

[CFE_EVS_MsgFormat_Enum_t](#) CFE_EVS_SetEventFormatMode_Payload_t::MsgFormat

Mode to use in the command.

Definition at line 988 of file cfe_evs_msg.h.

38.74.2.2 Spare

[uint8](#) CFE_EVS_SetEventFormatMode_Payload_t::Spare

Pad to even byte.

Definition at line 989 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/[cfe_evs_msg.h](#)

38.75 CFE_EVS_SetEventFormatMode_t Struct Reference

```
#include <cfe_evs_msg.h>
```

Data Fields

- [uint8 CmdHeader](#) [[CFE_SB_CMD_HDR_SIZE](#)]
- [CFE_EVS_SetEventFormatMode_Payload_t Payload](#)

38.75.1 Detailed Description

Definition at line 992 of file cfe_evs_msg.h.

38.75.2 Field Documentation

38.75.2.1 CmdHeader

[uint8](#) CFE_EVS_SetEventFormatMode_t::CmdHeader[[CFE_SB_CMD_HDR_SIZE](#)]

Definition at line 993 of file cfe_evs_msg.h.

38.75.2.2 Payload

CFE_EVS_SetEventFormatMode_Payload_t CFE_EVS_SetEventFormatMode_t::Payload

Definition at line 994 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.76 CFE_EVS_SetLogMode_Payload_t Struct Reference

Set Event Format Mode or Set Log Mode Commands.

```
#include <cfe_evs_msg.h>
```

Data Fields

- CFE_EVS_LogMode_Enum_t LogMode

    Mode to use in the command.
- uint8 Spare

    Pad to even byte.

38.76.1 Detailed Description

Set Event Format Mode or Set Log Mode Commands.

For command details, see CFE_EVS_SET_EVENT_FORMAT_MODE_CC and/or CFE_EVS_SET_LOG_MODE_CC

Definition at line 971 of file cfe_evs_msg.h.

38.76.2 Field Documentation

38.76.2.1 LogMode

CFE_EVS_LogMode_Enum_t CFE_EVS_SetLogMode_Payload_t::LogMode

Mode to use in the command.

Definition at line 972 of file cfe_evs_msg.h.

38.76.2.2 Spare

`uint8` `CFE_EVS_SetLogMode_Payload_t::Spare`

Pad to even byte.

Definition at line 973 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.77 CFE_EVS_SetLogMode_t Struct Reference

`#include <cfe_evs_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_SetLogMode_Payload_t Payload

38.77.1 Detailed Description

Definition at line 976 of file cfe_evs_msg.h.

38.77.2 Field Documentation

38.77.2.1 CmdHeader

`uint8` `CFE_EVS_SetLogMode_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]`

Definition at line 977 of file cfe_evs_msg.h.

38.77.2.2 Payload

`CFE_EVS_SetLogMode_Payload_t` `CFE_EVS_SetLogMode_t::Payload`

Definition at line 978 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.78   CFE_EVS_ShortEventTlm_Payload_t Struct Reference

```
#include <cfe_evs_msg.h>
```

Data Fields

- CFE_EVS_PacketID_t PacketID

    Event packet information.

38.78.1   Detailed Description

Name Event Message Telemetry Packet (Short format)

Definition at line 1221 of file cfe_evs_msg.h.

38.78.2   Field Documentation

38.78.2.1   PacketID

CFE_EVS_PacketID_t CFE_EVS_ShortEventTlm_Payload_t::PacketID

Event packet information.

Definition at line 1222 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.79   CFE_EVS_ShortEventTlm_t Struct Reference

```
#include <cfe_evs_msg.h>
```

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]
- CFE_EVS_ShortEventTlm_Payload_t Payload

38.79.1   Detailed Description

Definition at line 1232 of file cfe_evs_msg.h.

38.79.2   Field Documentation

38.79.2.1   Payload

`CFE_EVS_ShortEventTlm_Payload_t` `CFE_EVS_ShortEventTlm_t::Payload`

Definition at line 1234 of file cfe_evs_msg.h.

38.79.2.2   TlmHeader

`uint8` `CFE_EVS_ShortEventTlm_t::TlmHeader[`CFE_SB_TLM_HDR_SIZE`]`

Definition at line 1233 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.80   CFE_EVS_WriteAppDataFile_t Struct Reference

`#include <cfe_evs_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_AppDataCmd_Payload_t Payload

38.80.1   Detailed Description

Definition at line 960 of file cfe_evs_msg.h.

38.80.2   Field Documentation

38.80.2.1   CmdHeader

`uint8` `CFE_EVS_WriteAppDataFile_t::CmdHeader[`CFE_SB_CMD_HDR_SIZE`]`

Definition at line 961 of file cfe_evs_msg.h.

38.80.2.2   Payload

CFE_EVS_AppDataCmd_t CFE_EVS_WriteAppDataFile_t::Payload

Definition at line 962 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.81   CFE_EVS_WriteLogDataFile_t Struct Reference

#include <cfe_evs_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_EVS_LogFileCmd_Payload_t Payload

38.81.1   Detailed Description

Definition at line 944 of file cfe_evs_msg.h.

38.81.2   Field Documentation

38.81.2.1   CmdHeader

uint8 CFE_EVS_WriteLogDataFile_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 945 of file cfe_evs_msg.h.

38.81.2.2   Payload

CFE_EVS_LogFileCmd_Payload_t CFE_EVS_WriteLogDataFile_t::Payload

Definition at line 946 of file cfe_evs_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h

38.82 CFE_FS_Header_t Struct Reference

Standard cFE File header structure definition.

```
#include <cfe_fs_extern_typedefs.h>
```

Data Fields

- uint32 ContentType

  Identifies the content type (='cFE1'=0x63464531)
- uint32 SubType

  Type of `ContentType`*, if necessary.*
- uint32 Length

  Length of primary header.
- uint32 SpacecraftID

  Spacecraft that generated the file.
- uint32 ProcessorID

  Processor that generated the file.
- uint32 ApplicationID

  Application that generated the file.
- uint32 TimeSeconds

  File creation timestamp (seconds)
- uint32 TimeSubSeconds

  File creation timestamp (sub-seconds)
- char Description [CFE_FS_HDR_DESC_MAX_LEN]

  File description.

38.82.1 Detailed Description

Standard cFE File header structure definition.

Definition at line 223 of file cfe_fs_extern_typedefs.h.

38.82.2 Field Documentation

38.82.2.1 ApplicationID

uint32 CFE_FS_Header_t::ApplicationID

Application that generated the file.

Definition at line 232 of file cfe_fs_extern_typedefs.h.

38.82.2.2   ContentType

uint32 CFE_FS_Header_t::ContentType

Identifies the content type (='cFE1'=0x63464531)

Definition at line 225 of file cfe_fs_extern_typedefs.h.

38.82.2.3   Description

char CFE_FS_Header_t::Description[CFE_FS_HDR_DESC_MAX_LEN]

File description.

Definition at line 237 of file cfe_fs_extern_typedefs.h.

38.82.2.4   Length

uint32 CFE_FS_Header_t::Length

Length of primary header.

Definition at line 229 of file cfe_fs_extern_typedefs.h.

38.82.2.5   ProcessorID

uint32 CFE_FS_Header_t::ProcessorID

Processor that generated the file.

Definition at line 231 of file cfe_fs_extern_typedefs.h.

38.82.2.6   SpacecraftID

uint32 CFE_FS_Header_t::SpacecraftID

Spacecraft that generated the file.

Definition at line 230 of file cfe_fs_extern_typedefs.h.

38.82.2.7 SubType

`uint32` `CFE_FS_Header_t::SubType`

Type of `ContentType`, if necessary.

Standard SubType definitions can be found here

Definition at line 226 of file cfe_fs_extern_typedefs.h.

38.82.2.8 TimeSeconds

`uint32` `CFE_FS_Header_t::TimeSeconds`

File creation timestamp (seconds)

Definition at line 234 of file cfe_fs_extern_typedefs.h.

38.82.2.9 TimeSubSeconds

`uint32` `CFE_FS_Header_t::TimeSubSeconds`

File creation timestamp (sub-seconds)

Definition at line 235 of file cfe_fs_extern_typedefs.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_fs_extern_typedefs.h

38.83 CFE_PSP_CommandData_t Struct Reference

Data Fields

- char ResetType [CFE_PSP_RESET_NAME_LENGTH]
- uint32 GotResetType
- uint32 SubType
- uint32 GotSubType
- char CpuName [CFE_PSP_CPU_NAME_LENGTH]
- uint32 GotCpuName
- uint32 CpuId
- uint32 GotCpuId
- uint32 SpacecraftId
- uint32 GotSpacecraftId

38.83.1   Detailed Description

Definition at line 88 of file cfe_psp_start.c.

38.83.2   Field Documentation

38.83.2.1   CpuId

`uint32` `CFE_PSP_CommandData_t::CpuId`

Definition at line 99 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

38.83.2.2   CpuName

`char` `CFE_PSP_CommandData_t::CpuName[`CFE_PSP_CPU_NAME_LENGTH`]`

Definition at line 96 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

38.83.2.3   GotCpuId

`uint32` `CFE_PSP_CommandData_t::GotCpuId`

Definition at line 100 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

38.83.2.4   GotCpuName

`uint32` `CFE_PSP_CommandData_t::GotCpuName`

Definition at line 97 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

38.83.2.5 GotResetType

uint32 CFE_PSP_CommandData_t::GotResetType

Definition at line 91 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

38.83.2.6 GotSpacecraftId

uint32 CFE_PSP_CommandData_t::GotSpacecraftId

Definition at line 103 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

38.83.2.7 GotSubType

uint32 CFE_PSP_CommandData_t::GotSubType

Definition at line 94 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

38.83.2.8 ResetType

char CFE_PSP_CommandData_t::ResetType[CFE_PSP_RESET_NAME_LENGTH]

Definition at line 90 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

38.83.2.9 SpacecraftId

uint32 CFE_PSP_CommandData_t::SpacecraftId

Definition at line 102 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

38.83.2.10   SubType

`uint32` CFE_PSP_CommandData_t::SubType

Definition at line 93 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

The documentation for this struct was generated from the following file:

- psp/fsw/pc-linux/src/cfe_psp_start.c

38.84   CFE_PSP_LinuxReservedAreaFixedLayout_t Struct Reference

Data Fields

- CFE_PSP_ReservedMemoryBootRecord_t BootRecord
- CFE_PSP_ExceptionStorage_t ExceptionStorage

38.84.1   Detailed Description

Definition at line 82 of file cfe_psp_memory.c.

38.84.2   Field Documentation

38.84.2.1   BootRecord

`CFE_PSP_ReservedMemoryBootRecord_t CFE_PSP_LinuxReservedAreaFixedLayout_t::BootRecord`

Definition at line 84 of file cfe_psp_memory.c.

Referenced by CFE_PSP_InitResetArea().

38.84.2.2   ExceptionStorage

`CFE_PSP_ExceptionStorage_t CFE_PSP_LinuxReservedAreaFixedLayout_t::ExceptionStorage`

Definition at line 85 of file cfe_psp_memory.c.

Referenced by CFE_PSP_InitResetArea().

The documentation for this struct was generated from the following file:

- psp/fsw/pc-linux/src/cfe_psp_memory.c

38.85 CFE_PSP_MemTable_t Struct Reference

```
#include <cfe_psp.h>
```

Data Fields

- uint32 MemoryType
- uint32 WordSize
- cpuaddr StartAddr
- uint32 Size
- uint32 Attributes

38.85.1 Detailed Description

Definition at line 155 of file cfe_psp.h.

38.85.2 Field Documentation

38.85.2.1 Attributes

uint32 CFE_PSP_MemTable_t::Attributes

Definition at line 161 of file cfe_psp.h.

38.85.2.2 MemoryType

uint32 CFE_PSP_MemTable_t::MemoryType

Definition at line 157 of file cfe_psp.h.

38.85.2.3 Size

uint32 CFE_PSP_MemTable_t::Size

Definition at line 160 of file cfe_psp.h.

38.85.2.4   StartAddr

cpuaddr CFE_PSP_MemTable_t::StartAddr

Definition at line 159 of file cfe_psp.h.

38.85.2.5   WordSize

uint32 CFE_PSP_MemTable_t::WordSize

Definition at line 158 of file cfe_psp.h.

The documentation for this struct was generated from the following file:

- psp/fsw/inc/cfe_psp.h

38.86   CFE_PSP_VersionInfo_t Struct Reference

#include <cfe_psp_configdata.h>

Data Fields

- uint8 MajorVersion
- uint8 MinorVersion
- uint8 Revision
- uint8 MissionRev
- char Version [16]

38.86.1   Detailed Description

Definition at line 40 of file cfe_psp_configdata.h.

38.86.2   Field Documentation

38.86.2.1   MajorVersion

uint8 CFE_PSP_VersionInfo_t::MajorVersion

Definition at line 42 of file cfe_psp_configdata.h.

38.86.2.2 MinorVersion

`uint8` `CFE_PSP_VersionInfo_t::MinorVersion`

Definition at line 43 of file cfe_psp_configdata.h.

38.86.2.3 MissionRev

`uint8` `CFE_PSP_VersionInfo_t::MissionRev`

Definition at line 45 of file cfe_psp_configdata.h.

38.86.2.4 Revision

`uint8` `CFE_PSP_VersionInfo_t::Revision`

Definition at line 44 of file cfe_psp_configdata.h.

38.86.2.5 Version

`char CFE_PSP_VersionInfo_t::Version[16]`

Definition at line 46 of file cfe_psp_configdata.h.

The documentation for this struct was generated from the following file:

- psp/fsw/inc/cfe_psp_configdata.h

38.87 CFE_SB_AllSubscriptionsTlm_Payload_t Struct Reference

`#include <cfe_sb_msg.h>`

Data Fields

- uint32 **PktSegment**

    Pkt number(starts at 1) in the series.
- uint32 **TotalSegments**

    Total number of pkts needed to complete the request.
- uint32 **Entries**

    Number of entries in the pkt.
- CFE_SB_SubEntries_t Entry [CFE_SB_SUB_ENTRIES_PER_PKT]

    Array of CFE_SB_SubEntries_t entries.

38.87.1   Detailed Description

Name SB Previous Subscriptions Packet

This structure defines the pkt(s) sent by SB that contains a list of all current subscriptions. This pkt is generated on cmd and intended to be used primarily by the Software Bus Networking Application (SBN). Typically, when the cmd is received there are more subscriptions than can fit in one pkt. The complete list of subscriptions is sent via a series of segmented pkts.

Definition at line 742 of file cfe_sb_msg.h.

38.87.2   Field Documentation

38.87.2.1   Entries

uint32 CFE_SB_AllSubscriptionsTlm_Payload_t::Entries

Number of entries in the pkt.

Definition at line 746 of file cfe_sb_msg.h.

38.87.2.2   Entry

CFE_SB_SubEntries_t CFE_SB_AllSubscriptionsTlm_Payload_t::Entry[CFE_SB_SUB_ENTRIES_PER_PKT]

Array of CFE_SB_SubEntries_t entries.

Definition at line 747 of file cfe_sb_msg.h.

38.87.2.3   PktSegment

uint32 CFE_SB_AllSubscriptionsTlm_Payload_t::PktSegment

Pkt number(starts at 1) in the series.

Definition at line 744 of file cfe_sb_msg.h.

38.87.2.4 TotalSegments

`uint32` `CFE_SB_AllSubscriptionsTlm_Payload_t::TotalSegments`

Total number of pkts needed to complete the request.

Definition at line 745 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.88 CFE_SB_AllSubscriptionsTlm_t Struct Reference

`#include <cfe_sb_msg.h>`

Data Fields

- CFE_SB_TlmHdr_t Hdr

    cFE Software Bus Telemetry Message Header
- CFE_SB_AllSubscriptionsTlm_Payload_t Payload

38.88.1 Detailed Description

Definition at line 750 of file cfe_sb_msg.h.

38.88.2 Field Documentation

38.88.2.1 Hdr

`CFE_SB_TlmHdr_t` `CFE_SB_AllSubscriptionsTlm_t::Hdr`

cFE Software Bus Telemetry Message Header

Definition at line 751 of file cfe_sb_msg.h.

38.88.2.2   Payload

CFE_SB_AllSubscriptionsTlm_Payload_t CFE_SB_AllSubscriptionsTlm_t::Payload

Definition at line 752 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.89   CFE_SB_CmdHdr_t Union Reference

Generic Software Bus Command Header Type Definition.

```
#include <cfe_sb.h>
```

Data Fields

- CCSDS_CommandPacket_t Cmd
- CFE_SB_Msg_t BaseMsg

38.89.1   Detailed Description

Generic Software Bus Command Header Type Definition.

Definition at line 158 of file cfe_sb.h.

38.89.2   Field Documentation

38.89.2.1   BaseMsg

CFE_SB_Msg_t CFE_SB_CmdHdr_t::BaseMsg

Base type (primary header)

Definition at line 160 of file cfe_sb.h.

38.89.2.2 Cmd

[CCSDS_CommandPacket_t](#) CFE_SB_CmdHdr_t::Cmd

Definition at line 159 of file cfe_sb.h.

The documentation for this union was generated from the following file:

- cfe/fsw/cfe-core/src/inc/[cfe_sb.h](#)

38.90 CFE_SB_HousekeepingTlm_Payload_t Struct Reference

```
#include <cfe_sb_msg.h>
```

Data Fields

- [uint8 CommandCounter](#)

  Count of valid commands received.
- [uint8 CommandErrorCounter](#)

  Count of invalid commands received.
- [uint8 NoSubscribersCounter](#)

  Count pkts sent with no subscribers.
- [uint8 MsgSendErrorCounter](#)

  Count of message send errors.
- [uint8 MsgReceiveErrorCounter](#)

  Count of message receive errors.
- [uint8 InternalErrorCounter](#)

  Count of queue read or write errors.
- [uint8 CreatePipeErrorCounter](#)

  Count of errors in create pipe API.
- [uint8 SubscribeErrorCounter](#)

  Count of errors in subscribe API.
- [uint8 PipeOptsErrorCounter](#)

  Count of errors in set/get pipe options API.
- [uint8 DuplicateSubscriptionsCounter](#)

  Count of duplicate subscriptions.
- [uint8 GetPipeIdByNameErrorCounter](#)

  Count of errors in get pipe id by name API.
- [uint8 Spare2Align](#) [1]

  Spare bytes to ensure alignment.
- [uint16 PipeOverflowErrorCounter](#)

  Count of pipe overflow errors.
- [uint16 MsgLimitErrorCounter](#)

  Count of msg id to pipe errors.
- [CFE_ES_MemHandle_t MemPoolHandle](#)

  Handle to SB's Memory Pool.
- [uint32 MemInUse](#)

  Memory in use.
- [uint32 UnmarkedMem](#)

  cfg param CFE_PLATFORM_SB_BUF_MEMORY_BYTES minus Peak Memory in use

38.90.1   Detailed Description

Name Software Bus task housekeeping Packet

Definition at line 543 of file cfe_sb_msg.h.

38.90.2   Field Documentation

38.90.2.1   CommandCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::CommandCounter

Count of valid commands received.

Telemetry Mnemonic(s) $sc_$cpu_SB_CMDPC

Definition at line 545 of file cfe_sb_msg.h.

38.90.2.2   CommandErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::CommandErrorCounter

Count of invalid commands received.

Telemetry Mnemonic(s) $sc_$cpu_SB_CMDEC

Definition at line 547 of file cfe_sb_msg.h.

38.90.2.3   CreatePipeErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::CreatePipeErrorCounter

Count of errors in create pipe API.

Telemetry Mnemonic(s) $sc_$cpu_SB_NewPipeEC

Definition at line 558 of file cfe_sb_msg.h.

38.90.2.4 DuplicateSubscriptionsCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::DuplicateSubscriptionsCounter

Count of duplicate subscriptions.

Telemetry Mnemonic(s) $sc_$cpu_SB_DupSubCnt

Definition at line 564 of file cfe_sb_msg.h.

38.90.2.5 GetPipeIdByNameErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::GetPipeIdByNameErrorCounter

Count of errors in get pipe id by name API.

Telemetry Mnemonic(s) $sc_$cpu_SB_GetPipeIDByNameEC

Definition at line 566 of file cfe_sb_msg.h.

38.90.2.6 InternalErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::InternalErrorCounter

Count of queue read or write errors.

Telemetry Mnemonic(s) $sc_$cpu_SB_InternalEC

Definition at line 556 of file cfe_sb_msg.h.

38.90.2.7 MemInUse

uint32 CFE_SB_HousekeepingTlm_Payload_t::MemInUse

Memory in use.

Telemetry Mnemonic(s) $sc_$cpu_SB_MemInUse

Definition at line 579 of file cfe_sb_msg.h.

38.90.2.8 MemPoolHandle

CFE_ES_MemHandle_t CFE_SB_HousekeepingTlm_Payload_t::MemPoolHandle

Handle to SB's Memory Pool.

Telemetry Mnemonic(s) $sc_$cpu_SB_MemPoolHdl

Definition at line 576 of file cfe_sb_msg.h.

38.90.2.9 MsgLimitErrorCounter

uint16 CFE_SB_HousekeepingTlm_Payload_t::MsgLimitErrorCounter

Count of msg id to pipe errors.

Telemetry Mnemonic(s) $sc_$cpu_SB_MsgLimEC

Definition at line 573 of file cfe_sb_msg.h.

38.90.2.10 MsgReceiveErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::MsgReceiveErrorCounter

Count of message receive errors.

Telemetry Mnemonic(s) $sc_$cpu_SB_MsgRecEC

Definition at line 554 of file cfe_sb_msg.h.

38.90.2.11 MsgSendErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::MsgSendErrorCounter

Count of message send errors.

Telemetry Mnemonic(s) $sc_$cpu_SB_MsgSndEC

Definition at line 551 of file cfe_sb_msg.h.

38.90.2.12 NoSubscribersCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::NoSubscribersCounter

Count pkts sent with no subscribers.

Telemetry Mnemonic(s) $sc_$cpu_SB_NoSubEC

Definition at line 549 of file cfe_sb_msg.h.

38.90.2.13 PipeOptsErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::PipeOptsErrorCounter

Count of errors in set/get pipe options API.

Telemetry Mnemonic(s) $sc_$cpu_SB_PipeOptsEC

Definition at line 562 of file cfe_sb_msg.h.

38.90.2.14 PipeOverflowErrorCounter

uint16 CFE_SB_HousekeepingTlm_Payload_t::PipeOverflowErrorCounter

Count of pipe overflow errors.

Telemetry Mnemonic(s) $sc_$cpu_SB_PipeOvrEC

Definition at line 571 of file cfe_sb_msg.h.

38.90.2.15 Spare2Align

uint8 CFE_SB_HousekeepingTlm_Payload_t::Spare2Align[1]

Spare bytes to ensure alignment.

Telemetry Mnemonic(s) $sc_$cpu_SB_Spare2Align[2]

Definition at line 568 of file cfe_sb_msg.h.

38.90.2.16 SubscribeErrorCounter

uint8 CFE_SB_HousekeepingTlm_Payload_t::SubscribeErrorCounter

Count of errors in subscribe API.

Telemetry Mnemonic(s) $sc_$cpu_SB_SubscrEC

Definition at line 560 of file cfe_sb_msg.h.

38.90.2.17 UnmarkedMem

uint32 CFE_SB_HousekeepingTlm_Payload_t::UnmarkedMem

cfg param CFE_PLATFORM_SB_BUF_MEMORY_BYTES minus Peak Memory in use

Telemetry Mnemonic(s) $sc_$cpu_SB_UnMarkedMem

Definition at line 582 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.91 CFE_SB_HousekeepingTlm_t Struct Reference

#include <cfe_sb_msg.h>

Data Fields

- CFE_SB_TlmHdr_t Hdr

    cFE Software Bus Telemetry Message Header
- CFE_SB_HousekeepingTlm_Payload_t Payload

38.91.1 Detailed Description

Definition at line 586 of file cfe_sb_msg.h.

38.91.2 Field Documentation

38.91.2.1 Hdr

CFE_SB_TlmHdr_t CFE_SB_HousekeepingTlm_t::Hdr

cFE Software Bus Telemetry Message Header

Definition at line 587 of file cfe_sb_msg.h.

38.91.2.2 Payload

CFE_SB_HousekeepingTlm_Payload_t CFE_SB_HousekeepingTlm_t::Payload

Definition at line 588 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.92 CFE_SB_Msg_t Union Reference

Generic Software Bus Message Type Definition.

```
#include <cfe_sb.h>
```

Data Fields

- CCSDS_PriHdr_t Hdr
    - *CCSDS Primary Header CCSDS_PriHdr_t.*
- CCSDS_SpacePacket_t SpacePacket
- uint32 Dword
    - *Forces minimum of 32-bit alignment for this object.*
- uint8 Byte [sizeof(CCSDS_PriHdr_t)]
    - *Allows byte-level access.*

38.92.1 Detailed Description

Generic Software Bus Message Type Definition.

Definition at line 150 of file cfe_sb.h.

38.92.2 Field Documentation

38.92.2.1   Byte

uint8 CFE_SB_Msg_t::Byte[sizeof(CCSDS_PriHdr_t)]

Allows byte-level access.

Definition at line 154 of file cfe_sb.h.

38.92.2.2   Dword

uint32 CFE_SB_Msg_t::Dword

Forces minimum of 32-bit alignment for this object.

Definition at line 153 of file cfe_sb.h.

38.92.2.3   Hdr

CCSDS_PriHdr_t CFE_SB_Msg_t::Hdr

CCSDS Primary Header CCSDS_PriHdr_t.

Definition at line 151 of file cfe_sb.h.

38.92.2.4   SpacePacket

CCSDS_SpacePacket_t CFE_SB_Msg_t::SpacePacket

Definition at line 152 of file cfe_sb.h.

The documentation for this union was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb.h

38.93   CFE_SB_MsgMapFileEntry_t Struct Reference

SB Map File Entry.

#include <cfe_sb_msg.h>

Data Fields

- CFE_SB_MsgId_t MsgId

    Message Id which has been subscribed to.
- CFE_SB_MsgRouteIdx_Atom_t Index

    Routing table index where pipe destinations are found.

38.93.1 Detailed Description

SB Map File Entry.

Structure of one element of the map information in response to CFE_SB_SEND_MAP_INFO_CC

Definition at line 685 of file cfe_sb_msg.h.

38.93.2 Field Documentation

38.93.2.1 Index

CFE_SB_MsgRouteIdx_Atom_t CFE_SB_MsgMapFileEntry_t::Index

Routing table index where pipe destinations are found.

Definition at line 687 of file cfe_sb_msg.h.

38.93.2.2 MsgId

CFE_SB_MsgId_t CFE_SB_MsgMapFileEntry_t::MsgId

Message Id which has been subscribed to.

Definition at line 686 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.94 CFE_SB_PipeDepthStats_t Struct Reference

SB Pipe Depth Statistics.

```
#include <cfe_sb_msg.h>
```

Data Fields

- CFE_SB_PipeId_t PipeId

    Pipe Id associated with the stats below.

- uint8 Spare

    Spare byte to ensure alignment.

- uint16 Depth

    Number of messages the pipe can hold.

- uint16 InUse

    Number of messages currently on the pipe.

- uint16 PeakInUse

    Peak number of messages that have been on the pipe.

38.94.1   Detailed Description

SB Pipe Depth Statistics.

Used in SB Statistics Telemetry Packet CFE_SB_StatsTlm_t

Definition at line 597 of file cfe_sb_msg.h.

38.94.2   Field Documentation

38.94.2.1   Depth

`uint16 CFE_SB_PipeDepthStats_t::Depth`

Number of messages the pipe can hold.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDDEPTH

Definition at line 603 of file cfe_sb_msg.h.

38.94.2.2   InUse

`uint16 CFE_SB_PipeDepthStats_t::InUse`

Number of messages currently on the pipe.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDINUSE

Definition at line 605 of file cfe_sb_msg.h.

38.94.2.3   PeakInUse

`uint16` `CFE_SB_PipeDepthStats_t::PeakInUse`

Peak number of messages that have been on the pipe.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDPKINUSE

Definition at line 607 of file cfe_sb_msg.h.

38.94.2.4   PipeId

`CFE_SB_PipeId_t` `CFE_SB_PipeDepthStats_t::PipeId`

Pipe Id associated with the stats below.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDPIPEID

Definition at line 599 of file cfe_sb_msg.h.

38.94.2.5   Spare

`uint8` `CFE_SB_PipeDepthStats_t::Spare`

Spare byte to ensure alignment.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES].SB_PDSPARE

Definition at line 601 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.95   CFE_SB_Qos_t Struct Reference

Quality Of Service Type Definition.

`#include <cfe_sb.h>`

Data Fields

- **uint8 Priority**

    Specify high(1) or low(0) message priority for off-board routing, currently unused.
- **uint8 Reliability**

    Specify high(1) or low(0) message transfer reliability for off-board routing, currently unused.

38.95.1   Detailed Description

Quality Of Service Type Definition.

Currently an unused parameter in CFE_SB_SubscribeEx Intended to be used for interprocessor communication only

Definition at line 203 of file cfe_sb.h.

38.95.2   Field Documentation

38.95.2.1   Priority

uint8 CFE_SB_Qos_t::Priority

Specify high(1) or low(0) message priority for off-board routing, currently unused.

Definition at line 204 of file cfe_sb.h.

38.95.2.2   Reliability

uint8 CFE_SB_Qos_t::Reliability

Specify high(1) or low(0) message transfer reliability for off-board routing, currently unused.

Definition at line 205 of file cfe_sb.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb.h

38.96   CFE_SB_RouteCmd_Payload_t Struct Reference

Enable/Disable Route Commands.

```
#include <cfe_sb_msg.h>
```

Data Fields

- CFE_SB_MsgId_t MsgId

    Message ID of route to be enabled or disabled CFE_SB_MsgId_t.

- CFE_SB_PipeId_t Pipe

    Pipe ID of route to be enabled or disabled CFE_SB_PipeId_t.

- uint8 Spare

    Spare byte to make command even number of bytes.

38.96.1   Detailed Description

Enable/Disable Route Commands.

This structure contains a definition used by two SB commands, 'Enable Route' CFE_SB_ENABLE_ROUTE_CC and 'Disable Route' CFE_SB_DISABLE_ROUTE_CC. A route is the destination pipe for a particular message and is therefore defined as a MsgId and PipeId combination.

Definition at line 518 of file cfe_sb_msg.h.

38.96.2   Field Documentation

38.96.2.1   MsgId

CFE_SB_MsgId_t CFE_SB_RouteCmd_Payload_t::MsgId

Message ID of route to be enabled or disabled CFE_SB_MsgId_t.

Definition at line 520 of file cfe_sb_msg.h.

38.96.2.2   Pipe

CFE_SB_PipeId_t CFE_SB_RouteCmd_Payload_t::Pipe

Pipe ID of route to be enabled or disabled CFE_SB_PipeId_t.

Definition at line 521 of file cfe_sb_msg.h.

38.96.2.3   Spare

uint8 CFE_SB_RouteCmd_Payload_t::Spare

Spare byte to make command even number of bytes.

Definition at line 522 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.97   CFE_SB_RouteCmd_t Struct Reference

#include <cfe_sb_msg.h>

Data Fields

- CFE_SB_CmdHdr_t Hdr

    cFE Software Bus Command Message Header CFE_SB_CmdHdr_t
- CFE_SB_RouteCmd_Payload_t Payload

38.97.1   Detailed Description

Definition at line 525 of file cfe_sb_msg.h.

38.97.2   Field Documentation

38.97.2.1   Hdr

CFE_SB_CmdHdr_t CFE_SB_RouteCmd_t::Hdr

cFE Software Bus Command Message Header CFE_SB_CmdHdr_t

Definition at line 526 of file cfe_sb_msg.h.

38.97.2.2   Payload

CFE_SB_RouteCmd_Payload_t CFE_SB_RouteCmd_t::Payload

Definition at line 527 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.98   CFE_SB_RoutingFileEntry_t Struct Reference

SB Routing File Entry.

```
#include <cfe_sb_msg.h>
```

Data Fields

- CFE_SB_MsgId_t MsgId

  Message Id portion of the route.
- CFE_SB_PipeId_t PipeId

  Pipe Id portion of the route.
- uint8 State

  Route Enabled or Disabled.
- uint16 MsgCnt

  Number of msgs with this MsgId sent to this PipeId.
- char AppName [CFE_MISSION_MAX_API_LEN]

  Pipe Depth Statistics.
- char PipeName [CFE_MISSION_MAX_API_LEN]

  Pipe Depth Statistics.

38.98.1   Detailed Description

SB Routing File Entry.

Structure of one element of the routing information in response to CFE_SB_SEND_ROUTING_INFO_CC

Definition at line 670 of file cfe_sb_msg.h.

38.98.2   Field Documentation

38.98.2.1 AppName

char CFE_SB_RoutingFileEntry_t::AppName[CFE_MISSION_MAX_API_LEN]

Pipe Depth Statistics.

Definition at line 675 of file cfe_sb_msg.h.

38.98.2.2 MsgCnt

uint16 CFE_SB_RoutingFileEntry_t::MsgCnt

Number of msgs with this MsgId sent to this PipeId.

Definition at line 674 of file cfe_sb_msg.h.

38.98.2.3 MsgId

CFE_SB_MsgId_t CFE_SB_RoutingFileEntry_t::MsgId

Message Id portion of the route.

Definition at line 671 of file cfe_sb_msg.h.

38.98.2.4 PipeId

CFE_SB_PipeId_t CFE_SB_RoutingFileEntry_t::PipeId

Pipe Id portion of the route.

Definition at line 672 of file cfe_sb_msg.h.

38.98.2.5 PipeName

char CFE_SB_RoutingFileEntry_t::PipeName[CFE_MISSION_MAX_API_LEN]

Pipe Depth Statistics.

Definition at line 676 of file cfe_sb_msg.h.

38.98.2.6 State

`uint8` `CFE_SB_RoutingFileEntry_t::State`

Route Enabled or Disabled.

Definition at line 673 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.99 CFE_SB_SenderId_t Struct Reference

Message Sender Identification Type Definition.

`#include <cfe_sb.h>`

Data Fields

- uint32 ProcessorId

  Processor Id from which the message was sent.
- char AppName [OS_MAX_API_NAME]

  Application that sent the message.

38.99.1 Detailed Description

Message Sender Identification Type Definition.

Parameter used in CFE_SB_GetLastSenderId API which allows the receiver of a message to validate the sender of the message.

Definition at line 216 of file cfe_sb.h.

38.99.2 Field Documentation

38.99.2.1 AppName

`char CFE_SB_SenderId_t::AppName[OS_MAX_API_NAME]`

Application that sent the message.

Definition at line 218 of file cfe_sb.h.

38.99.2.2   ProcessorId

uint32 CFE_SB_SenderId_t::ProcessorId

Processor Id from which the message was sent.

Definition at line 217 of file cfe_sb.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb.h

38.100   CFE_SB_SingleSubscriptionTlm_Payload_t Struct Reference

#include <cfe_sb_msg.h>

Data Fields

- uint8 SubType

    Subscription or Unsubscription.
- CFE_SB_MsgId_t MsgId

    MsgId subscribed or unsubscribe to.
- CFE_SB_Qos_t Qos

    Quality of Service, used only for interprocessor communication.
- CFE_SB_PipeId_t Pipe

    Destination pipe id to send above msg id.

38.100.1   Detailed Description

Name SB Subscription Report Packet

This structure defines the pkt sent by SB when a subscription or a request to unsubscribe is received while subscription reporting is enabled. By default subscription reporting is disabled. This feature is intended to be used primarily by Software Bus Networking Application (SBN)

See also

> CFE_SB_ENABLE_SUB_REPORTING_CC, CFE_SB_DISABLE_SUB_REPORTING_CC

Definition at line 701 of file cfe_sb_msg.h.

38.100.2   Field Documentation

38.100.2.1 MsgId

CFE_SB_MsgId_t CFE_SB_SingleSubscriptionTlm_Payload_t::MsgId

MsgId subscribed or unsubscribe to.

Definition at line 704 of file cfe_sb_msg.h.

38.100.2.2 Pipe

CFE_SB_PipeId_t CFE_SB_SingleSubscriptionTlm_Payload_t::Pipe

Destination pipe id to send above msg id.

Definition at line 706 of file cfe_sb_msg.h.

38.100.2.3 Qos

CFE_SB_Qos_t CFE_SB_SingleSubscriptionTlm_Payload_t::Qos

Quality of Service, used only for interprocessor communication.

Definition at line 705 of file cfe_sb_msg.h.

38.100.2.4 SubType

uint8 CFE_SB_SingleSubscriptionTlm_Payload_t::SubType

Subscription or Unsubscription.

Definition at line 703 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.101 CFE_SB_SingleSubscriptionTlm_t Struct Reference

#include <cfe_sb_msg.h>

Data Fields

- CFE_SB_TlmHdr_t Hdr

    cFE Software Bus Telemetry Message Header

- CFE_SB_SingleSubscriptionTlm_Payload_t Payload

38.101.1   Detailed Description

Definition at line 710 of file cfe_sb_msg.h.

38.101.2   Field Documentation

38.101.2.1   Hdr

CFE_SB_TlmHdr_t CFE_SB_SingleSubscriptionTlm_t::Hdr

cFE Software Bus Telemetry Message Header

Definition at line 711 of file cfe_sb_msg.h.

38.101.2.2   Payload

CFE_SB_SingleSubscriptionTlm_Payload_t CFE_SB_SingleSubscriptionTlm_t::Payload

Definition at line 712 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.102   CFE_SB_StatsTlm_Payload_t Struct Reference

```
#include <cfe_sb_msg.h>
```

Data Fields

- uint32 MsgIdsInUse

    Current number of MsgIds with a destination.
- uint32 PeakMsgIdsInUse

    Peak number of MsgIds with a destination.
- uint32 MaxMsgIdsAllowed

    cFE Cfg Param CFE_PLATFORM_SB_MAX_MSG_IDS
- uint32 PipesInUse

    Number of pipes currently in use.
- uint32 PeakPipesInUse

    Peak number of pipes since last reboot.
- uint32 MaxPipesAllowed

    cFE Cfg Param CFE_PLATFORM_SB_MAX_PIPES
- uint32 MemInUse

    Memory bytes currently in use for SB msg transfers.
- uint32 PeakMemInUse

    Peak memory bytes in use for SB msg transfers.
- uint32 MaxMemAllowed

    cFE Cfg Param CFE_PLATFORM_SB_BUF_MEMORY_BYTES
- uint32 SubscriptionsInUse

    Number of current subscriptions.
- uint32 PeakSubscriptionsInUse

    Peak number of subscriptions.
- uint32 MaxSubscriptionsAllowed

    product of CFE_PLATFORM_SB_MAX_MSG_IDS and CFE_PLATFORM_SB_MAX_DEST_PER_PKT
- uint32 SBBuffersInUse

    Number of SB message buffers currently in use.
- uint32 PeakSBBuffersInUse

    Max number of SB message buffers in use.
- uint32 MaxPipeDepthAllowed

    cFE Cfg Param CFE_SB_MAX_PIPE_DEPTH
- CFE_SB_PipeDepthStats_t PipeDepthStats [CFE_MISSION_SB_MAX_PIPES]

    Pipe Depth Statistics CFE_SB_PipeDepthStats_t.

38.102.1 Detailed Description

Name SB Statistics Telemetry Packet

SB Statistics packet sent (via CFE_SB_SendMsg) in response to CFE_SB_SEND_SB_STATS_CC

Definition at line 617 of file cfe_sb_msg.h.

38.102.2 Field Documentation

38.102.2.1   MaxMemAllowed

`uint32 CFE_SB_StatsTlm_Payload_t::MaxMemAllowed`

cFE Cfg Param CFE_PLATFORM_SB_BUF_MEMORY_BYTES

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMMBMALW

Definition at line 637 of file cfe_sb_msg.h.

38.102.2.2   MaxMsgIdsAllowed

`uint32 CFE_SB_StatsTlm_Payload_t::MaxMsgIdsAllowed`

cFE Cfg Param CFE_PLATFORM_SB_MAX_MSG_IDS

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMMMIDALW

Definition at line 623 of file cfe_sb_msg.h.

38.102.2.3   MaxPipeDepthAllowed

`uint32 CFE_SB_StatsTlm_Payload_t::MaxPipeDepthAllowed`

cFE Cfg Param CFE_SB_MAX_PIPE_DEPTH

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMMPDALW

Definition at line 653 of file cfe_sb_msg.h.

38.102.2.4   MaxPipesAllowed

`uint32 CFE_SB_StatsTlm_Payload_t::MaxPipesAllowed`

cFE Cfg Param CFE_PLATFORM_SB_MAX_PIPES

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMMPALW

Definition at line 630 of file cfe_sb_msg.h.

38.102.2.5 MaxSubscriptionsAllowed

`uint32` `CFE_SB_StatsTlm_Payload_t::MaxSubscriptionsAllowed`

product of CFE_PLATFORM_SB_MAX_MSG_IDS and CFE_PLATFORM_SB_MAX_DEST_PER_PKT

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMMSALW

Definition at line 644 of file cfe_sb_msg.h.

38.102.2.6 MemInUse

`uint32` `CFE_SB_StatsTlm_Payload_t::MemInUse`

Memory bytes currently in use for SB msg transfers.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMBMIU

Definition at line 633 of file cfe_sb_msg.h.

38.102.2.7 MsgIdsInUse

`uint32` `CFE_SB_StatsTlm_Payload_t::MsgIdsInUse`

Current number of MsgIds with a destination.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMMIDIU

Definition at line 619 of file cfe_sb_msg.h.

38.102.2.8 PeakMemInUse

`uint32` `CFE_SB_StatsTlm_Payload_t::PeakMemInUse`

Peak memory bytes in use for SB msg transfers.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPBMIU

Definition at line 635 of file cfe_sb_msg.h.

38.102.2.9   PeakMsgIdsInUse

`uint32` `CFE_SB_StatsTlm_Payload_t::PeakMsgIdsInUse`

Peak number of MsgIds with a destination.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPMIDIU

Definition at line 621 of file cfe_sb_msg.h.

38.102.2.10   PeakPipesInUse

`uint32` `CFE_SB_StatsTlm_Payload_t::PeakPipesInUse`

Peak number of pipes since last reboot.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPPIU

Definition at line 628 of file cfe_sb_msg.h.

38.102.2.11   PeakSBBuffersInUse

`uint32` `CFE_SB_StatsTlm_Payload_t::PeakSBBuffersInUse`

Max number of SB message buffers in use.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPSBBIU

Definition at line 650 of file cfe_sb_msg.h.

38.102.2.12   PeakSubscriptionsInUse

`uint32` `CFE_SB_StatsTlm_Payload_t::PeakSubscriptionsInUse`

Peak number of subscriptions.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPSIU

Definition at line 642 of file cfe_sb_msg.h.

38.102.2.13   PipeDepthStats

`CFE_SB_PipeDepthStats_t` CFE_SB_StatsTlm_Payload_t::PipeDepthStats[`CFE_MISSION_SB_MAX_PIPES`]

Pipe Depth Statistics CFE_SB_PipeDepthStats_t.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPDS[CFE_SB_MAX_PIPES]

Definition at line 655 of file cfe_sb_msg.h.

38.102.2.14   PipesInUse

`uint32` CFE_SB_StatsTlm_Payload_t::PipesInUse

Number of pipes currently in use.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMPIU

Definition at line 626 of file cfe_sb_msg.h.

38.102.2.15   SBBuffersInUse

`uint32` CFE_SB_StatsTlm_Payload_t::SBBuffersInUse

Number of SB message buffers currently in use.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMSBBIU

Definition at line 648 of file cfe_sb_msg.h.

38.102.2.16   SubscriptionsInUse

`uint32` CFE_SB_StatsTlm_Payload_t::SubscriptionsInUse

Number of current subscriptions.

Telemetry Mnemonic(s) $sc_$cpu_SB_Stat.SB_SMSIU

Definition at line 640 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.103 CFE_SB_StatsTlm_t Struct Reference

```
#include <cfe_sb_msg.h>
```

Data Fields

- CFE_SB_TlmHdr_t Hdr

    cFE Software Bus Telemetry Message Header
- CFE_SB_StatsTlm_Payload_t Payload

38.103.1 Detailed Description

Definition at line 659 of file cfe_sb_msg.h.

38.103.2 Field Documentation

38.103.2.1 Hdr

CFE_SB_TlmHdr_t CFE_SB_StatsTlm_t::Hdr

cFE Software Bus Telemetry Message Header

Definition at line 660 of file cfe_sb_msg.h.

38.103.2.2 Payload

CFE_SB_StatsTlm_Payload_t CFE_SB_StatsTlm_t::Payload

Definition at line 661 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.104 CFE_SB_SubEntries_t Struct Reference

SB Previous Subscriptions Entry.

```
#include <cfe_sb_msg.h>
```

Data Fields

- CFE_SB_MsgId_t MsgId

    MsgId portion of the subscription.
- CFE_SB_Qos_t Qos

    Qos portion of the subscription.
- CFE_SB_PipeId_t Pipe

    PipeId portion of the subscription.

38.104.1 Detailed Description

SB Previous Subscriptions Entry.

This structure defines an entry used in the CFE_SB_PrevSubsPkt_t Intended to be used primarily by Software Bus Networking Application (SBN)

Used in structure definition CFE_SB_AllSubscriptionsTlm_t

Definition at line 724 of file cfe_sb_msg.h.

38.104.2 Field Documentation

38.104.2.1 MsgId

CFE_SB_MsgId_t CFE_SB_SubEntries_t::MsgId

MsgId portion of the subscription.

Definition at line 726 of file cfe_sb_msg.h.

38.104.2.2 Pipe

CFE_SB_PipeId_t CFE_SB_SubEntries_t::Pipe

PipeId portion of the subscription.

Definition at line 728 of file cfe_sb_msg.h.

38.104.2.3   Qos

CFE_SB_Qos_t CFE_SB_SubEntries_t::Qos

Qos portion of the subscription.

Definition at line 727 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.105   CFE_SB_TlmHdr_t Union Reference

Generic Software Bus Telemetry Header Type Definition.

`#include <cfe_sb.h>`

Data Fields

- CCSDS_TelemetryPacket_t Tlm
- CFE_SB_Msg_t BaseMsg

38.105.1   Detailed Description

Generic Software Bus Telemetry Header Type Definition.

Definition at line 164 of file cfe_sb.h.

38.105.2   Field Documentation

38.105.2.1   BaseMsg

CFE_SB_Msg_t CFE_SB_TlmHdr_t::BaseMsg

Base type (primary header)

Definition at line 166 of file cfe_sb.h.

38.105.2.2 Tlm

CCSDS_TelemetryPacket_t CFE_SB_TlmHdr_t::Tlm

Definition at line 165 of file cfe_sb.h.

The documentation for this union was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb.h

38.106 CFE_SB_WriteFileInfoCmd_Payload_t Struct Reference

Write File Info Commands.

```
#include <cfe_sb_msg.h>
```

Data Fields

- char Filename [CFE_MISSION_MAX_PATH_LEN]

  Path and Filename of data to be loaded.

38.106.1 Detailed Description

Write File Info Commands.

This structure contains a generic definition used by three SB commands, 'Write Routing Info to File' CFE_SB_SEND↩
_ROUTING_INFO_CC, 'Write Pipe Info to File' CFE_SB_SEND_PIPE_INFO_CC and 'Write Map Info to File' CFE_S↩
B_SEND_MAP_INFO_CC.

Definition at line 494 of file cfe_sb_msg.h.

38.106.2 Field Documentation

38.106.2.1 Filename

char CFE_SB_WriteFileInfoCmd_Payload_t::Filename[CFE_MISSION_MAX_PATH_LEN]

Path and Filename of data to be loaded.

Definition at line 495 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.107   CFE_SB_WriteFileInfoCmd_t Struct Reference

```
#include <cfe_sb_msg.h>
```

Data Fields

- CFE_SB_CmdHdr_t Hdr

    cFE Software Bus Command Message Header CFE_SB_CmdHdr_t
- CFE_SB_WriteFileInfoCmd_Payload_t Payload

38.107.1   Detailed Description

Definition at line 498 of file cfe_sb_msg.h.

38.107.2   Field Documentation

38.107.2.1   Hdr

CFE_SB_CmdHdr_t CFE_SB_WriteFileInfoCmd_t::Hdr

cFE Software Bus Command Message Header CFE_SB_CmdHdr_t

Definition at line 499 of file cfe_sb_msg.h.

38.107.2.2   Payload

CFE_SB_WriteFileInfoCmd_Payload_t CFE_SB_WriteFileInfoCmd_t::Payload

Definition at line 500 of file cfe_sb_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h

38.108   CFE_TBL_AbortLoad_t Struct Reference

```
#include <cfe_tbl_msg.h>
```

Data Fields

- **uint8 CmdHeader** [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header

- CFE_TBL_AbortLoadCmd_Payload_t Payload

38.108.1 Detailed Description

Definition at line 666 of file cfe_tbl_msg.h.

38.108.2 Field Documentation

38.108.2.1 CmdHeader

uint8 CFE_TBL_AbortLoad_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 668 of file cfe_tbl_msg.h.

38.108.2.2 Payload

CFE_TBL_AbortLoadCmd_Payload_t CFE_TBL_AbortLoad_t::Payload

Definition at line 669 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.109 CFE_TBL_AbortLoadCmd_Payload_t Struct Reference

Abort Load Command.

```
#include <cfe_tbl_msg.h>
```

Data Fields

- char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Full Name of Table whose load is to be aborted.

38.109.1 Detailed Description

Abort Load Command.

For command details, see CFE_TBL_ABORT_LOAD_CC

Definition at line 659 of file cfe_tbl_msg.h.

38.109.2 Field Documentation

38.109.2.1 TableName

char CFE_TBL_AbortLoadCmd_Payload_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Full Name of Table whose load is to be aborted.

ASCII string containing full table name identifier of a table whose load is to be aborted

Definition at line 661 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.110 CFE_TBL_Activate_t Struct Reference

#include <cfe_tbl_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header
- CFE_TBL_ActivateCmd_Payload_t Payload

38.110.1 Detailed Description

Definition at line 589 of file cfe_tbl_msg.h.

38.110.2 Field Documentation

38.110.2.1 CmdHeader

uint8 CFE_TBL_Activate_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 591 of file cfe_tbl_msg.h.

38.110.2.2 Payload

CFE_TBL_ActivateCmd_Payload_t CFE_TBL_Activate_t::Payload

Definition at line 592 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.111 CFE_TBL_ActivateCmd_Payload_t Struct Reference

Activate Table Command.

#include <cfe_tbl_msg.h>

Data Fields

- char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Full Name of Table to be activated.

38.111.1 Detailed Description

Activate Table Command.

For command details, see CFE_TBL_ACTIVATE_CC

Definition at line 582 of file cfe_tbl_msg.h.

38.111.2 Field Documentation

38.111.2.1   TableName

char CFE_TBL_ActivateCmd_Payload_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Full Name of Table to be activated.

ASCII string containing full table name identifier of table to be activated

Definition at line 584 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.112   CFE_TBL_DelCDSCmd_Payload_t Struct Reference

Delete Critical Table CDS Command.

```
#include <cfe_tbl_msg.h>
```

Data Fields

- char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]
  Full Name of Table whose CDS is to be deleted.

38.112.1   Detailed Description

Delete Critical Table CDS Command.

For command details, see CFE_TBL_DELETE_CDS_CC

Definition at line 639 of file cfe_tbl_msg.h.

38.112.2   Field Documentation

38.112.2.1   TableName

char CFE_TBL_DelCDSCmd_Payload_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Full Name of Table whose CDS is to be deleted.

ASCII string containing full table name identifier of a critical table whose CDS is to be deleted

Definition at line 641 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.113 CFE_TBL_DeleteCDS_t Struct Reference

```
#include <cfe_tbl_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header
- CFE_TBL_DelCDSCmd_Payload_t Payload

38.113.1 Detailed Description

Definition at line 648 of file cfe_tbl_msg.h.

38.113.2 Field Documentation

38.113.2.1 CmdHeader

```
uint8 CFE_TBL_DeleteCDS_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]
```

cFE Software Bus Command Message Header

Definition at line 650 of file cfe_tbl_msg.h.

38.113.2.2 Payload

```
CFE_TBL_DelCDSCmd_Payload_t CFE_TBL_DeleteCDS_t::Payload
```

Definition at line 651 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.114 CFE_TBL_Dump_t Struct Reference

```
#include <cfe_tbl_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header
- CFE_TBL_DumpCmd_Payload_t Payload

38.114.1   Detailed Description

Definition at line 547 of file cfe_tbl_msg.h.

38.114.2   Field Documentation

38.114.2.1   CmdHeader

uint8 CFE_TBL_Dump_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 549 of file cfe_tbl_msg.h.

38.114.2.2   Payload

CFE_TBL_DumpCmd_Payload_t CFE_TBL_Dump_t::Payload

Definition at line 550 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.115   CFE_TBL_DumpCmd_Payload_t Struct Reference

Dump Table Command.

#include <cfe_tbl_msg.h>

Data Fields

- uint16 ActiveTableFlag

    CFE_TBL_BufferSelect_INACTIVE=Inactive Table, CFE_TBL_BufferSelect_ACTIVE=Active Table
- char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Full name of table to be dumped.
- char DumpFilename [CFE_MISSION_MAX_PATH_LEN]

    Full Filename where data is to be written.

38.115.1 Detailed Description

Dump Table Command.

For command details, see CFE_TBL_DUMP_CC

Definition at line 531 of file cfe_tbl_msg.h.

38.115.2 Field Documentation

38.115.2.1 ActiveTableFlag

uint16 CFE_TBL_DumpCmd_Payload_t::ActiveTableFlag

CFE_TBL_BufferSelect_INACTIVE=Inactive Table, CFE_TBL_BufferSelect_ACTIVE=Active Table

Selects either the "Inactive" (CFE_TBL_BufferSelect_INACTIVE) buffer or the "Active" (CFE_TBL_BufferSelect_ACT←
IVE) buffer to be dumped

Definition at line 533 of file cfe_tbl_msg.h.

38.115.2.2 DumpFilename

char CFE_TBL_DumpCmd_Payload_t::DumpFilename[CFE_MISSION_MAX_PATH_LEN]

Full Filename where data is to be written.

ASCII string containing full path of filename where data is to be dumped

Definition at line 542 of file cfe_tbl_msg.h.

38.115.2.3 TableName

char CFE_TBL_DumpCmd_Payload_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Full name of table to be dumped.

ASCII string containing full table name identifier of table to be dumped

Definition at line 539 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.116   CFE_TBL_DumpRegistry_t Struct Reference

```
#include <cfe_tbl_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header
- CFE_TBL_DumpRegistryCmd_Payload_t Payload

38.116.1   Detailed Description

Definition at line 608 of file cfe_tbl_msg.h.

38.116.2   Field Documentation

38.116.2.1   CmdHeader

uint8 CFE_TBL_DumpRegistry_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 610 of file cfe_tbl_msg.h.

38.116.2.2   Payload

CFE_TBL_DumpRegistryCmd_Payload_t CFE_TBL_DumpRegistry_t::Payload

Definition at line 611 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.117   CFE_TBL_DumpRegistryCmd_Payload_t Struct Reference

Dump Registry Command.

```
#include <cfe_tbl_msg.h>
```

Data Fields

- char DumpFilename [CFE_MISSION_MAX_PATH_LEN]

  Full Filename where dumped data is to be written.

38.117.1   Detailed Description

Dump Registry Command.

For command details, see CFE_TBL_DUMP_REGISTRY_CC

Definition at line 600 of file cfe_tbl_msg.h.

38.117.2   Field Documentation

38.117.2.1   DumpFilename

char CFE_TBL_DumpRegistryCmd_Payload_t::DumpFilename[CFE_MISSION_MAX_PATH_LEN]

Full Filename where dumped data is to be written.

ASCII string containing full path of filename where registry is to be dumped

Definition at line 602 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.118   CFE_TBL_File_Hdr_t Struct Reference

The definition of the header fields that are included in CFE Table Data files.

#include <cfe_tbl_extern_typedefs.h>

Data Fields

- uint32 Reserved
- uint32 Offset
- uint32 NumBytes
- char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

38.118.1   Detailed Description

The definition of the header fields that are included in CFE Table Data files.

This header follows the CFE_FS header and precedes the the actual table data.

Definition at line 69 of file cfe_tbl_extern_typedefs.h.

38.118.2   Field Documentation

38.118.2.1   NumBytes

`uint32 CFE_TBL_File_Hdr_t::NumBytes`

Number of bytes to load into table

Definition at line 73 of file cfe_tbl_extern_typedefs.h.

38.118.2.2   Offset

`uint32 CFE_TBL_File_Hdr_t::Offset`

Byte Offset at which load should commence

Definition at line 72 of file cfe_tbl_extern_typedefs.h.

38.118.2.3   Reserved

`uint32 CFE_TBL_File_Hdr_t::Reserved`

Future Use: NumTblSegments in File?

Definition at line 71 of file cfe_tbl_extern_typedefs.h.

38.118.2.4   TableName

`char CFE_TBL_File_Hdr_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]`

Fully qualified name of table to load

Definition at line 74 of file cfe_tbl_extern_typedefs.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_extern_typedefs.h

38.119 CFE_TBL_FileDef_t Struct Reference

```
#include <cfe_tbl_filedef.h>
```

Data Fields

- char ObjectName [64]

    Name of instantiated variable that contains desired table image.
- char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Name of Table as defined onboard.
- char Description [CFE_FS_HDR_DESC_MAX_LEN]

    Description of table image that is included in cFE File Header.
- char TgtFilename [CFE_MISSION_MAX_FILE_LEN]

    Default filename to be used for output of elf2cfetbl utility.
- uint32 ObjectSize

    Size, in bytes, of instantiated object.

38.119.1 Detailed Description

Definition at line 61 of file cfe_tbl_filedef.h.

38.119.2 Field Documentation

38.119.2.1 Description

char CFE_TBL_FileDef_t::Description[CFE_FS_HDR_DESC_MAX_LEN]

Description of table image that is included in cFE File Header.

Definition at line 65 of file cfe_tbl_filedef.h.

38.119.2.2 ObjectName

char CFE_TBL_FileDef_t::ObjectName[64]

Name of instantiated variable that contains desired table image.

Definition at line 63 of file cfe_tbl_filedef.h.

38.119.2.3 ObjectSize

`uint32 CFE_TBL_FileDef_t::ObjectSize`

Size, in bytes, of instantiated object.

Definition at line 67 of file cfe_tbl_filedef.h.

38.119.2.4 TableName

`char CFE_TBL_FileDef_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]`

Name of Table as defined onboard.

Definition at line 64 of file cfe_tbl_filedef.h.

38.119.2.5 TgtFilename

`char CFE_TBL_FileDef_t::TgtFilename[CFE_MISSION_MAX_FILE_LEN]`

Default filename to be used for output of elf2cfetbl utility.

Definition at line 66 of file cfe_tbl_filedef.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_filedef.h

38.120 CFE_TBL_HousekeepingTlm_Payload_t Struct Reference

`#include <cfe_tbl_msg.h>`

Data Fields

- uint8 CommandCounter

    Count of valid commands received.
- uint8 CommandErrorCounter

    Count of invalid commands received.
- uint16 NumTables

    Number of Tables Registered.
- uint16 NumLoadPending

    Number of Tables pending on Applications for their update.
- uint16 ValidationCounter

    Number of completed table validations.
- uint32 LastValCrc

    Data Integrity Value computed for last table validated.
- int32 LastValStatus

    Returned status from validation function for last table validated.
- bool ActiveBuffer

    Indicator of whether table buffer validated was 0=Inactive, 1=Active.
- char LastValTableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Name of last table validated.
- uint8 SuccessValCounter

    Total number of successful table validations.
- uint8 FailedValCounter

    Total number of unsuccessful table validations.
- uint8 NumValRequests

    Number of times Table Services has requested validations from Apps.
- uint8 NumFreeSharedBufs

    Number of free Shared Working Buffers.
- uint8 ByteAlignPad1

    Spare byte to ensure longword alignment.
- CFE_ES_MemHandle_t MemPoolHandle

    Handle to TBL's memory pool.
- CFE_TIME_SysTime_t LastUpdateTime

    Time of last table update.
- char LastUpdatedTable [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Name of the last table updated.
- char LastFileLoaded [CFE_MISSION_MAX_PATH_LEN]

    Path and Name of last table image file loaded.
- char LastFileDumped [CFE_MISSION_MAX_PATH_LEN]

    Path and Name of last file dumped to.
- char LastTableLoaded [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Name of the last table loaded.

38.120.1 Detailed Description

Name Table Services Housekeeping Packet

Definition at line 704 of file cfe_tbl_msg.h.

38.120.2   Field Documentation

38.120.2.1   ActiveBuffer

`bool CFE_TBL_HousekeepingTlm_Payload_t::ActiveBuffer`

Indicator of whether table buffer validated was 0=Inactive, 1=Active.

[Telemetry Mnemonic(s)](#) $sc_$cpu_TBL_LastValBuf

Definition at line 731 of file cfe_tbl_msg.h.

38.120.2.2   ByteAlignPad1

`uint8 CFE_TBL_HousekeepingTlm_Payload_t::ByteAlignPad1`

Spare byte to ensure longword alignment.

[Telemetry Mnemonic(s)](#) $sc_$cpu_TBL_ByteAlignPad1

Definition at line 747 of file cfe_tbl_msg.h.

38.120.2.3   CommandCounter

`uint8 CFE_TBL_HousekeepingTlm_Payload_t::CommandCounter`

Count of valid commands received.

[Telemetry Mnemonic(s)](#) $sc_$cpu_TBL_CMDPC

Definition at line 709 of file cfe_tbl_msg.h.

38.120.2.4   CommandErrorCounter

`uint8 CFE_TBL_HousekeepingTlm_Payload_t::CommandErrorCounter`

Count of invalid commands received.

[Telemetry Mnemonic(s)](#) $sc_$cpu_TBL_CMDEC

Definition at line 711 of file cfe_tbl_msg.h.

38.120.2.5 FailedValCounter

`uint8` `CFE_TBL_HousekeepingTlm_Payload_t::FailedValCounter`

Total number of unsuccessful table validations.

Telemetry Mnemonic(s) $sc_$cpu_TBL_ValFailedCtr

Definition at line 737 of file cfe_tbl_msg.h.

38.120.2.6 LastFileDumped

`char CFE_TBL_HousekeepingTlm_Payload_t::LastFileDumped[CFE_MISSION_MAX_PATH_LEN]`

Path and Name of last file dumped to.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastFileDumped[OS_MAX_PATH_LEN]

Definition at line 757 of file cfe_tbl_msg.h.

38.120.2.7 LastFileLoaded

`char CFE_TBL_HousekeepingTlm_Payload_t::LastFileLoaded[CFE_MISSION_MAX_PATH_LEN]`

Path and Name of last table image file loaded.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastFileLoaded[OS_MAX_PATH_LEN]

Definition at line 755 of file cfe_tbl_msg.h.

38.120.2.8 LastTableLoaded

`char CFE_TBL_HousekeepingTlm_Payload_t::LastTableLoaded[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]`

Name of the last table loaded.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastTableLoaded[CFE_TBL_MAX_FULL_NAME_LEN]

Definition at line 759 of file cfe_tbl_msg.h.

38.120.2.9   LastUpdatedTable

char CFE_TBL_HousekeepingTlm_Payload_t::LastUpdatedTable[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Name of the last table updated.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastUpdTblName[CFE_TB_MAX_FULL_NAME_LEN]

Definition at line 753 of file cfe_tbl_msg.h.

38.120.2.10   LastUpdateTime

CFE_TIME_SysTime_t CFE_TBL_HousekeepingTlm_Payload_t::LastUpdateTime

Time of last table update.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastUpdTime, $sc_$cpu_TBL_SECONDS, $sc_$cpu_TBL_SUBSECONDS

Definition at line 751 of file cfe_tbl_msg.h.

38.120.2.11   LastValCrc

uint32 CFE_TBL_HousekeepingTlm_Payload_t::LastValCrc

Data Integrity Value computed for last table validated.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastValCRC

Definition at line 727 of file cfe_tbl_msg.h.

38.120.2.12   LastValStatus

int32 CFE_TBL_HousekeepingTlm_Payload_t::LastValStatus

Returned status from validation function for last table validated.

Telemetry Mnemonic(s) $sc_$cpu_TBl_LastValS

Definition at line 729 of file cfe_tbl_msg.h.

38.120.2.13 LastValTableName

`char CFE_TBL_HousekeepingTlm_Payload_t::LastValTableName[`CFE_MISSION_TBL_MAX_FULL_NAME_LEN`]`

Name of last table validated.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastValTblName[CFE_TB_MAX_FULL_NAME_LEN]

Definition at line 733 of file cfe_tbl_msg.h.

38.120.2.14 MemPoolHandle

`CFE_ES_MemHandle_t CFE_TBL_HousekeepingTlm_Payload_t::MemPoolHandle`

Handle to TBL's memory pool.

Telemetry Mnemonic(s) $sc_$cpu_TBL_MemPoolHandle

Definition at line 749 of file cfe_tbl_msg.h.

38.120.2.15 NumFreeSharedBufs

`uint8 CFE_TBL_HousekeepingTlm_Payload_t::NumFreeSharedBufs`

Number of free Shared Working Buffers.

Telemetry Mnemonic(s) $sc_$cpu_TBL_NumFreeShrBuf

Definition at line 745 of file cfe_tbl_msg.h.

38.120.2.16 NumLoadPending

`uint16 CFE_TBL_HousekeepingTlm_Payload_t::NumLoadPending`

Number of Tables pending on Applications for their update.

Telemetry Mnemonic(s) $sc_$cpu_TBL_NumUpdatesPend

Definition at line 719 of file cfe_tbl_msg.h.

38.120.2.17   NumTables

uint16 CFE_TBL_HousekeepingTlm_Payload_t::NumTables

Number of Tables Registered.

Telemetry Mnemonic(s) $sc_$cpu_TBL_NumTables

Definition at line 717 of file cfe_tbl_msg.h.

38.120.2.18   NumValRequests

uint8 CFE_TBL_HousekeepingTlm_Payload_t::NumValRequests

Number of times Table Services has requested validations from Apps.

Telemetry Mnemonic(s) $sc_$cpu_TBL_ValReqCtr

Definition at line 739 of file cfe_tbl_msg.h.

38.120.2.19   SuccessValCounter

uint8 CFE_TBL_HousekeepingTlm_Payload_t::SuccessValCounter

Total number of successful table validations.

Telemetry Mnemonic(s) $sc_$cpu_TBL_ValSuccessCtr

Definition at line 735 of file cfe_tbl_msg.h.

38.120.2.20   ValidationCounter

uint16 CFE_TBL_HousekeepingTlm_Payload_t::ValidationCounter

Number of completed table validations.

Telemetry Mnemonic(s) $sc_$cpu_TBL_ValCompltdCtr

Definition at line 725 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.121 CFE_TBL_HousekeepingTlm_t Struct Reference

```
#include <cfe_tbl_msg.h>
```

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]

    cFE Software Bus Telemetry Message Header
- CFE_TBL_HousekeepingTlm_Payload_t Payload

38.121.1 Detailed Description

Definition at line 763 of file cfe_tbl_msg.h.

38.121.2 Field Documentation

38.121.2.1 Payload

```
CFE_TBL_HousekeepingTlm_Payload_t CFE_TBL_HousekeepingTlm_t::Payload
```

Definition at line 766 of file cfe_tbl_msg.h.

38.121.2.2 TlmHeader

```
uint8 CFE_TBL_HousekeepingTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]
```

cFE Software Bus Telemetry Message Header

Definition at line 765 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.122 CFE_TBL_Info_t Struct Reference

Table Info.

```
#include <cfe_tbl.h>
```

Data Fields

- **uint32 Size**

    Size, in bytes, of Table.
- **uint32 NumUsers**

    Number of Apps with access to the table.
- **uint32 FileCreateTimeSecs**

    File creation time from last file loaded into table.
- **uint32 FileCreateTimeSubSecs**

    File creation time from last file loaded into table.
- **uint32 Crc**

    Most recently calculated CRC by TBL services on table contents.
- **CFE_TIME_SysTime_t TimeOfLastUpdate**

    Time when Table was last updated.
- bool **TableLoadedOnce**

    Flag indicating whether table has been loaded once or not.
- bool **DumpOnly**

    Flag indicating Table is NOT to be loaded.
- bool **DoubleBuffered**

    Flag indicating Table has a dedicated inactive buffer.
- bool **UserDefAddr**

    Flag indicating Table address was defined by Owner Application.
- bool **Critical**

    Flag indicating Table contents are maintained in a CDS.
- char **LastFileLoaded** [**OS_MAX_PATH_LEN**]

    Filename of last file loaded into table.

38.122.1   Detailed Description

Table Info.

Definition at line 132 of file cfe_tbl.h.

38.122.2   Field Documentation

38.122.2.1   Crc

`uint32 CFE_TBL_Info_t::Crc`

Most recently calculated CRC by TBL services on table contents.

Definition at line 138 of file cfe_tbl.h.

38.122.2.2   Critical

`bool CFE_TBL_Info_t::Critical`

Flag indicating Table contents are maintained in a CDS.

Definition at line 144 of file cfe_tbl.h.

38.122.2.3   DoubleBuffered

`bool CFE_TBL_Info_t::DoubleBuffered`

Flag indicating Table has a dedicated inactive buffer.

Definition at line 142 of file cfe_tbl.h.

38.122.2.4   DumpOnly

`bool CFE_TBL_Info_t::DumpOnly`

Flag indicating Table is NOT to be loaded.

Definition at line 141 of file cfe_tbl.h.

38.122.2.5   FileCreateTimeSecs

`uint32 CFE_TBL_Info_t::FileCreateTimeSecs`

File creation time from last file loaded into table.

Definition at line 136 of file cfe_tbl.h.

38.122.2.6   FileCreateTimeSubSecs

`uint32 CFE_TBL_Info_t::FileCreateTimeSubSecs`

File creation time from last file loaded into table.

Definition at line 137 of file cfe_tbl.h.

38.122.2.7   LastFileLoaded

char CFE_TBL_Info_t::LastFileLoaded[OS_MAX_PATH_LEN]

Filename of last file loaded into table.

Definition at line 145 of file cfe_tbl.h.

38.122.2.8   NumUsers

uint32 CFE_TBL_Info_t::NumUsers

Number of Apps with access to the table.

Definition at line 135 of file cfe_tbl.h.

38.122.2.9   Size

uint32 CFE_TBL_Info_t::Size

Size, in bytes, of Table.

Definition at line 134 of file cfe_tbl.h.

38.122.2.10   TableLoadedOnce

bool CFE_TBL_Info_t::TableLoadedOnce

Flag indicating whether table has been loaded once or not.

Definition at line 140 of file cfe_tbl.h.

38.122.2.11   TimeOfLastUpdate

CFE_TIME_SysTime_t CFE_TBL_Info_t::TimeOfLastUpdate

Time when Table was last updated.

Definition at line 139 of file cfe_tbl.h.

38.122.2.12 UserDefAddr

`bool CFE_TBL_Info_t::UserDefAddr`

Flag indicating Table address was defined by Owner Application.

Definition at line 143 of file cfe_tbl.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl.h

38.123 CFE_TBL_Load_t Struct Reference

`#include <cfe_tbl_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

  cFE Software Bus Command Message Header
- CFE_TBL_LoadCmd_Payload_t Payload

38.123.1 Detailed Description

Definition at line 520 of file cfe_tbl_msg.h.

38.123.2 Field Documentation

38.123.2.1 CmdHeader

`uint8 CFE_TBL_Load_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]`

cFE Software Bus Command Message Header

Definition at line 522 of file cfe_tbl_msg.h.

38.124   CFE_TBL_LoadCmd_Payload_t Struct Reference

Load Table Command.

```
#include <cfe_tbl_msg.h>
```

Data Fields

- char LoadFilename [CFE_MISSION_MAX_PATH_LEN]
  Filename (and path) of data to be loaded.

38.124.1   Detailed Description

Load Table Command.

For command details, see CFE_TBL_LOAD_CC

Definition at line 513 of file cfe_tbl_msg.h.

38.124.2   Field Documentation

38.124.2.1   LoadFilename

char CFE_TBL_LoadCmd_Payload_t::LoadFilename[CFE_MISSION_MAX_PATH_LEN]

Filename (and path) of data to be loaded.

ASCII Character string containing full path filename for file to be loaded

Definition at line 515 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.125 CFE_TBL_NoArgsCmd_t Struct Reference

Generic "no arguments" command.

```
#include <cfe_tbl_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

    cFE Software Bus Command Message Header

38.125.1 Detailed Description

Generic "no arguments" command.

This command structure is used for commands that do not have any parameters. This includes:

1. The Housekeeping Request Message

2. The No-Op Command (For details, see CFE_TBL_NOOP_CC)

3. The Reset Counters Command (For details, see CFE_TBL_RESET_COUNTERS_CC)

Definition at line 493 of file cfe_tbl_msg.h.

38.125.2 Field Documentation

38.125.2.1 CmdHeader

uint8 CFE_TBL_NoArgsCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 495 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.126 CFE_TBL_NotifyCmd_Payload_t Struct Reference

Table Management Notification Message.

```
#include <cfe_tbl_msg.h>
```

Data Fields

- uint32 Parameter

     Application specified command parameter.

38.126.1   Detailed Description

Table Management Notification Message.

Description

Whenever an application that owns a table calls the CFE_TBL_NotifyByMessage API following the table registration, Table services will generate the following command message with the application specified message ID, command code and parameter whenever the table requires management (e.g. - loads and validations).

Definition at line 686 of file cfe_tbl_msg.h.

38.126.2   Field Documentation

38.126.2.1   Parameter

uint32 CFE_TBL_NotifyCmd_Payload_t::Parameter

Application specified command parameter.

Definition at line 688 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.127   CFE_TBL_NotifyCmd_t Struct Reference

```
#include <cfe_tbl_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

     cFE Software Bus Command Message Header
- CFE_TBL_NotifyCmd_Payload_t Payload

38.127.1 Detailed Description

Definition at line 691 of file cfe_tbl_msg.h.

38.127.2 Field Documentation

38.127.2.1 CmdHeader

uint8 CFE_TBL_NotifyCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 693 of file cfe_tbl_msg.h.

38.127.2.2 Payload

CFE_TBL_NotifyCmd_Payload_t CFE_TBL_NotifyCmd_t::Payload

Definition at line 694 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.128 CFE_TBL_SendRegistry_t Struct Reference

#include <cfe_tbl_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

  cFE Software Bus Command Message Header
- CFE_TBL_SendRegistryCmd_Payload_t Payload

38.128.1 Detailed Description

Definition at line 628 of file cfe_tbl_msg.h.

38.128.2 Field Documentation

38.128.2.1 CmdHeader

uint8 CFE_TBL_SendRegistry_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 630 of file cfe_tbl_msg.h.

38.128.2.2 Payload

CFE_TBL_SendRegistryCmd_Payload_t CFE_TBL_SendRegistry_t::Payload

Definition at line 631 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.129 CFE_TBL_SendRegistryCmd_Payload_t Struct Reference

Telemeter Table Registry Entry Command.

```
#include <cfe_tbl_msg.h>
```

Data Fields

- char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]
  Full Name of Table whose registry entry is to be telemetered.

38.129.1 Detailed Description

Telemeter Table Registry Entry Command.

For command details, see CFE_TBL_SEND_REGISTRY_CC

Definition at line 619 of file cfe_tbl_msg.h.

38.129.2 Field Documentation

38.129.2.1 TableName

char CFE_TBL_SendRegistryCmd_Payload_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Full Name of Table whose registry entry is to be telemetered.

ASCII string containing full table name identifier of table whose registry entry is to be telemetered via CFE_TBL_Table↩
RegistryTlm_t

Definition at line 621 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.130 CFE_TBL_TableRegistryTlm_t Struct Reference

#include <cfe_tbl_msg.h>

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]
  cFE Software Bus Telemetry Message Header
- CFE_TBL_TblRegPacket_Payload_t Payload

38.130.1 Detailed Description

Definition at line 811 of file cfe_tbl_msg.h.

38.130.2 Field Documentation

38.130.2.1 Payload

CFE_TBL_TblRegPacket_Payload_t CFE_TBL_TableRegistryTlm_t::Payload

Definition at line 814 of file cfe_tbl_msg.h.

38.130.2.2   TlmHeader

uint8 CFE_TBL_TableRegistryTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]

cFE Software Bus Telemetry Message Header

Definition at line 813 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.131   CFE_TBL_TblRegPacket_Payload_t Struct Reference

#include <cfe_tbl_msg.h>

Data Fields

- uint32 Size

    Size, in bytes, of Table.
- uint32 Crc

    Most recently calculated CRC of Table.
- cpuaddr ActiveBufferAddr

    Address of Active Buffer.
- cpuaddr InactiveBufferAddr

    Address of Inactive Buffer.
- cpuaddr ValidationFuncPtr

    Ptr to Owner App's function that validates tbl contents.
- CFE_TIME_SysTime_t TimeOfLastUpdate

    Time when Table was last updated.
- uint32 FileCreateTimeSecs

    File creation time from last file loaded into table.
- uint32 FileCreateTimeSubSecs

    File creation time from last file loaded into table.
- bool TableLoadedOnce

    Flag indicating whether table has been loaded once or not.
- bool LoadPending

    Flag indicating an inactive buffer is ready to be copied.
- bool DumpOnly

    Flag indicating Table is NOT to be loaded.
- bool DoubleBuffered

    Flag indicating Table has a dedicated inactive buffer.
- char Name [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

    Processor specific table name.
- char LastFileLoaded [CFE_MISSION_MAX_PATH_LEN]

    Filename of last file loaded into table.
- char OwnerAppName [CFE_MISSION_MAX_API_LEN]

    Name of owning application.
- bool Critical

    Indicates whether table is Critical or not.
- uint8 ByteAlign4

    Spare byte to maintain byte alignment.

38.131.1   Detailed Description

Name Table Registry Info Packet

Definition at line 773 of file cfe_tbl_msg.h.

38.131.2   Field Documentation

38.131.2.1   ActiveBufferAddr

cpuaddr CFE_TBL_TblRegPacket_Payload_t::ActiveBufferAddr

Address of Active Buffer.

Telemetry Mnemonic(s) $sc_$cpu_TBL_ActBufAdd

Definition at line 779 of file cfe_tbl_msg.h.

38.131.2.2   ByteAlign4

uint8 CFE_TBL_TblRegPacket_Payload_t::ByteAlign4

Spare byte to maintain byte alignment.

Telemetry Mnemonic(s) $sc_$cpu_TBL_Spare4

Definition at line 807 of file cfe_tbl_msg.h.

38.131.2.3   Crc

uint32 CFE_TBL_TblRegPacket_Payload_t::Crc

Most recently calculated CRC of Table.

Telemetry Mnemonic(s) $sc_$cpu_TBL_CRC

Definition at line 777 of file cfe_tbl_msg.h.

38.131.2.4   Critical

```
bool CFE_TBL_TblRegPacket_Payload_t::Critical
```

Indicates whether table is Critical or not.

Telemetry Mnemonic(s) $sc_$cpu_TBL_Spare3

Definition at line 805 of file cfe_tbl_msg.h.

38.131.2.5   DoubleBuffered

```
bool CFE_TBL_TblRegPacket_Payload_t::DoubleBuffered
```

Flag indicating Table has a dedicated inactive buffer.

Telemetry Mnemonic(s) $sc_$cpu_TBL_DblBuffered

Definition at line 797 of file cfe_tbl_msg.h.

38.131.2.6   DumpOnly

```
bool CFE_TBL_TblRegPacket_Payload_t::DumpOnly
```

Flag indicating Table is NOT to be loaded.

Telemetry Mnemonic(s) $sc_$cpu_TBL_DumpOnly

Definition at line 795 of file cfe_tbl_msg.h.

38.131.2.7   FileCreateTimeSecs

```
uint32 CFE_TBL_TblRegPacket_Payload_t::FileCreateTimeSecs
```

File creation time from last file loaded into table.

Telemetry Mnemonic(s) $sc_$cpu_TBL_FILECSECONDS

Definition at line 787 of file cfe_tbl_msg.h.

38.131.2.8 FileCreateTimeSubSecs

uint32 CFE_TBL_TblRegPacket_Payload_t::FileCreateTimeSubSecs

File creation time from last file loaded into table.

Telemetry Mnemonic(s) $sc_$cpu_TBL_FILECSUBSECONDS

Definition at line 789 of file cfe_tbl_msg.h.

38.131.2.9 InactiveBufferAddr

cpuaddr CFE_TBL_TblRegPacket_Payload_t::InactiveBufferAddr

Address of Inactive Buffer.

Telemetry Mnemonic(s) $sc_$cpu_TBL_IActBufAdd

Definition at line 781 of file cfe_tbl_msg.h.

38.131.2.10 LastFileLoaded

char CFE_TBL_TblRegPacket_Payload_t::LastFileLoaded[CFE_MISSION_MAX_PATH_LEN]

Filename of last file loaded into table.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LastFileUpd[OS_MAX_PATH_LEN]

Definition at line 801 of file cfe_tbl_msg.h.

38.131.2.11 LoadPending

bool CFE_TBL_TblRegPacket_Payload_t::LoadPending

Flag indicating an inactive buffer is ready to be copied.

Telemetry Mnemonic(s) $sc_$cpu_TBL_UpdatePndng

Definition at line 793 of file cfe_tbl_msg.h.

38.131.2.12   Name

char CFE_TBL_TblRegPacket_Payload_t::Name[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Processor specific table name.

Telemetry Mnemonic(s) $sc_$cpu_TBL_Name[CFE_TB_MAX_FULL_NAME_LEN]

Definition at line 799 of file cfe_tbl_msg.h.

38.131.2.13   OwnerAppName

char CFE_TBL_TblRegPacket_Payload_t::OwnerAppName[CFE_MISSION_MAX_API_LEN]

Name of owning application.

Telemetry Mnemonic(s) $sc_$cpu_TBL_OwnerApp[OS_MAX_API_NAME]

Definition at line 803 of file cfe_tbl_msg.h.

38.131.2.14   Size

uint32 CFE_TBL_TblRegPacket_Payload_t::Size

Size, in bytes, of Table.

Telemetry Mnemonic(s) $sc_$cpu_TBL_SIZE

Definition at line 775 of file cfe_tbl_msg.h.

38.131.2.15   TableLoadedOnce

bool CFE_TBL_TblRegPacket_Payload_t::TableLoadedOnce

Flag indicating whether table has been loaded once or not.

Telemetry Mnemonic(s) $sc_$cpu_TBL_LoadedOnce

Definition at line 791 of file cfe_tbl_msg.h.

38.131.2.16 TimeOfLastUpdate

CFE_TIME_SysTime_t CFE_TBL_TblRegPacket_Payload_t::TimeOfLastUpdate

Time when Table was last updated.

Telemetry Mnemonic(s) $sc_$cpu_TBL_TimeLastUpd, $sc_$cpu_TBL_TLUSECONDS, $sc_$cpu_TBL_TLUSUB↩
SECONDS

Definition at line 785 of file cfe_tbl_msg.h.

38.131.2.17 ValidationFuncPtr

cpuaddr CFE_TBL_TblRegPacket_Payload_t::ValidationFuncPtr

Ptr to Owner App's function that validates tbl contents.

Telemetry Mnemonic(s) $sc_$cpu_TBL_ValFuncPtr

Definition at line 783 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.132 CFE_TBL_Validate_t Struct Reference

#include <cfe_tbl_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
    cFE Software Bus Command Message Header
- CFE_TBL_ValidateCmd_Payload_t Payload

38.132.1 Detailed Description

Definition at line 571 of file cfe_tbl_msg.h.

38.132.2   Field Documentation

38.132.2.1   CmdHeader

uint8 CFE_TBL_Validate_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

cFE Software Bus Command Message Header

Definition at line 573 of file cfe_tbl_msg.h.

38.132.2.2   Payload

CFE_TBL_ValidateCmd_Payload_t CFE_TBL_Validate_t::Payload

Definition at line 574 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

  • cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.133   CFE_TBL_ValidateCmd_Payload_t Struct Reference

Validate Table Command.

#include <cfe_tbl_msg.h>

Data Fields

  • uint16 ActiveTableFlag
       CFE_TBL_BufferSelect_INACTIVE=Inactive Table, CFE_TBL_BufferSelect_ACTIVE=Active Table
  • char TableName [CFE_MISSION_TBL_MAX_FULL_NAME_LEN]
       Full Name of Table to be validated.

38.133.1   Detailed Description

Validate Table Command.

For command details, see CFE_TBL_VALIDATE_CC

Definition at line 558 of file cfe_tbl_msg.h.

38.133.2 Field Documentation

38.133.2.1 ActiveTableFlag

`uint16` CFE_TBL_ValidateCmd_Payload_t::ActiveTableFlag

CFE_TBL_BufferSelect_INACTIVE=Inactive Table, CFE_TBL_BufferSelect_ACTIVE=Active Table

Selects either the "Inactive" (CFE_TBL_BufferSelect_INACTIVE) buffer or the "Active" (CFE_TBL_BufferSelect_ACT↩
IVE) buffer to be validated

Definition at line 560 of file cfe_tbl_msg.h.

38.133.2.2 TableName

`char` CFE_TBL_ValidateCmd_Payload_t::TableName[CFE_MISSION_TBL_MAX_FULL_NAME_LEN]

Full Name of Table to be validated.

ASCII string containing full table name identifier of table to be validated

Definition at line 566 of file cfe_tbl_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h

38.134 CFE_TIME_1HzCmd_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

38.134.1 Detailed Description

Definition at line 869 of file cfe_time_msg.h.

38.134.2 Field Documentation

38.134.2.1   CmdHeader

uint8 CFE_TIME_1HzCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 871 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.135   CFE_TIME_DiagnosticTlm_Payload_t Struct Reference

#include <cfe_time_msg.h>

Data Fields

- CFE_TIME_SysTime_t AtToneMET

    MET at time of tone.
- CFE_TIME_SysTime_t AtToneSTCF

    STCF at time of tone.
- CFE_TIME_SysTime_t AtToneDelay

    Adjustment for slow tone detection.
- CFE_TIME_SysTime_t AtToneLatch

    Local clock latched at time of tone.
- int16 AtToneLeapSeconds

    Leap Seconds at time of tone.
- int16 ClockStateAPI

    Clock state as per API.
- CFE_TIME_SysTime_t TimeSinceTone

    Time elapsed since the tone.
- CFE_TIME_SysTime_t CurrentLatch

    Local clock latched just "now".
- CFE_TIME_SysTime_t CurrentMET

    MET at this instant.
- CFE_TIME_SysTime_t CurrentTAI

    TAI at this instant.
- CFE_TIME_SysTime_t CurrentUTC

    UTC at this instant.
- int16 ClockSetState

    Time has been "set".
- int16 ClockFlyState

    Current fly-wheel state.
- int16 ClockSource

    Internal vs external, etc.
- int16 ClockSignal

    Primary vs redundant, etc.

Max local clock value before rollover.

- uint32 ToneOverLimit

  Max between tone signal interrupts.

- uint32 ToneUnderLimit

  Min between tone signal interrupts.

- uint32 DataStoreStatus

  Data Store status (preserved across processor reset)

38.135.1 Detailed Description

Name Time Services Diagnostics Packet

Definition at line 990 of file cfe_time_msg.h.

38.135.2 Field Documentation

38.135.2.1 AtToneDelay

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::AtToneDelay

Adjustment for slow tone detection.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DLatentS, $sc_$cpu_TIME_DLatentSs

Definition at line 999 of file cfe_time_msg.h.

38.135.2.2 AtToneLatch

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::AtToneLatch

Local clock latched at time of tone.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTValidS, $sc_$cpu_TIME_DTValidSs

Definition at line 1001 of file cfe_time_msg.h.

38.135.2.3   AtToneLeapSeconds

int16 CFE_TIME_DiagnosticTlm_Payload_t::AtToneLeapSeconds

Leap Seconds at time of tone.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DLeapS

Definition at line 1004 of file cfe_time_msg.h.

38.135.2.4   AtToneMET

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::AtToneMET

MET at time of tone.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTMETS, $sc_$cpu_TIME_DTMETSs

Definition at line 995 of file cfe_time_msg.h.

38.135.2.5   AtToneSTCF

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::AtToneSTCF

STCF at time of tone.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DSTCFS, $sc_$cpu_TIME_DSTCFSS

Definition at line 997 of file cfe_time_msg.h.

38.135.2.6   ClockFlyState

int16 CFE_TIME_DiagnosticTlm_Payload_t::ClockFlyState

Current fly-wheel state.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DFlywheel

Definition at line 1028 of file cfe_time_msg.h.

38.135.2.7 ClockSetState

`int16 CFE_TIME_DiagnosticTlm_Payload_t::ClockSetState`

Time has been "set".

Telemetry Mnemonic(s) $sc_$cpu_TIME_DValid

Definition at line 1026 of file cfe_time_msg.h.

38.135.2.8 ClockSignal

`int16 CFE_TIME_DiagnosticTlm_Payload_t::ClockSignal`

Primary vs redundant, etc.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DSignal

Definition at line 1032 of file cfe_time_msg.h.

38.135.2.9 ClockSource

`int16 CFE_TIME_DiagnosticTlm_Payload_t::ClockSource`

Internal vs external, etc.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DSource

Definition at line 1030 of file cfe_time_msg.h.

38.135.2.10 ClockStateAPI

`int16 CFE_TIME_DiagnosticTlm_Payload_t::ClockStateAPI`

Clock state as per API.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DAPIState

Definition at line 1006 of file cfe_time_msg.h.

38.135.2.11 ClockStateFlags

uint16 CFE_TIME_DiagnosticTlm_Payload_t::ClockStateFlags

Clock State Flags.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DStateFlags, $sc_$cpu_TIME_DFlagSet, $sc_$cpu_TIME_DFlagFly, $sc_$cpu_TIME_DFlagSrc, $sc_$cpu_TIME_DFlagPri, $sc_$cpu_TIME_DFlagSfly, $sc_↩ $cpu_TIME_DFlagCfly, $sc_$cpu_TIME_DFlagAdjd, $sc_$cpu_TIME_DFlag1Hzd, $sc_↩ $cpu_TIME_DFlagClat, $sc_$cpu_TIME_DFlagSorC, $sc_$cpu_TIME_DFlagNIU

Definition at line 1042 of file cfe_time_msg.h.

38.135.2.12 CurrentLatch

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::CurrentLatch

Local clock latched just "now".

Telemetry Mnemonic(s) $sc_$cpu_TIME_DLocalS, $sc_$cpu_TIME_DLocalSs

Definition at line 1014 of file cfe_time_msg.h.

38.135.2.13 CurrentMET

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::CurrentMET

MET at this instant.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DMETS, $sc_$cpu_TIME_DMETSs

Definition at line 1016 of file cfe_time_msg.h.

38.135.2.14 CurrentTAI

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::CurrentTAI

TAI at this instant.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTAIS, $sc_$cpu_TIME_DTAISS

Definition at line 1018 of file cfe_time_msg.h.

38.135.2.15   CurrentUTC

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::CurrentUTC

UTC at this instant.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DUTCS, $sc_$cpu_TIME_DUTCSS

Definition at line 1020 of file cfe_time_msg.h.

38.135.2.16   DataStoreStatus

uint32 CFE_TIME_DiagnosticTlm_Payload_t::DataStoreStatus

Data Store status (preserved across processor reset)

Telemetry Mnemonic(s) $sc_$cpu_TIME_DataStStat

Definition at line 1132 of file cfe_time_msg.h.

38.135.2.17   DelayDirection

int16 CFE_TIME_DiagnosticTlm_Payload_t::DelayDirection

Client latency adjustment direction.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DLatentDir

Definition at line 1052 of file cfe_time_msg.h.

38.135.2.18   Forced2Fly

int16 CFE_TIME_DiagnosticTlm_Payload_t::Forced2Fly

Commanded into fly-wheel.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DCMD2Fly

Definition at line 1036 of file cfe_time_msg.h.

38.135.2.19 LocalIntCounter

`uint32` `CFE_TIME_DiagnosticTlm_Payload_t::LocalIntCounter`

Local 1Hz ISR execution count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_D1HzISRCNT

Definition at line 1090 of file cfe_time_msg.h.

38.135.2.20 LocalTaskCounter

`uint32` `CFE_TIME_DiagnosticTlm_Payload_t::LocalTaskCounter`

Local 1Hz task execution count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_D1HzTaskCNT

Definition at line 1092 of file cfe_time_msg.h.

38.135.2.21 MaxElapsed

`uint32` `CFE_TIME_DiagnosticTlm_Payload_t::MaxElapsed`

Max tone signal / data pkt arrival window (Sub-seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_DMaxWindow

Definition at line 1112 of file cfe_time_msg.h.

38.135.2.22 MaxLocalClock

`CFE_TIME_SysTime_t` `CFE_TIME_DiagnosticTlm_Payload_t::MaxLocalClock`

Max local clock value before rollover.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DWrapS, $sc_$cpu_TIME_DWrapSs

Definition at line 1118 of file cfe_time_msg.h.

38.135.2.23   MinElapsed

`uint32` `CFE_TIME_DiagnosticTlm_Payload_t::MinElapsed`

Min tone signal / data pkt arrival window (Sub-seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_DMinWindow

Definition at line 1110 of file cfe_time_msg.h.

38.135.2.24   OneHzAdjust

`CFE_TIME_SysTime_t` `CFE_TIME_DiagnosticTlm_Payload_t::OneHzAdjust`

Current 1Hz STCF adjustment.

Telemetry Mnemonic(s) $sc_$cpu_TIME_D1HzAdjS, $sc_$cpu_TIME_D1HzAdjSs

Definition at line 1060 of file cfe_time_msg.h.

38.135.2.25   OneHzDirection

`int16` `CFE_TIME_DiagnosticTlm_Payload_t::OneHzDirection`

1Hz STCF adjustment direction

Telemetry Mnemonic(s) $sc_$cpu_TIME_D1HzAdjDir

Definition at line 1050 of file cfe_time_msg.h.

38.135.2.26   OneTimeAdjust

`CFE_TIME_SysTime_t` `CFE_TIME_DiagnosticTlm_Payload_t::OneTimeAdjust`

Previous one-time STCF adjustment.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DAdjustS, $sc_$cpu_TIME_DAdjustSs

Definition at line 1058 of file cfe_time_msg.h.

38.135.2.27 OneTimeDirection

`int16` `CFE_TIME_DiagnosticTlm_Payload_t::OneTimeDirection`

One time STCF adjustment direction (Add = 1, Sub = 2)

Telemetry Mnemonic(s) $sc_$cpu_TIME_DAdjustDir

Definition at line 1048 of file cfe_time_msg.h.

38.135.2.28 ServerFlyState

`int16` `CFE_TIME_DiagnosticTlm_Payload_t::ServerFlyState`

Used by clients only.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DSrvFly

Definition at line 1034 of file cfe_time_msg.h.

38.135.2.29 TimeSinceTone

`CFE_TIME_SysTime_t` `CFE_TIME_DiagnosticTlm_Payload_t::TimeSinceTone`

Time elapsed since the tone.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DElapsedS, $sc_$cpu_TIME_DElapsedSs

Definition at line 1012 of file cfe_time_msg.h.

38.135.2.30 ToneDataCounter

`uint32` `CFE_TIME_DiagnosticTlm_Payload_t::ToneDataCounter`

Time at the tone data SB message count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTatTCNT

Definition at line 1080 of file cfe_time_msg.h.

38.135.2.31   ToneDataLatch

CFE_TIME_SysTime_t CFE_TIME_DiagnosticTlm_Payload_t::ToneDataLatch

Local Clock latched at arrival of tone data.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTDS, $sc_$cpu_TIME_DTDSs

Definition at line 1068 of file cfe_time_msg.h.

38.135.2.32   ToneIntCounter

uint32 CFE_TIME_DiagnosticTlm_Payload_t::ToneIntCounter

Tone signal ISR execution count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTsISRCNT

Definition at line 1082 of file cfe_time_msg.h.

38.135.2.33   ToneIntErrorCounter

uint32 CFE_TIME_DiagnosticTlm_Payload_t::ToneIntErrorCounter

Tone signal ISR error count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTsISRERR

Definition at line 1084 of file cfe_time_msg.h.

38.135.2.34   ToneMatchCounter

uint32 CFE_TIME_DiagnosticTlm_Payload_t::ToneMatchCounter

Tone signal / data verification count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DVerifyCNT

Definition at line 1074 of file cfe_time_msg.h.

38.135.2.35   ToneMatchErrorCounter

`uint32` CFE_TIME_DiagnosticTlm_Payload_t::ToneMatchErrorCounter

Tone signal / data verification error count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DVerifyER

Definition at line 1076 of file cfe_time_msg.h.

38.135.2.36   ToneOverLimit

`uint32` CFE_TIME_DiagnosticTlm_Payload_t::ToneOverLimit

Max between tone signal interrupts.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DMaxSs

Definition at line 1124 of file cfe_time_msg.h.

38.135.2.37   ToneSignalCounter

`uint32` CFE_TIME_DiagnosticTlm_Payload_t::ToneSignalCounter

Tone signal detected SB message count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTSDetCNT

Definition at line 1078 of file cfe_time_msg.h.

38.135.2.38   ToneSignalLatch

`CFE_TIME_SysTime_t` CFE_TIME_DiagnosticTlm_Payload_t::ToneSignalLatch

Local Clock latched at most recent tone signal.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTTS, $sc_$cpu_TIME_DTTSs

Definition at line 1066 of file cfe_time_msg.h.

38.135.2.39   ToneTaskCounter

uint32 CFE_TIME_DiagnosticTlm_Payload_t::ToneTaskCounter

Tone task execution count.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DTsTaskCNT

Definition at line 1086 of file cfe_time_msg.h.

38.135.2.40   ToneUnderLimit

uint32 CFE_TIME_DiagnosticTlm_Payload_t::ToneUnderLimit

Min between tone signal interrupts.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DMinSs

Definition at line 1126 of file cfe_time_msg.h.

38.135.2.41   VersionCounter

uint32 CFE_TIME_DiagnosticTlm_Payload_t::VersionCounter

Count of mods to time at tone reference data (version)

Telemetry Mnemonic(s) $sc_$cpu_TIME_DVersionCNT

Definition at line 1088 of file cfe_time_msg.h.

38.135.2.42   VirtualMET

uint32 CFE_TIME_DiagnosticTlm_Payload_t::VirtualMET

Software MET.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DLogicalMET

Definition at line 1098 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.136 CFE_TIME_DiagnosticTlm_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- uint8 TlmHeader [CFE_SB_TLM_HDR_SIZE]
- CFE_TIME_DiagnosticTlm_Payload_t Payload

38.136.1 Detailed Description

Definition at line 1136 of file cfe_time_msg.h.

38.136.2 Field Documentation

38.136.2.1 Payload

`CFE_TIME_DiagnosticTlm_Payload_t CFE_TIME_DiagnosticTlm_t::Payload`

Definition at line 1139 of file cfe_time_msg.h.

38.136.2.2 TlmHeader

`uint8 CFE_TIME_DiagnosticTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]`

Definition at line 1138 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.137 CFE_TIME_FakeToneCmd_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- CFE_SB_CmdHdr_t CmdHeader

38.137.1   Detailed Description

Definition at line 889 of file cfe_time_msg.h.

38.137.2   Field Documentation

38.137.2.1   CmdHeader

[CFE_SB_CmdHdr_t](#) CFE_TIME_FakeToneCmd_t::CmdHeader

Definition at line 891 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/[cfe_time_msg.h](#)

38.138   CFE_TIME_HousekeepingTlm_Payload_t Struct Reference

```
#include <cfe_time_msg.h>
```

Data Fields

- uint8 **CommandCounter**

    Time Command Execution Counter.
- uint8 **CommandErrorCounter**

    Time Command Error Counter.
- uint16 **ClockStateFlags**

    State Flags.
- int16 **ClockStateAPI**

    API State.
- int16 **LeapSeconds**

    Current Leaps Seconds.
- uint32 **SecondsMET**

    Current MET (seconds)
- uint32 **SubsecsMET**

    Current MET (sub-seconds)
- uint32 **SecondsSTCF**

    Current STCF (seconds)
- uint32 **SubsecsSTCF**

    Current STCF (sub-seconds)
- uint32 **Seconds1HzAdj**

    Current 1 Hz SCTF adjustment (seconds)
- uint32 **Subsecs1HzAdj**

    Current 1 Hz SCTF adjustment (sub-seconds)
- uint32 **SecondsDelay**

    Current 1 Hz SCTF Delay (seconds)
- uint32 **SubsecsDelay**

    Current 1 Hz SCTF Delay (sub-seconds)

38.138.1 Detailed Description

Name Time Services Housekeeping Packet

Definition at line 919 of file cfe_time_msg.h.

38.138.2 Field Documentation

38.138.2.1 ClockStateAPI

`int16` CFE_TIME_HousekeepingTlm_Payload_t::ClockStateAPI

API State.

Telemetry Mnemonic(s) $sc_$cpu_TIME_DAPIState

Definition at line 934 of file cfe_time_msg.h.

38.138.2.2 ClockStateFlags

`uint16` CFE_TIME_HousekeepingTlm_Payload_t::ClockStateFlags

State Flags.

Telemetry Mnemonic(s) $sc_$cpu_TIME_StateFlg, $sc_$cpu_TIME_FlagSet, $sc_$cpu_TIME_FlagFly, $sc_$cpu↩
_TIME_FlagSrc, $sc_$cpu_TIME_FlagPri, $sc_$cpu_TIME_FlagSfly, $sc_$cpu_TIME_↩
FlagCfly, $sc_$cpu_TIME_FlagAdjd, $sc_$cpu_TIME_Flag1Hzd, $sc_$cpu_TIME_FlagClat,
$sc_$cpu_TIME_FlagSorC, $sc_$cpu_TIME_FlagNIU

Definition at line 932 of file cfe_time_msg.h.

38.138.2.3 CommandCounter

`uint8` CFE_TIME_HousekeepingTlm_Payload_t::CommandCounter

Time Command Execution Counter.

Telemetry Mnemonic(s) $sc_$cpu_TIME_CMDPC

Definition at line 924 of file cfe_time_msg.h.

38.138.2.4   CommandErrorCounter

uint8 CFE_TIME_HousekeepingTlm_Payload_t::CommandErrorCounter

Time Command Error Counter.

Telemetry Mnemonic(s) $sc_$cpu_TIME_CMDEC

Definition at line 926 of file cfe_time_msg.h.

38.138.2.5   LeapSeconds

int16 CFE_TIME_HousekeepingTlm_Payload_t::LeapSeconds

Current Leaps Seconds.

Telemetry Mnemonic(s) $sc_$cpu_TIME_LeapSecs

Definition at line 940 of file cfe_time_msg.h.

38.138.2.6   Seconds1HzAdj

uint32 CFE_TIME_HousekeepingTlm_Payload_t::Seconds1HzAdj

Current 1 Hz SCTF adjustment (seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_1HzAdjSecs

Definition at line 960 of file cfe_time_msg.h.

38.138.2.7   SecondsDelay

uint32 CFE_TIME_HousekeepingTlm_Payload_t::SecondsDelay

Current 1 Hz SCTF Delay (seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_1HzAdjSecs

Definition at line 970 of file cfe_time_msg.h.

38.138.2.8 SecondsMET

`uint32` `CFE_TIME_HousekeepingTlm_Payload_t::SecondsMET`

Current MET (seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_METSecs

Definition at line 946 of file cfe_time_msg.h.

38.138.2.9 SecondsSTCF

`uint32` `CFE_TIME_HousekeepingTlm_Payload_t::SecondsSTCF`

Current STCF (seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_STCFSecs

Definition at line 951 of file cfe_time_msg.h.

38.138.2.10 Subsecs1HzAdj

`uint32` `CFE_TIME_HousekeepingTlm_Payload_t::Subsecs1HzAdj`

Current 1 Hz SCTF adjustment (sub-seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_1HzAdjSSecs

Definition at line 962 of file cfe_time_msg.h.

38.138.2.11 SubsecsDelay

`uint32` `CFE_TIME_HousekeepingTlm_Payload_t::SubsecsDelay`

Current 1 Hz SCTF Delay (sub-seconds)

Telemetry Mnemonic(s) $sc_$cpu_TIME_1HzAdjSSecs

Definition at line 972 of file cfe_time_msg.h.

38.138.2.12 SubsecsMET

`uint32` `CFE_TIME_HousekeepingTlm_Payload_t::SubsecsMET`

Current MET (sub-seconds)

[Telemetry Mnemonic(s)](#) $sc_$cpu_TIME_METSubsecs

Definition at line 948 of file cfe_time_msg.h.

38.138.2.13 SubsecsSTCF

`uint32` `CFE_TIME_HousekeepingTlm_Payload_t::SubsecsSTCF`

Current STCF (sub-seconds)

[Telemetry Mnemonic(s)](#) $sc_$cpu_TIME_STCFSubsecs

Definition at line 953 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/[cfe_time_msg.h](#)

38.139 CFE_TIME_HousekeepingTlm_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- [uint8 TlmHeader](#) [[CFE_SB_TLM_HDR_SIZE](#)]
- [CFE_TIME_HousekeepingTlm_Payload_t Payload](#)

38.139.1 Detailed Description

Definition at line 978 of file cfe_time_msg.h.

38.139.2 Field Documentation

38.139.2.1   Payload

CFE_TIME_HousekeepingTlm_Payload_t CFE_TIME_HousekeepingTlm_t::Payload

Definition at line 981 of file cfe_time_msg.h.

38.139.2.2   TlmHeader

uint8 CFE_TIME_HousekeepingTlm_t::TlmHeader[CFE_SB_TLM_HDR_SIZE]

Definition at line 980 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.140   CFE_TIME_LeapsCmd_Payload_t Struct Reference

#include <cfe_time_msg.h>

Data Fields

- int16 LeapSeconds

38.140.1   Detailed Description

Definition at line 747 of file cfe_time_msg.h.

38.140.2   Field Documentation

38.140.2.1   LeapSeconds

int16 CFE_TIME_LeapsCmd_Payload_t::LeapSeconds

Definition at line 749 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.141 CFE_TIME_NoArgsCmd_t Struct Reference

```
#include <cfe_time_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]

38.141.1 Detailed Description

Definition at line 729 of file cfe_time_msg.h.

38.141.2 Field Documentation

38.141.2.1 CmdHeader

uint8 CFE_TIME_NoArgsCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 731 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.142 CFE_TIME_OneHzAdjustmentCmd_Payload_t Struct Reference

```
#include <cfe_time_msg.h>
```

Data Fields

- uint32 Seconds
- uint32 Subseconds

38.142.1 Detailed Description

Definition at line 844 of file cfe_time_msg.h.

38.142.2 Field Documentation

38.142.2.1 Seconds

`uint32` `CFE_TIME_OneHzAdjustmentCmd_Payload_t::Seconds`

Definition at line 846 of file cfe_time_msg.h.

38.142.2.2 Subseconds

`uint32` `CFE_TIME_OneHzAdjustmentCmd_Payload_t::Subseconds`

Definition at line 847 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.143 CFE_TIME_OneHzAdjustmentCmd_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_TIME_OneHzAdjustmentCmd_Payload_t Payload

38.143.1 Detailed Description

Definition at line 851 of file cfe_time_msg.h.

38.143.2 Field Documentation

38.143.2.1 CmdHeader

`uint8` `CFE_TIME_OneHzAdjustmentCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]`

Definition at line 853 of file cfe_time_msg.h.

38.143.2.2 Payload

CFE_TIME_OneHzAdjustmentCmd_Payload_t CFE_TIME_OneHzAdjustmentCmd_t::Payload

Definition at line 854 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.144 CFE_TIME_ResetVars_t Struct Reference

Time related variables that are maintained through a Processor Reset.

```
#include <cfe_time.h>
```

Data Fields

- uint32 Signature

    Data validation signature used to verify data structure contents.
- int16 LeapSeconds

    Leap seconds value.
- uint16 ClockSignal

    Current clock signal selection.
- CFE_TIME_SysTime_t CurrentMET

    Current Mission Elapsed Time (MET)
- CFE_TIME_SysTime_t CurrentSTCF

    Current Spacecraft Time Correlation Factor (STCF)
- CFE_TIME_SysTime_t CurrentDelay

    Current time client delay value.

38.144.1 Detailed Description

Time related variables that are maintained through a Processor Reset.

Description

The CFE_TIME_ResetVars_t data structure contains those variables that are maintained in an area of memory that is not cleared during a Processor Reset. This allows the cFE Time Service to maintain time to the best of its ability after a Processor Reset.

Definition at line 153 of file cfe_time.h.

38.144.2 Field Documentation

38.144.2.1 ClockSignal

uint16 CFE_TIME_ResetVars_t::ClockSignal

Current clock signal selection.

Definition at line 157 of file cfe_time.h.

38.144.2.2 CurrentDelay

CFE_TIME_SysTime_t CFE_TIME_ResetVars_t::CurrentDelay

Current time client delay value.

Definition at line 160 of file cfe_time.h.

38.144.2.3 CurrentMET

CFE_TIME_SysTime_t CFE_TIME_ResetVars_t::CurrentMET

Current Mission Elapsed Time (MET)

Definition at line 158 of file cfe_time.h.

38.144.2.4 CurrentSTCF

CFE_TIME_SysTime_t CFE_TIME_ResetVars_t::CurrentSTCF

Current Spacecraft Time Correlation Factor (STCF)

Definition at line 159 of file cfe_time.h.

38.144.2.5 LeapSeconds

int16 CFE_TIME_ResetVars_t::LeapSeconds

Leap seconds value.

Definition at line 156 of file cfe_time.h.

38.144.2.6 Signature

uint32 CFE_TIME_ResetVars_t::Signature

Data validation signature used to verify data structure contents.

Definition at line 155 of file cfe_time.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time.h

38.145 CFE_TIME_SetLeapSeconds_t Struct Reference

#include <cfe_time_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_TIME_LeapsCmd_Payload_t Payload

38.145.1 Detailed Description

Definition at line 752 of file cfe_time_msg.h.

38.145.2 Field Documentation

38.145.2.1 CmdHeader

uint8 CFE_TIME_SetLeapSeconds_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 754 of file cfe_time_msg.h.

38.145.2.2 Payload

CFE_TIME_LeapsCmd_Payload_t CFE_TIME_SetLeapSeconds_t::Payload

Definition at line 755 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.146 CFE_TIME_SetSignal_t Struct Reference

```
#include <cfe_time_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_TIME_SignalCmd_Payload_t Payload

38.146.1 Detailed Description

Definition at line 804 of file cfe_time_msg.h.

38.146.2 Field Documentation

38.146.2.1 CmdHeader

uint8 CFE_TIME_SetSignal_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 806 of file cfe_time_msg.h.

38.146.2.2 Payload

CFE_TIME_SignalCmd_Payload_t CFE_TIME_SetSignal_t::Payload

Definition at line 807 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.147 CFE_TIME_SetSource_t Struct Reference

```
#include <cfe_time_msg.h>
```

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_TIME_SourceCmd_Payload_t Payload

38.147.1   Detailed Description

Definition at line 787 of file cfe_time_msg.h.

38.147.2   Field Documentation

38.147.2.1   CmdHeader

uint8 CFE_TIME_SetSource_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 789 of file cfe_time_msg.h.

38.147.2.2   Payload

CFE_TIME_SourceCmd_Payload_t CFE_TIME_SetSource_t::Payload

Definition at line 790 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.148   CFE_TIME_SetState_t Struct Reference

#include <cfe_time_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_TIME_StateCmd_Payload_t Payload

38.148.1   Detailed Description

Definition at line 770 of file cfe_time_msg.h.

38.148.2   Field Documentation

38.148.2.1 CmdHeader

`uint8` CFE_TIME_SetState_t::CmdHeader[`CFE_SB_CMD_HDR_SIZE`]

Definition at line 772 of file cfe_time_msg.h.

38.148.2.2 Payload

`CFE_TIME_StateCmd_Payload_t` CFE_TIME_SetState_t::Payload

Definition at line 773 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.149 CFE_TIME_SignalCmd_Payload_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- int16 ToneSource

    CFE_TIME_ToneSignalSelect_PRIMARY=Primary Source, CFE_TIME_ToneSignalSelect_REDUNDANT=Redundant Source

38.149.1 Detailed Description

Definition at line 797 of file cfe_time_msg.h.

38.149.2 Field Documentation

38.149.2.1 ToneSource

`int16` CFE_TIME_SignalCmd_Payload_t::ToneSource

CFE_TIME_ToneSignalSelect_PRIMARY=Primary Source, CFE_TIME_ToneSignalSelect_REDUNDANT=Redundant Source

Selects either the "Primary" or "Redundant" tone signal source

Definition at line 799 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.150   CFE_TIME_SourceCmd_Payload_t Struct Reference

```
#include <cfe_time_msg.h>
```

Data Fields

- int16 TimeSource

    CFE_TIME_SourceSelect_INTERNAL=Internal Source, CFE_TIME_SourceSelect_EXTERNAL=External Source

38.150.1   Detailed Description

Definition at line 780 of file cfe_time_msg.h.

38.150.2   Field Documentation

38.150.2.1   TimeSource

```
int16 CFE_TIME_SourceCmd_Payload_t::TimeSource
```

CFE_TIME_SourceSelect_INTERNAL=Internal Source, CFE_TIME_SourceSelect_EXTERNAL=External Source

Selects either the "Internal" and "External" clock source

Definition at line 782 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.151   CFE_TIME_StateCmd_Payload_t Struct Reference

```
#include <cfe_time_msg.h>
```

Data Fields

- int16 ClockState

    CFE_TIME_ClockState_INVALID=Spacecraft time has not been accurately set, CFE_TIME_ClockState_VAL↩
    ID=Spacecraft clock has been accurately set, CFE_TIME_ClockState_FLYWHEEL=Force into FLYWHEEL mode

38.151.1 Detailed Description

Definition at line 762 of file cfe_time_msg.h.

38.151.2 Field Documentation

38.151.2.1 ClockState

int16 CFE_TIME_StateCmd_Payload_t::ClockState

CFE_TIME_ClockState_INVALID=Spacecraft time has not been accurately set, CFE_TIME_ClockState_VAL↩
ID=Spacecraft clock has been accurately set, CFE_TIME_ClockState_FLYWHEEL=Force into FLYWHEEL mode

Selects the current clock state

Definition at line 764 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.152 CFE_TIME_SysTime_t Struct Reference

Data structure used to hold system time values.

#include <cfe_time.h>

Data Fields

- uint32 Seconds

    Number of seconds since epoch.
- uint32 Subseconds

    Number of subseconds since epoch (LSB = 2^{-32} seconds)

38.152.1 Detailed Description

Data structure used to hold system time values.

Description

The CFE_TIME_SysTime_t data structure is used to hold time values. Time is referred to as the elapsed time (in seconds and subseconds) since a specified epoch time. The subseconds field contains the number of 2^{-32} second intervals that have elapsed since the epoch.

Definition at line 115 of file cfe_time.h.

38.152.2 Field Documentation

38.152.2.1 Seconds

`uint32 CFE_TIME_SysTime_t::Seconds`

Number of seconds since epoch.

Definition at line 117 of file cfe_time.h.

38.152.2.2 Subseconds

`uint32 CFE_TIME_SysTime_t::Subseconds`

Number of subseconds since epoch (LSB = 2^{-32} seconds)

Definition at line 118 of file cfe_time.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time.h

38.153 CFE_TIME_TimeCmd_Payload_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- uint32 Seconds
- uint32 MicroSeconds

38.153.1 Detailed Description

Definition at line 815 of file cfe_time_msg.h.

38.153.2 Field Documentation

38.153.2.1 MicroSeconds

`uint32` CFE_TIME_TimeCmd_Payload_t::MicroSeconds

Definition at line 818 of file cfe_time_msg.h.

38.153.2.2 Seconds

`uint32` CFE_TIME_TimeCmd_Payload_t::Seconds

Definition at line 817 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.154 CFE_TIME_TimeCmd_t Struct Reference

`#include <cfe_time_msg.h>`

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_TIME_TimeCmd_Payload_t Payload

38.154.1 Detailed Description

Definition at line 821 of file cfe_time_msg.h.

38.154.2 Field Documentation

38.154.2.1 CmdHeader

`uint8` CFE_TIME_TimeCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 823 of file cfe_time_msg.h.

38.154.2.2   Payload

CFE_TIME_TimeCmd_Payload_t CFE_TIME_TimeCmd_t::Payload

Definition at line 824 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.155   CFE_TIME_ToneDataCmd_Payload_t Struct Reference

#include <cfe_time_msg.h>

Data Fields

- CFE_TIME_SysTime_t AtToneMET

  MET at time of tone.
- CFE_TIME_SysTime_t AtToneSTCF

  STCF at time of tone.
- int16 AtToneLeapSeconds

  Leap Seconds at time of tone.
- int16 AtToneState

  Clock state at time of tone.

38.155.1   Detailed Description

Definition at line 899 of file cfe_time_msg.h.

38.155.2   Field Documentation

38.155.2.1   AtToneLeapSeconds

int16 CFE_TIME_ToneDataCmd_Payload_t::AtToneLeapSeconds

Leap Seconds at time of tone.

Definition at line 903 of file cfe_time_msg.h.

38.155.2.2 AtToneMET

CFE_TIME_SysTime_t CFE_TIME_ToneDataCmd_Payload_t::AtToneMET

MET at time of tone.

Definition at line 901 of file cfe_time_msg.h.

38.155.2.3 AtToneState

int16 CFE_TIME_ToneDataCmd_Payload_t::AtToneState

Clock state at time of tone.

Definition at line 904 of file cfe_time_msg.h.

38.155.2.4 AtToneSTCF

CFE_TIME_SysTime_t CFE_TIME_ToneDataCmd_Payload_t::AtToneSTCF

STCF at time of tone.

Definition at line 902 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.156 CFE_TIME_ToneDataCmd_t Struct Reference

#include <cfe_time_msg.h>

Data Fields

- uint8 CmdHeader [CFE_SB_CMD_HDR_SIZE]
- CFE_TIME_ToneDataCmd_Payload_t Payload

38.156.1 Detailed Description

Definition at line 907 of file cfe_time_msg.h.

38.156.2   Field Documentation

38.156.2.1   CmdHeader

uint8 CFE_TIME_ToneDataCmd_t::CmdHeader[CFE_SB_CMD_HDR_SIZE]

Definition at line 909 of file cfe_time_msg.h.

38.156.2.2   Payload

CFE_TIME_ToneDataCmd_Payload_t CFE_TIME_ToneDataCmd_t::Payload

Definition at line 910 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.157   CFE_TIME_ToneSignalCmd_t Struct Reference

#include <cfe_time_msg.h>

Data Fields

- CFE_SB_CmdHdr_t CmdHeader

38.157.1   Detailed Description

Definition at line 879 of file cfe_time_msg.h.

38.157.2   Field Documentation

38.157.2.1   CmdHeader

CFE_SB_CmdHdr_t CFE_TIME_ToneSignalCmd_t::CmdHeader

Definition at line 881 of file cfe_time_msg.h.

The documentation for this struct was generated from the following file:

- cfe/fsw/cfe-core/src/inc/cfe_time_msg.h

38.158 OS_bin_sem_prop_t Struct Reference

OSAL binary semaphore properties.

```
#include <osapi-os-core.h>
```

Data Fields

- char name [OS_MAX_API_NAME]
- uint32 creator
- int32 value

38.158.1 Detailed Description

OSAL binary semaphore properties.

Definition at line 107 of file osapi-os-core.h.

38.158.2 Field Documentation

38.158.2.1 creator

```
uint32 OS_bin_sem_prop_t::creator
```

Definition at line 110 of file osapi-os-core.h.

38.158.2.2 name

```
char OS_bin_sem_prop_t::name[OS_MAX_API_NAME]
```

Definition at line 109 of file osapi-os-core.h.

38.158.2.3 value

```
int32 OS_bin_sem_prop_t::value
```

Definition at line 111 of file osapi-os-core.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-core.h

38.159   OS_count_sem_prop_t Struct Reference

OSAL counting semaphore properties.

```
#include <osapi-os-core.h>
```

Data Fields

- char name [OS_MAX_API_NAME]
- uint32 creator
- int32 value

38.159.1   Detailed Description

OSAL counting semaphore properties.

Definition at line 115 of file osapi-os-core.h.

38.159.2   Field Documentation

38.159.2.1   creator

```
uint32 OS_count_sem_prop_t::creator
```

Definition at line 118 of file osapi-os-core.h.

38.159.2.2   name

```
char OS_count_sem_prop_t::name[OS_MAX_API_NAME]
```

Definition at line 117 of file osapi-os-core.h.

38.159.2.3   value

```
int32 OS_count_sem_prop_t::value
```

Definition at line 119 of file osapi-os-core.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-core.h

38.160 os_dirent_t Struct Reference

Directory entry.

```
#include <osapi-os-filesys.h>
```

Data Fields

- char FileName [OS_MAX_FILE_NAME]

38.160.1 Detailed Description

Directory entry.

Definition at line 219 of file osapi-os-filesys.h.

38.160.2 Field Documentation

38.160.2.1 FileName

```
char os_dirent_t::FileName[OS_MAX_FILE_NAME]
```

Definition at line 221 of file osapi-os-filesys.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-filesys.h

38.161 OS_FdSet Struct Reference

An abstract structure capable of holding several OSAL IDs.

```
#include <osapi-os-core.h>
```

Data Fields

- uint8 object_ids [(OS_MAX_NUM_OPEN_FILES+7)/8]

38.161.1 Detailed Description

An abstract structure capable of holding several OSAL IDs.

This is part of the select API and is manipulated using the related API calls. It should not be modified directly by applications.

See also

OS_SelectFdZero(), OS_SelectFdAdd(), OS_SelectFdClear(), OS_SelectFdIsSet()

Definition at line 156 of file osapi-os-core.h.

38.161.2 Field Documentation

38.161.2.1 object_ids

uint8 OS_FdSet::object_ids[(OS_MAX_NUM_OPEN_FILES+7)/8]

Definition at line 158 of file osapi-os-core.h.

The documentation for this struct was generated from the following file:

  • osal/src/os/inc/osapi-os-core.h

38.162 OS_file_prop_t Struct Reference

OSAL file properties.

```
#include <osapi-os-filesys.h>
```

Data Fields

  • char Path [OS_MAX_PATH_LEN]
  • uint32 User
  • uint8 IsValid

38.162.1 Detailed Description

OSAL file properties.

Definition at line 165 of file osapi-os-filesys.h.

38.162.2 Field Documentation

38.162.2.1 IsValid

`uint8 OS_file_prop_t::IsValid`

Definition at line 169 of file osapi-os-filesys.h.

38.162.2.2 Path

`char OS_file_prop_t::Path[OS_MAX_PATH_LEN]`

Definition at line 167 of file osapi-os-filesys.h.

38.162.2.3 User

`uint32 OS_file_prop_t::User`

Definition at line 168 of file osapi-os-filesys.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-filesys.h

38.163 os_fsinfo_t Struct Reference

OSAL file system info.

`#include <osapi-os-filesys.h>`

Data Fields

- uint32 MaxFds

    Total number of file descriptors.
- uint32 FreeFds

    Total number that are free.
- uint32 MaxVolumes

    Maximum number of volumes.
- uint32 FreeVolumes

    Total number of volumes free.

38.163.1   Detailed Description

OSAL file system info.

Definition at line 156 of file osapi-os-filesys.h.

38.163.2   Field Documentation

38.163.2.1   FreeFds

uint32 os_fsinfo_t::FreeFds

Total number that are free.

Definition at line 159 of file osapi-os-filesys.h.

38.163.2.2   FreeVolumes

uint32 os_fsinfo_t::FreeVolumes

Total number of volumes free.

Definition at line 161 of file osapi-os-filesys.h.

38.163.2.3   MaxFds

uint32 os_fsinfo_t::MaxFds

Total number of file descriptors.

Definition at line 158 of file osapi-os-filesys.h.

38.163.2.4   MaxVolumes

uint32 os_fsinfo_t::MaxVolumes

Maximum number of volumes.

Definition at line 160 of file osapi-os-filesys.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-filesys.h

38.164 os_fstat_t Struct Reference

File system status.

```
#include <osapi-os-filesys.h>
```

Data Fields

- uint32 FileModeBits
- int32 FileTime
- uint32 FileSize

38.164.1 Detailed Description

File system status.

Note

This used to be directly typedef'ed to the "struct stat" from the C library

Some C libraries (glibc in particular) actually define member names to reference into sub-structures, so attempting to reuse a name like "st_mtime" might not work.

Definition at line 180 of file osapi-os-filesys.h.

38.164.2 Field Documentation

38.164.2.1 FileModeBits

```
uint32 os_fstat_t::FileModeBits
```

Definition at line 182 of file osapi-os-filesys.h.

38.164.2.2 FileSize

```
uint32 os_fstat_t::FileSize
```

Definition at line 184 of file osapi-os-filesys.h.

38.164.2.3   FileTime

`int32 os_fstat_t::FileTime`

Definition at line 183 of file osapi-os-filesys.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-filesys.h

38.165   OS_heap_prop_t Struct Reference

OSAL heap properties.

`#include <osapi-os-core.h>`

Data Fields

- **uint32 free_bytes**
- **uint32 free_blocks**
- **uint32 largest_free_block**

38.165.1   Detailed Description

OSAL heap properties.

See also

> OS_HeapGetInfo()

Definition at line 141 of file osapi-os-core.h.

38.165.2   Field Documentation

38.165.2.1   free_blocks

`uint32 OS_heap_prop_t::free_blocks`

Definition at line 144 of file osapi-os-core.h.

38.165.2.2 free_bytes

uint32 OS_heap_prop_t::free_bytes

Definition at line 143 of file osapi-os-core.h.

38.165.2.3 largest_free_block

uint32 OS_heap_prop_t::largest_free_block

Definition at line 145 of file osapi-os-core.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-core.h

38.166 OS_module_address_t Struct Reference

OSAL module address properties.

```
#include <osapi-os-loader.h>
```

Data Fields

- uint32 valid
- uint32 flags
- cpuaddr code_address
- cpuaddr code_size
- cpuaddr data_address
- cpuaddr data_size
- cpuaddr bss_address
- cpuaddr bss_size

38.166.1 Detailed Description

OSAL module address properties.

Definition at line 43 of file osapi-os-loader.h.

38.166.2 Field Documentation

38.166.2.1   bss_address

cpuaddr OS_module_address_t::bss_address

Definition at line 51 of file osapi-os-loader.h.

38.166.2.2   bss_size

cpuaddr OS_module_address_t::bss_size

Definition at line 52 of file osapi-os-loader.h.

38.166.2.3   code_address

cpuaddr OS_module_address_t::code_address

Definition at line 47 of file osapi-os-loader.h.

38.166.2.4   code_size

cpuaddr OS_module_address_t::code_size

Definition at line 48 of file osapi-os-loader.h.

38.166.2.5   data_address

cpuaddr OS_module_address_t::data_address

Definition at line 49 of file osapi-os-loader.h.

38.166.2.6   data_size

cpuaddr OS_module_address_t::data_size

Definition at line 50 of file osapi-os-loader.h.

38.166.2.7 flags

`uint32` OS_module_address_t::flags

Definition at line 46 of file osapi-os-loader.h.

38.166.2.8 valid

`uint32` OS_module_address_t::valid

Definition at line 45 of file osapi-os-loader.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-loader.h

38.167 OS_module_prop_t Struct Reference

OSAL module properties.

`#include <osapi-os-loader.h>`

Data Fields

- cpuaddr entry_point
- cpuaddr host_module_id
- char filename [OS_MAX_PATH_LEN]
- char name [OS_MAX_API_NAME]
- OS_module_address_t addr

38.167.1 Detailed Description

OSAL module properties.

Definition at line 56 of file osapi-os-loader.h.

38.167.2 Field Documentation

38.167.2.1   addr

[OS_module_address_t](#) `OS_module_prop_t::addr`

Definition at line 62 of file osapi-os-loader.h.

38.167.2.2   entry_point

[cpuaddr](#) `OS_module_prop_t::entry_point`

Definition at line 58 of file osapi-os-loader.h.

38.167.2.3   filename

`char OS_module_prop_t::filename[`[OS_MAX_PATH_LEN](#)`]`

Definition at line 60 of file osapi-os-loader.h.

38.167.2.4   host_module_id

[cpuaddr](#) `OS_module_prop_t::host_module_id`

Definition at line 59 of file osapi-os-loader.h.

38.167.2.5   name

`char OS_module_prop_t::name[`[OS_MAX_API_NAME](#)`]`

Definition at line 61 of file osapi-os-loader.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/[osapi-os-loader.h](#)

38.168   OS_mut_sem_prop_t Struct Reference

OSAL mutexe properties.

```
#include <osapi-os-core.h>
```

Data Fields

- char name [OS_MAX_API_NAME]
- uint32 creator

38.168.1 Detailed Description

OSAL mutexe properties.

Definition at line 123 of file osapi-os-core.h.

38.168.2 Field Documentation

38.168.2.1 creator

uint32 OS_mut_sem_prop_t::creator

Definition at line 126 of file osapi-os-core.h.

38.168.2.2 name

char OS_mut_sem_prop_t::name[OS_MAX_API_NAME]

Definition at line 125 of file osapi-os-core.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-core.h

38.169 OS_queue_prop_t Struct Reference

OSAL queue properties.

```
#include <osapi-os-core.h>
```

Data Fields

- char name [OS_MAX_API_NAME]
- uint32 creator

38.169.1 Detailed Description

OSAL queue properties.

Definition at line 100 of file osapi-os-core.h.

38.169.2 Field Documentation

38.169.2.1 creator

uint32 OS_queue_prop_t::creator

Definition at line 103 of file osapi-os-core.h.

38.169.2.2 name

char OS_queue_prop_t::name[OS_MAX_API_NAME]

Definition at line 102 of file osapi-os-core.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-core.h

38.170 OS_SockAddr_t Struct Reference

Encapsulates a generic network address.

#include <osapi-os-net.h>

Data Fields

- uint32 ActualLength
  Length of the actual address data.
- OS_SockAddrData_t AddrData
  Abstract Address data.

38.170.1 Detailed Description

Encapsulates a generic network address.

This is just an abstract buffer type that holds a network address. It is allocated for the worst-case size defined by OS_SOCKADDR_MAX_LEN, and the real size is stored within.

Definition at line 104 of file osapi-os-net.h.

38.170.2 Field Documentation

38.170.2.1 ActualLength

`uint32 OS_SockAddr_t::ActualLength`

Length of the actual address data.

Definition at line 106 of file osapi-os-net.h.

38.170.2.2 AddrData

`OS_SockAddrData_t OS_SockAddr_t::AddrData`

Abstract Address data.

Definition at line 107 of file osapi-os-net.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-net.h

38.171 OS_SockAddrData_t Union Reference

Storage buffer for generic network address.

`#include <osapi-os-net.h>`

Data Fields

- uint8 Buffer [OS_SOCKADDR_MAX_LEN]

    Ensures length of at least OS_SOCKADDR_MAX_LEN.
- uint32 AlignU32

    Ensures uint32 alignment.
- void ∗ AlignPtr

    Ensures pointer alignment.

38.171.1   Detailed Description

Storage buffer for generic network address.

This is a union type that helps to ensure a minimum alignment value for the data storage, such that it can be cast to the system-specific type without increasing alignment requirements.

Definition at line 90 of file osapi-os-net.h.

38.171.2   Field Documentation

38.171.2.1   AlignPtr

```
void* OS_SockAddrData_t::AlignPtr
```

Ensures pointer alignment.

Definition at line 94 of file osapi-os-net.h.

38.171.2.2   AlignU32

```
uint32 OS_SockAddrData_t::AlignU32
```

Ensures uint32 alignment.

Definition at line 93 of file osapi-os-net.h.

38.171.2.3   Buffer

```
uint8 OS_SockAddrData_t::Buffer[OS_SOCKADDR_MAX_LEN]
```

Ensures length of at least OS_SOCKADDR_MAX_LEN.

Definition at line 92 of file osapi-os-net.h.

The documentation for this union was generated from the following file:

- osal/src/os/inc/osapi-os-net.h

38.172 OS_socket_prop_t Struct Reference

Encapsulates socket properties.

```
#include <osapi-os-net.h>
```

Data Fields

- char name [OS_MAX_API_NAME]

  Name of the socket.
- uint32 creator

  OSAL TaskID which opened the socket.

38.172.1 Detailed Description

Encapsulates socket properties.

This is for consistency with other OSAL resource types. Currently no extra properties are exposed here but this could change in a future revision of OSAL as needed.

Definition at line 117 of file osapi-os-net.h.

38.172.2 Field Documentation

38.172.2.1 creator

```
uint32 OS_socket_prop_t::creator
```

OSAL TaskID which opened the socket.

Definition at line 120 of file osapi-os-net.h.

38.172.2.2 name

```
char OS_socket_prop_t::name[OS_MAX_API_NAME]
```

Name of the socket.

Definition at line 119 of file osapi-os-net.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-net.h

38.173   OS_static_symbol_record_t Struct Reference

Associates a single symbol name with a memory address.

```
#include <osapi-os-loader.h>
```

Data Fields

- const char * Name
- void(* Address)(void)
- const char * Module

38.173.1   Detailed Description

Associates a single symbol name with a memory address.

If the OS_STATIC_SYMBOL_TABLE feature is enabled, then an array of these structures should be provided by the application. When the application needs to find a symbol address, the static table will be checked in addition to (or instead of) the OS/library-provided lookup function.

This static symbol allows systems that do not implement dynamic module loading to maintain the same semantics as dynamically loaded modules.

Definition at line 78 of file osapi-os-loader.h.

38.173.2   Field Documentation

38.173.2.1   Address

```
void(* OS_static_symbol_record_t::Address) (void)
```

Definition at line 81 of file osapi-os-loader.h.

38.173.2.2   Module

```
const char* OS_static_symbol_record_t::Module
```

Definition at line 82 of file osapi-os-loader.h.

38.173.2.3 Name

```
const char* OS_static_symbol_record_t::Name
```

Definition at line 80 of file osapi-os-loader.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-loader.h

38.174 OS_task_prop_t Struct Reference

OSAL task properties.

```
#include <osapi-os-core.h>
```

Data Fields

- char name [OS_MAX_API_NAME]
- uint32 creator
- uint32 stack_size
- uint32 priority
- uint32 OStask_id

38.174.1 Detailed Description

OSAL task properties.

Definition at line 88 of file osapi-os-core.h.

38.174.2 Field Documentation

38.174.2.1 creator

```
uint32 OS_task_prop_t::creator
```

Definition at line 91 of file osapi-os-core.h.

38.174.2.2 name

```
char OS_task_prop_t::name[OS_MAX_API_NAME]
```

Definition at line 90 of file osapi-os-core.h.

38.174.2.3 OStask_id

```
uint32 OS_task_prop_t::OStask_id
```

[Deprecated](#)

Definition at line 95 of file osapi-os-core.h.

38.174.2.4 priority

```
uint32 OS_task_prop_t::priority
```

Definition at line 93 of file osapi-os-core.h.

38.174.2.5 stack_size

```
uint32 OS_task_prop_t::stack_size
```

Definition at line 92 of file osapi-os-core.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-core.h

38.175 OS_time_t Struct Reference

OSAL time.

```
#include <osapi-os-core.h>
```

Data Fields

- uint32 seconds
- uint32 microsecs

38.175.1 Detailed Description

OSAL time.

Definition at line 131 of file osapi-os-core.h.

38.175.2 Field Documentation

38.175.2.1 microsecs

`uint32 OS_time_t::microsecs`

Definition at line 134 of file osapi-os-core.h.

Referenced by CFE_PSP_Get_Timebase().

38.175.2.2 seconds

`uint32 OS_time_t::seconds`

Definition at line 133 of file osapi-os-core.h.

Referenced by CFE_PSP_Get_Timebase().

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-core.h

38.176 OS_timebase_prop_t Struct Reference

Time base properties.

`#include <osapi-os-timer.h>`

Data Fields

- char name [OS_MAX_API_NAME]
- uint32 creator
- uint32 nominal_interval_time
- uint32 freerun_time
- uint32 accuracy

38.176.1   Detailed Description

Time base properties.

Definition at line 51 of file osapi-os-timer.h.

38.176.2   Field Documentation

38.176.2.1   accuracy

`uint32 OS_timebase_prop_t::accuracy`

Definition at line 57 of file osapi-os-timer.h.

38.176.2.2   creator

`uint32 OS_timebase_prop_t::creator`

Definition at line 54 of file osapi-os-timer.h.

38.176.2.3   freerun_time

`uint32 OS_timebase_prop_t::freerun_time`

Definition at line 56 of file osapi-os-timer.h.

38.176.2.4   name

`char OS_timebase_prop_t::name[OS_MAX_API_NAME]`

Definition at line 53 of file osapi-os-timer.h.

38.176.2.5   nominal_interval_time

`uint32 OS_timebase_prop_t::nominal_interval_time`

Definition at line 55 of file osapi-os-timer.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-timer.h

38.177 OS_timer_prop_t Struct Reference

Timer properties.

```
#include <osapi-os-timer.h>
```

Data Fields

- char name [OS_MAX_API_NAME]
- uint32 creator
- uint32 start_time
- uint32 interval_time
- uint32 accuracy

38.177.1 Detailed Description

Timer properties.

Definition at line 40 of file osapi-os-timer.h.

38.177.2 Field Documentation

38.177.2.1 accuracy

```
uint32 OS_timer_prop_t::accuracy
```

Definition at line 46 of file osapi-os-timer.h.

38.177.2.2 creator

```
uint32 OS_timer_prop_t::creator
```

Definition at line 43 of file osapi-os-timer.h.

38.177.2.3 interval_time

```
uint32 OS_timer_prop_t::interval_time
```

Definition at line 45 of file osapi-os-timer.h.

38.177.2.4   name

```
char OS_timer_prop_t::name[OS_MAX_API_NAME]
```

Definition at line 42 of file osapi-os-timer.h.

38.177.2.5   start_time

```
uint32 OS_timer_prop_t::start_time
```

Definition at line 44 of file osapi-os-timer.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-timer.h

38.178   OS_VolumeInfo_t Struct Reference

Internal structure of the OS volume table for mounted file systems and path translation.

```
#include <osapi-os-filesys.h>
```

Data Fields

- char DeviceName [OS_FS_DEV_NAME_LEN]
- char PhysDevName [OS_FS_PHYS_NAME_LEN]
- uint32 VolumeType
- uint8 VolatileFlag
- uint8 FreeFlag
- uint8 IsMounted
- char VolumeName [OS_FS_VOL_NAME_LEN]
- char MountPoint [OS_MAX_PATH_LEN]
- uint32 BlockSize

38.178.1   Detailed Description

Internal structure of the OS volume table for mounted file systems and path translation.

Deprecated Use the OSAL file system API to register volumes

Definition at line 138 of file osapi-os-filesys.h.

38.178.2   Field Documentation

38.178.2.1   BlockSize

`uint32 OS_VolumeInfo_t::BlockSize`

Definition at line 148 of file osapi-os-filesys.h.

38.178.2.2   DeviceName

`char OS_VolumeInfo_t::DeviceName[OS_FS_DEV_NAME_LEN]`

Definition at line 140 of file osapi-os-filesys.h.

38.178.2.3   FreeFlag

`uint8 OS_VolumeInfo_t::FreeFlag`

Definition at line 144 of file osapi-os-filesys.h.

38.178.2.4   IsMounted

`uint8 OS_VolumeInfo_t::IsMounted`

Definition at line 145 of file osapi-os-filesys.h.

38.178.2.5   MountPoint

`char OS_VolumeInfo_t::MountPoint[OS_MAX_PATH_LEN]`

Definition at line 147 of file osapi-os-filesys.h.

38.178.2.6   PhysDevName

`char OS_VolumeInfo_t::PhysDevName[OS_FS_PHYS_NAME_LEN]`

Definition at line 141 of file osapi-os-filesys.h.

38.178.2.7 VolatileFlag

uint8 OS_VolumeInfo_t::VolatileFlag

Definition at line 143 of file osapi-os-filesys.h.

38.178.2.8 VolumeName

char OS_VolumeInfo_t::VolumeName[OS_FS_VOL_NAME_LEN]

Definition at line 146 of file osapi-os-filesys.h.

38.178.2.9 VolumeType

uint32 OS_VolumeInfo_t::VolumeType

Definition at line 142 of file osapi-os-filesys.h.

The documentation for this struct was generated from the following file:

- osal/src/os/inc/osapi-os-filesys.h

38.179 Target_PspConfigData Struct Reference

```
#include <cfe_psp_configdata.h>
```

Data Fields

- uint32 PSP_WatchdogMin
- uint32 PSP_WatchdogMax
- uint32 PSP_MemTableSize
- uint32 PSP_ExceptionLogSize
- CFE_PSP_MemTable_t ∗ PSP_MemoryTable
- uint32 HW_NumEepromBanks
- CFE_PSP_VersionInfo_t PSP_VersionInfo

38.179.1 Detailed Description

PSP/Hardware configuration parameters This structure should be instantiated by the PSP according such that other modules do not need to directly include the PSP configuration at compile time.

Definition at line 57 of file cfe_psp_configdata.h.

38.179.2 Field Documentation

38.179.2.1 HW_NumEepromBanks

uint32 Target_PspConfigData::HW_NumEepromBanks

Number of EEPROM banks on this platform

Definition at line 68 of file cfe_psp_configdata.h.

38.179.2.2 PSP_ExceptionLogSize

uint32 Target_PspConfigData::PSP_ExceptionLogSize

Size of PSP exception log

Definition at line 62 of file cfe_psp_configdata.h.

38.179.2.3 PSP_MemoryTable

CFE_PSP_MemTable_t* Target_PspConfigData::PSP_MemoryTable

Pointer to PSP memory table (forward reference)

Definition at line 63 of file cfe_psp_configdata.h.

38.179.2.4 PSP_MemTableSize

uint32 Target_PspConfigData::PSP_MemTableSize

Size of PSP memory table

Definition at line 61 of file cfe_psp_configdata.h.

38.179.2.5 PSP_VersionInfo

CFE_PSP_VersionInfo_t Target_PspConfigData::PSP_VersionInfo

Definition at line 70 of file cfe_psp_configdata.h.

38.179.2.6 PSP_WatchdogMax

`uint32` `Target_PspConfigData::PSP_WatchdogMax`

PSP Maximum watchdog in milliseconds

Definition at line 60 of file cfe_psp_configdata.h.

38.179.2.7 PSP_WatchdogMin

`uint32` `Target_PspConfigData::PSP_WatchdogMin`

PSP Minimum watchdog in milliseconds

Definition at line 59 of file cfe_psp_configdata.h.

The documentation for this struct was generated from the following file:

- psp/fsw/inc/cfe_psp_configdata.h

39 File Documentation

39.1 build/doc/osconfig-example.h File Reference

Macros

- #define OS_MAX_TASKS

    Configuration file Operating System Abstraction Layer.
- #define OS_MAX_QUEUES

    The maximum number of queues to support.
- #define OS_MAX_COUNT_SEMAPHORES

    The maximum number of counting semaphores to support.
- #define OS_MAX_BIN_SEMAPHORES

    The maximum number of binary semaphores to support.
- #define OS_MAX_MUTEXES

    The maximum number of mutexes to support.
- #define OS_MAX_MODULES

    The maximum number of modules to support.
- #define OS_MAX_TIMEBASES

    The maximum number of timebases to support.
- #define OS_MAX_TIMERS

    The maximum number of timer callbacks to support.
- #define OS_MAX_NUM_OPEN_FILES

    The maximum number of concurrently open files to support.
- #define OS_MAX_NUM_OPEN_DIRS

     The maximum number of concurrently open directories to support.

- #define OS_MAX_FILE_SYSTEMS

  The maximum number of file systems to support.

- #define OS_MAX_SYM_LEN

  The maximum length of symbols.

- #define OS_MAX_FILE_NAME

  The maximum length of OSAL file names.

- #define OS_MAX_PATH_LEN

  The maximum length of OSAL path names.

- #define OS_MAX_API_NAME

  The maximum length of OSAL resource names.

- #define OS_SOCKADDR_MAX_LEN

  The maximum size of the socket address structure.

- #define OS_BUFFER_SIZE

  The maximum size of output produced by a single OS_printf()

- #define OS_BUFFER_MSG_DEPTH

  The maximum number of OS_printf() output strings to buffer.

- #define OS_UTILITYTASK_PRIORITY

  Priority level of the background utility task.

- #define OS_UTILITYTASK_STACK_SIZE

  The stack size of the background utility task.

- #define OS_MAX_CMD_LEN

  The maximum size of a shell command.

- #define OS_QUEUE_MAX_DEPTH

  The maximum depth of OSAL queues.

- #define OS_SHELL_CMD_INPUT_FILE_NAME ""

  The name of the temporary file used to store shell commands.

- #define OS_PRINTF_CONSOLE_NAME ""

  The name of the primary console device.

- #define OS_MAX_CONSOLES 1

  The maximum number of console devices to support.

- #define OS_MODULE_FILE_EXTENSION ".so"

  The system-specific file extension used on loadable module files.

39.1.1 Macro Definition Documentation

39.1.1.1 OS_BUFFER_MSG_DEPTH

```
#define OS_BUFFER_MSG_DEPTH
```

The maximum number of OS_printf() output strings to buffer.

Based on the OSAL_CONFIG_PRINTF_BUFFER_DEPTH configuration option

Definition at line 196 of file osconfig-example.h.

39.1.1.2   OS_BUFFER_SIZE

`#define OS_BUFFER_SIZE`

The maximum size of output produced by a single OS_printf()

Based on the OSAL_CONFIG_PRINTF_BUFFER_SIZE configuration option

Definition at line 189 of file osconfig-example.h.

39.1.1.3   OS_MAX_API_NAME

`#define OS_MAX_API_NAME`

The maximum length of OSAL resource names.

Based on the OSAL_CONFIG_MAX_API_NAME configuration option

Note

> This value must include a terminating NUL character

Definition at line 172 of file osconfig-example.h.

39.1.1.4   OS_MAX_BIN_SEMAPHORES

`#define OS_MAX_BIN_SEMAPHORES`

The maximum number of binary semaphores to support.

Based on the OSAL_CONFIG_MAX_BIN_SEMAPHORES configuration option

Definition at line 81 of file osconfig-example.h.

39.1.1.5   OS_MAX_CMD_LEN

`#define OS_MAX_CMD_LEN`

The maximum size of a shell command.

This limit is only applicable if shell support is enabled.

Based on the OSAL_CONFIG_MAX_CMD_LEN configuration option

Note

> This value must include a terminating NUL character

Definition at line 227 of file osconfig-example.h.

39.1.1.6 OS_MAX_CONSOLES

```
#define OS_MAX_CONSOLES 1
```

The maximum number of console devices to support.

Fixed value based on current OSAL implementation, not user configurable.

Definition at line 269 of file osconfig-example.h.

39.1.1.7 OS_MAX_COUNT_SEMAPHORES

```
#define OS_MAX_COUNT_SEMAPHORES
```

The maximum number of counting semaphores to support.

Based on the OSAL_CONFIG_MAX_COUNT_SEMAPHORES configuration option

Definition at line 74 of file osconfig-example.h.

39.1.1.8 OS_MAX_FILE_NAME

```
#define OS_MAX_FILE_NAME
```

The maximum length of OSAL file names.

This limit applies specifically to the file name portion, not the directory portion, of a path name.

Based on the OSAL_CONFIG_MAX_FILE_NAME configuration option

Note

> This value must include a terminating NUL character

Definition at line 151 of file osconfig-example.h.

39.1.1.9 OS_MAX_FILE_SYSTEMS

```
#define OS_MAX_FILE_SYSTEMS
```

The maximum number of file systems to support.

Based on the OSAL_CONFIG_MAX_FILE_SYSTEMS configuration option

Definition at line 130 of file osconfig-example.h.

39.1.1.10   OS_MAX_MODULES

#define OS_MAX_MODULES

The maximum number of modules to support.

Based on the OSAL_CONFIG_MAX_MODULES configuration option

Definition at line 95 of file osconfig-example.h.

39.1.1.11   OS_MAX_MUTEXES

#define OS_MAX_MUTEXES

The maximum number of mutexes to support.

Based on the OSAL_CONFIG_MAX_MUTEXES configuration option

Definition at line 88 of file osconfig-example.h.

39.1.1.12   OS_MAX_NUM_OPEN_DIRS

#define OS_MAX_NUM_OPEN_DIRS

The maximum number of concurrently open directories to support.

Based on the OSAL_CONFIG_MAX_NUM_OPEN_DIRS configuration option

Definition at line 123 of file osconfig-example.h.

39.1.1.13   OS_MAX_NUM_OPEN_FILES

#define OS_MAX_NUM_OPEN_FILES

The maximum number of concurrently open files to support.

Based on the OSAL_CONFIG_MAX_NUM_OPEN_FILES configuration option

Definition at line 116 of file osconfig-example.h.

39.1.1.14 OS_MAX_PATH_LEN

`#define OS_MAX_PATH_LEN`

The maximum length of OSAL path names.

This limit applies to the overall length of a path name, including the file name and directory portions.

Based on the OSAL_CONFIG_MAX_PATH_LEN configuration option

Note

>   This value must include a terminating NUL character

Definition at line 163 of file osconfig-example.h.

39.1.1.15 OS_MAX_QUEUES

`#define OS_MAX_QUEUES`

The maximum number of queues to support.

Based on the OSAL_CONFIG_MAX_QUEUES configuration option

Definition at line 67 of file osconfig-example.h.

39.1.1.16 OS_MAX_SYM_LEN

`#define OS_MAX_SYM_LEN`

The maximum length of symbols.

Based on the OSAL_CONFIG_MAX_SYM_LEN configuration option

Note

>   This value must include a terminating NUL character

Definition at line 139 of file osconfig-example.h.

39.1.1.17 OS_MAX_TASKS

#define OS_MAX_TASKS

Configuration file Operating System Abstraction Layer.

The specific definitions in this file may only be modified by setting the respective OSAL configuration options in the CMake build.

Any direct modifications to the generated copy will be overwritten each time CMake executes.

Note

> This file was automatically generated by CMake from /home/travis/build/nasa/cFS/cfe/default_config.cmake The maximum number of to support

Based on the OSAL_CONFIG_MAX_TASKS configuration option

Definition at line 60 of file osconfig-example.h.

39.1.1.18 OS_MAX_TIMEBASES

#define OS_MAX_TIMEBASES

The maximum number of timebases to support.

Based on the OSAL_CONFIG_MAX_TIMEBASES configuration option

Definition at line 102 of file osconfig-example.h.

39.1.1.19 OS_MAX_TIMERS

#define OS_MAX_TIMERS

The maximum number of timer callbacks to support.

Based on the OSAL_CONFIG_MAX_TIMERS configuration option

Definition at line 109 of file osconfig-example.h.

39.1.1.20 OS_MODULE_FILE_EXTENSION

```
#define OS_MODULE_FILE_EXTENSION ".so"
```

The system-specific file extension used on loadable module files.

Fixed value based on system selection, not user configurable.

Definition at line 276 of file osconfig-example.h.

39.1.1.21 OS_PRINTF_CONSOLE_NAME

```
#define OS_PRINTF_CONSOLE_NAME ""
```

The name of the primary console device.

This is the device to which OS_printf() output is written. The output may be configured to tag each line with this prefix for identification.

Based on the OSAL_CONFIG_PRINTF_CONSOLE_NAME configuration option

Definition at line 254 of file osconfig-example.h.

39.1.1.22 OS_QUEUE_MAX_DEPTH

```
#define OS_QUEUE_MAX_DEPTH
```

The maximum depth of OSAL queues.

Based on the OSAL_CONFIG_QUEUE_MAX_DEPTH configuration option

Definition at line 234 of file osconfig-example.h.

39.1.1.23 OS_SHELL_CMD_INPUT_FILE_NAME

```
#define OS_SHELL_CMD_INPUT_FILE_NAME ""
```

The name of the temporary file used to store shell commands.

This configuration is only applicable if shell support is enabled, and only necessary/relevant on some OS implementations.

Based on the OSAL_CONFIG_SHELL_CMD_INPUT_FILE_NAME configuration option

Definition at line 244 of file osconfig-example.h.

39.1.1.24 OS_SOCKADDR_MAX_LEN

```
#define OS_SOCKADDR_MAX_LEN
```

The maximum size of the socket address structure.

This is part of the Socket API, and should be set large enough to hold the largest address type in use on the target system.

Based on the OSAL_CONFIG_SOCKADDR_MAX_LEN configuration option

Definition at line 182 of file osconfig-example.h.

39.1.1.25 OS_UTILITYTASK_PRIORITY

```
#define OS_UTILITYTASK_PRIORITY
```

Priority level of the background utility task.

This task is responsible for writing buffered output of OS_printf to the actual console device, and any other future maintenance task.

Based on the OSAL_CONFIG_UTILITYTASK_PRIORITY configuration option

Definition at line 206 of file osconfig-example.h.

39.1.1.26 OS_UTILITYTASK_STACK_SIZE

```
#define OS_UTILITYTASK_STACK_SIZE
```

The stack size of the background utility task.

This task is responsible for writing buffered output of OS_printf to the actual console device, and any other future maintenance task.

Based on the OSAL_CONFIG_UTILITYTASK_STACK_SIZE configuration option

Definition at line 216 of file osconfig-example.h.

39.2 build/native/default_cpu1/inc/cfe_msgids.h File Reference

```
#include "/home/travis/build/nasa/cFS/sample_defs/cpu1_msgids.h"
```

39.3 build/native/default_cpu1/inc/cfe_platform_cfg.h File Reference

```
#include "/home/travis/build/nasa/cFS/sample_defs/cpu1_platform_cfg.h"
```

39.4 build/native/default_cpu1/inc/osconfig.h File Reference

Macros

- #define OSAL_CONFIG_INCLUDE_DYNAMIC_LOADER

    Configuration file Operating System Abstraction Layer.
- #define OSAL_CONFIG_INCLUDE_NETWORK
- #define OSAL_CONFIG_INCLUDE_STATIC_LOADER
- #define OSAL_CONFIG_DEBUG_PRINTF
- #define OSAL_CONFIG_DEBUG_PERMISSIVE_MODE
- #define OS_MAX_TASKS 64

    The maximum number of to support.
- #define OS_MAX_QUEUES 64

    The maximum number of queues to support.
- #define OS_MAX_COUNT_SEMAPHORES 20

    The maximum number of counting semaphores to support.
- #define OS_MAX_BIN_SEMAPHORES 20

    The maximum number of binary semaphores to support.
- #define OS_MAX_MUTEXES 20

    The maximum number of mutexes to support.
- #define OS_MAX_MODULES 20

    The maximum number of modules to support.
- #define OS_MAX_TIMEBASES 5

    The maximum number of timebases to support.
- #define OS_MAX_TIMERS 10

    The maximum number of timer callbacks to support.
- #define OS_MAX_NUM_OPEN_FILES 50

    The maximum number of concurrently open files to support.
- #define OS_MAX_NUM_OPEN_DIRS 4

    The maximum number of concurrently open directories to support.
- #define OS_MAX_FILE_SYSTEMS 14

    The maximum number of file systems to support.
- #define OS_MAX_SYM_LEN 64

    The maximum length of symbols.
- #define OS_MAX_FILE_NAME 20

    The maximum length of OSAL file names.
- #define OS_MAX_PATH_LEN 64

    The maximum length of OSAL path names.
- #define OS_MAX_API_NAME 20

    The maximum length of OSAL resource names.
- #define OS_SOCKADDR_MAX_LEN 28

The maximum size of the socket address structure.

- #define OS_BUFFER_SIZE 172

    The maximum size of output produced by a single OS_printf()

- #define OS_BUFFER_MSG_DEPTH 100

    The maximum number of OS_printf() output strings to buffer.

- #define OS_UTILITYTASK_PRIORITY 245

    Priority level of the background utility task.

- #define OS_UTILITYTASK_STACK_SIZE 2048

    The stack size of the background utility task.

- #define OS_MAX_CMD_LEN 1000

    The maximum size of a shell command.

- #define OS_QUEUE_MAX_DEPTH 50

    The maximum depth of OSAL queues.

- #define OS_SHELL_CMD_INPUT_FILE_NAME ""

    The name of the temporary file used to store shell commands.

- #define OS_PRINTF_CONSOLE_NAME ""

    The name of the primary console device.

- #define OS_MAX_CONSOLES 1

    The maximum number of console devices to support.

- #define OS_MODULE_FILE_EXTENSION ".so"

    The system-specific file extension used on loadable module files.

39.4.1   Macro Definition Documentation

39.4.1.1   OS_BUFFER_MSG_DEPTH

```
#define OS_BUFFER_MSG_DEPTH 100
```

The maximum number of OS_printf() output strings to buffer.

Based on the OSAL_CONFIG_PRINTF_BUFFER_DEPTH configuration option

Definition at line 196 of file osconfig.h.

39.4.1.2   OS_BUFFER_SIZE

```
#define OS_BUFFER_SIZE 172
```

The maximum size of output produced by a single OS_printf()

Based on the OSAL_CONFIG_PRINTF_BUFFER_SIZE configuration option

Definition at line 189 of file osconfig.h.

39.4.1.3 OS_MAX_API_NAME

```
#define OS_MAX_API_NAME 20
```

The maximum length of OSAL resource names.

Based on the OSAL_CONFIG_MAX_API_NAME configuration option

Note

> This value must include a terminating NUL character

Definition at line 172 of file osconfig.h.

39.4.1.4 OS_MAX_BIN_SEMAPHORES

```
#define OS_MAX_BIN_SEMAPHORES 20
```

The maximum number of binary semaphores to support.

Based on the OSAL_CONFIG_MAX_BIN_SEMAPHORES configuration option

Definition at line 81 of file osconfig.h.

39.4.1.5 OS_MAX_CMD_LEN

```
#define OS_MAX_CMD_LEN 1000
```

The maximum size of a shell command.

This limit is only applicable if shell support is enabled.

Based on the OSAL_CONFIG_MAX_CMD_LEN configuration option

Note

> This value must include a terminating NUL character

Definition at line 227 of file osconfig.h.

39.4.1.6   OS_MAX_CONSOLES

`#define OS_MAX_CONSOLES 1`

The maximum number of console devices to support.

Fixed value based on current OSAL implementation, not user configurable.

Definition at line 269 of file osconfig.h.

39.4.1.7   OS_MAX_COUNT_SEMAPHORES

`#define OS_MAX_COUNT_SEMAPHORES 20`

The maximum number of counting semaphores to support.

Based on the OSAL_CONFIG_MAX_COUNT_SEMAPHORES configuration option

Definition at line 74 of file osconfig.h.

39.4.1.8   OS_MAX_FILE_NAME

`#define OS_MAX_FILE_NAME 20`

The maximum length of OSAL file names.

This limit applies specifically to the file name portion, not the directory portion, of a path name.

Based on the OSAL_CONFIG_MAX_FILE_NAME configuration option

Note

   This value must include a terminating NUL character

Definition at line 151 of file osconfig.h.

39.4.1.9   OS_MAX_FILE_SYSTEMS

`#define OS_MAX_FILE_SYSTEMS 14`

The maximum number of file systems to support.

Based on the OSAL_CONFIG_MAX_FILE_SYSTEMS configuration option

Definition at line 130 of file osconfig.h.

39.4.1.10 OS_MAX_MODULES

```
#define OS_MAX_MODULES 20
```

The maximum number of modules to support.

Based on the OSAL_CONFIG_MAX_MODULES configuration option

Definition at line 95 of file osconfig.h.

39.4.1.11 OS_MAX_MUTEXES

```
#define OS_MAX_MUTEXES 20
```

The maximum number of mutexes to support.

Based on the OSAL_CONFIG_MAX_MUTEXES configuration option

Definition at line 88 of file osconfig.h.

39.4.1.12 OS_MAX_NUM_OPEN_DIRS

```
#define OS_MAX_NUM_OPEN_DIRS 4
```

The maximum number of concurrently open directories to support.

Based on the OSAL_CONFIG_MAX_NUM_OPEN_DIRS configuration option

Definition at line 123 of file osconfig.h.

39.4.1.13 OS_MAX_NUM_OPEN_FILES

```
#define OS_MAX_NUM_OPEN_FILES 50
```

The maximum number of concurrently open files to support.

Based on the OSAL_CONFIG_MAX_NUM_OPEN_FILES configuration option

Definition at line 116 of file osconfig.h.

39.4.1.14   OS_MAX_PATH_LEN

`#define OS_MAX_PATH_LEN 64`

The maximum length of OSAL path names.

This limit applies to the overall length of a path name, including the file name and directory portions.

Based on the OSAL_CONFIG_MAX_PATH_LEN configuration option

Note

> This value must include a terminating NUL character

Definition at line 163 of file osconfig.h.

39.4.1.15   OS_MAX_QUEUES

`#define OS_MAX_QUEUES 64`

The maximum number of queues to support.

Based on the OSAL_CONFIG_MAX_QUEUES configuration option

Definition at line 67 of file osconfig.h.

39.4.1.16   OS_MAX_SYM_LEN

`#define OS_MAX_SYM_LEN 64`

The maximum length of symbols.

Based on the OSAL_CONFIG_MAX_SYM_LEN configuration option

Note

> This value must include a terminating NUL character

Definition at line 139 of file osconfig.h.

39.4.1.17 OS_MAX_TASKS

```
#define OS_MAX_TASKS 64
```

The maximum number of to support.

Based on the OSAL_CONFIG_MAX_TASKS configuration option

Definition at line 60 of file osconfig.h.

39.4.1.18 OS_MAX_TIMEBASES

```
#define OS_MAX_TIMEBASES 5
```

The maximum number of timebases to support.

Based on the OSAL_CONFIG_MAX_TIMEBASES configuration option

Definition at line 102 of file osconfig.h.

39.4.1.19 OS_MAX_TIMERS

```
#define OS_MAX_TIMERS 10
```

The maximum number of timer callbacks to support.

Based on the OSAL_CONFIG_MAX_TIMERS configuration option

Definition at line 109 of file osconfig.h.

39.4.1.20 OS_MODULE_FILE_EXTENSION

```
#define OS_MODULE_FILE_EXTENSION ".so"
```

The system-specific file extension used on loadable module files.

Fixed value based on system selection, not user configurable.

Definition at line 276 of file osconfig.h.

39.4.1.21   OS_PRINTF_CONSOLE_NAME

`#define OS_PRINTF_CONSOLE_NAME ""`

The name of the primary console device.

This is the device to which OS_printf() output is written. The output may be configured to tag each line with this prefix for identification.

Based on the OSAL_CONFIG_PRINTF_CONSOLE_NAME configuration option

Definition at line 254 of file osconfig.h.

39.4.1.22   OS_QUEUE_MAX_DEPTH

`#define OS_QUEUE_MAX_DEPTH 50`

The maximum depth of OSAL queues.

Based on the OSAL_CONFIG_QUEUE_MAX_DEPTH configuration option

Definition at line 234 of file osconfig.h.

39.4.1.23   OS_SHELL_CMD_INPUT_FILE_NAME

`#define OS_SHELL_CMD_INPUT_FILE_NAME ""`

The name of the temporary file used to store shell commands.

This configuration is only applicable if shell support is enabled, and only necessary/relevant on some OS implementations.

Based on the OSAL_CONFIG_SHELL_CMD_INPUT_FILE_NAME configuration option

Definition at line 244 of file osconfig.h.

39.4.1.24   OS_SOCKADDR_MAX_LEN

`#define OS_SOCKADDR_MAX_LEN 28`

The maximum size of the socket address structure.

This is part of the Socket API, and should be set large enough to hold the largest address type in use on the target system.

Based on the OSAL_CONFIG_SOCKADDR_MAX_LEN configuration option

Definition at line 182 of file osconfig.h.

39.4.1.25 OS_UTILITYTASK_PRIORITY

```
#define OS_UTILITYTASK_PRIORITY 245
```

Priority level of the background utility task.

This task is responsible for writing buffered output of OS_printf to the actual console device, and any other future maintenance task.

Based on the OSAL_CONFIG_UTILITYTASK_PRIORITY configuration option

Definition at line 206 of file osconfig.h.

39.4.1.26 OS_UTILITYTASK_STACK_SIZE

```
#define OS_UTILITYTASK_STACK_SIZE 2048
```

The stack size of the background utility task.

This task is responsible for writing buffered output of OS_printf to the actual console device, and any other future maintenance task.

Based on the OSAL_CONFIG_UTILITYTASK_STACK_SIZE configuration option

Definition at line 216 of file osconfig.h.

39.4.1.27 OSAL_CONFIG_DEBUG_PERMISSIVE_MODE

```
#define OSAL_CONFIG_DEBUG_PERMISSIVE_MODE
```

Definition at line 46 of file osconfig.h.

39.4.1.28 OSAL_CONFIG_DEBUG_PRINTF

```
#define OSAL_CONFIG_DEBUG_PRINTF
```

Definition at line 45 of file osconfig.h.

39.4.1.29 OSAL_CONFIG_INCLUDE_DYNAMIC_LOADER

```
#define OSAL_CONFIG_INCLUDE_DYNAMIC_LOADER
```

Configuration file Operating System Abstraction Layer.

The specific definitions in this file may only be modified by setting the respective OSAL configuration options in the CMake build.

Any direct modifications to the generated copy will be overwritten each time CMake executes.

Note

This file was automatically generated by CMake from /home/travis/build/nasa/cFS/osal/default_config.cmake

Definition at line 41 of file osconfig.h.

39.4.1.30 OSAL_CONFIG_INCLUDE_NETWORK

```
#define OSAL_CONFIG_INCLUDE_NETWORK
```

Definition at line 42 of file osconfig.h.

39.4.1.31 OSAL_CONFIG_INCLUDE_STATIC_LOADER

```
#define OSAL_CONFIG_INCLUDE_STATIC_LOADER
```

Definition at line 43 of file osconfig.h.

39.5 cpu1_msgids.h File Reference

```
#include "cfe_mission_cfg.h"
```

Macros

- #define CFE_EVS_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_EVS_CMD_MSG /∗ 0x1801 ∗/
- #define CFE_SB_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_SB_CMD_MSG /∗ 0x1803 ∗/
- #define CFE_TBL_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TBL_CMD_MSG /∗ 0x1804 ∗/
- #define CFE_TIME_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_CMD_MSG /∗ 0x1805 ∗/
- #define CFE_ES_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_ES_CMD_MSG /∗ 0x1806 ∗/
- #define CFE_ES_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_ES_SEND_HK_MSG /∗ 0x1808 ∗/
- #define CFE_EVS_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_EVS_SEND_HK_↩ MSG /∗ 0x1809 ∗/
- #define CFE_SB_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_SB_SEND_HK_MSG /∗ 0x180B ∗/
- #define CFE_TBL_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TBL_SEND_HK_M↩ SG /∗ 0x180C ∗/
- #define CFE_TIME_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_SEND_HK↩ _MSG /∗ 0x180D ∗/
- #define CFE_SB_SUB_RPT_CTRL_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_SB_SUB_RP↩ T_CTRL_MSG /∗ 0x180E ∗/
- #define CFE_TIME_TONE_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_TONE_C↩ MD_MSG /∗ 0x1810 ∗/
- #define CFE_TIME_1HZ_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_1HZ_CMD↩ _MSG /∗ 0x1811 ∗/
- #define CFE_TIME_DATA_CMD_MID CFE_MISSION_CMD_MID_BASE_GLOB + CFE_MISSION_TIME_DA↩ TA_CMD_MSG /∗ 0x1860 ∗/
- #define CFE_TIME_SEND_CMD_MID CFE_MISSION_CMD_MID_BASE_GLOB + CFE_MISSION_TIME_SE↩ ND_CMD_MSG /∗ 0x1862 ∗/
- #define CFE_ES_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_HK_TLM_MSG /∗ 0x0800 ∗/
- #define CFE_EVS_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_EVS_HK_TLM_MSG /∗ 0x0801 ∗/
- #define CFE_SB_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_HK_TLM_MSG /∗ 0x0803 ∗/
- #define CFE_TBL_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TBL_HK_TLM_MSG /∗ 0x0804 ∗/
- #define CFE_TIME_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TIME_HK_TLM_MSG /∗ 0x0805 ∗/
- #define CFE_TIME_DIAG_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TIME_DIAG_TLM↩ _MSG /∗ 0x0806 ∗/
- #define CFE_EVS_LONG_EVENT_MSG_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_EVS_LO↩ NG_EVENT_MSG_MSG /∗ 0x0808 ∗/
- #define CFE_EVS_SHORT_EVENT_MSG_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_EVS_S↩ HORT_EVENT_MSG_MSG /∗ 0x0809 ∗/
- #define CFE_SB_STATS_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_STATS_TLM_↩ MSG /∗ 0x080A ∗/
- #define CFE_ES_APP_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_APP_TLM_MSG /∗ 0x080B ∗/
- #define CFE_TBL_REG_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TBL_REG_TLM_MSG /∗ 0x080C ∗/

- #define CFE_SB_ALLSUBS_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_ALLSUBS_↩ TLM_MSG /∗ 0x080D ∗/
- #define CFE_SB_ONESUB_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_ONESUB_T↩ LM_MSG /∗ 0x080E ∗/
- #define CFE_ES_SHELL_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_SHELL_TLM_↩ MSG /∗ 0x080F ∗/
- #define CFE_ES_MEMSTATS_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_MEMST↩ ATS_TLM_MSG /∗ 0x0810 ∗/
- #define CFE_EVS_EVENT_MSG_MID CFE_EVS_LONG_EVENT_MSG_MID

39.5.1 Macro Definition Documentation

39.5.1.1 CFE_ES_APP_TLM_MID

#define CFE_ES_APP_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_APP_TLM_MSG /∗ 0x080B ∗/

Definition at line 87 of file cpu1_msgids.h.

39.5.1.2 CFE_ES_CMD_MID

#define CFE_ES_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_ES_CMD_MSG /∗ 0x1806 ∗/

Definition at line 52 of file cpu1_msgids.h.

39.5.1.3 CFE_ES_HK_TLM_MID

#define CFE_ES_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_HK_TLM_MSG /∗ 0x0800 ∗/

Definition at line 77 of file cpu1_msgids.h.

39.5.1.4 CFE_ES_MEMSTATS_TLM_MID

#define CFE_ES_MEMSTATS_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_MEMSTATS_TLM_MSG /∗ 0x0810 ∗/

Definition at line 96 of file cpu1_msgids.h.

39.5.1.5 CFE_ES_SEND_HK_MID

#define CFE_ES_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_ES_SEND_HK_MSG /* 0x1808 */

Definition at line 54 of file cpu1_msgids.h.

39.5.1.6 CFE_ES_SHELL_TLM_MID

#define CFE_ES_SHELL_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_ES_SHELL_TLM_MSG /* 0x080F */

Definition at line 93 of file cpu1_msgids.h.

39.5.1.7 CFE_EVS_CMD_MID

#define CFE_EVS_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_EVS_CMD_MSG /* 0x1801 */

Definition at line 47 of file cpu1_msgids.h.

39.5.1.8 CFE_EVS_EVENT_MSG_MID

#define CFE_EVS_EVENT_MSG_MID CFE_EVS_LONG_EVENT_MSG_MID

Definition at line 104 of file cpu1_msgids.h.

39.5.1.9 CFE_EVS_HK_TLM_MID

#define CFE_EVS_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_EVS_HK_TLM_MSG /* 0x0801 */

Definition at line 78 of file cpu1_msgids.h.

39.5.1.10 CFE_EVS_LONG_EVENT_MSG_MID

#define CFE_EVS_LONG_EVENT_MSG_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_EVS_LONG_EVENT_MSG_MSG /* 0x0808 */

Definition at line 84 of file cpu1_msgids.h.

39.5.1.11   CFE_EVS_SEND_HK_MID

#define CFE_EVS_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_EVS_SEND_HK_MSG /* 0x1809 */

Definition at line 55 of file cpu1_msgids.h.

39.5.1.12   CFE_EVS_SHORT_EVENT_MSG_MID

#define CFE_EVS_SHORT_EVENT_MSG_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_EVS_SHORT_EVENT_MSG_↩
MSG /* 0x0809 */

Definition at line 85 of file cpu1_msgids.h.

39.5.1.13   CFE_SB_ALLSUBS_TLM_MID

#define CFE_SB_ALLSUBS_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_ALLSUBS_TLM_MSG /* 0x080↩
D */

Definition at line 89 of file cpu1_msgids.h.

39.5.1.14   CFE_SB_CMD_MID

#define CFE_SB_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_SB_CMD_MSG /* 0x1803 */

Definition at line 49 of file cpu1_msgids.h.

39.5.1.15   CFE_SB_HK_TLM_MID

#define CFE_SB_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_HK_TLM_MSG /* 0x0803 */

Definition at line 80 of file cpu1_msgids.h.

39.5.1.16   CFE_SB_ONESUB_TLM_MID

#define CFE_SB_ONESUB_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_ONESUB_TLM_MSG /* 0x080E
*/

Definition at line 90 of file cpu1_msgids.h.

39.5.1.17 CFE_SB_SEND_HK_MID

#define CFE_SB_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_SB_SEND_HK_MSG /* 0x180B */

Definition at line 57 of file cpu1_msgids.h.

39.5.1.18 CFE_SB_STATS_TLM_MID

#define CFE_SB_STATS_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_SB_STATS_TLM_MSG /* 0x080A */

Definition at line 86 of file cpu1_msgids.h.

39.5.1.19 CFE_SB_SUB_RPT_CTRL_MID

#define CFE_SB_SUB_RPT_CTRL_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_SB_SUB_RPT_CTRL_MSG /* 0x180E */

Definition at line 61 of file cpu1_msgids.h.

39.5.1.20 CFE_TBL_CMD_MID

#define CFE_TBL_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TBL_CMD_MSG /* 0x1804 */

Definition at line 50 of file cpu1_msgids.h.

39.5.1.21 CFE_TBL_HK_TLM_MID

#define CFE_TBL_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TBL_HK_TLM_MSG /* 0x0804 */

Definition at line 81 of file cpu1_msgids.h.

39.5.1.22 CFE_TBL_REG_TLM_MID

#define CFE_TBL_REG_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TBL_REG_TLM_MSG /* 0x080C */

Definition at line 88 of file cpu1_msgids.h.

39.5.1.23 CFE_TBL_SEND_HK_MID

#define CFE_TBL_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TBL_SEND_HK_MSG /* 0x180C */

Definition at line 58 of file cpu1_msgids.h.

39.5.1.24 CFE_TIME_1HZ_CMD_MID

#define CFE_TIME_1HZ_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_1HZ_CMD_MSG /* 0x1811 */

Definition at line 64 of file cpu1_msgids.h.

39.5.1.25 CFE_TIME_CMD_MID

#define CFE_TIME_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_CMD_MSG /* 0x1805 */

Definition at line 51 of file cpu1_msgids.h.

39.5.1.26 CFE_TIME_DATA_CMD_MID

#define CFE_TIME_DATA_CMD_MID CFE_MISSION_CMD_MID_BASE_GLOB + CFE_MISSION_TIME_DATA_CMD_MSG /* 0x1860 */

Definition at line 70 of file cpu1_msgids.h.

39.5.1.27 CFE_TIME_DIAG_TLM_MID

#define CFE_TIME_DIAG_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TIME_DIAG_TLM_MSG /* 0x0806 */

Definition at line 83 of file cpu1_msgids.h.

39.5.1.28 CFE_TIME_HK_TLM_MID

#define CFE_TIME_HK_TLM_MID CFE_MISSION_TLM_MID_BASE1 + CFE_MISSION_TIME_HK_TLM_MSG /* 0x0805 */

Definition at line 82 of file cpu1_msgids.h.

39.5.1.29 CFE_TIME_SEND_CMD_MID

```
#define CFE_TIME_SEND_CMD_MID CFE_MISSION_CMD_MID_BASE_GLOB + CFE_MISSION_TIME_SEND_CMD_MSG /*
0x1862 */
```

Definition at line 71 of file cpu1_msgids.h.

39.5.1.30 CFE_TIME_SEND_HK_MID

```
#define CFE_TIME_SEND_HK_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_SEND_HK_MSG /* 0x180D */
```

Definition at line 59 of file cpu1_msgids.h.

39.5.1.31 CFE_TIME_TONE_CMD_MID

```
#define CFE_TIME_TONE_CMD_MID CFE_MISSION_CMD_MID_BASE1 + CFE_MISSION_TIME_TONE_CMD_MSG /* 0x1810
*/
```

Definition at line 63 of file cpu1_msgids.h.

39.6 cpu1_platform_cfg.h File Reference

```
#include "cfe_mission_cfg.h"
```

Macros

- #define CFE_PLATFORM_CPU_ID 1
- #define CFE_PLATFORM_CPU_NAME "CPU1"
- #define CFE_PLATFORM_SB_MAX_MSG_IDS 256
- #define CFE_PLATFORM_SB_MAX_PIPES 64
- #define CFE_PLATFORM_SB_MAX_DEST_PER_PKT 16
- #define CFE_PLATFORM_SB_DEFAULT_MSG_LIMIT 4
- #define CFE_PLATFORM_SB_BUF_MEMORY_BYTES 524288
- #define CFE_PLATFORM_SB_MAX_PIPE_DEPTH 256
- #define CFE_PLATFORM_SB_HIGHEST_VALID_MSGID 0x1FFF
- #define CFE_PLATFORM_ENDIAN CCSDS_LITTLE_ENDIAN
- #define CFE_PLATFORM_SB_DEFAULT_ROUTING_FILENAME "/ram/cfe_sb_route.dat"
- #define CFE_PLATFORM_SB_DEFAULT_PIPE_FILENAME "/ram/cfe_sb_pipe.dat"
- #define CFE_PLATFORM_SB_DEFAULT_MAP_FILENAME "/ram/cfe_sb_msgmap.dat"
- #define CFE_PLATFORM_SB_FILTERED_EVENT1 CFE_SB_SEND_NO_SUBS_EID
- #define CFE_PLATFORM_SB_FILTER_MASK1 CFE_EVS_FIRST_4_STOP
- #define CFE_PLATFORM_SB_FILTERED_EVENT2 CFE_SB_DUP_SUBSCRIP_EID
- #define CFE_PLATFORM_SB_FILTER_MASK2 CFE_EVS_FIRST_4_STOP

- #define CFE_PLATFORM_SB_FILTERED_EVENT3 CFE_SB_MSGID_LIM_ERR_EID
- #define CFE_PLATFORM_SB_FILTER_MASK3 CFE_EVS_FIRST_16_STOP
- #define CFE_PLATFORM_SB_FILTERED_EVENT4 CFE_SB_Q_FULL_ERR_EID
- #define CFE_PLATFORM_SB_FILTER_MASK4 CFE_EVS_FIRST_16_STOP
- #define CFE_PLATFORM_SB_FILTERED_EVENT5 0
- #define CFE_PLATFORM_SB_FILTER_MASK5 CFE_EVS_NO_FILTER
- #define CFE_PLATFORM_SB_FILTERED_EVENT6 0
- #define CFE_PLATFORM_SB_FILTER_MASK6 CFE_EVS_NO_FILTER
- #define CFE_PLATFORM_SB_FILTERED_EVENT7 0
- #define CFE_PLATFORM_SB_FILTER_MASK7 CFE_EVS_NO_FILTER
- #define CFE_PLATFORM_SB_FILTERED_EVENT8 0
- #define CFE_PLATFORM_SB_FILTER_MASK8 CFE_EVS_NO_FILTER
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_01 8
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_02 16
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_03 20
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_04 36
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_05 64
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_06 96
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_07 128
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_08 160
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_09 256
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_10 512
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_11 1024
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_12 2048
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_13 4096
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_14 8192
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_15 16384
- #define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_16 32768
- #define CFE_PLATFORM_SB_MAX_BLOCK_SIZE (CFE_MISSION_SB_MAX_SB_MSG_SIZE + 40)
- #define CFE_PLATFORM_SB_DEFAULT_REPORT_SENDER 1
- #define CFE_PLATFORM_TIME_CFG_SERVER true
- #define CFE_PLATFORM_TIME_CFG_CLIENT false
- #define CFE_PLATFORM_TIME_CFG_VIRTUAL true
- #define CFE_PLATFORM_TIME_CFG_SIGNAL false
- #define CFE_PLATFORM_TIME_CFG_SOURCE false
- #define CFE_PLATFORM_TIME_CFG_SRC_MET false
- #define CFE_PLATFORM_TIME_CFG_SRC_GPS false
- #define CFE_PLATFORM_TIME_CFG_SRC_TIME false
- #define CFE_PLATFORM_TIME_MAX_DELTA_SECS 0
- #define CFE_PLATFORM_TIME_MAX_DELTA_SUBS 500000
- #define CFE_PLATFORM_TIME_MAX_LOCAL_SECS 27
- #define CFE_PLATFORM_TIME_MAX_LOCAL_SUBS 0
- #define CFE_PLATFORM_TIME_CFG_TONE_LIMIT 20000
- #define CFE_PLATFORM_TIME_CFG_START_FLY 2
- #define CFE_PLATFORM_TIME_CFG_LATCH_FLY 8
- #define CFE_PLATFORM_ES_MAX_APPLICATIONS 32
- #define CFE_PLATFORM_ES_MAX_LIBRARIES 10
- #define CFE_PLATFORM_ES_ER_LOG_ENTRIES 20
- #define CFE_PLATFORM_ES_ER_LOG_MAX_CONTEXT_SIZE 256
- #define CFE_PLATFORM_ES_SYSTEM_LOG_SIZE 3072
- #define CFE_PLATFORM_ES_OBJECT_TABLE_SIZE 30

- #define CFE_PLATFORM_ES_MAX_GEN_COUNTERS 8
- #define CFE_PLATFORM_ES_APP_SCAN_RATE 1000
- #define CFE_PLATFORM_ES_APP_KILL_TIMEOUT 5
- #define CFE_PLATFORM_ES_RAM_DISK_SECTOR_SIZE 512
- #define CFE_PLATFORM_ES_RAM_DISK_NUM_SECTORS 4096
- #define CFE_PLATFORM_ES_RAM_DISK_PERCENT_RESERVED 30
- #define CFE_PLATFORM_ES_RAM_DISK_MOUNT_STRING "/ram"
- #define CFE_PLATFORM_ES_CDS_SIZE (128 ∗ 1024)
- #define CFE_PLATFORM_ES_USER_RESERVED_SIZE (1024 ∗ 1024)
- #define CFE_PLATFORM_ES_RESET_AREA_SIZE (170 ∗ 1024)
- #define CFE_PLATFORM_ES_MEMPOOL_ALIGN_SIZE_MIN 4
- #define CFE_PLATFORM_ES_NONVOL_STARTUP_FILE "/cf/cfe_es_startup.scr"
- #define CFE_PLATFORM_ES_VOLATILE_STARTUP_FILE "/ram/cfe_es_startup.scr"
- #define CFE_PLATFORM_ES_DEFAULT_SHELL_FILENAME "/ram/ShellCmd.out"
- #define CFE_PLATFORM_ES_MAX_SHELL_CMD 64
- #define CFE_PLATFORM_ES_MAX_SHELL_PKT 64
- #define CFE_PLATFORM_ES_SHELL_OS_DELAY_MILLISEC 200
- #define CFE_PLATFORM_ES_DEFAULT_APP_LOG_FILE "/ram/cfe_es_app_info.log"
- #define CFE_PLATFORM_ES_DEFAULT_TASK_LOG_FILE "/ram/cfe_es_task_info.log"
- #define CFE_PLATFORM_ES_DEFAULT_SYSLOG_FILE "/ram/cfe_es_syslog.log"
- #define CFE_PLATFORM_ES_DEFAULT_ER_LOG_FILE "/ram/cfe_erlog.log"
- #define CFE_PLATFORM_ES_DEFAULT_PERF_DUMP_FILENAME "/ram/cfe_es_perf.dat"
- #define CFE_PLATFORM_ES_DEFAULT_CDS_REG_DUMP_FILE "/ram/cfe_cds_reg.log"
- #define CFE_PLATFORM_ES_DEFAULT_POR_SYSLOG_MODE 0
- #define CFE_PLATFORM_ES_DEFAULT_PR_SYSLOG_MODE 1
- #define CFE_PLATFORM_ES_PERF_MAX_IDS 128
- #define CFE_PLATFORM_ES_PERF_DATA_BUFFER_SIZE 10000
- #define CFE_PLATFORM_ES_PERF_FILTMASK_NONE 0
- #define CFE_PLATFORM_ES_PERF_FILTMASK_ALL ∼CFE_PLATFORM_ES_PERF_FILTMASK_NONE
- #define CFE_PLATFORM_ES_PERF_FILTMASK_INIT CFE_PLATFORM_ES_PERF_FILTMASK_ALL
- #define CFE_PLATFORM_ES_PERF_TRIGMASK_NONE 0
- #define CFE_PLATFORM_ES_PERF_TRIGMASK_ALL ∼CFE_PLATFORM_ES_PERF_TRIGMASK_NONE
- #define CFE_PLATFORM_ES_PERF_TRIGMASK_INIT CFE_PLATFORM_ES_PERF_TRIGMASK_NONE
- #define CFE_PLATFORM_ES_PERF_CHILD_PRIORITY 200
- #define CFE_PLATFORM_ES_PERF_CHILD_STACK_SIZE 4096
- #define CFE_PLATFORM_ES_PERF_CHILD_MS_DELAY 20
- #define CFE_PLATFORM_ES_PERF_ENTRIES_BTWN_DLYS 50
- #define CFE_PLATFORM_ES_DEFAULT_STACK_SIZE 8192
- #define CFE_PLATFORM_EVS_START_TASK_PRIORITY 61
- #define CFE_PLATFORM_EVS_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
- #define CFE_PLATFORM_SB_START_TASK_PRIORITY 64
- #define CFE_PLATFORM_SB_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
- #define CFE_PLATFORM_ES_START_TASK_PRIORITY 68
- #define CFE_PLATFORM_ES_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
- #define CFE_PLATFORM_TIME_START_TASK_PRIORITY 60
- #define CFE_PLATFORM_TIME_TONE_TASK_PRIORITY 25
- #define CFE_PLATFORM_TIME_1HZ_TASK_PRIORITY 25
- #define CFE_PLATFORM_TIME_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_S↩ IZE
- #define CFE_PLATFORM_TIME_TONE_TASK_STACK_SIZE 4096
- #define CFE_PLATFORM_TIME_1HZ_TASK_STACK_SIZE 8192

- #define CFE_PLATFORM_TBL_START_TASK_PRIORITY 70
- #define CFE_PLATFORM_TBL_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
- #define CFE_PLATFORM_ES_CDS_MAX_NUM_ENTRIES 512
- #define CFE_PLATFORM_ES_MAX_PROCESSOR_RESETS 2
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_01 8
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_02 16
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_03 32
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_04 48
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_05 64
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_06 96
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_07 128
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_08 160
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_09 256
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_10 512
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_11 1024
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_12 2048
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_13 4096
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_14 8192
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_15 16384
- #define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_16 32768
- #define CFE_PLATFORM_ES_MAX_BLOCK_SIZE 80000
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_01 8
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_02 16
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_03 32
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_04 48
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_05 64
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_06 96
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_07 128
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_08 160
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_09 256
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_10 512
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_11 1024
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_12 2048
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_13 4096
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_14 8192
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_15 16384
- #define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_16 32768
- #define CFE_PLATFORM_ES_CDS_MAX_BLOCK_SIZE 80000
- #define CFE_PLATFORM_EVS_MAX_EVENT_FILTERS 8
- #define CFE_PLATFORM_EVS_LOG_ON
- #define CFE_PLATFORM_EVS_DEFAULT_LOG_FILE "/ram/cfe_evs.log"
- #define CFE_PLATFORM_EVS_LOG_MAX 20
- #define CFE_PLATFORM_EVS_DEFAULT_APP_DATA_FILE "/ram/cfe_evs_app.dat"
- #define CFE_PLATFORM_EVS_PORT_DEFAULT 0x0001
- #define CFE_PLATFORM_EVS_DEFAULT_TYPE_FLAG 0xE
- #define CFE_PLATFORM_EVS_DEFAULT_LOG_MODE 1
- #define CFE_PLATFORM_EVS_DEFAULT_MSG_FORMAT_MODE CFE_EVS_MsgFormat_LONG
- #define CFE_PLATFORM_TBL_BUF_MEMORY_BYTES 524288
- #define CFE_PLATFORM_TBL_MAX_DBL_TABLE_SIZE 16384
- #define CFE_PLATFORM_TBL_MAX_SNGL_TABLE_SIZE 16384
- #define CFE_PLATFORM_TBL_MAX_NUM_TABLES 128

- #define CFE_PLATFORM_TBL_MAX_CRITICAL_TABLES 32
- #define CFE_PLATFORM_TBL_MAX_NUM_HANDLES 256
- #define CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_LOADS 4
- #define CFE_PLATFORM_TBL_MAX_NUM_VALIDATIONS 10
- #define CFE_PLATFORM_TBL_DEFAULT_REG_DUMP_FILE "/ram/cfe_tbl_reg.log"
- #define CFE_PLATFORM_TBL_VALID_SCID_COUNT 0
- #define CFE_PLATFORM_TBL_U32FROM4CHARS(_C1, _C2, _C3, _C4)
- #define CFE_PLATFORM_TBL_VALID_SCID_1 (CFE_MISSION_SPACECRAFT_ID)
- #define CFE_PLATFORM_TBL_VALID_SCID_2 (CFE_PLATFORM_TBL_U32FROM4CHARS('a', 'b', 'c', 'd'))
- #define CFE_PLATFORM_TBL_VALID_PRID_COUNT 0
- #define CFE_PLATFORM_TBL_VALID_PRID_1 (CFE_PLATFORM_CPU_ID)
- #define CFE_PLATFORM_TBL_VALID_PRID_2 (CFE_PLATFORM_TBL_U32FROM4CHARS('a', 'b', 'c', 'd'))
- #define CFE_PLATFORM_TBL_VALID_PRID_3 0
- #define CFE_PLATFORM_TBL_VALID_PRID_4 0
- #define CFE_MISSION_REV 0
- #define CFE_PLATFORM_ES_STARTUP_SYNC_POLL_MSEC 50
- #define CFE_PLATFORM_CORE_MAX_STARTUP_MSEC 30000
- #define CFE_PLATFORM_ES_STARTUP_SCRIPT_TIMEOUT_MSEC 1000
- #define CFE_CPU_ID CFE_PLATFORM_CPU_ID
- #define CFE_CPU_NAME CFE_PLATFORM_CPU_NAME
- #define CFE_SB_MAX_MSG_IDS CFE_PLATFORM_SB_MAX_MSG_IDS
- #define CFE_SB_MAX_PIPES CFE_PLATFORM_SB_MAX_PIPES
- #define CFE_SB_MAX_DEST_PER_PKT CFE_PLATFORM_SB_MAX_DEST_PER_PKT
- #define CFE_SB_DEFAULT_MSG_LIMIT CFE_PLATFORM_SB_DEFAULT_MSG_LIMIT
- #define CFE_SB_BUF_MEMORY_BYTES CFE_PLATFORM_SB_BUF_MEMORY_BYTES
- #define CFE_SB_MAX_PIPE_DEPTH CFE_PLATFORM_SB_MAX_PIPE_DEPTH
- #define CFE_SB_HIGHEST_VALID_MSGID CFE_PLATFORM_SB_HIGHEST_VALID_MSGID
- #define CFE_SB_DEFAULT_ROUTING_FILENAME CFE_PLATFORM_SB_DEFAULT_ROUTING_FILENAME
- #define CFE_SB_DEFAULT_PIPE_FILENAME CFE_PLATFORM_SB_DEFAULT_PIPE_FILENAME
- #define CFE_SB_DEFAULT_MAP_FILENAME CFE_PLATFORM_SB_DEFAULT_MAP_FILENAME
- #define CFE_SB_FILTERED_EVENT1 CFE_PLATFORM_SB_FILTERED_EVENT1
- #define CFE_SB_FILTER_MASK1 CFE_PLATFORM_SB_FILTER_MASK1
- #define CFE_SB_FILTERED_EVENT2 CFE_PLATFORM_SB_FILTERED_EVENT2
- #define CFE_SB_FILTER_MASK2 CFE_PLATFORM_SB_FILTER_MASK2
- #define CFE_SB_FILTERED_EVENT3 CFE_PLATFORM_SB_FILTERED_EVENT3
- #define CFE_SB_FILTER_MASK3 CFE_PLATFORM_SB_FILTER_MASK3
- #define CFE_SB_FILTERED_EVENT4 CFE_PLATFORM_SB_FILTERED_EVENT4
- #define CFE_SB_FILTER_MASK4 CFE_PLATFORM_SB_FILTER_MASK4
- #define CFE_SB_FILTERED_EVENT5 CFE_PLATFORM_SB_FILTERED_EVENT5
- #define CFE_SB_FILTER_MASK5 CFE_PLATFORM_SB_FILTER_MASK5
- #define CFE_SB_FILTERED_EVENT6 CFE_PLATFORM_SB_FILTERED_EVENT6
- #define CFE_SB_FILTER_MASK6 CFE_PLATFORM_SB_FILTER_MASK6
- #define CFE_SB_FILTERED_EVENT7 CFE_PLATFORM_SB_FILTERED_EVENT7
- #define CFE_SB_FILTER_MASK7 CFE_PLATFORM_SB_FILTER_MASK7
- #define CFE_SB_FILTERED_EVENT8 CFE_PLATFORM_SB_FILTERED_EVENT8
- #define CFE_SB_FILTER_MASK8 CFE_PLATFORM_SB_FILTER_MASK8
- #define CFE_SB_MEM_BLOCK_SIZE_01 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_01
- #define CFE_SB_MEM_BLOCK_SIZE_02 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_02
- #define CFE_SB_MEM_BLOCK_SIZE_03 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_03
- #define CFE_SB_MEM_BLOCK_SIZE_04 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_04
- #define CFE_SB_MEM_BLOCK_SIZE_05 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_05

- #define CFE_SB_MEM_BLOCK_SIZE_06 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_06
- #define CFE_SB_MEM_BLOCK_SIZE_07 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_07
- #define CFE_SB_MEM_BLOCK_SIZE_08 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_08
- #define CFE_SB_MEM_BLOCK_SIZE_09 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_09
- #define CFE_SB_MEM_BLOCK_SIZE_10 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_10
- #define CFE_SB_MEM_BLOCK_SIZE_11 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_11
- #define CFE_SB_MEM_BLOCK_SIZE_12 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_12
- #define CFE_SB_MEM_BLOCK_SIZE_13 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_13
- #define CFE_SB_MEM_BLOCK_SIZE_14 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_14
- #define CFE_SB_MEM_BLOCK_SIZE_15 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_15
- #define CFE_SB_MEM_BLOCK_SIZE_16 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_16
- #define CFE_SB_MAX_BLOCK_SIZE CFE_PLATFORM_SB_MAX_BLOCK_SIZE
- #define CFE_SB_DEFAULT_REPORT_SENDER CFE_PLATFORM_SB_DEFAULT_REPORT_SENDER
- #define CFE_TIME_CFG_SERVER CFE_PLATFORM_TIME_CFG_SERVER
- #define CFE_TIME_CFG_CLIENT CFE_PLATFORM_TIME_CFG_CLIENT
- #define CFE_TIME_CFG_VIRTUAL CFE_PLATFORM_TIME_CFG_VIRTUAL
- #define CFE_TIME_CFG_SIGNAL CFE_PLATFORM_TIME_CFG_SIGNAL
- #define CFE_TIME_CFG_SOURCE CFE_PLATFORM_TIME_CFG_SOURCE
- #define CFE_TIME_CFG_SRC_MET CFE_PLATFORM_TIME_CFG_SRC_MET
- #define CFE_TIME_CFG_SRC_GPS CFE_PLATFORM_TIME_CFG_SRC_GPS
- #define CFE_TIME_CFG_SRC_TIME CFE_PLATFORM_TIME_CFG_SRC_TIME
- #define CFE_TIME_MAX_DELTA_SECS CFE_PLATFORM_TIME_MAX_DELTA_SECS
- #define CFE_TIME_MAX_DELTA_SUBS CFE_PLATFORM_TIME_MAX_DELTA_SUBS
- #define CFE_TIME_MAX_LOCAL_SECS CFE_PLATFORM_TIME_MAX_LOCAL_SECS
- #define CFE_TIME_MAX_LOCAL_SUBS CFE_PLATFORM_TIME_MAX_LOCAL_SUBS
- #define CFE_TIME_CFG_TONE_LIMIT CFE_PLATFORM_TIME_CFG_TONE_LIMIT
- #define CFE_TIME_CFG_START_FLY CFE_PLATFORM_TIME_CFG_START_FLY
- #define CFE_TIME_CFG_LATCH_FLY CFE_PLATFORM_TIME_CFG_LATCH_FLY
- #define CFE_ES_MAX_APPLICATIONS CFE_PLATFORM_ES_MAX_APPLICATIONS
- #define CFE_ES_MAX_LIBRARIES CFE_PLATFORM_ES_MAX_LIBRARIES
- #define CFE_ES_ER_LOG_ENTRIES CFE_PLATFORM_ES_ER_LOG_ENTRIES
- #define CFE_ES_ER_LOG_MAX_CONTEXT_SIZE CFE_PLATFORM_ES_ER_LOG_MAX_CONTEXT_SIZE
- #define CFE_ES_SYSTEM_LOG_SIZE CFE_PLATFORM_ES_SYSTEM_LOG_SIZE
- #define CFE_ES_OBJECT_TABLE_SIZE CFE_PLATFORM_ES_OBJECT_TABLE_SIZE
- #define CFE_ES_MAX_GEN_COUNTERS CFE_PLATFORM_ES_MAX_GEN_COUNTERS
- #define CFE_ES_APP_SCAN_RATE CFE_PLATFORM_ES_APP_SCAN_RATE
- #define CFE_ES_APP_KILL_TIMEOUT CFE_PLATFORM_ES_APP_KILL_TIMEOUT
- #define CFE_ES_RAM_DISK_SECTOR_SIZE CFE_PLATFORM_ES_RAM_DISK_SECTOR_SIZE
- #define CFE_ES_RAM_DISK_NUM_SECTORS CFE_PLATFORM_ES_RAM_DISK_NUM_SECTORS
- #define CFE_ES_RAM_DISK_PERCENT_RESERVED CFE_PLATFORM_ES_RAM_DISK_PERCENT_RES↩ERVED
- #define CFE_ES_RAM_DISK_MOUNT_STRING CFE_PLATFORM_ES_RAM_DISK_MOUNT_STRING
- #define CFE_ES_CDS_SIZE CFE_PLATFORM_ES_CDS_SIZE
- #define CFE_ES_USER_RESERVED_SIZE CFE_PLATFORM_ES_USER_RESERVED_SIZE
- #define CFE_ES_RESET_AREA_SIZE CFE_PLATFORM_ES_RESET_AREA_SIZE
- #define CFE_ES_NONVOL_STARTUP_FILE CFE_PLATFORM_ES_NONVOL_STARTUP_FILE
- #define CFE_ES_VOLATILE_STARTUP_FILE CFE_PLATFORM_ES_VOLATILE_STARTUP_FILE
- #define CFE_ES_DEFAULT_SHELL_FILENAME CFE_PLATFORM_ES_DEFAULT_SHELL_FILENAME
- #define CFE_ES_MAX_SHELL_CMD CFE_PLATFORM_ES_MAX_SHELL_CMD
- #define CFE_ES_MAX_SHELL_PKT CFE_PLATFORM_ES_MAX_SHELL_PKT
- #define CFE_ES_DEFAULT_APP_LOG_FILE CFE_PLATFORM_ES_DEFAULT_APP_LOG_FILE

- #define CFE_ES_DEFAULT_TASK_LOG_FILE CFE_PLATFORM_ES_DEFAULT_TASK_LOG_FILE
- #define CFE_ES_DEFAULT_SYSLOG_FILE CFE_PLATFORM_ES_DEFAULT_SYSLOG_FILE
- #define CFE_ES_DEFAULT_ER_LOG_FILE CFE_PLATFORM_ES_DEFAULT_ER_LOG_FILE
- #define CFE_ES_DEFAULT_PERF_DUMP_FILENAME CFE_PLATFORM_ES_DEFAULT_PERF_FI↩
LENAME
- #define CFE_ES_DEFAULT_CDS_REG_DUMP_FILE CFE_PLATFORM_ES_DEFAULT_CDS_REG_DUMP↩
_FILE
- #define CFE_ES_DEFAULT_SYSLOG_MODE CFE_PLATFORM_ES_DEFAULT_PR_SYSLOG_MODE
- #define CFE_ES_PERF_MAX_IDS CFE_PLATFORM_ES_PERF_MAX_IDS
- #define CFE_ES_PERF_DATA_BUFFER_SIZE CFE_PLATFORM_ES_PERF_DATA_BUFFER_SIZE
- #define CFE_ES_PERF_FILTMASK_NONE CFE_PLATFORM_ES_PERF_FILTMASK_NONE
- #define CFE_ES_PERF_FILTMASK_ALL CFE_PLATFORM_ES_PERF_FILTMASK_ALL
- #define CFE_ES_PERF_FILTMASK_INIT CFE_PLATFORM_ES_PERF_FILTMASK_INIT
- #define CFE_ES_PERF_TRIGMASK_NONE CFE_PLATFORM_ES_PERF_TRIGMASK_NONE
- #define CFE_ES_PERF_TRIGMASK_ALL CFE_PLATFORM_ES_PERF_TRIGMASK_ALL
- #define CFE_ES_PERF_TRIGMASK_INIT CFE_PLATFORM_ES_PERF_TRIGMASK_INIT
- #define CFE_ES_PERF_CHILD_PRIORITY CFE_PLATFORM_ES_PERF_CHILD_PRIORITY
- #define CFE_ES_PERF_CHILD_STACK_SIZE CFE_PLATFORM_ES_PERF_CHILD_STACK_SIZE
- #define CFE_ES_PERF_CHILD_MS_DELAY CFE_PLATFORM_ES_PERF_CHILD_MS_DELAY
- #define CFE_ES_PERF_ENTRIES_BTWN_DLYS CFE_PLATFORM_ES_PERF_ENTRIES_BTWN_DLYS
- #define CFE_ES_DEFAULT_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
- #define CFE_ES_EXCEPTION_FUNCTION CFE_PLATFORM_ES_EXCEPTION_FUNCTION
- #define CFE_EVS_START_TASK_PRIORITY CFE_PLATFORM_EVS_START_TASK_PRIORITY
- #define CFE_EVS_START_TASK_STACK_SIZE CFE_PLATFORM_EVS_START_TASK_STACK_SIZE
- #define CFE_SB_START_TASK_PRIORITY CFE_PLATFORM_SB_START_TASK_PRIORITY
- #define CFE_SB_START_TASK_STACK_SIZE CFE_PLATFORM_SB_START_TASK_STACK_SIZE
- #define CFE_ES_START_TASK_PRIORITY CFE_PLATFORM_ES_START_TASK_PRIORITY
- #define CFE_ES_START_TASK_STACK_SIZE CFE_PLATFORM_ES_START_TASK_STACK_SIZE
- #define CFE_TIME_START_TASK_PRIORITY CFE_PLATFORM_TIME_START_TASK_PRIORITY
- #define CFE_TIME_TONE_TASK_PRIORITY CFE_PLATFORM_TIME_TONE_TASK_PRIORITY
- #define CFE_TIME_1HZ_TASK_PRIORITY CFE_PLATFORM_TIME_1HZ_TASK_PRIORITY
- #define CFE_TIME_START_TASK_STACK_SIZE CFE_PLATFORM_TIME_START_TASK_STACK_SIZE
- #define CFE_TIME_TONE_TASK_STACK_SIZE CFE_PLATFORM_TIME_TONE_TASK_STACK_SIZE
- #define CFE_TIME_1HZ_TASK_STACK_SIZE CFE_PLATFORM_TIME_1HZ_TASK_STACK_SIZE
- #define CFE_TBL_START_TASK_PRIORITY CFE_PLATFORM_TBL_START_TASK_PRIORITY
- #define CFE_TBL_START_TASK_STACK_SIZE CFE_PLATFORM_TBL_START_TASK_STACK_SIZE
- #define CFE_ES_CDS_MAX_NUM_ENTRIES CFE_PLATFORM_ES_CDS_MAX_NUM_ENTRIES
- #define CFE_ES_MAX_PROCESSOR_RESETS CFE_PLATFORM_ES_MAX_PROCESSOR_RESETS
- #define CFE_ES_MEM_BLOCK_SIZE_01 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_01
- #define CFE_ES_MEM_BLOCK_SIZE_02 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_02
- #define CFE_ES_MEM_BLOCK_SIZE_03 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_03
- #define CFE_ES_MEM_BLOCK_SIZE_04 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_04
- #define CFE_ES_MEM_BLOCK_SIZE_05 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_05
- #define CFE_ES_MEM_BLOCK_SIZE_06 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_06
- #define CFE_ES_MEM_BLOCK_SIZE_07 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_07
- #define CFE_ES_MEM_BLOCK_SIZE_08 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_08
- #define CFE_ES_MEM_BLOCK_SIZE_09 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_09
- #define CFE_ES_MEM_BLOCK_SIZE_10 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_10
- #define CFE_ES_MEM_BLOCK_SIZE_11 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_11
- #define CFE_ES_MEM_BLOCK_SIZE_12 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_12
- #define CFE_ES_MEM_BLOCK_SIZE_13 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_13

- #define CFE_ES_MEM_BLOCK_SIZE_14 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_14
- #define CFE_ES_MEM_BLOCK_SIZE_15 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_15
- #define CFE_ES_MEM_BLOCK_SIZE_16 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_16
- #define CFE_ES_MAX_BLOCK_SIZE CFE_PLATFORM_ES_MAX_BLOCK_SIZE
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_01 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_01
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_02 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_02
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_03 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_03
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_04 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_04
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_05 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_05
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_06 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_06
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_07 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_07
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_08 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_08
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_09 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_09
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_10 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_10
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_11 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_11
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_12 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_12
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_13 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_13
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_14 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_14
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_15 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_15
- #define CFE_ES_CDS_MEM_BLOCK_SIZE_16 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_16
- #define CFE_ES_CDS_MAX_BLOCK_SIZE CFE_PLATFORM_ES_CDS_MAX_BLOCK_SIZE
- #define CFE_EVS_MAX_EVENT_FILTERS CFE_PLATFORM_EVS_MAX_EVENT_FILTERS
- #define CFE_EVS_LOG_ON CFE_PLATFORM_EVS_LOG_ON
- #define CFE_EVS_DEFAULT_LOG_FILE CFE_PLATFORM_EVS_DEFAULT_LOG_FILE
- #define CFE_EVS_LOG_MAX CFE_PLATFORM_EVS_LOG_MAX
- #define CFE_EVS_DEFAULT_APP_DATA_FILE CFE_PLATFORM_EVS_DEFAULT_APP_DATA_FILE
- #define CFE_EVS_PORT_DEFAULT CFE_PLATFORM_EVS_PORT_DEFAULT
- #define CFE_EVS_DEFAULT_TYPE_FLAG CFE_PLATFORM_EVS_DEFAULT_TYPE_FLAG
- #define CFE_EVS_DEFAULT_LOG_MODE CFE_PLATFORM_EVS_DEFAULT_LOG_MODE
- #define CFE_EVS_DEFAULT_MSG_FORMAT_MODE CFE_PLATFORM_EVS_DEFAULT_MSG_FORMAT_↩ MODE
- #define CFE_TBL_BUF_MEMORY_BYTES CFE_PLATFORM_TBL_BUF_MEMORY_BYTES
- #define CFE_TBL_MAX_DBL_TABLE_SIZE CFE_PLATFORM_TBL_MAX_DBL_TABLE_SIZE
- #define CFE_TBL_MAX_SNGL_TABLE_SIZE CFE_PLATFORM_TBL_MAX_SNGL_TABLE_SIZE
- #define CFE_TBL_MAX_NUM_TABLES CFE_PLATFORM_TBL_MAX_NUM_TABLES
- #define CFE_TBL_MAX_CRITICAL_TABLES CFE_PLATFORM_TBL_MAX_CRITICAL_TABLES
- #define CFE_TBL_MAX_NUM_HANDLES CFE_PLATFORM_TBL_MAX_NUM_HANDLES
- #define CFE_TBL_MAX_SIMULTANEOUS_LOADS CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_LOADS
- #define CFE_TBL_MAX_NUM_VALIDATIONS CFE_PLATFORM_TBL_MAX_NUM_VALIDATIONS
- #define CFE_TBL_DEFAULT_REG_DUMP_FILE CFE_PLATFORM_TBL_DEFAULT_REG_DUMP_FILE
- #define CFE_TBL_VALID_SCID_COUNT CFE_PLATFORM_TBL_VALID_SCID_COUNT
- #define CFE_TBL_U32FROM4CHARS CFE_PLATFORM_TBL_U32FROM4CHARS
- #define CFE_TBL_VALID_SCID_1 CFE_PLATFORM_TBL_VALID_SCID_1
- #define CFE_TBL_VALID_SCID_2 CFE_PLATFORM_TBL_VALID_SCID_2
- #define CFE_TBL_VALID_PRID_COUNT CFE_PLATFORM_TBL_VALID_PRID_COUNT
- #define CFE_TBL_VALID_PRID_1 CFE_PLATFORM_TBL_VALID_PRID_1
- #define CFE_TBL_VALID_PRID_2 CFE_PLATFORM_TBL_VALID_PRID_2
- #define CFE_TBL_VALID_PRID_3 CFE_PLATFORM_TBL_VALID_PRID_3
- #define CFE_TBL_VALID_PRID_4 CFE_PLATFORM_TBL_VALID_PRID_4
- #define CFE_ES_STARTUP_SYNC_POLL_MSEC CFE_PLATFORM_ES_STARTUP_SYNC_POLL_MSEC
- #define CFE_CORE_MAX_STARTUP_MSEC CFE_PLATFORM_CORE_MAX_STARTUP_MSEC
- #define CFE_ES_STARTUP_SCRIPT_TIMEOUT_MSEC CFE_PLATFORM_ES_STARTUP_SCRIPT_TIMEO↩ UT_MSEC
- #define CFE_TIME_ENA_1HZ_CMD_PKT true

39.6.1   Macro Definition Documentation

39.6.1.1   CFE_CORE_MAX_STARTUP_MSEC

#define CFE_CORE_MAX_STARTUP_MSEC CFE_PLATFORM_CORE_MAX_STARTUP_MSEC

Definition at line 2070 of file cpu1_platform_cfg.h.

39.6.1.2   CFE_CPU_ID

#define CFE_CPU_ID CFE_PLATFORM_CPU_ID

Definition at line 1889 of file cpu1_platform_cfg.h.

39.6.1.3   CFE_CPU_NAME

#define CFE_CPU_NAME CFE_PLATFORM_CPU_NAME

Definition at line 1890 of file cpu1_platform_cfg.h.

39.6.1.4   CFE_ES_APP_KILL_TIMEOUT

#define CFE_ES_APP_KILL_TIMEOUT CFE_PLATFORM_ES_APP_KILL_TIMEOUT

Definition at line 1958 of file cpu1_platform_cfg.h.

39.6.1.5   CFE_ES_APP_SCAN_RATE

#define CFE_ES_APP_SCAN_RATE CFE_PLATFORM_ES_APP_SCAN_RATE

Definition at line 1957 of file cpu1_platform_cfg.h.

39.6.1.6   CFE_ES_CDS_MAX_BLOCK_SIZE

#define CFE_ES_CDS_MAX_BLOCK_SIZE CFE_PLATFORM_ES_CDS_MAX_BLOCK_SIZE

Definition at line 2041 of file cpu1_platform_cfg.h.

39.6.1.7 CFE_ES_CDS_MAX_NUM_ENTRIES

#define CFE_ES_CDS_MAX_NUM_ENTRIES CFE_PLATFORM_ES_CDS_MAX_NUM_ENTRIES

Definition at line 2006 of file cpu1_platform_cfg.h.

39.6.1.8 CFE_ES_CDS_MEM_BLOCK_SIZE_01

#define CFE_ES_CDS_MEM_BLOCK_SIZE_01 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_01

Definition at line 2025 of file cpu1_platform_cfg.h.

39.6.1.9 CFE_ES_CDS_MEM_BLOCK_SIZE_02

#define CFE_ES_CDS_MEM_BLOCK_SIZE_02 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_02

Definition at line 2026 of file cpu1_platform_cfg.h.

39.6.1.10 CFE_ES_CDS_MEM_BLOCK_SIZE_03

#define CFE_ES_CDS_MEM_BLOCK_SIZE_03 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_03

Definition at line 2027 of file cpu1_platform_cfg.h.

39.6.1.11 CFE_ES_CDS_MEM_BLOCK_SIZE_04

#define CFE_ES_CDS_MEM_BLOCK_SIZE_04 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_04

Definition at line 2028 of file cpu1_platform_cfg.h.

39.6.1.12 CFE_ES_CDS_MEM_BLOCK_SIZE_05

#define CFE_ES_CDS_MEM_BLOCK_SIZE_05 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_05

Definition at line 2029 of file cpu1_platform_cfg.h.

39.6.1.13 CFE_ES_CDS_MEM_BLOCK_SIZE_06

#define CFE_ES_CDS_MEM_BLOCK_SIZE_06 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_06

Definition at line 2030 of file cpu1_platform_cfg.h.

39.6.1.14 CFE_ES_CDS_MEM_BLOCK_SIZE_07

#define CFE_ES_CDS_MEM_BLOCK_SIZE_07 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_07

Definition at line 2031 of file cpu1_platform_cfg.h.

39.6.1.15 CFE_ES_CDS_MEM_BLOCK_SIZE_08

#define CFE_ES_CDS_MEM_BLOCK_SIZE_08 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_08

Definition at line 2032 of file cpu1_platform_cfg.h.

39.6.1.16 CFE_ES_CDS_MEM_BLOCK_SIZE_09

#define CFE_ES_CDS_MEM_BLOCK_SIZE_09 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_09

Definition at line 2033 of file cpu1_platform_cfg.h.

39.6.1.17 CFE_ES_CDS_MEM_BLOCK_SIZE_10

#define CFE_ES_CDS_MEM_BLOCK_SIZE_10 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_10

Definition at line 2034 of file cpu1_platform_cfg.h.

39.6.1.18 CFE_ES_CDS_MEM_BLOCK_SIZE_11

#define CFE_ES_CDS_MEM_BLOCK_SIZE_11 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_11

Definition at line 2035 of file cpu1_platform_cfg.h.

39.6.1.19   CFE_ES_CDS_MEM_BLOCK_SIZE_12

#define CFE_ES_CDS_MEM_BLOCK_SIZE_12 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_12

Definition at line 2036 of file cpu1_platform_cfg.h.

39.6.1.20   CFE_ES_CDS_MEM_BLOCK_SIZE_13

#define CFE_ES_CDS_MEM_BLOCK_SIZE_13 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_13

Definition at line 2037 of file cpu1_platform_cfg.h.

39.6.1.21   CFE_ES_CDS_MEM_BLOCK_SIZE_14

#define CFE_ES_CDS_MEM_BLOCK_SIZE_14 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_14

Definition at line 2038 of file cpu1_platform_cfg.h.

39.6.1.22   CFE_ES_CDS_MEM_BLOCK_SIZE_15

#define CFE_ES_CDS_MEM_BLOCK_SIZE_15 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_15

Definition at line 2039 of file cpu1_platform_cfg.h.

39.6.1.23   CFE_ES_CDS_MEM_BLOCK_SIZE_16

#define CFE_ES_CDS_MEM_BLOCK_SIZE_16 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_16

Definition at line 2040 of file cpu1_platform_cfg.h.

39.6.1.24   CFE_ES_CDS_SIZE

#define CFE_ES_CDS_SIZE CFE_PLATFORM_ES_CDS_SIZE

Definition at line 1963 of file cpu1_platform_cfg.h.

39.6.1.25 CFE_ES_DEFAULT_APP_LOG_FILE

#define CFE_ES_DEFAULT_APP_LOG_FILE CFE_PLATFORM_ES_DEFAULT_APP_LOG_FILE

Definition at line 1971 of file cpu1_platform_cfg.h.

39.6.1.26 CFE_ES_DEFAULT_CDS_REG_DUMP_FILE

#define CFE_ES_DEFAULT_CDS_REG_DUMP_FILE CFE_PLATFORM_ES_DEFAULT_CDS_REG_DUMP_FILE

Definition at line 1976 of file cpu1_platform_cfg.h.

39.6.1.27 CFE_ES_DEFAULT_ER_LOG_FILE

#define CFE_ES_DEFAULT_ER_LOG_FILE CFE_PLATFORM_ES_DEFAULT_ER_LOG_FILE

Definition at line 1974 of file cpu1_platform_cfg.h.

39.6.1.28 CFE_ES_DEFAULT_PERF_DUMP_FILENAME

#define CFE_ES_DEFAULT_PERF_DUMP_FILENAME CFE_PLATFORM_ES_DEFAULT_PERF_DUMP_FILENAME

Definition at line 1975 of file cpu1_platform_cfg.h.

39.6.1.29 CFE_ES_DEFAULT_SHELL_FILENAME

#define CFE_ES_DEFAULT_SHELL_FILENAME CFE_PLATFORM_ES_DEFAULT_SHELL_FILENAME

Definition at line 1968 of file cpu1_platform_cfg.h.

39.6.1.30 CFE_ES_DEFAULT_STACK_SIZE

#define CFE_ES_DEFAULT_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE

Definition at line 1990 of file cpu1_platform_cfg.h.

39.6.1.31   CFE_ES_DEFAULT_SYSLOG_FILE

#define CFE_ES_DEFAULT_SYSLOG_FILE CFE_PLATFORM_ES_DEFAULT_SYSLOG_FILE

Definition at line 1973 of file cpu1_platform_cfg.h.

39.6.1.32   CFE_ES_DEFAULT_SYSLOG_MODE

#define CFE_ES_DEFAULT_SYSLOG_MODE CFE_PLATFORM_ES_DEFAULT_PR_SYSLOG_MODE

Definition at line 1977 of file cpu1_platform_cfg.h.

39.6.1.33   CFE_ES_DEFAULT_TASK_LOG_FILE

#define CFE_ES_DEFAULT_TASK_LOG_FILE CFE_PLATFORM_ES_DEFAULT_TASK_LOG_FILE

Definition at line 1972 of file cpu1_platform_cfg.h.

39.6.1.34   CFE_ES_ER_LOG_ENTRIES

#define CFE_ES_ER_LOG_ENTRIES CFE_PLATFORM_ES_ER_LOG_ENTRIES

Definition at line 1952 of file cpu1_platform_cfg.h.

39.6.1.35   CFE_ES_ER_LOG_MAX_CONTEXT_SIZE

#define CFE_ES_ER_LOG_MAX_CONTEXT_SIZE CFE_PLATFORM_ES_ER_LOG_MAX_CONTEXT_SIZE

Definition at line 1953 of file cpu1_platform_cfg.h.

39.6.1.36   CFE_ES_EXCEPTION_FUNCTION

#define CFE_ES_EXCEPTION_FUNCTION CFE_PLATFORM_ES_EXCEPTION_FUNCTION

Definition at line 1991 of file cpu1_platform_cfg.h.

39.6.1.37   CFE_ES_MAX_APPLICATIONS

#define CFE_ES_MAX_APPLICATIONS CFE_PLATFORM_ES_MAX_APPLICATIONS

Definition at line 1950 of file cpu1_platform_cfg.h.

39.6.1.38   CFE_ES_MAX_BLOCK_SIZE

#define CFE_ES_MAX_BLOCK_SIZE CFE_PLATFORM_ES_MAX_BLOCK_SIZE

Definition at line 2024 of file cpu1_platform_cfg.h.

39.6.1.39   CFE_ES_MAX_GEN_COUNTERS

#define CFE_ES_MAX_GEN_COUNTERS CFE_PLATFORM_ES_MAX_GEN_COUNTERS

Definition at line 1956 of file cpu1_platform_cfg.h.

39.6.1.40   CFE_ES_MAX_LIBRARIES

#define CFE_ES_MAX_LIBRARIES CFE_PLATFORM_ES_MAX_LIBRARIES

Definition at line 1951 of file cpu1_platform_cfg.h.

39.6.1.41   CFE_ES_MAX_PROCESSOR_RESETS

#define CFE_ES_MAX_PROCESSOR_RESETS CFE_PLATFORM_ES_MAX_PROCESSOR_RESETS

Definition at line 2007 of file cpu1_platform_cfg.h.

39.6.1.42   CFE_ES_MAX_SHELL_CMD

#define CFE_ES_MAX_SHELL_CMD CFE_PLATFORM_ES_MAX_SHELL_CMD

Definition at line 1969 of file cpu1_platform_cfg.h.

39.6.1.43   CFE_ES_MAX_SHELL_PKT

#define CFE_ES_MAX_SHELL_PKT CFE_PLATFORM_ES_MAX_SHELL_PKT

Definition at line 1970 of file cpu1_platform_cfg.h.

39.6.1.44   CFE_ES_MEM_BLOCK_SIZE_01

#define CFE_ES_MEM_BLOCK_SIZE_01 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_01

Definition at line 2008 of file cpu1_platform_cfg.h.

39.6.1.45   CFE_ES_MEM_BLOCK_SIZE_02

#define CFE_ES_MEM_BLOCK_SIZE_02 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_02

Definition at line 2009 of file cpu1_platform_cfg.h.

39.6.1.46   CFE_ES_MEM_BLOCK_SIZE_03

#define CFE_ES_MEM_BLOCK_SIZE_03 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_03

Definition at line 2010 of file cpu1_platform_cfg.h.

39.6.1.47   CFE_ES_MEM_BLOCK_SIZE_04

#define CFE_ES_MEM_BLOCK_SIZE_04 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_04

Definition at line 2011 of file cpu1_platform_cfg.h.

39.6.1.48   CFE_ES_MEM_BLOCK_SIZE_05

#define CFE_ES_MEM_BLOCK_SIZE_05 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_05

Definition at line 2012 of file cpu1_platform_cfg.h.

39.6.1.49 CFE_ES_MEM_BLOCK_SIZE_06

#define CFE_ES_MEM_BLOCK_SIZE_06 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_06

Definition at line 2013 of file cpu1_platform_cfg.h.

39.6.1.50 CFE_ES_MEM_BLOCK_SIZE_07

#define CFE_ES_MEM_BLOCK_SIZE_07 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_07

Definition at line 2014 of file cpu1_platform_cfg.h.

39.6.1.51 CFE_ES_MEM_BLOCK_SIZE_08

#define CFE_ES_MEM_BLOCK_SIZE_08 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_08

Definition at line 2015 of file cpu1_platform_cfg.h.

39.6.1.52 CFE_ES_MEM_BLOCK_SIZE_09

#define CFE_ES_MEM_BLOCK_SIZE_09 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_09

Definition at line 2016 of file cpu1_platform_cfg.h.

39.6.1.53 CFE_ES_MEM_BLOCK_SIZE_10

#define CFE_ES_MEM_BLOCK_SIZE_10 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_10

Definition at line 2017 of file cpu1_platform_cfg.h.

39.6.1.54 CFE_ES_MEM_BLOCK_SIZE_11

#define CFE_ES_MEM_BLOCK_SIZE_11 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_11

Definition at line 2018 of file cpu1_platform_cfg.h.

39.6.1.55   CFE_ES_MEM_BLOCK_SIZE_12

#define CFE_ES_MEM_BLOCK_SIZE_12 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_12

Definition at line 2019 of file cpu1_platform_cfg.h.

39.6.1.56   CFE_ES_MEM_BLOCK_SIZE_13

#define CFE_ES_MEM_BLOCK_SIZE_13 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_13

Definition at line 2020 of file cpu1_platform_cfg.h.

39.6.1.57   CFE_ES_MEM_BLOCK_SIZE_14

#define CFE_ES_MEM_BLOCK_SIZE_14 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_14

Definition at line 2021 of file cpu1_platform_cfg.h.

39.6.1.58   CFE_ES_MEM_BLOCK_SIZE_15

#define CFE_ES_MEM_BLOCK_SIZE_15 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_15

Definition at line 2022 of file cpu1_platform_cfg.h.

39.6.1.59   CFE_ES_MEM_BLOCK_SIZE_16

#define CFE_ES_MEM_BLOCK_SIZE_16 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_16

Definition at line 2023 of file cpu1_platform_cfg.h.

39.6.1.60   CFE_ES_NONVOL_STARTUP_FILE

#define CFE_ES_NONVOL_STARTUP_FILE CFE_PLATFORM_ES_NONVOL_STARTUP_FILE

Definition at line 1966 of file cpu1_platform_cfg.h.

39.6.1.61 CFE_ES_OBJECT_TABLE_SIZE

#define CFE_ES_OBJECT_TABLE_SIZE CFE_PLATFORM_ES_OBJECT_TABLE_SIZE

Definition at line 1955 of file cpu1_platform_cfg.h.

39.6.1.62 CFE_ES_PERF_CHILD_MS_DELAY

#define CFE_ES_PERF_CHILD_MS_DELAY CFE_PLATFORM_ES_PERF_CHILD_MS_DELAY

Definition at line 1988 of file cpu1_platform_cfg.h.

39.6.1.63 CFE_ES_PERF_CHILD_PRIORITY

#define CFE_ES_PERF_CHILD_PRIORITY CFE_PLATFORM_ES_PERF_CHILD_PRIORITY

Definition at line 1986 of file cpu1_platform_cfg.h.

39.6.1.64 CFE_ES_PERF_CHILD_STACK_SIZE

#define CFE_ES_PERF_CHILD_STACK_SIZE CFE_PLATFORM_ES_PERF_CHILD_STACK_SIZE

Definition at line 1987 of file cpu1_platform_cfg.h.

39.6.1.65 CFE_ES_PERF_DATA_BUFFER_SIZE

#define CFE_ES_PERF_DATA_BUFFER_SIZE CFE_PLATFORM_ES_PERF_DATA_BUFFER_SIZE

Definition at line 1979 of file cpu1_platform_cfg.h.

39.6.1.66 CFE_ES_PERF_ENTRIES_BTWN_DLYS

#define CFE_ES_PERF_ENTRIES_BTWN_DLYS CFE_PLATFORM_ES_PERF_ENTRIES_BTWN_DLYS

Definition at line 1989 of file cpu1_platform_cfg.h.

39.6.1.67   CFE_ES_PERF_FILTMASK_ALL

#define CFE_ES_PERF_FILTMASK_ALL CFE_PLATFORM_ES_PERF_FILTMASK_ALL

Definition at line 1981 of file cpu1_platform_cfg.h.

39.6.1.68   CFE_ES_PERF_FILTMASK_INIT

#define CFE_ES_PERF_FILTMASK_INIT CFE_PLATFORM_ES_PERF_FILTMASK_INIT

Definition at line 1982 of file cpu1_platform_cfg.h.

39.6.1.69   CFE_ES_PERF_FILTMASK_NONE

#define CFE_ES_PERF_FILTMASK_NONE CFE_PLATFORM_ES_PERF_FILTMASK_NONE

Definition at line 1980 of file cpu1_platform_cfg.h.

39.6.1.70   CFE_ES_PERF_MAX_IDS

#define CFE_ES_PERF_MAX_IDS CFE_PLATFORM_ES_PERF_MAX_IDS

Definition at line 1978 of file cpu1_platform_cfg.h.

39.6.1.71   CFE_ES_PERF_TRIGMASK_ALL

#define CFE_ES_PERF_TRIGMASK_ALL CFE_PLATFORM_ES_PERF_TRIGMASK_ALL

Definition at line 1984 of file cpu1_platform_cfg.h.

39.6.1.72   CFE_ES_PERF_TRIGMASK_INIT

#define CFE_ES_PERF_TRIGMASK_INIT CFE_PLATFORM_ES_PERF_TRIGMASK_INIT

Definition at line 1985 of file cpu1_platform_cfg.h.

39.6.1.73 CFE_ES_PERF_TRIGMASK_NONE

#define CFE_ES_PERF_TRIGMASK_NONE CFE_PLATFORM_ES_PERF_TRIGMASK_NONE

Definition at line 1983 of file cpu1_platform_cfg.h.

39.6.1.74 CFE_ES_RAM_DISK_MOUNT_STRING

#define CFE_ES_RAM_DISK_MOUNT_STRING CFE_PLATFORM_ES_RAM_DISK_MOUNT_STRING

Definition at line 1962 of file cpu1_platform_cfg.h.

39.6.1.75 CFE_ES_RAM_DISK_NUM_SECTORS

#define CFE_ES_RAM_DISK_NUM_SECTORS CFE_PLATFORM_ES_RAM_DISK_NUM_SECTORS

Definition at line 1960 of file cpu1_platform_cfg.h.

39.6.1.76 CFE_ES_RAM_DISK_PERCENT_RESERVED

#define CFE_ES_RAM_DISK_PERCENT_RESERVED CFE_PLATFORM_ES_RAM_DISK_PERCENT_RESERVED

Definition at line 1961 of file cpu1_platform_cfg.h.

39.6.1.77 CFE_ES_RAM_DISK_SECTOR_SIZE

#define CFE_ES_RAM_DISK_SECTOR_SIZE CFE_PLATFORM_ES_RAM_DISK_SECTOR_SIZE

Definition at line 1959 of file cpu1_platform_cfg.h.

39.6.1.78 CFE_ES_RESET_AREA_SIZE

#define CFE_ES_RESET_AREA_SIZE CFE_PLATFORM_ES_RESET_AREA_SIZE

Definition at line 1965 of file cpu1_platform_cfg.h.

39.6.1.79   CFE_ES_START_TASK_PRIORITY

#define CFE_ES_START_TASK_PRIORITY CFE_PLATFORM_ES_START_TASK_PRIORITY

Definition at line 1996 of file cpu1_platform_cfg.h.

39.6.1.80   CFE_ES_START_TASK_STACK_SIZE

#define CFE_ES_START_TASK_STACK_SIZE CFE_PLATFORM_ES_START_TASK_STACK_SIZE

Definition at line 1997 of file cpu1_platform_cfg.h.

39.6.1.81   CFE_ES_STARTUP_SCRIPT_TIMEOUT_MSEC

#define CFE_ES_STARTUP_SCRIPT_TIMEOUT_MSEC CFE_PLATFORM_ES_STARTUP_SCRIPT_TIMEOUT_MSEC

Definition at line 2071 of file cpu1_platform_cfg.h.

39.6.1.82   CFE_ES_STARTUP_SYNC_POLL_MSEC

#define CFE_ES_STARTUP_SYNC_POLL_MSEC CFE_PLATFORM_ES_STARTUP_SYNC_POLL_MSEC

Definition at line 2069 of file cpu1_platform_cfg.h.

39.6.1.83   CFE_ES_SYSTEM_LOG_SIZE

#define CFE_ES_SYSTEM_LOG_SIZE CFE_PLATFORM_ES_SYSTEM_LOG_SIZE

Definition at line 1954 of file cpu1_platform_cfg.h.

39.6.1.84   CFE_ES_USER_RESERVED_SIZE

#define CFE_ES_USER_RESERVED_SIZE CFE_PLATFORM_ES_USER_RESERVED_SIZE

Definition at line 1964 of file cpu1_platform_cfg.h.

39.6.1.85 CFE_ES_VOLATILE_STARTUP_FILE

#define CFE_ES_VOLATILE_STARTUP_FILE CFE_PLATFORM_ES_VOLATILE_STARTUP_FILE

Definition at line 1967 of file cpu1_platform_cfg.h.

39.6.1.86 CFE_EVS_DEFAULT_APP_DATA_FILE

#define CFE_EVS_DEFAULT_APP_DATA_FILE CFE_PLATFORM_EVS_DEFAULT_APP_DATA_FILE

Definition at line 2046 of file cpu1_platform_cfg.h.

39.6.1.87 CFE_EVS_DEFAULT_LOG_FILE

#define CFE_EVS_DEFAULT_LOG_FILE CFE_PLATFORM_EVS_DEFAULT_LOG_FILE

Definition at line 2044 of file cpu1_platform_cfg.h.

39.6.1.88 CFE_EVS_DEFAULT_LOG_MODE

#define CFE_EVS_DEFAULT_LOG_MODE CFE_PLATFORM_EVS_DEFAULT_LOG_MODE

Definition at line 2049 of file cpu1_platform_cfg.h.

39.6.1.89 CFE_EVS_DEFAULT_MSG_FORMAT_MODE

#define CFE_EVS_DEFAULT_MSG_FORMAT_MODE CFE_PLATFORM_EVS_DEFAULT_MSG_FORMAT_MODE

Definition at line 2050 of file cpu1_platform_cfg.h.

39.6.1.90 CFE_EVS_DEFAULT_TYPE_FLAG

#define CFE_EVS_DEFAULT_TYPE_FLAG CFE_PLATFORM_EVS_DEFAULT_TYPE_FLAG

Definition at line 2048 of file cpu1_platform_cfg.h.

39.6.1.91   CFE_EVS_LOG_MAX

#define CFE_EVS_LOG_MAX CFE_PLATFORM_EVS_LOG_MAX

Definition at line 2045 of file cpu1_platform_cfg.h.

39.6.1.92   CFE_EVS_LOG_ON

#define CFE_EVS_LOG_ON CFE_PLATFORM_EVS_LOG_ON

Definition at line 2043 of file cpu1_platform_cfg.h.

39.6.1.93   CFE_EVS_MAX_EVENT_FILTERS

#define CFE_EVS_MAX_EVENT_FILTERS CFE_PLATFORM_EVS_MAX_EVENT_FILTERS

Definition at line 2042 of file cpu1_platform_cfg.h.

39.6.1.94   CFE_EVS_PORT_DEFAULT

#define CFE_EVS_PORT_DEFAULT CFE_PLATFORM_EVS_PORT_DEFAULT

Definition at line 2047 of file cpu1_platform_cfg.h.

39.6.1.95   CFE_EVS_START_TASK_PRIORITY

#define CFE_EVS_START_TASK_PRIORITY CFE_PLATFORM_EVS_START_TASK_PRIORITY

Definition at line 1992 of file cpu1_platform_cfg.h.

39.6.1.96   CFE_EVS_START_TASK_STACK_SIZE

#define CFE_EVS_START_TASK_STACK_SIZE CFE_PLATFORM_EVS_START_TASK_STACK_SIZE

Definition at line 1993 of file cpu1_platform_cfg.h.

39.6.1.97 CFE_MISSION_REV

```
#define CFE_MISSION_REV 0
```

Purpose Mission specific version number for cFE

Description:

The cFE version number consists of four parts: major version number, minor version number, revision number and mission specific revision number. The mission specific revision number is defined here and the other parts are defined in "cfe_version.h".

Limits:

Must be defined as a numeric value that is greater than or equal to zero.

Definition at line 1807 of file cpu1_platform_cfg.h.

39.6.1.98 CFE_PLATFORM_CORE_MAX_STARTUP_MSEC

```
#define CFE_PLATFORM_CORE_MAX_STARTUP_MSEC 30000
```

Purpose CFE core application startup timeout

Description:

The upper limit for the amount of time that the cFE core applications (ES, SB, EVS, TIME, TBL) are each alloted to reach their respective "ready" states.

The CFE "main" thread starts individual tasks for each of the core applications (except FS). Each of these must perform some initialization work before the next core application can be started, so the main thread waits to ensure that the application has reached the "ready" state before starting the next application.

If any core application fails to start, then it indicates a major problem with the system and startup is aborted.

Units are in milliseconds

Limits:

Must be defined as an integer value that is greater than or equal to zero.

Definition at line 1853 of file cpu1_platform_cfg.h.

39.6.1.99   CFE_PLATFORM_CPU_ID

#define CFE_PLATFORM_CPU_ID 1

Definition at line 47 of file cpu1_platform_cfg.h.

39.6.1.100   CFE_PLATFORM_CPU_NAME

#define CFE_PLATFORM_CPU_NAME "CPU1"

Definition at line 52 of file cpu1_platform_cfg.h.

39.6.1.101   CFE_PLATFORM_ENDIAN

#define CFE_PLATFORM_ENDIAN CCSDS_LITTLE_ENDIAN

Purpose   Platform Endian Indicator

Description:

The value of this constant indicates the endianess of the target system

Limits

This parameter has a lower limit of 0 and an upper limit of 1.

Definition at line 199 of file cpu1_platform_cfg.h.

39.6.1.102   CFE_PLATFORM_ES_APP_KILL_TIMEOUT

#define CFE_PLATFORM_ES_APP_KILL_TIMEOUT 5

Purpose   Define ES Application Kill Timeout

Description:

ES Application Kill Timeout. This parameter controls the number of "scan periods" that ES will wait for an application to Exit after getting the signal Delete, Reload or Restart. The sequence works as follows:

  1. ES will set the control request for an App to Delete/Restart/Reload and set this kill timer to the value in this parameter.
  2. If the App is reponding and Calls it's RunLoop function, it will drop out of it's main loop and call CFE_ES_↩ ExitApp. Once it calls Exit App, then ES can delete, restart, or reload the app the next time it scans the app table.

3. If the App is not responding, the ES App will decrement this Kill Timeout value each time it runs. If the timeout value reaches zero, ES will kill the app.

The Kill timeout value depends on the CFE_PLATFORM_ES_APP_SCAN_RATE. If the Scan Rate is 1000, or 1 second, and this CFE_PLATFORM_ES_APP_KILL_TIMEOUT is set to 5, then it will take 5 seconds to kill a non-responding App. If the Scan Rate is 250, or 1/4 second, and the CFE_PLATFORM_ES_APP_KILL_TIMEOUT is set to 2, then it will take 1/2 second to time out.

Limits

There is a lower limit of 1 and an upper limit of 100 on this configuration paramater. Units are number of CFE_P↩LATFORM_ES_APP_SCAN_RATE cycles.

Definition at line 666 of file cpu1_platform_cfg.h.

39.6.1.103 CFE_PLATFORM_ES_APP_SCAN_RATE

```
#define CFE_PLATFORM_ES_APP_SCAN_RATE 1000
```

Purpose Define ES Application Control Scan Rate

Description:

ES Application Control Scan Rate. This parameter controls the speed that ES scans the Application Table looking for App Delete/Restart/Reload requests. All Applications are deleted, restarted, or reloaded by the ES Application. ES will periodically scan for control requests to process. The scan rate is controlled by this parameter, which is given in milliseconds. A value of 1000 means that ES will scan the Application Table once per second. Be careful not to set the value of this too low, because ES will use more CPU cycles scanning the table.

Limits

There is a lower limit of 100 and an upper limit of 20000 on this configuration paramater. millisecond units.

Definition at line 636 of file cpu1_platform_cfg.h.

39.6.1.104 CFE_PLATFORM_ES_CDS_MAX_BLOCK_SIZE

```
#define CFE_PLATFORM_ES_CDS_MAX_BLOCK_SIZE 80000
```

Definition at line 1445 of file cpu1_platform_cfg.h.

39.6.1.105   CFE_PLATFORM_ES_CDS_MAX_NUM_ENTRIES

```
#define CFE_PLATFORM_ES_CDS_MAX_NUM_ENTRIES 512
```

[Purpose](#)   Define Maximum Number of Registered CDS Blocks

Description:

> Maximum number of registered CDS Blocks

Limits

> There is a lower limit of 8. There are no restrictions on the upper limit however, the maximum number of CDS entries is system dependent and should be verified.

Definition at line 1364 of file cpu1_platform_cfg.h.

39.6.1.106   CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_01

```
#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_01 8
```

[Purpose](#)   Define ES Critical Data Store Memory Pool Block Sizes

Description:

> Intermediate ES Critical Data Store Memory Pool Block Sizes

Limits

> These sizes MUST be increasing and MUST be an integral multiple of 4.

Definition at line 1429 of file cpu1_platform_cfg.h.

39.6.1.107   CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_02

```
#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_02 16
```

Definition at line 1430 of file cpu1_platform_cfg.h.

39.6.1.108 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_03

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_03 32

Definition at line 1431 of file cpu1_platform_cfg.h.

39.6.1.109 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_04

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_04 48

Definition at line 1432 of file cpu1_platform_cfg.h.

39.6.1.110 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_05

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_05 64

Definition at line 1433 of file cpu1_platform_cfg.h.

39.6.1.111 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_06

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_06 96

Definition at line 1434 of file cpu1_platform_cfg.h.

39.6.1.112 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_07

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_07 128

Definition at line 1435 of file cpu1_platform_cfg.h.

39.6.1.113 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_08

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_08 160

Definition at line 1436 of file cpu1_platform_cfg.h.

39.6.1.114 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_09

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_09 256

Definition at line 1437 of file cpu1_platform_cfg.h.

39.6.1.115 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_10

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_10 512

Definition at line 1438 of file cpu1_platform_cfg.h.

39.6.1.116 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_11

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_11 1024

Definition at line 1439 of file cpu1_platform_cfg.h.

39.6.1.117 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_12

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_12 2048

Definition at line 1440 of file cpu1_platform_cfg.h.

39.6.1.118 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_13

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_13 4096

Definition at line 1441 of file cpu1_platform_cfg.h.

39.6.1.119 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_14

#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_14 8192

Definition at line 1442 of file cpu1_platform_cfg.h.

39.6.1.120 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_15

`#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_15 16384`

Definition at line 1443 of file cpu1_platform_cfg.h.

39.6.1.121 CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_16

`#define CFE_PLATFORM_ES_CDS_MEM_BLOCK_SIZE_16 32768`

Definition at line 1444 of file cpu1_platform_cfg.h.

39.6.1.122 CFE_PLATFORM_ES_CDS_SIZE

`#define CFE_PLATFORM_ES_CDS_SIZE ( 128 * 1024 )`

Purpose Define Critical Data Store Size

Description:

Defines the Critical Data Store (CDS) area size in bytes size. The CDS is one of four memory areas that are preserved during a processor reset. NOTE: Changing this value changes memory allocation, and may require changes to platform specific values (in CFE_PSP) such as USER_RESERVED_MEM in VxWorks depending on the memory areas being used for preserved data and on OS specific behavior.

Limits

There is a lower limit of 8192 and an upper limit of UINT_MAX (4 Gigabytes) on this configuration paramater.

Definition at line 763 of file cpu1_platform_cfg.h.

39.6.1.123 CFE_PLATFORM_ES_DEFAULT_APP_LOG_FILE

`#define CFE_PLATFORM_ES_DEFAULT_APP_LOG_FILE "/ram/cfe_es_app_info.log"`

Purpose Default Application Information Filename

Description:

The value of this constant defines the filename used to store information pertaining to all of the Applications that are registered with Executive Services. This filename is used only when no filename is specified in the the command to query all system apps.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 935 of file cpu1_platform_cfg.h.

39.6.1.124 CFE_PLATFORM_ES_DEFAULT_CDS_REG_DUMP_FILE

`#define CFE_PLATFORM_ES_DEFAULT_CDS_REG_DUMP_FILE "/ram/cfe_cds_reg.log"`

Purpose Default Critical Data Store Registry Filename

Description:

The value of this constant defines the filename used to store the Critical Data Store Registry. This filename is used only when no filename is specified in the command to stop performance data collecting.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 1010 of file cpu1_platform_cfg.h.

39.6.1.125 CFE_PLATFORM_ES_DEFAULT_ER_LOG_FILE

`#define CFE_PLATFORM_ES_DEFAULT_ER_LOG_FILE "/ram/cfe_erlog.log"`

Purpose Default Exception and Reset (ER) Log Filename

Description:

The value of this constant defines the filename used to store the Exception and Reset (ER) Log. This filename is used only when no filename is specified in the command to dump the ER log. No file specified in the cmd means the first character in the cmd filename is a NULL terminator (zero).

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 981 of file cpu1_platform_cfg.h.

39.6.1.126 CFE_PLATFORM_ES_DEFAULT_PERF_DUMP_FILENAME

`#define CFE_PLATFORM_ES_DEFAULT_PERF_DUMP_FILENAME "/ram/cfe_es_perf.dat"`

Purpose Default Performance Data Filename

Description:

The value of this constant defines the filename used to store the Performance Data. This filename is used only when no filename is specified in the command to stop performance data collecting.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 995 of file cpu1_platform_cfg.h.

39.6.1.127 CFE_PLATFORM_ES_DEFAULT_POR_SYSLOG_MODE

```
#define CFE_PLATFORM_ES_DEFAULT_POR_SYSLOG_MODE 0
```

Purpose Define Default System Log Mode following Power On Reset

Description:

Defines the default mode for the operation of the ES System log following a power on reset. The log may operate in either Overwrite mode = 0, where once the log becomes full the oldest message in the log will be overwritten, or Discard mode = 1, where once the log becomes full the contents of the log are preserved and the new event is discarded. This constant may hold a value of either 0 or 1 depending on the desired default. Overwrite Mode = 0, Discard Mode = 1.

Limits

There is a lower limit of 0 and an upper limit of 1 on this configuration paramater.

Definition at line 1028 of file cpu1_platform_cfg.h.

39.6.1.128 CFE_PLATFORM_ES_DEFAULT_PR_SYSLOG_MODE

```
#define CFE_PLATFORM_ES_DEFAULT_PR_SYSLOG_MODE 1
```

Purpose Define Default System Log Mode following Processor Reset

Description:

Defines the default mode for the operation of the ES System log following a processor reset. The log may operate in either Overwrite mode = 0, where once the log becomes full the oldest message in the log will be overwritten, or Discard mode = 1, where once the log becomes full the contents of the log are preserved and the new event is discarded. This constant may hold a value of either 0 or 1 depending on the desired default. Overwrite Mode = 0, Discard Mode = 1.

Limits

There is a lower limit of 0 and an upper limit of 1 on this configuration paramater.

Definition at line 1046 of file cpu1_platform_cfg.h.

39.6.1.129 CFE_PLATFORM_ES_DEFAULT_SHELL_FILENAME

`#define CFE_PLATFORM_ES_DEFAULT_SHELL_FILENAME "/ram/ShellCmd.out"`

Purpose Default Shell Filename

Description:

The value of this constant defines the filename used to store the shell output after a shell command is received by ES. This file contains the entire shell output. The fsw also sends the shell output in series of fixed size telemetry packets. This filename is used only when no filename is specified in the shell command.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 873 of file cpu1_platform_cfg.h.

39.6.1.130 CFE_PLATFORM_ES_DEFAULT_STACK_SIZE

`#define CFE_PLATFORM_ES_DEFAULT_STACK_SIZE 8192`

Purpose Define Default Stack Size for an Application

Description:

This parameter defines a default stack size. This parameter is used by the cFE Core Applications.

Limits

There is a lower limit of 2048. There are no restrictions on the upper limit however, the maximum stack size size is system dependent and should be verified. Most operating systems provide tools for measuring the amount of stack used by a task during operation. It is always a good idea to verify that no more than 1/2 of the stack is used.

Definition at line 1211 of file cpu1_platform_cfg.h.

39.6.1.131 CFE_PLATFORM_ES_DEFAULT_SYSLOG_FILE

`#define CFE_PLATFORM_ES_DEFAULT_SYSLOG_FILE "/ram/cfe_es_syslog.log"`

Purpose Default System Log Filename

Description:

The value of this constant defines the filename used to store important information (as ASCII text strings) that might not be able to be sent in an Event Message. This filename is used only when no filename is specified in the command to dump the system log. No file specified in the cmd means the first character in the cmd filename is a NULL terminator (zero).

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 966 of file cpu1_platform_cfg.h.

39.6.1.132 CFE_PLATFORM_ES_DEFAULT_TASK_LOG_FILE

```
#define CFE_PLATFORM_ES_DEFAULT_TASK_LOG_FILE "/ram/cfe_es_task_info.log"
```

Purpose Default Application Information Filename

Description:

> The value of this constant defines the filename used to store information pertaining to all of the Applications that are registered with Executive Services. This filename is used only when no filename is specified in the the command to query all system tasks.

Limits

> The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 950 of file cpu1_platform_cfg.h.

39.6.1.133 CFE_PLATFORM_ES_ER_LOG_ENTRIES

```
#define CFE_PLATFORM_ES_ER_LOG_ENTRIES 20
```

Purpose Define Max Number of ER (Exception and Reset) log entries

Description:

> Defines the maximum number of ER (Exception and Reset) log entries

Limits

> There is a lower limit of 1. There are no restrictions on the upper limit however, the maximum number of log entries is system dependent and should be verified.

Definition at line 559 of file cpu1_platform_cfg.h.

39.6.1.134 CFE_PLATFORM_ES_ER_LOG_MAX_CONTEXT_SIZE

```
#define CFE_PLATFORM_ES_ER_LOG_MAX_CONTEXT_SIZE 256
```

Purpose Maximum size of CPU Context in ES Error Log

Description:

> This should be large enough to accommodate the CPU context information supplied by the PSP on the given platform.

Limits:

> Must be greater than zero and a multiple of sizeof(uint32). Limited only by the available memory and the number of entries in the error log. Any context information beyond this size will be truncated.

Definition at line 573 of file cpu1_platform_cfg.h.

39.6.1.135 CFE_PLATFORM_ES_MAX_APPLICATIONS

`#define CFE_PLATFORM_ES_MAX_APPLICATIONS 32`

[Purpose](#) Define Max Number of Applications

Description:

Defines the maximum number of applications that can be loaded into the system. This number does not include child tasks.

Limits

There is a lower limit of 6. The lower limit corresponds to the cFE internal applications. There are no restrictions on the upper limit however, the maximum number of applications is system dependent and should be verified. AppIDs that are checked against this configuration are defined by a 32 bit data word.

Definition at line 531 of file cpu1_platform_cfg.h.

39.6.1.136 CFE_PLATFORM_ES_MAX_BLOCK_SIZE

`#define CFE_PLATFORM_ES_MAX_BLOCK_SIZE 80000`

Definition at line 1417 of file cpu1_platform_cfg.h.

39.6.1.137 CFE_PLATFORM_ES_MAX_GEN_COUNTERS

`#define CFE_PLATFORM_ES_MAX_GEN_COUNTERS 8`

[Purpose](#) Define Max Number of Generic Counters

Description:

Defines the maximum number of Generic Counters that can be registered.

Limits

This parameter has a lower limit of 1 and an upper limit of 65535.

Definition at line 616 of file cpu1_platform_cfg.h.

39.6.1.138 CFE_PLATFORM_ES_MAX_LIBRARIES

#define CFE_PLATFORM_ES_MAX_LIBRARIES 10

Purpose Define Max Number of Shared libraries

Description:

Defines the maximum number of cFE Shared libraries that can be loaded into the system.

Limits

There is a lower limit of 1. There are no restrictions on the upper limit however, the maximum number of libraries is system dependent and should be verified.

Definition at line 546 of file cpu1_platform_cfg.h.

39.6.1.139 CFE_PLATFORM_ES_MAX_PROCESSOR_RESETS

#define CFE_PLATFORM_ES_MAX_PROCESSOR_RESETS 2

Purpose Define Number of Processor Resets Before a Power On Reset

Description:

Number of Processor Resets before a Power On Reset is called. If set to 2, then 2 processor resets will occur, and the 3rd processor reset will be a power on reset instead.

Limits

There is a lower limit of 0. There are no restrictions on the upper limit however, the maximum number of processor resets may be system dependent and should be verified.

Definition at line 1380 of file cpu1_platform_cfg.h.

39.6.1.140 CFE_PLATFORM_ES_MAX_SHELL_CMD

#define CFE_PLATFORM_ES_MAX_SHELL_CMD 64

Purpose Define Max Shell Command Size

Description:

Defines the maximum size in characters of the shell command.

Limits

There is a lower limit of 64 and an upper limit of OS_MAX_CMD_LEN. Units are characters.

Definition at line 886 of file cpu1_platform_cfg.h.

39.6.1.141 CFE_PLATFORM_ES_MAX_SHELL_PKT

#define CFE_PLATFORM_ES_MAX_SHELL_PKT 64

Purpose Define Shell Command Telemetry Pkt Segment Size

Description:

Defines the size of the shell command tlm packet segments.The shell command output size is dependant on the shell command itself. If the shell output size is greater than the size of the packet defined here, the fsw will generate a series of tlm packets (of the size defined here) that can be reconstructed by the ground system.

Limits

There is a lower limit of 32 and an upper limit of CFE_SB_MAX_SB_MSG_SIZE.

Definition at line 902 of file cpu1_platform_cfg.h.

39.6.1.142 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_01

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_01 8

Purpose Define Default ES Memory Pool Block Sizes

Description:

Default Intermediate ES Memory Pool Block Sizes. If an application is using the CFE_ES Memory Pool AP↩
Is (CFE_ES_PoolCreate, CFE_ES_PoolCreateNoSem, CFE_ES_GetPoolBuf and CFE_ES_PutPoolBuf) but finds these sizes inappropriate for their use, they may wish to use the CFE_ES_PoolCreateEx API to specify their own intermediate block sizes

Limits

These sizes MUST be increasing and MUST be an integral multiple of 4. Also, CFE_PLATFORM_ES_MAX_↩
BLOCK_SIZE must be larger than CFE_MISSION_SB_MAX_SB_MSG_SIZE and both CFE_PLATFORM_TB↩
L_MAX_SNGL_TABLE_SIZE and CFE_PLATFORM_TBL_MAX_DBL_TABLE_SIZE. Note that if Table Services have been removed from the CFE, the table size limits are still enforced although the table size definitions may be reduced. Refer to the CFS Deployment Guide for information about removing CFE Table Services from the CFE.

Definition at line 1401 of file cpu1_platform_cfg.h.

39.6.1.143 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_02

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_02 16

Definition at line 1402 of file cpu1_platform_cfg.h.

39.6.1.144   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_03

```
#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_03 32
```

Definition at line 1403 of file cpu1_platform_cfg.h.

39.6.1.145   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_04

```
#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_04 48
```

Definition at line 1404 of file cpu1_platform_cfg.h.

39.6.1.146   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_05

```
#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_05 64
```

Definition at line 1405 of file cpu1_platform_cfg.h.

39.6.1.147   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_06

```
#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_06 96
```

Definition at line 1406 of file cpu1_platform_cfg.h.

39.6.1.148   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_07

```
#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_07 128
```

Definition at line 1407 of file cpu1_platform_cfg.h.

39.6.1.149   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_08

```
#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_08 160
```

Definition at line 1408 of file cpu1_platform_cfg.h.

39.6.1.150   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_09

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_09 256

Definition at line 1409 of file cpu1_platform_cfg.h.

39.6.1.151   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_10

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_10 512

Definition at line 1410 of file cpu1_platform_cfg.h.

39.6.1.152   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_11

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_11 1024

Definition at line 1411 of file cpu1_platform_cfg.h.

39.6.1.153   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_12

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_12 2048

Definition at line 1412 of file cpu1_platform_cfg.h.

39.6.1.154   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_13

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_13 4096

Definition at line 1413 of file cpu1_platform_cfg.h.

39.6.1.155   CFE_PLATFORM_ES_MEM_BLOCK_SIZE_14

#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_14 8192

Definition at line 1414 of file cpu1_platform_cfg.h.

39.6.1.156 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_15

`#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_15 16384`

Definition at line 1415 of file cpu1_platform_cfg.h.

39.6.1.157 CFE_PLATFORM_ES_MEM_BLOCK_SIZE_16

`#define CFE_PLATFORM_ES_MEM_BLOCK_SIZE_16 32768`

Definition at line 1416 of file cpu1_platform_cfg.h.

39.6.1.158 CFE_PLATFORM_ES_MEMPOOL_ALIGN_SIZE_MIN

`#define CFE_PLATFORM_ES_MEMPOOL_ALIGN_SIZE_MIN 4`

Purpose Define Memory Pool Alignment Size

Description:

Ensures that buffers obtained from a memory pool are aligned to a certain minimum block size. Note the allocator will always align to the minimum required by the CPU architecture. This may be set greater than the CPU requirement as desired for optimal performance.

For some architectures/applications it may be beneficial to set this to the cache line size of the target CPU, or to use special SIMD instructions that require a more stringent memory alignment.

Limits

This must always be a power of 2, as it is used as a binary address mask.

Definition at line 827 of file cpu1_platform_cfg.h.

39.6.1.159 CFE_PLATFORM_ES_NONVOL_STARTUP_FILE

`#define CFE_PLATFORM_ES_NONVOL_STARTUP_FILE "/cf/cfe_es_startup.scr"`

Purpose ES Nonvolatile Startup Filename

Description:

The value of this constant defines the path and name of the file that contains a list of modules that will be loaded and started by the cFE after the cFE finishes its startup sequence.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 842 of file cpu1_platform_cfg.h.

39.6.1.160   CFE_PLATFORM_ES_OBJECT_TABLE_SIZE

#define CFE_PLATFORM_ES_OBJECT_TABLE_SIZE 30

Purpose   Define Number of entries in the ES Object table

Description:

Defines the number of entries in the ES Object table. This table controls the core cFE startup.

Limits

There is a lower limit of 15. There are no restrictions on the upper limit however, the maximum object table size is system dependent and should be verified.

Definition at line 604 of file cpu1_platform_cfg.h.

39.6.1.161   CFE_PLATFORM_ES_PERF_CHILD_MS_DELAY

#define CFE_PLATFORM_ES_PERF_CHILD_MS_DELAY 20

Purpose   Define Performance Analyzer Child Task Delay

Description:

This parameter defines the delay time (in milliseconds) between performance data file writes performed by the Executive Services Performace Analyzer Child Task.

Limits

It is recommended this parameter be greater than or equal to 20ms. This parameter is limited by the maximum value allowed by the data type. In this case, the data type is an unsigned 32-bit integer, so the valid range is 0 to 0xFFFFFFFF.

Definition at line 1185 of file cpu1_platform_cfg.h.

39.6.1.162   CFE_PLATFORM_ES_PERF_CHILD_PRIORITY

#define CFE_PLATFORM_ES_PERF_CHILD_PRIORITY 200

Purpose   Define Performance Analyzer Child Task Priority

Description:

This parameter defines the priority of the child task spawed by the Executive Services to write performance data to a file. Lower numbers are higher priority, with 1 being the highest priority in the case of a child task.

Limits

Valid range for a child task is 1 to 255 however, the priority cannot be higher (lower number) than the ES parent application priority.

Definition at line 1156 of file cpu1_platform_cfg.h.

39.6.1.163   CFE_PLATFORM_ES_PERF_CHILD_STACK_SIZE

```
#define CFE_PLATFORM_ES_PERF_CHILD_STACK_SIZE 4096
```

Purpose   Define Performance Analyzer Child Task Stack Size

Description:

This parameter defines the stack size of the child task spawed by the Executive Services to write performance data
to a file.

Limits

It is recommended this parameter be greater than or equal to 4KB. This parameter is limited by the maximum
value allowed by the data type. In this case, the data type is an unsigned 32-bit integer, so the valid range is 0 to
0xFFFFFFFF.

Definition at line 1170 of file cpu1_platform_cfg.h.

39.6.1.164   CFE_PLATFORM_ES_PERF_DATA_BUFFER_SIZE

```
#define CFE_PLATFORM_ES_PERF_DATA_BUFFER_SIZE 10000
```

Purpose   Define Max Size of Performance Data Buffer

Description:

Defines the maximum size of the performance data buffer. Units are number of performance data entries. An entry
is defined by a 32 bit data word followed by a 64 bit time stamp.

Limits

There is a lower limit of 1025. There are no restrictions on the upper limit however, the maximum buffer size size
is system dependent and should be verified. The units are number of entries. An entry is defined by a 32 bit data
word followed by a 64 bit time stamp.

Definition at line 1075 of file cpu1_platform_cfg.h.

39.6.1.165   CFE_PLATFORM_ES_PERF_ENTRIES_BTWN_DLYS

```
#define CFE_PLATFORM_ES_PERF_ENTRIES_BTWN_DLYS 50
```

Purpose   Define Performance Analyzer Child Task Number of Entries Between Delay

Description:

This parameter defines the number of performace analyzer entries the Performace Analyzer Child Task will write to
the file between delays.

Definition at line 1195 of file cpu1_platform_cfg.h.

39.6.1.166   CFE_PLATFORM_ES_PERF_FILTMASK_ALL

#define CFE_PLATFORM_ES_PERF_FILTMASK_ALL ∼CFE_PLATFORM_ES_PERF_FILTMASK_NONE

Purpose Define Filter Mask Setting for Enabling All Performance Entries

Description:

> Defines the filter mask for enabling all performance entries. The value is a bit mask. For each bit, 0 means the corresponding entry is disabled and 1 means it is enabled.

Definition at line 1096 of file cpu1_platform_cfg.h.

39.6.1.167   CFE_PLATFORM_ES_PERF_FILTMASK_INIT

#define CFE_PLATFORM_ES_PERF_FILTMASK_INIT CFE_PLATFORM_ES_PERF_FILTMASK_ALL

Purpose Define Default Filter Mask Setting for Performance Data Buffer

Description:

> Defines the default filter mask for the performance data buffer. The value is a bit mask. For each bit, 0 means the corresponding entry is disabled and 1 means it is enabled.

Definition at line 1107 of file cpu1_platform_cfg.h.

39.6.1.168   CFE_PLATFORM_ES_PERF_FILTMASK_NONE

#define CFE_PLATFORM_ES_PERF_FILTMASK_NONE 0

Purpose Define Filter Mask Setting for Disabling All Performance Entries

Description:

> Defines the filter mask for disabling all performance entries. The value is a bit mask. For each bit, 0 means the corresponding entry is disabled and 1 means it is enabled.

Definition at line 1086 of file cpu1_platform_cfg.h.

39.6.1.169 CFE_PLATFORM_ES_PERF_MAX_IDS

#define CFE_PLATFORM_ES_PERF_MAX_IDS 128

Purpose Define Max Number of Performance IDs

Description:

Defines the maximum number of perf ids allowed.

Limits

This number must always be divisible by 32. There is a lower limit of 32 and an upper limit of 512 on this configuration paramater.

Definition at line 1059 of file cpu1_platform_cfg.h.

39.6.1.170 CFE_PLATFORM_ES_PERF_TRIGMASK_ALL

#define CFE_PLATFORM_ES_PERF_TRIGMASK_ALL ∼CFE_PLATFORM_ES_PERF_TRIGMASK_NONE

Purpose Define Filter Trigger Setting for Enabling All Performance Entries

Description:

Defines the trigger mask for enabling all performance data entries. The value is a bit mask. For each bit, 0 means the trigger for the corresponding entry is disabled and 1 means it is enabled.

Definition at line 1130 of file cpu1_platform_cfg.h.

39.6.1.171 CFE_PLATFORM_ES_PERF_TRIGMASK_INIT

#define CFE_PLATFORM_ES_PERF_TRIGMASK_INIT CFE_PLATFORM_ES_PERF_TRIGMASK_NONE

Purpose Define Default Filter Trigger Setting for Performance Data Buffer

Description:

Defines the default trigger mask for the performance data buffer. The value is a 32-bit mask. For each bit, 0 means the trigger for the corresponding entry is disabled and 1 means it is enabled.

Definition at line 1141 of file cpu1_platform_cfg.h.

39.6.1.172 CFE_PLATFORM_ES_PERF_TRIGMASK_NONE

`#define CFE_PLATFORM_ES_PERF_TRIGMASK_NONE 0`

Purpose Define Default Filter Trigger Setting for Disabling All Performance Entries

Description:

Defines the default trigger mask for disabling all performance data entries. The value is a bit mask. For each bit, 0 means the trigger for the corresponding entry is disabled and 1 means it is enabled.

Definition at line 1119 of file cpu1_platform_cfg.h.

39.6.1.173 CFE_PLATFORM_ES_RAM_DISK_MOUNT_STRING

`#define CFE_PLATFORM_ES_RAM_DISK_MOUNT_STRING "/ram"`

Purpose RAM Disk Mount string

Description:

The CFE_PLATFORM_ES_RAM_DISK_MOUNT_STRING parameter is used to set the cFE mount path for the CFE RAM disk. This is a parameter for missions that do not want to use the default value of "/ram", or for missions that need to have a different value for different CPUs or Spacecraft. Note that the vxWorks OSAL cannot currently handle names that have more than one path separator in it. The names "/ram", "/ramdisk", "/disk123" will all work, but "/disks/ram" will not. Multiple separators can be used with the posix or RTEMS ports.

Definition at line 745 of file cpu1_platform_cfg.h.

39.6.1.174 CFE_PLATFORM_ES_RAM_DISK_NUM_SECTORS

`#define CFE_PLATFORM_ES_RAM_DISK_NUM_SECTORS 4096`

Purpose ES Ram Disk Number of Sectors

Description:

Defines the ram disk number of sectors. The ram disk is one of four memory areas that are preserved on a processor reset. NOTE: Changing this value changes memory allocation, and may require changes to platform specific values (in CFE_PSP) such as USER_RESERVED_MEM in VxWorks depending on the memory areas being used for preserved data and on OS specific behavior.

Limits

There is a lower limit of 128. There are no restrictions on the upper limit however, the maximum number of RAM sectors is system dependent and should be verified.

Definition at line 704 of file cpu1_platform_cfg.h.

39.6.1.175   CFE_PLATFORM_ES_RAM_DISK_PERCENT_RESERVED

`#define CFE_PLATFORM_ES_RAM_DISK_PERCENT_RESERVED 30`

Purpose Percentage of Ram Disk Reserved for Decompressing Apps

Description:

The CFE_PLATFORM_ES_RAM_DISK_PERCENT_RESERVED parameter is used to make sure that the Volatile (RAM) Disk has a defined amount of free space during a processor reset. The cFE uses the Volatile disk to decompress cFE applications during system startup. If this Volatile disk happens to get filled with logs and misc files, then a processor reset may not work, because there will be no room to decompress cFE apps. To solve that problem, this parameter sets the "Low Water Mark" for disk space on a Processor reset. It should be set to allow the largest cFE Application to be decompressed. During a Processor reset, if there is not sufficient space left on the disk, it will be re-formatted in order to clear up some space.

This feature can be turned OFF by setting the parameter to 0.

Limits

There is a lower limit of 0 and an upper limit of 75 on this configuration paramater.Units are percentage. A setting of zero will turn this feature off.

Definition at line 728 of file cpu1_platform_cfg.h.

39.6.1.176   CFE_PLATFORM_ES_RAM_DISK_SECTOR_SIZE

`#define CFE_PLATFORM_ES_RAM_DISK_SECTOR_SIZE 512`

Purpose ES Ram Disk Sector Size

Description:

Defines the ram disk sector size. The ram disk is 1 of 4 memory areas that are preserved on a processor reset. NOTE: Changing this value changes memory allocation, and may require changes to platform specific values (in C↩ FE_PSP) such as USER_RESERVED_MEM in VxWorks depending on the memory areas being used for preserved data and on OS specific behavior.

Limits

There is a lower limit of 128. There are no restrictions on the upper limit however, the maximum RAM disk sector size is system dependent and should be verified.

Definition at line 685 of file cpu1_platform_cfg.h.

39.6.1.177 CFE_PLATFORM_ES_RESET_AREA_SIZE

```
#define CFE_PLATFORM_ES_RESET_AREA_SIZE ( 170 * 1024 )
```

Purpose Define ES Reset Area Size

Description:

The ES Reset Area Size. This is the size in bytes of the cFE Reset variable and log area. This is a block of memory used by the cFE to store the system log ER Log and critical reset variables. This is 4 of 4 of the memory areas that are preserved during a processor reset. Note: This area must be sized large enough to hold all of the data structures. It should be automatically sized based on the CFE_ES_ResetData_t type, but circular dependancies in the headers prevent it from being defined this way. NOTE: Changing this value changes memory allocation, and may require changes to platform specific values (in CFE_PSP) such as USER_RESERVED_MEM in VxWorks depending on the memory areas being used for preserved data and on OS specific behavior.

Limits

There is a lower limit of 153600 (150KBytes) and an upper limit of UINT_MAX (4 Gigabytes) on this configuration paramater.

Definition at line 808 of file cpu1_platform_cfg.h.

39.6.1.178 CFE_PLATFORM_ES_SHELL_OS_DELAY_MILLISEC

```
#define CFE_PLATFORM_ES_SHELL_OS_DELAY_MILLISEC 200
```

Purpose Define OS Task Delay Value for ES Shell Command

Description:

This parameter defines the length of time (in milliseconds) ES will delay when sending shell command packets over the software bus to not flood the pipe on large messages.

Note: The milliseconds passed into OS_TaskDelay are converted into the units the underlying OS uses to measure time passing. Many platforms limit the precision of this value however, a delay may not be needed at all in which the value may be set to zero.

Limits

Not Applicable

Definition at line 920 of file cpu1_platform_cfg.h.

39.6.1.179 CFE_PLATFORM_ES_START_TASK_PRIORITY

`#define CFE_PLATFORM_ES_START_TASK_PRIORITY 68`

Purpose Define ES Task Priority

Description:

Defines the cFE_ES Task priority.

Limits

Not Applicable

Definition at line 1274 of file cpu1_platform_cfg.h.

39.6.1.180 CFE_PLATFORM_ES_START_TASK_STACK_SIZE

`#define CFE_PLATFORM_ES_START_TASK_STACK_SIZE` CFE_PLATFORM_ES_DEFAULT_STACK_SIZE

Purpose Define ES Task Stack Size

Description:

Defines the cFE_ES Task Stack Size

Limits

There is a lower limit of 2048 on this configuration paramater. There are no restrictions on the upper limit however, the maximum stack size size is system dependent and should be verified. Most operating systems provide tools for measuring the amount of stack used by a task during operation. It is always a good idea to verify that no more than 1/2 of the stack is used.

Definition at line 1289 of file cpu1_platform_cfg.h.

39.6.1.181 CFE_PLATFORM_ES_STARTUP_SCRIPT_TIMEOUT_MSEC

`#define CFE_PLATFORM_ES_STARTUP_SCRIPT_TIMEOUT_MSEC 1000`

Purpose Startup script timeout

Description:

The upper limit for the total amount of time that all apps listed in the CFE ES startup script may take to all become ready.

Unlike the "core" app timeout, this is a soft limit; if the alloted time is exceeded, it probably indicates an issue with one of the apps, but does not cause CFE ES to take any additional action other than logging the event to the syslog.

Units are in milliseconds

Limits:

Must be defined as an integer value that is greater than or equal to zero.

Definition at line 1871 of file cpu1_platform_cfg.h.

39.6.1.182 CFE_PLATFORM_ES_STARTUP_SYNC_POLL_MSEC

```
#define CFE_PLATFORM_ES_STARTUP_SYNC_POLL_MSEC 50
```

Purpose Poll timer for startup sync delay

Description:

During startup, some tasks may need to synchronize their own initialization with the initialization of other applications in the system.

CFE ES implements an API to accomplish this, that performs a task delay (sleep) while polling the overall system state until other tasks are ready.

This value controls the amount of time that the CFE_ES_ApplicationSyncDelay will sleep between each check of the system state. This should be large enough to allow other tasks to run, but not so large as to noticeably delay the startup completion.

Units are in milliseconds

Limits:

Must be defined as an integer value that is greater than or equal to zero.

Definition at line 1829 of file cpu1_platform_cfg.h.

39.6.1.183 CFE_PLATFORM_ES_SYSTEM_LOG_SIZE

```
#define CFE_PLATFORM_ES_SYSTEM_LOG_SIZE 3072
```

Purpose Define Size of the cFE System Log.

Description:

Defines the size in bytes of the cFE system log. The system log holds variable length strings that are terminated by a linefeed and null character.

Limits

There is a lower limit of 512. There are no restrictions on the upper limit however, the maximum system log size is system dependent and should be verified.

Definition at line 589 of file cpu1_platform_cfg.h.

39.6.1.184 CFE_PLATFORM_ES_USER_RESERVED_SIZE

```
#define CFE_PLATFORM_ES_USER_RESERVED_SIZE ( 1024 * 1024 )
```

Purpose Define User Reserved Memory Size

Description:

User Reserved Memory Size. This is the size in bytes of the cFE User reserved Memory area. This is a block of memory that is available for cFE application use. The address is obtained by calling CFE_PSP_GetUser← ReservedArea. The User Reserved Memory is one of four memory areas that are preserved during a processor reset. NOTE: Changing this value changes memory allocation, and may require changes to platform specific values (in CFE_PSP) such as USER_RESERVED_MEM in VxWorks depending on the memory areas being used for preserved data and on OS specific behavior.

Limits

There is a lower limit of 1024 and an upper limit of UINT_MAX (4 Gigabytes) on this configuration paramater.

Definition at line 784 of file cpu1_platform_cfg.h.

39.6.1.185 CFE_PLATFORM_ES_VOLATILE_STARTUP_FILE

```
#define CFE_PLATFORM_ES_VOLATILE_STARTUP_FILE "/ram/cfe_es_startup.scr"
```

Purpose ES Volatile Startup Filename

Description:

The value of this constant defines the path and name of the file that contains a list of modules that will be loaded and started by the cFE after the cFE finishes its startup sequence.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 857 of file cpu1_platform_cfg.h.

39.6.1.186 CFE_PLATFORM_EVS_DEFAULT_APP_DATA_FILE

```
#define CFE_PLATFORM_EVS_DEFAULT_APP_DATA_FILE "/ram/cfe_evs_app.dat"
```

Purpose Default EVS Application Data Filename

Description:

The value of this constant defines the filename used to store the EVS Application Data(event counts/filtering information). This filename is used only when no filename is specified in the command to dump the event log.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 1518 of file cpu1_platform_cfg.h.

39.6.1.187 CFE_PLATFORM_EVS_DEFAULT_LOG_FILE

```
#define CFE_PLATFORM_EVS_DEFAULT_LOG_FILE "/ram/cfe_evs.log"
```

Purpose Default Event Log Filename

Description:

The value of this constant defines the filename used to store the Event Services local event log. This filename is used only when no filename is specified in the command to dump the event log.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 1489 of file cpu1_platform_cfg.h.

39.6.1.188 CFE_PLATFORM_EVS_DEFAULT_LOG_MODE

```
#define CFE_PLATFORM_EVS_DEFAULT_LOG_MODE 1
```

Purpose Default EVS Local Event Log Mode

Description:

Defines a state of overwrite(0) or discard(1) for the operation of the EVS local event log. The log may operate in either Overwrite mode = 0, where once the log becomes full the oldest event in the log will be overwritten, or Discard mode = 1, where once the log becomes full the contents of the log are preserved and the new event is discarded. Overwrite Mode = 0, Discard Mode = 1.

Limits

The valid settings are 0 or 1

Definition at line 1569 of file cpu1_platform_cfg.h.

39.6.1.189   CFE_PLATFORM_EVS_DEFAULT_MSG_FORMAT_MODE

`#define CFE_PLATFORM_EVS_DEFAULT_MSG_FORMAT_MODE` CFE_EVS_MsgFormat_LONG

Purpose   Default EVS Message Format Mode

Description:

Defines the default message format (long or short) for event messages being sent to the ground. Choose between CFE_EVS_MsgFormat_LONG or CFE_EVS_MsgFormat_SHORT.

Limits

The valid settings are CFE_EVS_MsgFormat_LONG or CFE_EVS_MsgFormat_SHORT

Definition at line 1583 of file cpu1_platform_cfg.h.

39.6.1.190   CFE_PLATFORM_EVS_DEFAULT_TYPE_FLAG

`#define CFE_PLATFORM_EVS_DEFAULT_TYPE_FLAG 0xE`

Purpose   Default EVS Event Type Filter Mask

Description:

Defines a state of on or off for all four event types. The term event 'type' refers to the criticality level and may be Debug, Informational, Error or Critical. Each event type has a bit position. (bit 0 = Debug, bit 1 = Info, bit 2 = Error, bit 3 = Critical). This is a global setting, meaning it applies to all applications. To filter an event type, set its bit to zero. For example, 0xE means Debug = OFF, Info = ON, Error = ON, Critical = ON

Limits

The valid settings are 0x0 to 0xF.

Definition at line 1551 of file cpu1_platform_cfg.h.

39.6.1.191   CFE_PLATFORM_EVS_LOG_MAX

`#define CFE_PLATFORM_EVS_LOG_MAX 20`

Purpose   Maximum Number of Events in EVS Local Event Log

Description:

Dictates the EVS local event log capacity. Units are the number of events.

Limits

There are no restrictions on the lower and upper limits however, the maximum log size is system dependent and should be verified.

Definition at line 1502 of file cpu1_platform_cfg.h.

39.6.1.192 CFE_PLATFORM_EVS_LOG_ON

#define CFE_PLATFORM_EVS_LOG_ON

Purpose Enable or Disable EVS Local Event Log

Description:

The CFE_PLATFORM_EVS_LOG_ON configuration parameter must be defined to enable EVS event logging. In order to disable the local event log this definition needs to be commented out.

Limits

Not Applicable

Definition at line 1474 of file cpu1_platform_cfg.h.

39.6.1.193 CFE_PLATFORM_EVS_MAX_EVENT_FILTERS

#define CFE_PLATFORM_EVS_MAX_EVENT_FILTERS 8

Purpose Define Maximum Number of Event Filters per Application

Description:

Maximum number of events that may be filtered per application.

Limits

There are no restrictions on the lower and upper limits however, the maximum number of event filters is system dependent and should be verified.

Definition at line 1460 of file cpu1_platform_cfg.h.

39.6.1.194 CFE_PLATFORM_EVS_PORT_DEFAULT

#define CFE_PLATFORM_EVS_PORT_DEFAULT 0x0001

Purpose Default EVS Output Port State

Description:

Defines the default port state (enabled or deisabled) for the four output ports defined within the Event Service. Port 1 is usually the uart output terminal. To enable a port, set the proper bit to a 1. Bit 0 is port 1, bit 1 is port2 etc.

Limits

The valid settings are 0x0 to 0xF.

Definition at line 1533 of file cpu1_platform_cfg.h.

39.6.1.195 CFE_PLATFORM_EVS_START_TASK_PRIORITY

```
#define CFE_PLATFORM_EVS_START_TASK_PRIORITY 61
```

Purpose Define EVS Task Priority

Description:

Defines the cFE_EVS Task priority.

Limits

Not Applicable

Definition at line 1222 of file cpu1_platform_cfg.h.

39.6.1.196 CFE_PLATFORM_EVS_START_TASK_STACK_SIZE

```
#define CFE_PLATFORM_EVS_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
```

Purpose Define EVS Task Stack Size

Description:

Defines the cFE_EVS Task Stack Size

Limits

There is a lower limit of 2048 on this configuration paramater. There are no restrictions on the upper limit however, the maximum stack size size is system dependent and should be verified. Most operating systems provide tools for measuring the amount of stack used by a task during operation. It is always a good idea to verify that no more than 1/2 of the stack is used.

Definition at line 1237 of file cpu1_platform_cfg.h.

39.6.1.197 CFE_PLATFORM_SB_BUF_MEMORY_BYTES

```
#define CFE_PLATFORM_SB_BUF_MEMORY_BYTES 524288
```

Purpose Size of the SB buffer memory pool

Description:

Dictates the size of the SB memory pool. For each message the SB sends, the SB dynamically allocates from this memory pool, the memory needed to process the message. The memory needed to process each message is msg size + msg descriptor(CFE_SB_BufferD_t). This memory pool is also used to allocate destination descriptors (CFE_SB_DestinationD_t) during the subscription process. To see the run-time, high-water mark and the current utilization figures regarding this parameter, send an SB command to 'Send Statistics Pkt'. Some memory statistics have been added to the SB housekeeping packet. NOTE: It is important to monitor these statistics to ensure the desired memory margin is met.

Limits

This parameter has a lower limit of 512 and an upper limit of UINT_MAX (4 Gigabytes).

Definition at line 142 of file cpu1_platform_cfg.h.

39.6.1.198 CFE_PLATFORM_SB_DEFAULT_MAP_FILENAME

```
#define CFE_PLATFORM_SB_DEFAULT_MAP_FILENAME "/ram/cfe_sb_msgmap.dat"
```

Purpose Default Message Map Filename

Description:

The value of this constant defines the filename used to store the software bus message map information. This filename is used only when no filename is specified in the command. The message map is a lookup table (array of 16bit words) that has an element for each possible MsgId value and holds the routing table index for that MsgId. The Msg Map provides fast access to the destinations of a message.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 246 of file cpu1_platform_cfg.h.

39.6.1.199 CFE_PLATFORM_SB_DEFAULT_MSG_LIMIT

```
#define CFE_PLATFORM_SB_DEFAULT_MSG_LIMIT 4
```

Purpose Default Subscription Message Limit

Description:

Dictates the default Message Limit when using the CFE_SB_Subscribe API. This will limit the number of messages with a specific message ID that can be received through a subscription. This only changes the default; other message limits can be set on a per subscription basis using CFE_SB_SubscribeEx .

Limits

This parameter has a lower limit of 4 and an upper limit of 65535.

Definition at line 119 of file cpu1_platform_cfg.h.

39.6.1.200 CFE_PLATFORM_SB_DEFAULT_PIPE_FILENAME

`#define CFE_PLATFORM_SB_DEFAULT_PIPE_FILENAME "/ram/cfe_sb_pipe.dat"`

Purpose Default Pipe Information Filename

Description:

The value of this constant defines the filename used to store the software bus pipe information. This filename is used only when no filename is specified in the command.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 228 of file cpu1_platform_cfg.h.

39.6.1.201 CFE_PLATFORM_SB_DEFAULT_REPORT_SENDER

`#define CFE_PLATFORM_SB_DEFAULT_REPORT_SENDER 1`

Purpose Define Default Sender Information Storage Mode

Description:

Defines the default mode for the storing of sender information when sending a software bus message. If set to 1, the sender information will be stored. If set to 0, the sender information will not be stored.

Limits

There is a lower limit of 0 and an upper limit of 1 on this configuration paramater.

Definition at line 330 of file cpu1_platform_cfg.h.

39.6.1.202 CFE_PLATFORM_SB_DEFAULT_ROUTING_FILENAME

`#define CFE_PLATFORM_SB_DEFAULT_ROUTING_FILENAME "/ram/cfe_sb_route.dat"`

Purpose Default Routing Information Filename

Description:

The value of this constant defines the filename used to store the software bus routing information. This filename is used only when no filename is specified in the command.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 213 of file cpu1_platform_cfg.h.

39.6.1.203 CFE_PLATFORM_SB_FILTER_MASK1

#define CFE_PLATFORM_SB_FILTER_MASK1 CFE_EVS_FIRST_4_STOP

Definition at line 265 of file cpu1_platform_cfg.h.

39.6.1.204 CFE_PLATFORM_SB_FILTER_MASK2

#define CFE_PLATFORM_SB_FILTER_MASK2 CFE_EVS_FIRST_4_STOP

Definition at line 268 of file cpu1_platform_cfg.h.

39.6.1.205 CFE_PLATFORM_SB_FILTER_MASK3

#define CFE_PLATFORM_SB_FILTER_MASK3 CFE_EVS_FIRST_16_STOP

Definition at line 271 of file cpu1_platform_cfg.h.

39.6.1.206 CFE_PLATFORM_SB_FILTER_MASK4

#define CFE_PLATFORM_SB_FILTER_MASK4 CFE_EVS_FIRST_16_STOP

Definition at line 274 of file cpu1_platform_cfg.h.

39.6.1.207 CFE_PLATFORM_SB_FILTER_MASK5

#define CFE_PLATFORM_SB_FILTER_MASK5 CFE_EVS_NO_FILTER

Definition at line 277 of file cpu1_platform_cfg.h.

39.6.1.208 CFE_PLATFORM_SB_FILTER_MASK6

#define CFE_PLATFORM_SB_FILTER_MASK6 CFE_EVS_NO_FILTER

Definition at line 280 of file cpu1_platform_cfg.h.

39.6.1.209 CFE_PLATFORM_SB_FILTER_MASK7

#define CFE_PLATFORM_SB_FILTER_MASK7 CFE_EVS_NO_FILTER

Definition at line 283 of file cpu1_platform_cfg.h.

39.6.1.210 CFE_PLATFORM_SB_FILTER_MASK8

#define CFE_PLATFORM_SB_FILTER_MASK8 CFE_EVS_NO_FILTER

Definition at line 286 of file cpu1_platform_cfg.h.

39.6.1.211 CFE_PLATFORM_SB_FILTERED_EVENT1

#define CFE_PLATFORM_SB_FILTERED_EVENT1 CFE_SB_SEND_NO_SUBS_EID

Purpose SB Event Filtering

Description:

This group of configuration paramters dictates what SB events will be filtered through EVS. The filtering will begin after the SB task initializes and stay in effect until a cmd to EVS changes it. This allows the operator to set limits on the number of event messages that are sent during system initialization. NOTE: Set all unused event values and mask values to zero

Limits

This filtering applies only to SB events. These parameters have a lower limit of 0 and an upper limit of 65535.

Definition at line 264 of file cpu1_platform_cfg.h.

39.6.1.212 CFE_PLATFORM_SB_FILTERED_EVENT2

#define CFE_PLATFORM_SB_FILTERED_EVENT2 CFE_SB_DUP_SUBSCRIP_EID

Definition at line 267 of file cpu1_platform_cfg.h.

39.6.1.213 CFE_PLATFORM_SB_FILTERED_EVENT3

#define CFE_PLATFORM_SB_FILTERED_EVENT3 CFE_SB_MSGID_LIM_ERR_EID

Definition at line 270 of file cpu1_platform_cfg.h.

39.6.1.214 CFE_PLATFORM_SB_FILTERED_EVENT4

#define CFE_PLATFORM_SB_FILTERED_EVENT4 CFE_SB_Q_FULL_ERR_EID

Definition at line 273 of file cpu1_platform_cfg.h.

39.6.1.215 CFE_PLATFORM_SB_FILTERED_EVENT5

#define CFE_PLATFORM_SB_FILTERED_EVENT5 0

Definition at line 276 of file cpu1_platform_cfg.h.

39.6.1.216 CFE_PLATFORM_SB_FILTERED_EVENT6

#define CFE_PLATFORM_SB_FILTERED_EVENT6 0

Definition at line 279 of file cpu1_platform_cfg.h.

39.6.1.217 CFE_PLATFORM_SB_FILTERED_EVENT7

#define CFE_PLATFORM_SB_FILTERED_EVENT7 0

Definition at line 282 of file cpu1_platform_cfg.h.

39.6.1.218 CFE_PLATFORM_SB_FILTERED_EVENT8

#define CFE_PLATFORM_SB_FILTERED_EVENT8 0

Definition at line 285 of file cpu1_platform_cfg.h.

39.6.1.219 **CFE_PLATFORM_SB_HIGHEST_VALID_MSGID**

`#define CFE_PLATFORM_SB_HIGHEST_VALID_MSGID 0x1FFF`

Purpose Highest Valid Message Id

Description:

The value of this constant dictates the size of the SB message map. The SB message map is a lookup table that provides the routing table index for fast access into the routing table. The default setting of 0x1FFF was chosen to save memory. This reduces the message map from 128Kbytes to 16Kbytes. See CFE_FSW_DCR 504 for more details.

If this value is different in a distributed architecture some platforms may not be able to subscribe to messages generated on other platforms since the message id would exceed the mapping table's highest index. Care would have to be taken to ensure the constrained platform did not subscribe to message Ids that exceed CFE_PLATFORM_SB_HIGHEST_↩ VALID_MSGID

The recommended case to to have this value the same across all mission platforms

Limits

This parameter has a lower limit of 1 and an upper limit of 0xFFFF. Note for current implementations, V2/Extended headers assign 0xFFFFFFFF as the invalid message ID value, and default headers assigns 0xFFFF as the invalid value. This means for default headers, 0xFFFF is invalid even if you set the value below to it's maximum of 0xFFFF. The allocated message table is this size + 1 (could change based on implementaiton).

Definition at line 188 of file cpu1_platform_cfg.h.

39.6.1.220 **CFE_PLATFORM_SB_MAX_BLOCK_SIZE**

`#define CFE_PLATFORM_SB_MAX_BLOCK_SIZE (CFE_MISSION_SB_MAX_SB_MSG_SIZE + 40)`

Definition at line 316 of file cpu1_platform_cfg.h.

39.6.1.221 **CFE_PLATFORM_SB_MAX_DEST_PER_PKT**

`#define CFE_PLATFORM_SB_MAX_DEST_PER_PKT 16`

Purpose Maximum Number of unique local destinations a single MsgId can have

Description:

Dictates the maximum number of unique local destinations a single MsgId can have.

Limits

This parameter has a lower limit of 1. There are no restrictions on the upper limit however, the maximum number of destinations per packet is system dependent and should be verified. Destination number values that are checked against this configuration are defined by a 16 bit data word.

Definition at line 103 of file cpu1_platform_cfg.h.

39.6.1.222   CFE_PLATFORM_SB_MAX_MSG_IDS

```
#define CFE_PLATFORM_SB_MAX_MSG_IDS 256
```

Purpose Maximum Number of Unique Message IDs SB Routing Table can hold

Description:

Dictates the maximum number of unique MsgIds the SB routing table will hold. This constant has a direct affect on the size of SB's tables and arrays. Keeping this count as low as possible will save memory. To see the run-time, high-water mark and the current utilization figures regarding this parameter, send an SB command to 'Send Statistics Pkt'.

Limits

This parameter has a lower limit of 1 and an upper limit of 1024.

Definition at line 68 of file cpu1_platform_cfg.h.

39.6.1.223   CFE_PLATFORM_SB_MAX_PIPE_DEPTH

```
#define CFE_PLATFORM_SB_MAX_PIPE_DEPTH 256
```

Purpose Maximum depth allowed when creating an SB pipe

Description:

The value of this constant dictates the maximum pipe depth that an application may request. The pipe depth is given as a paramter in the CFE_SB_CreatePipe API.

Limits

This parameter has a lower limit of 1. There are no restrictions on the upper limit however, the maximum pipe depth is system dependent and should be verified. Pipe Depth values that are checked against this configuration are defined by a 16 bit data word.

Definition at line 159 of file cpu1_platform_cfg.h.

39.6.1.224   CFE_PLATFORM_SB_MAX_PIPES

```
#define CFE_PLATFORM_SB_MAX_PIPES 64
```

[Purpose](#) Maximum Number of Unique Pipes SB Routing Table can hold

Description:

Dictates the maximum number of unique Pipes the SB routing table will hold. This constant has a direct affect on the size of SB's tables and arrays. Keeping this count as low as possible will save memory. To see the run-time, high-water mark and the current utilization figures regarding this parameter, send an SB command to 'Send Statistics Pkt'.

Limits

This parameter has a lower limit of 1. This parameter must also be less than or equal to OS_MAX_QUEUES.

Definition at line 86 of file cpu1_platform_cfg.h.

39.6.1.225   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_01

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_01 8
```

[Purpose](#) Define SB Memory Pool Block Sizes

Description:

Software Bus Memory Pool Block Sizes

Limits

These sizes MUST be increasing and MUST be an integral multiple of 4. The number of block sizes defined cannot exceed [CFE_ES_MAX_MEMPOOL_BLOCK_SIZES](#)

Definition at line 300 of file cpu1_platform_cfg.h.

39.6.1.226   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_02

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_02 16
```

Definition at line 301 of file cpu1_platform_cfg.h.

39.6.1.227   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_03

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_03 20
```

Definition at line 302 of file cpu1_platform_cfg.h.

39.6.1.228   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_04

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_04 36
```

Definition at line 303 of file cpu1_platform_cfg.h.

39.6.1.229   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_05

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_05 64
```

Definition at line 304 of file cpu1_platform_cfg.h.

39.6.1.230   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_06

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_06 96
```

Definition at line 305 of file cpu1_platform_cfg.h.

39.6.1.231   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_07

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_07 128
```

Definition at line 306 of file cpu1_platform_cfg.h.

39.6.1.232   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_08

```
#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_08 160
```

Definition at line 307 of file cpu1_platform_cfg.h.

39.6.1.233 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_09

`#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_09 256`

Definition at line 308 of file cpu1_platform_cfg.h.

39.6.1.234 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_10

`#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_10 512`

Definition at line 309 of file cpu1_platform_cfg.h.

39.6.1.235 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_11

`#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_11 1024`

Definition at line 310 of file cpu1_platform_cfg.h.

39.6.1.236 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_12

`#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_12 2048`

Definition at line 311 of file cpu1_platform_cfg.h.

39.6.1.237 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_13

`#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_13 4096`

Definition at line 312 of file cpu1_platform_cfg.h.

39.6.1.238 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_14

`#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_14 8192`

Definition at line 313 of file cpu1_platform_cfg.h.

39.6.1.239   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_15

#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_15 16384

Definition at line 314 of file cpu1_platform_cfg.h.

39.6.1.240   CFE_PLATFORM_SB_MEM_BLOCK_SIZE_16

#define CFE_PLATFORM_SB_MEM_BLOCK_SIZE_16 32768

Definition at line 315 of file cpu1_platform_cfg.h.

39.6.1.241   CFE_PLATFORM_SB_START_TASK_PRIORITY

#define CFE_PLATFORM_SB_START_TASK_PRIORITY 64

Purpose Define SB Task Priority

Description:

Defines the cFE_SB Task priority.

Limits

Not Applicable

Definition at line 1248 of file cpu1_platform_cfg.h.

39.6.1.242   CFE_PLATFORM_SB_START_TASK_STACK_SIZE

#define CFE_PLATFORM_SB_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE

Purpose Define SB Task Stack Size

Description:

Defines the cFE_SB Task Stack Size

Limits

There is a lower limit of 2048 on this configuration paramater. There are no restrictions on the upper limit however, the maximum stack size size is system dependent and should be verified. Most operating systems provide tools for measuring the amount of stack used by a task during operation. It is always a good idea to verify that no more than 1/2 of the stack is used.

Definition at line 1263 of file cpu1_platform_cfg.h.

39.6.1.243 CFE_PLATFORM_TBL_BUF_MEMORY_BYTES

```
#define CFE_PLATFORM_TBL_BUF_MEMORY_BYTES 524288
```

Purpose Size of Table Services Table Memory Pool

Description:

Defines the TOTAL size of the memory pool that cFE Table Services allocates from the system. The size must be large enough to provide memory for each registered table, the inactive buffers for double buffered tables and for the shared inactive buffers for single buffered tables.

Limits

The cFE does not place a limit on the size of this parameter.

Definition at line 1601 of file cpu1_platform_cfg.h.

39.6.1.244 CFE_PLATFORM_TBL_DEFAULT_REG_DUMP_FILE

```
#define CFE_PLATFORM_TBL_DEFAULT_REG_DUMP_FILE "/ram/cfe_tbl_reg.log"
```

Purpose Default Filename for a Table Registry Dump

Description:

Defines the file name used to store the table registry when no filename is specified in the dump registry command.

Limits

The length of each string, including the NULL terminator cannot exceed the OS_MAX_PATH_LEN value.

Definition at line 1715 of file cpu1_platform_cfg.h.

39.6.1.245 CFE_PLATFORM_TBL_MAX_CRITICAL_TABLES

```
#define CFE_PLATFORM_TBL_MAX_CRITICAL_TABLES 32
```

Purpose Maximum Number of Critical Tables that can be Registered

Description:

Defines the maximum number of critical tables supported by this processor's Table Services.

Limits

This number must be less than 32767. It should be recognized that this parameter determines the size of the Critical Table Registry which is maintained in the Critical Data Store. An excessively high number will waste Critical Data Store memory. Therefore, this number must not exceed the value defined in CFE_ES_CDS_MAX_CRITICAL_T←
ABLES.

Definition at line 1656 of file cpu1_platform_cfg.h.

39.6.1.246   CFE_PLATFORM_TBL_MAX_DBL_TABLE_SIZE

#define CFE_PLATFORM_TBL_MAX_DBL_TABLE_SIZE 16384

Purpose Maximum Size Allowed for a Double Buffered Table

Description:

Defines the maximum allowed size (in bytes) of a double buffered table.

Limits

The cFE does not place a limit on the size of this parameter but it must be less than half of CFE_PLATFORM_T←
BL_BUF_MEMORY_BYTES.

Definition at line 1613 of file cpu1_platform_cfg.h.

39.6.1.247   CFE_PLATFORM_TBL_MAX_NUM_HANDLES

#define CFE_PLATFORM_TBL_MAX_NUM_HANDLES 256

Purpose Maximum Number of Table Handles

Description:

Defines the maximum number of Table Handles.

Limits

This number must be less than 32767. This number must be at least as big as the number of tables (CFE_PLAT←
FORM_TBL_MAX_NUM_TABLES) and should be set higher if tables are shared between applications.

Definition at line 1669 of file cpu1_platform_cfg.h.

39.6.1.248   CFE_PLATFORM_TBL_MAX_NUM_TABLES

#define CFE_PLATFORM_TBL_MAX_NUM_TABLES 128

Purpose Maximum Number of Tables Allowed to be Registered

Description:

Defines the maximum number of tables supported by this processor's Table Services.

Limits

This number must be less than 32767. It should be recognized that this parameter determines the size of the Table
Registry. An excessively high number will waste memory.

Definition at line 1642 of file cpu1_platform_cfg.h.

39.6.1.249   CFE_PLATFORM_TBL_MAX_NUM_VALIDATIONS

```
#define CFE_PLATFORM_TBL_MAX_NUM_VALIDATIONS 10
```

Purpose Maximum Number of Simultaneous Table Validations

Description:

Defines the maximum number of pending validations that the Table Services can handle at any one time. When a table has a validation function, a validation request is made of the application to perform that validation. This number determines how many of those requests can be outstanding at any one time.

Limits

This number must be less than 32767. An excessively high number will degrade system performance and waste memory. A number less than 20 is suggested but not required.

Definition at line 1702 of file cpu1_platform_cfg.h.

39.6.1.250   CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_LOADS

```
#define CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_LOADS 4
```

Purpose Maximum Number of Simultaneous Loads to Support

Description:

Defines the maximum number of single buffered tables that can be loaded simultaneously. This number is used to determine the number of shared buffers to allocate.

Limits

This number must be less than 32767. An excessively high number will degrade system performance and waste memory. A number less than 5 is suggested but not required.

Definition at line 1684 of file cpu1_platform_cfg.h.

39.6.1.251   CFE_PLATFORM_TBL_MAX_SNGL_TABLE_SIZE

#define CFE_PLATFORM_TBL_MAX_SNGL_TABLE_SIZE 16384

Purpose Maximum Size Allowed for a Single Buffered Table

Description:

Defines the maximum allowed size (in bytes) of a single buffered table. **NOTE:** This size determines the size of all shared table buffers. Therefore, this size will be multiplied by CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_L↩ OADS below when allocating memory for shared tables.

Limits

The cFE does not place a limit on the size of this parameter but it must be small enough to allow for CFE_PLATF↩ ORM_TBL_MAX_SIMULTANEOUS_LOADS number of tables to fit into CFE_PLATFORM_TBL_BUF_MEMOR↩ Y_BYTES.

Definition at line 1629 of file cpu1_platform_cfg.h.

39.6.1.252   CFE_PLATFORM_TBL_START_TASK_PRIORITY

#define CFE_PLATFORM_TBL_START_TASK_PRIORITY 70

Purpose Define TBL Task Priority

Description:

Defines the cFE_TBL Task priority.

Limits

Not Applicable

Definition at line 1336 of file cpu1_platform_cfg.h.

39.6.1.253   CFE_PLATFORM_TBL_START_TASK_STACK_SIZE

#define CFE_PLATFORM_TBL_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE

Purpose Define TBL Task Stack Size

Description:

Defines the cFE_TBL Task Stack Size

Limits

There is a lower limit of 2048 on this configuration paramater. There are no restrictions on the upper limit however, the maximum stack size size is system dependent and should be verified. Most operating systems provide tools for measuring the amount of stack used by a task during operation. It is always a good idea to verify that no more than 1/2 of the stack is used.

Definition at line 1351 of file cpu1_platform_cfg.h.

39.6.1.254   CFE_PLATFORM_TBL_U32FROM4CHARS

```
#define CFE_PLATFORM_TBL_U32FROM4CHARS(
              _C1,
              _C2,
              _C3,
              _C4 )
```

Value:

```
( (uint32)(_C1) << 24 | \
    (uint32)(_C2) << 16 | \
    (uint32)(_C3) << 8 | \
    (uint32)(_C4) )
```

Definition at line 1737 of file cpu1_platform_cfg.h.

39.6.1.255   CFE_PLATFORM_TBL_VALID_PRID_1

```
#define CFE_PLATFORM_TBL_VALID_PRID_1 (CFE_PLATFORM_CPU_ID)
```

Purpose Processor ID values used for table load validation

Description:

> Defines the processor ID values used for validating the processor ID field in the table file header. To be valid, the spacecraft ID specified in the table file header must match one of the values defined here.

Limits

> This value can be any 32 bit unsigned integer.

Definition at line 1789 of file cpu1_platform_cfg.h.

39.6.1.256   CFE_PLATFORM_TBL_VALID_PRID_2

```
#define CFE_PLATFORM_TBL_VALID_PRID_2 (CFE_PLATFORM_TBL_U32FROM4CHARS('a', 'b', 'c', 'd'))
```

Definition at line 1790 of file cpu1_platform_cfg.h.

39.6.1.257   CFE_PLATFORM_TBL_VALID_PRID_3

```
#define CFE_PLATFORM_TBL_VALID_PRID_3 0
```

Definition at line 1791 of file cpu1_platform_cfg.h.

39.6.1.258   CFE_PLATFORM_TBL_VALID_PRID_4

#define CFE_PLATFORM_TBL_VALID_PRID_4 0

Definition at line 1792 of file cpu1_platform_cfg.h.

39.6.1.259   CFE_PLATFORM_TBL_VALID_PRID_COUNT

#define CFE_PLATFORM_TBL_VALID_PRID_COUNT 0

Purpose Number of Processor ID's specified for validation

Description:

Defines the number of specified processor ID values that are verified during table loads. If the number is zero then no validation of the processor ID field in the table file header is performed when tables are loaded. Non-zero values indicate how many values from the list of processor ID's defined below are compared to the processor ID field in the table file header. The ELF2CFETBL tool may be used to create table files with specified processor ID values.

Limits

This number must be greater than or equal to zero and less than or equal to 4.

Definition at line 1775 of file cpu1_platform_cfg.h.

39.6.1.260   CFE_PLATFORM_TBL_VALID_SCID_1

#define CFE_PLATFORM_TBL_VALID_SCID_1 (CFE_MISSION_SPACECRAFT_ID)

Purpose Spacecraft ID values used for table load validation

Description:

Defines the spacecraft ID values used for validating the spacecraft ID field in the table file header. To be valid, the spacecraft ID specified in the table file header must match one of the values defined here.

Limits

This value can be any 32 bit unsigned integer.

Definition at line 1755 of file cpu1_platform_cfg.h.

39.6.1.261 CFE_PLATFORM_TBL_VALID_SCID_2

`#define CFE_PLATFORM_TBL_VALID_SCID_2 (CFE_PLATFORM_TBL_U32FROM4CHARS('a', 'b', 'c', 'd'))`

Definition at line 1756 of file cpu1_platform_cfg.h.

39.6.1.262 CFE_PLATFORM_TBL_VALID_SCID_COUNT

`#define CFE_PLATFORM_TBL_VALID_SCID_COUNT 0`

Purpose Number of Spacecraft ID's specified for validation

Description:

Defines the number of specified spacecraft ID values that are verified during table loads. If the number is zero then no validation of the spacecraft ID field in the table file header is performed when tables are loaded. Non-zero values indicate how many values from the list of spacecraft ID's defined below are compared to the spacecraft ID field in the table file header. The ELF2CFETBL tool may be used to create table files with specified spacecraft ID values.

Limits

This number must be greater than or equal to zero and less than or equal to 2.

Definition at line 1734 of file cpu1_platform_cfg.h.

39.6.1.263 CFE_PLATFORM_TIME_1HZ_TASK_PRIORITY

`#define CFE_PLATFORM_TIME_1HZ_TASK_PRIORITY 25`

Definition at line 1306 of file cpu1_platform_cfg.h.

39.6.1.264 CFE_PLATFORM_TIME_1HZ_TASK_STACK_SIZE

`#define CFE_PLATFORM_TIME_1HZ_TASK_STACK_SIZE 8192`

Definition at line 1325 of file cpu1_platform_cfg.h.

39.6.1.265 CFE_PLATFORM_TIME_CFG_CLIENT

`#define CFE_PLATFORM_TIME_CFG_CLIENT false`

Definition at line 346 of file cpu1_platform_cfg.h.

39.6.1.266   CFE_PLATFORM_TIME_CFG_LATCH_FLY

`#define CFE_PLATFORM_TIME_CFG_LATCH_FLY 8`

Purpose   Define Periodic Time to Update Local Clock Tone Latch

Description:

   Define Periodic Time to Update Local Clock Tone Latch. Applies only when in flywheel mode. This define dicates the period at which the simulated 'last tone' time is updated. Units are seconds.

Limits

   Not Applicable

Definition at line 514 of file cpu1_platform_cfg.h.

39.6.1.267   CFE_PLATFORM_TIME_CFG_SERVER

`#define CFE_PLATFORM_TIME_CFG_SERVER true`

Purpose   Time Server or Time Client Selection

Description:

   This configuration parameter selects whether the Time task functions as a time "server" or "client". A time server generates the "time at the tone" packet which is received by time clients.

Limits

   Enable one, and only one by defining either CFE_PLATFORM_TIME_CFG_SERVER or CFE_PLATFORM_TIM$\leftarrow$ E_CFG_CLIENT AS true. The other must be defined as false.

Definition at line 345 of file cpu1_platform_cfg.h.

39.6.1.268   CFE_PLATFORM_TIME_CFG_SIGNAL

`#define CFE_PLATFORM_TIME_CFG_SIGNAL false`

Purpose   Include or Exclude the Primary/Redundant Tone Selection Cmd

Description:

   Depending on the specific hardware system configuration, it may be possible to switch between a primary and redundant tone signal. If supported by hardware, this definitions will enable command interfaces to select the active tone signal. Both Time Clients and Time Servers support this feature. Note: Set the CFE_PLATFORM_TIME_C$\leftarrow$ FG_SIGNAL define to true to enable tone signal commands.

Limits

   Not Applicable

Definition at line 396 of file cpu1_platform_cfg.h.

39.6.1.269   CFE_PLATFORM_TIME_CFG_SOURCE

```
#define CFE_PLATFORM_TIME_CFG_SOURCE false
```

Purpose Include or Exclude the Internal/External Time Source Selection Cmd

Description:

By default, Time Servers maintain time using an internal MET which may be a h/w register or software counter, depending on available hardware. The following definition enables command interfaces to switch between an internal MET, or external time data received from one of several supported external time sources. Only a Time Server may be configured to use external time data. Note: Set the CFE_PLATFORM_TIME_CFG_SOURCE define to true to include the Time Source Selection Command (command allows selection between the internal or external time source). Then choose the external source with the CFE_TIME_CFG_SRC_??? define.

Limits

Only applies if CFE_PLATFORM_TIME_CFG_SERVER is set to true.

Definition at line 417 of file cpu1_platform_cfg.h.

39.6.1.270   CFE_PLATFORM_TIME_CFG_SRC_GPS

```
#define CFE_PLATFORM_TIME_CFG_SRC_GPS false
```

Definition at line 435 of file cpu1_platform_cfg.h.

39.6.1.271   CFE_PLATFORM_TIME_CFG_SRC_MET

```
#define CFE_PLATFORM_TIME_CFG_SRC_MET false
```

Purpose Choose the External Time Source for Server only

Description:

If CFE_PLATFORM_TIME_CFG_SOURCE is set to true, then one of the following external time source types must also be set to true. Do not set any of the external time source types to true unless CFE_PLATFORM_TIME_CF↩ G_SOURCE is set to true.

Limits

1. If CFE_PLATFORM_TIME_CFG_SOURCE is set to true then one and only one of the following three external time sources can and must be set true: CFE_PLATFORM_TIME_CFG_SRC_MET, CFE_PLATFORM_TI↩ ME_CFG_SRC_GPS, CFE_PLATFORM_TIME_CFG_SRC_TIME
2. Only applies if CFE_PLATFORM_TIME_CFG_SERVER is set to true.

Definition at line 434 of file cpu1_platform_cfg.h.

39.6.1.272   CFE_PLATFORM_TIME_CFG_SRC_TIME

```
#define CFE_PLATFORM_TIME_CFG_SRC_TIME false
```

Definition at line 436 of file cpu1_platform_cfg.h.

39.6.1.273   CFE_PLATFORM_TIME_CFG_START_FLY

```
#define CFE_PLATFORM_TIME_CFG_START_FLY 2
```

Purpose Define Time to Start Flywheel Since Last Tone

Description:

Define time to enter flywheel mode (in seconds since last tone data update) Units are microseconds as measured with the local clock.

Limits

Not Applicable

Definition at line 500 of file cpu1_platform_cfg.h.

39.6.1.274   CFE_PLATFORM_TIME_CFG_TONE_LIMIT

```
#define CFE_PLATFORM_TIME_CFG_TONE_LIMIT 20000
```

Purpose Define Timing Limits From One Tone To The Next

Description:

Defines limits to the timing of the 1Hz tone signal. A tone signal is valid only if it arrives within one second (plus or minus the tone limit) from the previous tone signal.Units are microseconds as measured with the local clock.

Limits

Not Applicable

Definition at line 486 of file cpu1_platform_cfg.h.

39.6.1.275   CFE_PLATFORM_TIME_CFG_VIRTUAL

```
#define CFE_PLATFORM_TIME_CFG_VIRTUAL true
```

Purpose   Time Tone In Big-Endian Order

Description:

> If this configuration parameter is defined, the CFE time server will publish time tones with payloads in big-endian order, and time clients will expect the tones to be in big-endian order. This is useful for mixed-endian environments. This will become obsolete once EDS is available and the CFE time tone message is defined.

Purpose   Local MET or Virtual MET Selection for Time Servers

Description:

> Depending on the specific hardware system configuration, it may be possible for Time Servers to read the "local" MET from a h/w register rather than having to track the MET as the count of tone signal interrupts (virtual MET)

Time Clients must be defined as using a virtual MET. Also, a Time Server cannot be defined as having both a h/w MET and an external time source (they both cannot synchronize to the same tone).

Note: "disable" this define (set to false) only for Time Servers with local hardware that supports a h/w MET that is synchronized to the tone signal !!!

Limits

> Only applies if CFE_PLATFORM_TIME_CFG_SERVER is set to true.

Definition at line 380 of file cpu1_platform_cfg.h.

39.6.1.276   CFE_PLATFORM_TIME_MAX_DELTA_SECS

```
#define CFE_PLATFORM_TIME_MAX_DELTA_SECS 0
```

Purpose   Define the Max Delta Limits for Time Servers using an Ext Time Source

Description:

> If CFE_PLATFORM_TIME_CFG_SOURCE is set to true and one of the external time sources is also set to true, then the delta time limits for range checking is used.

When a new time value is received from an external source, the value is compared against the "expected" time value. If the delta exceeds the following defined amount, then the new time data will be ignored. This range checking is only performed after the clock state has been commanded to "valid". Until then, external time data is accepted unconditionally.

Limits

> Applies only if both CFE_PLATFORM_TIME_CFG_SERVER and CFE_PLATFORM_TIME_CFG_SOURCE are set to true.

Definition at line 456 of file cpu1_platform_cfg.h.

39.6.1.277 CFE_PLATFORM_TIME_MAX_DELTA_SUBS

`#define CFE_PLATFORM_TIME_MAX_DELTA_SUBS 500000`

Definition at line 457 of file cpu1_platform_cfg.h.

39.6.1.278 CFE_PLATFORM_TIME_MAX_LOCAL_SECS

`#define CFE_PLATFORM_TIME_MAX_LOCAL_SECS 27`

Purpose Define the Local Clock Rollover Value in seconds and subseconds

Description:

Specifies the capability of the local clock. Indicates the time at which the local clock rolls over.

Limits

Not Applicable

Definition at line 470 of file cpu1_platform_cfg.h.

39.6.1.279 CFE_PLATFORM_TIME_MAX_LOCAL_SUBS

`#define CFE_PLATFORM_TIME_MAX_LOCAL_SUBS 0`

Definition at line 471 of file cpu1_platform_cfg.h.

39.6.1.280 CFE_PLATFORM_TIME_START_TASK_PRIORITY

`#define CFE_PLATFORM_TIME_START_TASK_PRIORITY 60`

Purpose Define TIME Task Priorities

Description:

Defines the cFE_TIME Task priority. Defines the cFE_TIME Tone Task priority. Defines the cFE_TIME 1HZ Task priority.

Limits

There is a lower limit of zero and an upper limit of 255 on these configuration paramaters. Remember that the meaning of each task priority is inverted – a "lower" number has a "higher" priority.

Definition at line 1304 of file cpu1_platform_cfg.h.

39.6.1.281   CFE_PLATFORM_TIME_START_TASK_STACK_SIZE

```
#define CFE_PLATFORM_TIME_START_TASK_STACK_SIZE CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
```

Purpose Define TIME Task Stack Sizes

Description:

Defines the cFE_TIME Main Task Stack Size Defines the cFE_TIME Tone Task Stack Size Defines the cFE_TIME 1HZ Task Stack Size

Limits

There is a lower limit of 2048 on these configuration paramaters. There are no restrictions on the upper limit however, the maximum stack size size is system dependent and should be verified. Most operating systems provide tools for measuring the amount of stack used by a task during operation. It is always a good idea to verify that no more than 1/2 of the stack is used.

Definition at line 1323 of file cpu1_platform_cfg.h.

39.6.1.282   CFE_PLATFORM_TIME_TONE_TASK_PRIORITY

```
#define CFE_PLATFORM_TIME_TONE_TASK_PRIORITY 25
```

Definition at line 1305 of file cpu1_platform_cfg.h.

39.6.1.283   CFE_PLATFORM_TIME_TONE_TASK_STACK_SIZE

```
#define CFE_PLATFORM_TIME_TONE_TASK_STACK_SIZE 4096
```

Definition at line 1324 of file cpu1_platform_cfg.h.

39.6.1.284   CFE_SB_BUF_MEMORY_BYTES

```
#define CFE_SB_BUF_MEMORY_BYTES CFE_PLATFORM_SB_BUF_MEMORY_BYTES
```

Definition at line 1895 of file cpu1_platform_cfg.h.

39.6.1.285   CFE_SB_DEFAULT_MAP_FILENAME

#define CFE_SB_DEFAULT_MAP_FILENAME CFE_PLATFORM_SB_DEFAULT_MAP_FILENAME

Definition at line 1900 of file cpu1_platform_cfg.h.

39.6.1.286   CFE_SB_DEFAULT_MSG_LIMIT

#define CFE_SB_DEFAULT_MSG_LIMIT CFE_PLATFORM_SB_DEFAULT_MSG_LIMIT

Definition at line 1894 of file cpu1_platform_cfg.h.

39.6.1.287   CFE_SB_DEFAULT_PIPE_FILENAME

#define CFE_SB_DEFAULT_PIPE_FILENAME CFE_PLATFORM_SB_DEFAULT_PIPE_FILENAME

Definition at line 1899 of file cpu1_platform_cfg.h.

39.6.1.288   CFE_SB_DEFAULT_REPORT_SENDER

#define CFE_SB_DEFAULT_REPORT_SENDER CFE_PLATFORM_SB_DEFAULT_REPORT_SENDER

Definition at line 1934 of file cpu1_platform_cfg.h.

39.6.1.289   CFE_SB_DEFAULT_ROUTING_FILENAME

#define CFE_SB_DEFAULT_ROUTING_FILENAME CFE_PLATFORM_SB_DEFAULT_ROUTING_FILENAME

Definition at line 1898 of file cpu1_platform_cfg.h.

39.6.1.290   CFE_SB_FILTER_MASK1

#define CFE_SB_FILTER_MASK1 CFE_PLATFORM_SB_FILTER_MASK1

Definition at line 1902 of file cpu1_platform_cfg.h.

39.6.1.291 CFE_SB_FILTER_MASK2

#define CFE_SB_FILTER_MASK2 CFE_PLATFORM_SB_FILTER_MASK2

Definition at line 1904 of file cpu1_platform_cfg.h.

39.6.1.292 CFE_SB_FILTER_MASK3

#define CFE_SB_FILTER_MASK3 CFE_PLATFORM_SB_FILTER_MASK3

Definition at line 1906 of file cpu1_platform_cfg.h.

39.6.1.293 CFE_SB_FILTER_MASK4

#define CFE_SB_FILTER_MASK4 CFE_PLATFORM_SB_FILTER_MASK4

Definition at line 1908 of file cpu1_platform_cfg.h.

39.6.1.294 CFE_SB_FILTER_MASK5

#define CFE_SB_FILTER_MASK5 CFE_PLATFORM_SB_FILTER_MASK5

Definition at line 1910 of file cpu1_platform_cfg.h.

39.6.1.295 CFE_SB_FILTER_MASK6

#define CFE_SB_FILTER_MASK6 CFE_PLATFORM_SB_FILTER_MASK6

Definition at line 1912 of file cpu1_platform_cfg.h.

39.6.1.296 CFE_SB_FILTER_MASK7

#define CFE_SB_FILTER_MASK7 CFE_PLATFORM_SB_FILTER_MASK7

Definition at line 1914 of file cpu1_platform_cfg.h.

39.6.1.297   CFE_SB_FILTER_MASK8

#define CFE_SB_FILTER_MASK8 CFE_PLATFORM_SB_FILTER_MASK8

Definition at line 1916 of file cpu1_platform_cfg.h.

39.6.1.298   CFE_SB_FILTERED_EVENT1

#define CFE_SB_FILTERED_EVENT1 CFE_PLATFORM_SB_FILTERED_EVENT1

Definition at line 1901 of file cpu1_platform_cfg.h.

39.6.1.299   CFE_SB_FILTERED_EVENT2

#define CFE_SB_FILTERED_EVENT2 CFE_PLATFORM_SB_FILTERED_EVENT2

Definition at line 1903 of file cpu1_platform_cfg.h.

39.6.1.300   CFE_SB_FILTERED_EVENT3

#define CFE_SB_FILTERED_EVENT3 CFE_PLATFORM_SB_FILTERED_EVENT3

Definition at line 1905 of file cpu1_platform_cfg.h.

39.6.1.301   CFE_SB_FILTERED_EVENT4

#define CFE_SB_FILTERED_EVENT4 CFE_PLATFORM_SB_FILTERED_EVENT4

Definition at line 1907 of file cpu1_platform_cfg.h.

39.6.1.302   CFE_SB_FILTERED_EVENT5

#define CFE_SB_FILTERED_EVENT5 CFE_PLATFORM_SB_FILTERED_EVENT5

Definition at line 1909 of file cpu1_platform_cfg.h.

39.6.1.303 CFE_SB_FILTERED_EVENT6

#define CFE_SB_FILTERED_EVENT6 CFE_PLATFORM_SB_FILTERED_EVENT6

Definition at line 1911 of file cpu1_platform_cfg.h.

39.6.1.304 CFE_SB_FILTERED_EVENT7

#define CFE_SB_FILTERED_EVENT7 CFE_PLATFORM_SB_FILTERED_EVENT7

Definition at line 1913 of file cpu1_platform_cfg.h.

39.6.1.305 CFE_SB_FILTERED_EVENT8

#define CFE_SB_FILTERED_EVENT8 CFE_PLATFORM_SB_FILTERED_EVENT8

Definition at line 1915 of file cpu1_platform_cfg.h.

39.6.1.306 CFE_SB_HIGHEST_VALID_MSGID

#define CFE_SB_HIGHEST_VALID_MSGID CFE_PLATFORM_SB_HIGHEST_VALID_MSGID

Definition at line 1897 of file cpu1_platform_cfg.h.

39.6.1.307 CFE_SB_MAX_BLOCK_SIZE

#define CFE_SB_MAX_BLOCK_SIZE CFE_PLATFORM_SB_MAX_BLOCK_SIZE

Definition at line 1933 of file cpu1_platform_cfg.h.

39.6.1.308 CFE_SB_MAX_DEST_PER_PKT

#define CFE_SB_MAX_DEST_PER_PKT CFE_PLATFORM_SB_MAX_DEST_PER_PKT

Definition at line 1893 of file cpu1_platform_cfg.h.

39.6.1.309   CFE_SB_MAX_MSG_IDS

#define CFE_SB_MAX_MSG_IDS CFE_PLATFORM_SB_MAX_MSG_IDS

Definition at line 1891 of file cpu1_platform_cfg.h.

39.6.1.310   CFE_SB_MAX_PIPE_DEPTH

#define CFE_SB_MAX_PIPE_DEPTH CFE_PLATFORM_SB_MAX_PIPE_DEPTH

Definition at line 1896 of file cpu1_platform_cfg.h.

39.6.1.311   CFE_SB_MAX_PIPES

#define CFE_SB_MAX_PIPES CFE_PLATFORM_SB_MAX_PIPES

Definition at line 1892 of file cpu1_platform_cfg.h.

39.6.1.312   CFE_SB_MEM_BLOCK_SIZE_01

#define CFE_SB_MEM_BLOCK_SIZE_01 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_01

Definition at line 1917 of file cpu1_platform_cfg.h.

39.6.1.313   CFE_SB_MEM_BLOCK_SIZE_02

#define CFE_SB_MEM_BLOCK_SIZE_02 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_02

Definition at line 1918 of file cpu1_platform_cfg.h.

39.6.1.314   CFE_SB_MEM_BLOCK_SIZE_03

#define CFE_SB_MEM_BLOCK_SIZE_03 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_03

Definition at line 1919 of file cpu1_platform_cfg.h.

39.6.1.315 CFE_SB_MEM_BLOCK_SIZE_04

#define CFE_SB_MEM_BLOCK_SIZE_04 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_04

Definition at line 1920 of file cpu1_platform_cfg.h.

39.6.1.316 CFE_SB_MEM_BLOCK_SIZE_05

#define CFE_SB_MEM_BLOCK_SIZE_05 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_05

Definition at line 1921 of file cpu1_platform_cfg.h.

39.6.1.317 CFE_SB_MEM_BLOCK_SIZE_06

#define CFE_SB_MEM_BLOCK_SIZE_06 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_06

Definition at line 1922 of file cpu1_platform_cfg.h.

39.6.1.318 CFE_SB_MEM_BLOCK_SIZE_07

#define CFE_SB_MEM_BLOCK_SIZE_07 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_07

Definition at line 1923 of file cpu1_platform_cfg.h.

39.6.1.319 CFE_SB_MEM_BLOCK_SIZE_08

#define CFE_SB_MEM_BLOCK_SIZE_08 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_08

Definition at line 1924 of file cpu1_platform_cfg.h.

39.6.1.320 CFE_SB_MEM_BLOCK_SIZE_09

#define CFE_SB_MEM_BLOCK_SIZE_09 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_09

Definition at line 1925 of file cpu1_platform_cfg.h.

39.6.1.321   CFE_SB_MEM_BLOCK_SIZE_10

#define CFE_SB_MEM_BLOCK_SIZE_10 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_10

Definition at line 1926 of file cpu1_platform_cfg.h.

39.6.1.322   CFE_SB_MEM_BLOCK_SIZE_11

#define CFE_SB_MEM_BLOCK_SIZE_11 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_11

Definition at line 1927 of file cpu1_platform_cfg.h.

39.6.1.323   CFE_SB_MEM_BLOCK_SIZE_12

#define CFE_SB_MEM_BLOCK_SIZE_12 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_12

Definition at line 1928 of file cpu1_platform_cfg.h.

39.6.1.324   CFE_SB_MEM_BLOCK_SIZE_13

#define CFE_SB_MEM_BLOCK_SIZE_13 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_13

Definition at line 1929 of file cpu1_platform_cfg.h.

39.6.1.325   CFE_SB_MEM_BLOCK_SIZE_14

#define CFE_SB_MEM_BLOCK_SIZE_14 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_14

Definition at line 1930 of file cpu1_platform_cfg.h.

39.6.1.326   CFE_SB_MEM_BLOCK_SIZE_15

#define CFE_SB_MEM_BLOCK_SIZE_15 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_15

Definition at line 1931 of file cpu1_platform_cfg.h.

39.6.1.327   CFE_SB_MEM_BLOCK_SIZE_16

#define CFE_SB_MEM_BLOCK_SIZE_16 CFE_PLATFORM_SB_MEM_BLOCK_SIZE_16

Definition at line 1932 of file cpu1_platform_cfg.h.

39.6.1.328   CFE_SB_START_TASK_PRIORITY

#define CFE_SB_START_TASK_PRIORITY CFE_PLATFORM_SB_START_TASK_PRIORITY

Definition at line 1994 of file cpu1_platform_cfg.h.

39.6.1.329   CFE_SB_START_TASK_STACK_SIZE

#define CFE_SB_START_TASK_STACK_SIZE CFE_PLATFORM_SB_START_TASK_STACK_SIZE

Definition at line 1995 of file cpu1_platform_cfg.h.

39.6.1.330   CFE_TBL_BUF_MEMORY_BYTES

#define CFE_TBL_BUF_MEMORY_BYTES CFE_PLATFORM_TBL_BUF_MEMORY_BYTES

Definition at line 2051 of file cpu1_platform_cfg.h.

39.6.1.331   CFE_TBL_DEFAULT_REG_DUMP_FILE

#define CFE_TBL_DEFAULT_REG_DUMP_FILE CFE_PLATFORM_TBL_DEFAULT_REG_DUMP_FILE

Definition at line 2059 of file cpu1_platform_cfg.h.

39.6.1.332   CFE_TBL_MAX_CRITICAL_TABLES

#define CFE_TBL_MAX_CRITICAL_TABLES CFE_PLATFORM_TBL_MAX_CRITICAL_TABLES

Definition at line 2055 of file cpu1_platform_cfg.h.

39.6.1.333 CFE_TBL_MAX_DBL_TABLE_SIZE

#define CFE_TBL_MAX_DBL_TABLE_SIZE CFE_PLATFORM_TBL_MAX_DBL_TABLE_SIZE

Definition at line 2052 of file cpu1_platform_cfg.h.

39.6.1.334 CFE_TBL_MAX_NUM_HANDLES

#define CFE_TBL_MAX_NUM_HANDLES CFE_PLATFORM_TBL_MAX_NUM_HANDLES

Definition at line 2056 of file cpu1_platform_cfg.h.

39.6.1.335 CFE_TBL_MAX_NUM_TABLES

#define CFE_TBL_MAX_NUM_TABLES CFE_PLATFORM_TBL_MAX_NUM_TABLES

Definition at line 2054 of file cpu1_platform_cfg.h.

39.6.1.336 CFE_TBL_MAX_NUM_VALIDATIONS

#define CFE_TBL_MAX_NUM_VALIDATIONS CFE_PLATFORM_TBL_MAX_NUM_VALIDATIONS

Definition at line 2058 of file cpu1_platform_cfg.h.

39.6.1.337 CFE_TBL_MAX_SIMULTANEOUS_LOADS

#define CFE_TBL_MAX_SIMULTANEOUS_LOADS CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_LOADS

Definition at line 2057 of file cpu1_platform_cfg.h.

39.6.1.338 CFE_TBL_MAX_SNGL_TABLE_SIZE

#define CFE_TBL_MAX_SNGL_TABLE_SIZE CFE_PLATFORM_TBL_MAX_SNGL_TABLE_SIZE

Definition at line 2053 of file cpu1_platform_cfg.h.

39.6.1.339 CFE_TBL_START_TASK_PRIORITY

#define CFE_TBL_START_TASK_PRIORITY CFE_PLATFORM_TBL_START_TASK_PRIORITY

Definition at line 2004 of file cpu1_platform_cfg.h.

39.6.1.340 CFE_TBL_START_TASK_STACK_SIZE

#define CFE_TBL_START_TASK_STACK_SIZE CFE_PLATFORM_TBL_START_TASK_STACK_SIZE

Definition at line 2005 of file cpu1_platform_cfg.h.

39.6.1.341 CFE_TBL_U32FROM4CHARS

#define CFE_TBL_U32FROM4CHARS CFE_PLATFORM_TBL_U32FROM4CHARS

Definition at line 2061 of file cpu1_platform_cfg.h.

39.6.1.342 CFE_TBL_VALID_PRID_1

#define CFE_TBL_VALID_PRID_1 CFE_PLATFORM_TBL_VALID_PRID_1

Definition at line 2065 of file cpu1_platform_cfg.h.

39.6.1.343 CFE_TBL_VALID_PRID_2

#define CFE_TBL_VALID_PRID_2 CFE_PLATFORM_TBL_VALID_PRID_2

Definition at line 2066 of file cpu1_platform_cfg.h.

39.6.1.344 CFE_TBL_VALID_PRID_3

#define CFE_TBL_VALID_PRID_3 CFE_PLATFORM_TBL_VALID_PRID_3

Definition at line 2067 of file cpu1_platform_cfg.h.

39.6.1.345   CFE_TBL_VALID_PRID_4

#define CFE_TBL_VALID_PRID_4 CFE_PLATFORM_TBL_VALID_PRID_4

Definition at line 2068 of file cpu1_platform_cfg.h.

39.6.1.346   CFE_TBL_VALID_PRID_COUNT

#define CFE_TBL_VALID_PRID_COUNT CFE_PLATFORM_TBL_VALID_PRID_COUNT

Definition at line 2064 of file cpu1_platform_cfg.h.

39.6.1.347   CFE_TBL_VALID_SCID_1

#define CFE_TBL_VALID_SCID_1 CFE_PLATFORM_TBL_VALID_SCID_1

Definition at line 2062 of file cpu1_platform_cfg.h.

39.6.1.348   CFE_TBL_VALID_SCID_2

#define CFE_TBL_VALID_SCID_2 CFE_PLATFORM_TBL_VALID_SCID_2

Definition at line 2063 of file cpu1_platform_cfg.h.

39.6.1.349   CFE_TBL_VALID_SCID_COUNT

#define CFE_TBL_VALID_SCID_COUNT CFE_PLATFORM_TBL_VALID_SCID_COUNT

Definition at line 2060 of file cpu1_platform_cfg.h.

39.6.1.350   CFE_TIME_1HZ_TASK_PRIORITY

#define CFE_TIME_1HZ_TASK_PRIORITY CFE_PLATFORM_TIME_1HZ_TASK_PRIORITY

Definition at line 2000 of file cpu1_platform_cfg.h.

39.6.1.351 CFE_TIME_1HZ_TASK_STACK_SIZE

#define CFE_TIME_1HZ_TASK_STACK_SIZE CFE_PLATFORM_TIME_1HZ_TASK_STACK_SIZE

Definition at line 2003 of file cpu1_platform_cfg.h.

39.6.1.352 CFE_TIME_CFG_CLIENT

#define CFE_TIME_CFG_CLIENT CFE_PLATFORM_TIME_CFG_CLIENT

Definition at line 1936 of file cpu1_platform_cfg.h.

39.6.1.353 CFE_TIME_CFG_LATCH_FLY

#define CFE_TIME_CFG_LATCH_FLY CFE_PLATFORM_TIME_CFG_LATCH_FLY

Definition at line 1949 of file cpu1_platform_cfg.h.

39.6.1.354 CFE_TIME_CFG_SERVER

#define CFE_TIME_CFG_SERVER CFE_PLATFORM_TIME_CFG_SERVER

Definition at line 1935 of file cpu1_platform_cfg.h.

39.6.1.355 CFE_TIME_CFG_SIGNAL

#define CFE_TIME_CFG_SIGNAL CFE_PLATFORM_TIME_CFG_SIGNAL

Definition at line 1938 of file cpu1_platform_cfg.h.

39.6.1.356 CFE_TIME_CFG_SOURCE

#define CFE_TIME_CFG_SOURCE CFE_PLATFORM_TIME_CFG_SOURCE

Definition at line 1939 of file cpu1_platform_cfg.h.

39.6.1.357   CFE_TIME_CFG_SRC_GPS

#define CFE_TIME_CFG_SRC_GPS CFE_PLATFORM_TIME_CFG_SRC_GPS

Definition at line 1941 of file cpu1_platform_cfg.h.

39.6.1.358   CFE_TIME_CFG_SRC_MET

#define CFE_TIME_CFG_SRC_MET CFE_PLATFORM_TIME_CFG_SRC_MET

Definition at line 1940 of file cpu1_platform_cfg.h.

39.6.1.359   CFE_TIME_CFG_SRC_TIME

#define CFE_TIME_CFG_SRC_TIME CFE_PLATFORM_TIME_CFG_SRC_TIME

Definition at line 1942 of file cpu1_platform_cfg.h.

39.6.1.360   CFE_TIME_CFG_START_FLY

#define CFE_TIME_CFG_START_FLY CFE_PLATFORM_TIME_CFG_START_FLY

Definition at line 1948 of file cpu1_platform_cfg.h.

39.6.1.361   CFE_TIME_CFG_TONE_LIMIT

#define CFE_TIME_CFG_TONE_LIMIT CFE_PLATFORM_TIME_CFG_TONE_LIMIT

Definition at line 1947 of file cpu1_platform_cfg.h.

39.6.1.362   CFE_TIME_CFG_VIRTUAL

#define CFE_TIME_CFG_VIRTUAL CFE_PLATFORM_TIME_CFG_VIRTUAL

Definition at line 1937 of file cpu1_platform_cfg.h.

39.6.1.363 CFE_TIME_ENA_1HZ_CMD_PKT

`#define CFE_TIME_ENA_1HZ_CMD_PKT true`

Definition at line 2078 of file cpu1_platform_cfg.h.

39.6.1.364 CFE_TIME_MAX_DELTA_SECS

`#define CFE_TIME_MAX_DELTA_SECS CFE_PLATFORM_TIME_MAX_DELTA_SECS`

Definition at line 1943 of file cpu1_platform_cfg.h.

39.6.1.365 CFE_TIME_MAX_DELTA_SUBS

`#define CFE_TIME_MAX_DELTA_SUBS CFE_PLATFORM_TIME_MAX_DELTA_SUBS`

Definition at line 1944 of file cpu1_platform_cfg.h.

39.6.1.366 CFE_TIME_MAX_LOCAL_SECS

`#define CFE_TIME_MAX_LOCAL_SECS CFE_PLATFORM_TIME_MAX_LOCAL_SECS`

Definition at line 1945 of file cpu1_platform_cfg.h.

39.6.1.367 CFE_TIME_MAX_LOCAL_SUBS

`#define CFE_TIME_MAX_LOCAL_SUBS CFE_PLATFORM_TIME_MAX_LOCAL_SUBS`

Definition at line 1946 of file cpu1_platform_cfg.h.

39.6.1.368 CFE_TIME_START_TASK_PRIORITY

`#define CFE_TIME_START_TASK_PRIORITY CFE_PLATFORM_TIME_START_TASK_PRIORITY`

Definition at line 1998 of file cpu1_platform_cfg.h.

39.6.1.369 CFE_TIME_START_TASK_STACK_SIZE

#define CFE_TIME_START_TASK_STACK_SIZE CFE_PLATFORM_TIME_START_TASK_STACK_SIZE

Definition at line 2001 of file cpu1_platform_cfg.h.

39.6.1.370 CFE_TIME_TONE_TASK_PRIORITY

#define CFE_TIME_TONE_TASK_PRIORITY CFE_PLATFORM_TIME_TONE_TASK_PRIORITY

Definition at line 1999 of file cpu1_platform_cfg.h.

39.6.1.371 CFE_TIME_TONE_TASK_STACK_SIZE

#define CFE_TIME_TONE_TASK_STACK_SIZE CFE_PLATFORM_TIME_TONE_TASK_STACK_SIZE

Definition at line 2002 of file cpu1_platform_cfg.h.

39.7 sample_mission_cfg.h File Reference

Macros

- #define CFE_MISSION_SPACECRAFT_ID 0x42
- #define CFE_MISSION_SB_PACKET_TIME_FORMAT CFE_MISSION_SB_TIME_32_16_SUBS
- #define CFE_MISSION_SB_MAX_SB_MSG_SIZE 32768
- #define CFE_MISSION_TIME_CFG_DEFAULT_TAI true
- #define CFE_MISSION_TIME_CFG_DEFAULT_UTC false
- #define CFE_MISSION_TIME_CFG_FAKE_TONE true
- #define CFE_MISSION_TIME_AT_TONE_WAS true
- #define CFE_MISSION_TIME_AT_TONE_WILL_BE false
- #define CFE_MISSION_TIME_MIN_ELAPSED 0
- #define CFE_MISSION_TIME_MAX_ELAPSED 200000
- #define CFE_MISSION_TIME_DEF_MET_SECS 1000
- #define CFE_MISSION_TIME_DEF_MET_SUBS 0
- #define CFE_MISSION_TIME_DEF_STCF_SECS 1000000
- #define CFE_MISSION_TIME_DEF_STCF_SUBS 0
- #define CFE_MISSION_TIME_DEF_LEAPS 32
- #define CFE_MISSION_TIME_DEF_DELAY_SECS 0
- #define CFE_MISSION_TIME_DEF_DELAY_SUBS 1000
- #define CFE_MISSION_TIME_EPOCH_YEAR 1980
- #define CFE_MISSION_TIME_EPOCH_DAY 1
- #define CFE_MISSION_TIME_EPOCH_HOUR 0
- #define CFE_MISSION_TIME_EPOCH_MINUTE 0
- #define CFE_MISSION_TIME_EPOCH_SECOND 0
- #define CFE_MISSION_TIME_FS_FACTOR 789004800

- #define CFE_MISSION_ES_CDS_MAX_NAME_LENGTH 16
- #define CFE_MISSION_EVS_MAX_MESSAGE_LENGTH 122
- #define CFE_MISSION_ES_DEFAULT_CRC CFE_MISSION_ES_CRC_16
- #define CFE_MISSION_TBL_MAX_NAME_LENGTH 16
- #define CFE_MISSION_CMD_MID_BASE1 0x1800
- #define CFE_MISSION_TLM_MID_BASE1 0x0800
- #define CFE_MISSION_CMD_APPID_BASE1 1
- #define CFE_MISSION_TLM_APPID_BASE1 0
- #define CFE_MISSION_CMD_MID_BASE_GLOB 0x1860
- #define CFE_MISSION_TLM_MID_BASE_GLOB 0x0860
- #define CFE_MISSION_EVS_CMD_MSG 1
- #define CFE_MISSION_SB_CMD_MSG 3
- #define CFE_MISSION_TBL_CMD_MSG 4
- #define CFE_MISSION_TIME_CMD_MSG 5
- #define CFE_MISSION_ES_CMD_MSG 6
- #define CFE_MISSION_ES_SEND_HK_MSG 8
- #define CFE_MISSION_EVS_SEND_HK_MSG 9
- #define CFE_MISSION_SB_SEND_HK_MSG 11
- #define CFE_MISSION_TBL_SEND_HK_MSG 12
- #define CFE_MISSION_TIME_SEND_HK_MSG 13
- #define CFE_MISSION_SB_SUB_RPT_CTRL_MSG 14
- #define CFE_MISSION_TIME_TONE_CMD_MSG 16
- #define CFE_MISSION_TIME_1HZ_CMD_MSG 17
- #define CFE_MISSION_TIME_DATA_CMD_MSG 0
- #define CFE_MISSION_TIME_SEND_CMD_MSG 2
- #define CFE_MISSION_ES_HK_TLM_MSG 0
- #define CFE_MISSION_EVS_HK_TLM_MSG 1
- #define CFE_MISSION_SB_HK_TLM_MSG 3
- #define CFE_MISSION_TBL_HK_TLM_MSG 4
- #define CFE_MISSION_TIME_HK_TLM_MSG 5
- #define CFE_MISSION_TIME_DIAG_TLM_MSG 6
- #define CFE_MISSION_EVS_LONG_EVENT_MSG_MSG 8
- #define CFE_MISSION_EVS_SHORT_EVENT_MSG_MSG 9
- #define CFE_MISSION_SB_STATS_TLM_MSG 10
- #define CFE_MISSION_ES_APP_TLM_MSG 11
- #define CFE_MISSION_TBL_REG_TLM_MSG 12
- #define CFE_MISSION_SB_ALLSUBS_TLM_MSG 13
- #define CFE_MISSION_SB_ONESUB_TLM_MSG 14
- #define CFE_MISSION_ES_SHELL_TLM_MSG 15
- #define CFE_MISSION_ES_MEMSTATS_TLM_MSG 16
- #define CFE_MISSION_ES_MAX_APPLICATIONS 16
- #define CFE_MISSION_ES_MAX_SHELL_CMD 64
- #define CFE_MISSION_ES_MAX_SHELL_PKT 64
- #define CFE_MISSION_ES_PERF_MAX_IDS 128
- #define CFE_MISSION_TBL_MAX_FULL_NAME_LEN (CFE_MISSION_TBL_MAX_NAME_LENGTH + CFE_↩
  MISSION_MAX_API_LEN + 4)
- #define CFE_MISSION_SB_MAX_PIPES 64
- #define CFE_MISSION_MAX_PATH_LEN 64
- #define CFE_MISSION_MAX_FILE_LEN 20
- #define CFE_MISSION_MAX_API_LEN 20

- #define CFE_MISSION_ES_CDS_MAX_NAME_LEN (CFE_MISSION_ES_CDS_MAX_NAME_LENGTH + CF↩
  E_MISSION_MAX_API_LEN + 4)
- #define CFE_SPACECRAFT_ID CFE_MISSION_SPACECRAFT_ID
- #define CFE_SB_TIME_32_16_SUBS CFE_MISSION_SB_TIME_32_16_SUBS
- #define CFE_SB_TIME_32_32_SUBS CFE_MISSION_SB_TIME_32_32_SUBS
- #define CFE_SB_TIME_32_32_M_20 CFE_MISSION_SB_TIME_32_32_M_20
- #define CFE_SB_PACKET_TIME_FORMAT CFE_MISSION_SB_PACKET_TIME_FORMAT
- #define CFE_SB_MAX_SB_MSG_SIZE CFE_MISSION_SB_MAX_SB_MSG_SIZE
- #define CFE_TIME_CFG_DEFAULT_TAI CFE_MISSION_TIME_CFG_DEFAULT_TAI
- #define CFE_TIME_CFG_DEFAULT_UTC CFE_MISSION_TIME_CFG_DEFAULT_UTC
- #define CFE_TIME_CFG_FAKE_TONE CFE_MISSION_TIME_CFG_FAKE_TONE
- #define CFE_TIME_AT_TONE_WAS CFE_MISSION_TIME_AT_TONE_WAS
- #define CFE_TIME_AT_TONE_WILL_BE CFE_MISSION_TIME_AT_TONE_WILL_BE
- #define CFE_TIME_MIN_ELAPSED CFE_MISSION_TIME_MIN_ELAPSED
- #define CFE_TIME_MAX_ELAPSED CFE_MISSION_TIME_MAX_ELAPSED
- #define CFE_TIME_DEF_MET_SECS CFE_MISSION_TIME_DEF_MET_SECS
- #define CFE_TIME_DEF_MET_SUBS CFE_MISSION_TIME_DEF_MET_SUBS
- #define CFE_TIME_DEF_STCF_SECS CFE_MISSION_TIME_DEF_STCF_SECS
- #define CFE_TIME_DEF_STCF_SUBS CFE_MISSION_TIME_DEF_STCF_SUBS
- #define CFE_TIME_DEF_LEAPS CFE_MISSION_TIME_DEF_LEAPS
- #define CFE_TIME_DEF_DELAY_SECS CFE_MISSION_TIME_DEF_DELAY_SECS
- #define CFE_TIME_DEF_DELAY_SUBS CFE_MISSION_TIME_DEF_DELAY_SUBS
- #define CFE_TIME_EPOCH_YEAR CFE_MISSION_TIME_EPOCH_YEAR
- #define CFE_TIME_EPOCH_DAY CFE_MISSION_TIME_EPOCH_DAY
- #define CFE_TIME_EPOCH_HOUR CFE_MISSION_TIME_EPOCH_HOUR
- #define CFE_TIME_EPOCH_MINUTE CFE_MISSION_TIME_EPOCH_MINUTE
- #define CFE_TIME_EPOCH_SECOND CFE_MISSION_TIME_EPOCH_SECOND
- #define CFE_TIME_FS_FACTOR CFE_MISSION_TIME_FS_FACTOR
- #define CFE_ES_CDS_MAX_NAME_LENGTH CFE_MISSION_ES_CDS_MAX_NAME_LENGTH
- #define CFE_EVS_MAX_MESSAGE_LENGTH CFE_MISSION_EVS_MAX_MESSAGE_LENGTH
- #define CFE_ES_CRC_8 CFE_MISSION_ES_CRC_8
- #define CFE_ES_CRC_16 CFE_MISSION_ES_CRC_16
- #define CFE_ES_CRC_32 CFE_MISSION_ES_CRC_32
- #define CFE_ES_DEFAULT_CRC CFE_MISSION_ES_DEFAULT_CRC
- #define CFE_TBL_MAX_NAME_LENGTH CFE_MISSION_TBL_MAX_NAME_LENGTH
- #define CFE_CMD_MID_BASE_CPU1 CFE_MISSION_CMD_MID_BASE_CPU1
- #define CFE_TLM_MID_BASE_CPU1 CFE_MISSION_TLM_MID_BASE_CPU1
- #define CFE_CMD_APPID_BASE_CPU1 CFE_MISSION_CMD_APPID_BASE_CPU1
- #define CFE_TLM_APPID_BASE_CPU1 CFE_MISSION_TLM_APPID_BASE_CPU1
- #define CFE_CMD_MID_BASE_CPU2 CFE_MISSION_CMD_MID_BASE_CPU2
- #define CFE_TLM_MID_BASE_CPU2 CFE_MISSION_TLM_MID_BASE_CPU2
- #define CFE_CMD_APPID_BASE_CPU2 CFE_MISSION_CMD_APPID_BASE_CPU2
- #define CFE_TLM_APPID_BASE_CPU2 CFE_MISSION_TLM_APPID_BASE_CPU2
- #define CFE_CMD_MID_BASE_CPU3 CFE_MISSION_CMD_MID_BASE_CPU3
- #define CFE_TLM_MID_BASE_CPU3 CFE_MISSION_TLM_MID_BASE_CPU3
- #define CFE_CMD_APPID_BASE_CPU3 CFE_MISSION_CMD_APPID_BASE_CPU3
- #define CFE_TLM_APPID_BASE_CPU3 CFE_MISSION_TLM_APPID_BASE_CPU3
- #define CFE_CMD_MID_BASE_GLOB CFE_MISSION_CMD_MID_BASE_GLOB
- #define CFE_TLM_MID_BASE_GLOB CFE_MISSION_TLM_MID_BASE_GLOB
- #define CFE_EVS_CMD_MSG CFE_MISSION_EVS_CMD_MSG
- #define CFE_SB_CMD_MSG CFE_MISSION_SB_CMD_MSG

- #define CFE_TBL_CMD_MSG CFE_MISSION_TBL_CMD_MSG
- #define CFE_TIME_CMD_MSG CFE_MISSION_TIME_CMD_MSG
- #define CFE_ES_CMD_MSG CFE_MISSION_ES_CMD_MSG
- #define CFE_ES_SEND_HK_MSG CFE_MISSION_ES_SEND_HK_MSG
- #define CFE_EVS_SEND_HK_MSG CFE_MISSION_EVS_SEND_HK_MSG
- #define CFE_SB_SEND_HK_MSG CFE_MISSION_SB_SEND_HK_MSG
- #define CFE_TBL_SEND_HK_MSG CFE_MISSION_TBL_SEND_HK_MSG
- #define CFE_TIME_SEND_HK_MSG CFE_MISSION_TIME_SEND_HK_MSG
- #define CFE_TIME_TONE_CMD_MSG CFE_MISSION_TIME_TONE_CMD_MSG
- #define CFE_TIME_1HZ_CMD_MSG CFE_MISSION_TIME_1HZ_CMD_MSG
- #define CFE_TIME_DATA_CMD_MSG CFE_MISSION_TIME_DATA_CMD_MSG
- #define CFE_TIME_SEND_CMD_MSG CFE_MISSION_TIME_SEND_CMD_MSG
- #define CFE_ES_HK_TLM_MSG CFE_MISSION_ES_HK_TLM_MSG
- #define CFE_EVS_HK_TLM_MSG CFE_MISSION_EVS_HK_TLM_MSG
- #define CFE_SB_HK_TLM_MSG CFE_MISSION_SB_HK_TLM_MSG
- #define CFE_TBL_HK_TLM_MSG CFE_MISSION_TBL_HK_TLM_MSG
- #define CFE_TIME_HK_TLM_MSG CFE_MISSION_TIME_HK_TLM_MSG
- #define CFE_TIME_DIAG_TLM_MSG CFE_MISSION_TIME_DIAG_TLM_MSG
- #define CFE_EVS_EVENT_MSG_MSG CFE_MISSION_EVS_LONG_EVENT_MSG_MSG
- #define CFE_SB_STATS_TLM_MSG CFE_MISSION_SB_STATS_TLM_MSG
- #define CFE_ES_APP_TLM_MSG CFE_MISSION_ES_APP_TLM_MSG
- #define CFE_TBL_REG_TLM_MSG CFE_MISSION_TBL_REG_TLM_MSG
- #define CFE_SB_ALLSUBS_TLM_MSG CFE_MISSION_SB_ALLSUBS_TLM_MSG
- #define CFE_SB_ONESUB_TLM_MSG CFE_MISSION_SB_ONESUB_TLM_MSG
- #define CFE_ES_SHELL_TLM_MSG CFE_MISSION_ES_SHELL_TLM_MSG
- #define CFE_ES_MEMSTATS_TLM_MSG CFE_MISSION_ES_MEMSTATS_TLM_MSG

Packet timestamp format identifiers

[Purpose](...) *cFE SB message format*

Description:

> *Dictates the message format used by the cFE.*

Limits

> *All versions of the cFE currently support only CCSDS as the message format Defining MESSAGE_FORMAT_↩*
> *IS_CCSDS_VER_2 implements the APID extended header format MESSAGE_FORMAT_IS_CCSDS_VER_2*
> *is optional*

- #define CFE_MISSION_SB_TIME_32_16_SUBS 1
  32 bits seconds + 16 bits subseconds (units = $2^{\wedge\wedge}$-16)
- #define CFE_MISSION_SB_TIME_32_32_SUBS 2
  32 bits seconds + 32 bits subseconds (units = $2^{\wedge\wedge}$-32)
- #define CFE_MISSION_SB_TIME_32_32_M_20 3
  32 bits seconds + 20 bits microsecs + 12 bits reserved

Checksum/CRC algorithm identifiers

- #define CFE_MISSION_ES_CRC_8 1
  CRC (8 bit additive - returns 32 bit total) (Currently not implemented)
- #define CFE_MISSION_ES_CRC_16 2
  CRC (16 bit additive - returns 32 bit total)
- #define CFE_MISSION_ES_CRC_32 3
  CRC (32 bit additive - returns 32 bit total) (Currently not implemented)

39.7.1 Macro Definition Documentation

39.7.1.1 CFE_CMD_APPID_BASE_CPU1

#define CFE_CMD_APPID_BASE_CPU1 CFE_MISSION_CMD_APPID_BASE_CPU1

Definition at line 736 of file sample_mission_cfg.h.

39.7.1.2 CFE_CMD_APPID_BASE_CPU2

#define CFE_CMD_APPID_BASE_CPU2 CFE_MISSION_CMD_APPID_BASE_CPU2

Definition at line 740 of file sample_mission_cfg.h.

39.7.1.3 CFE_CMD_APPID_BASE_CPU3

#define CFE_CMD_APPID_BASE_CPU3 CFE_MISSION_CMD_APPID_BASE_CPU3

Definition at line 744 of file sample_mission_cfg.h.

39.7.1.4 CFE_CMD_MID_BASE_CPU1

#define CFE_CMD_MID_BASE_CPU1 CFE_MISSION_CMD_MID_BASE_CPU1

Definition at line 734 of file sample_mission_cfg.h.

39.7.1.5 CFE_CMD_MID_BASE_CPU2

#define CFE_CMD_MID_BASE_CPU2 CFE_MISSION_CMD_MID_BASE_CPU2

Definition at line 738 of file sample_mission_cfg.h.

39.7.1.6 CFE_CMD_MID_BASE_CPU3

#define CFE_CMD_MID_BASE_CPU3 CFE_MISSION_CMD_MID_BASE_CPU3

Definition at line 742 of file sample_mission_cfg.h.

39.7.1.7 CFE_CMD_MID_BASE_GLOB

`#define CFE_CMD_MID_BASE_GLOB` CFE_MISSION_CMD_MID_BASE_GLOB

Definition at line 746 of file sample_mission_cfg.h.

39.7.1.8 CFE_ES_APP_TLM_MSG

`#define CFE_ES_APP_TLM_MSG` CFE_MISSION_ES_APP_TLM_MSG

Definition at line 770 of file sample_mission_cfg.h.

39.7.1.9 CFE_ES_CDS_MAX_NAME_LENGTH

`#define CFE_ES_CDS_MAX_NAME_LENGTH` CFE_MISSION_ES_CDS_MAX_NAME_LENGTH

Definition at line 727 of file sample_mission_cfg.h.

39.7.1.10 CFE_ES_CMD_MSG

`#define CFE_ES_CMD_MSG` CFE_MISSION_ES_CMD_MSG

Definition at line 752 of file sample_mission_cfg.h.

39.7.1.11 CFE_ES_CRC_16

`#define CFE_ES_CRC_16` CFE_MISSION_ES_CRC_16

Definition at line 730 of file sample_mission_cfg.h.

39.7.1.12 CFE_ES_CRC_32

`#define CFE_ES_CRC_32` CFE_MISSION_ES_CRC_32

Definition at line 731 of file sample_mission_cfg.h.

39.7.1.13   CFE_ES_CRC_8

#define CFE_ES_CRC_8 CFE_MISSION_ES_CRC_8

Definition at line 729 of file sample_mission_cfg.h.

39.7.1.14   CFE_ES_DEFAULT_CRC

#define CFE_ES_DEFAULT_CRC CFE_MISSION_ES_DEFAULT_CRC

Definition at line 732 of file sample_mission_cfg.h.

39.7.1.15   CFE_ES_HK_TLM_MSG

#define CFE_ES_HK_TLM_MSG CFE_MISSION_ES_HK_TLM_MSG

Definition at line 762 of file sample_mission_cfg.h.

39.7.1.16   CFE_ES_MEMSTATS_TLM_MSG

#define CFE_ES_MEMSTATS_TLM_MSG CFE_MISSION_ES_MEMSTATS_TLM_MSG

Definition at line 775 of file sample_mission_cfg.h.

39.7.1.17   CFE_ES_SEND_HK_MSG

#define CFE_ES_SEND_HK_MSG CFE_MISSION_ES_SEND_HK_MSG

Definition at line 753 of file sample_mission_cfg.h.

39.7.1.18   CFE_ES_SHELL_TLM_MSG

#define CFE_ES_SHELL_TLM_MSG CFE_MISSION_ES_SHELL_TLM_MSG

Definition at line 774 of file sample_mission_cfg.h.

39.7.1.19 CFE_EVS_CMD_MSG

#define CFE_EVS_CMD_MSG CFE_MISSION_EVS_CMD_MSG

Definition at line 748 of file sample_mission_cfg.h.

39.7.1.20 CFE_EVS_EVENT_MSG_MSG

#define CFE_EVS_EVENT_MSG_MSG CFE_MISSION_EVS_LONG_EVENT_MSG_MSG

Definition at line 768 of file sample_mission_cfg.h.

39.7.1.21 CFE_EVS_HK_TLM_MSG

#define CFE_EVS_HK_TLM_MSG CFE_MISSION_EVS_HK_TLM_MSG

Definition at line 763 of file sample_mission_cfg.h.

39.7.1.22 CFE_EVS_MAX_MESSAGE_LENGTH

#define CFE_EVS_MAX_MESSAGE_LENGTH CFE_MISSION_EVS_MAX_MESSAGE_LENGTH

Definition at line 728 of file sample_mission_cfg.h.

39.7.1.23 CFE_EVS_SEND_HK_MSG

#define CFE_EVS_SEND_HK_MSG CFE_MISSION_EVS_SEND_HK_MSG

Definition at line 754 of file sample_mission_cfg.h.

39.7.1.24 CFE_MISSION_CMD_APPID_BASE1

#define CFE_MISSION_CMD_APPID_BASE1 1

Definition at line 387 of file sample_mission_cfg.h.

39.7.1.25   CFE_MISSION_CMD_MID_BASE1

```
#define CFE_MISSION_CMD_MID_BASE1 0x1800
```

[Purpose](#) cFE Message ID Base Numbers

Description:

Message Id base numbers for the cFE messages These will now differ in format when using CCSDS version 2 as they will no longer include the Secondary Header Flag and CCSDS version bits.

NOTES: cFE MsgIds are the sum of the base numbers and the portable msg numbers.

For MESSAGE_FORMAT_IS_CCSDS_VER_2 These base MsgIds values are dependent on the values returned by the following SB Macros to form a 16 bit message ID (default macro definitions are in cfe_sb_msg_id_utils.h, default values below are representative of default macro definitions) : CFE_SB_CMD_MESSAGE_TYPE, CFE_SB_RD_APID_FR←
OM_MSGID CFE_SB_RD_SUBSYS_ID_FROM_MSGID and CFE_SB_RD_TYPE_FROM_MSGID

Limits

Must be less than CFE_PLATFORM_SB_HIGHEST_VALID_MSGID

Definition at line 380 of file sample_mission_cfg.h.

39.7.1.26   CFE_MISSION_CMD_MID_BASE_GLOB

```
#define CFE_MISSION_CMD_MID_BASE_GLOB 0x1860
```

Definition at line 391 of file sample_mission_cfg.h.

39.7.1.27   CFE_MISSION_ES_APP_TLM_MSG

```
#define CFE_MISSION_ES_APP_TLM_MSG 11
```

Definition at line 468 of file sample_mission_cfg.h.

39.7.1.28 CFE_MISSION_ES_CDS_MAX_NAME_LEN

```
#define CFE_MISSION_ES_CDS_MAX_NAME_LEN (CFE_MISSION_ES_CDS_MAX_NAME_LENGTH + CFE_MISSION_MAX_AP↩
I_LEN + 4)
```

Purpose Maximum Length of Full CDS Name in messages

Description:

Indicates the maximum length (in characters) of the entire CDS name of the following form: "ApplicationName.C↩
DSName"

This affects the layout of command/telemetry messages but does not affect run time behavior or internal allocation.

Limits

All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 683 of file sample_mission_cfg.h.

39.7.1.29 CFE_MISSION_ES_CDS_MAX_NAME_LENGTH

```
#define CFE_MISSION_ES_CDS_MAX_NAME_LENGTH 16
```

Purpose Maximum Length of CDS Name

Description:

Indicates the maximum length (in characters) of the CDS name ('CDSName') portion of a Full CDS Name of the following form: "ApplicationName.CDSName"

Limits

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 305 of file sample_mission_cfg.h.

39.7.1.30   CFE_MISSION_ES_CMD_MSG

`#define CFE_MISSION_ES_CMD_MSG 6`

Definition at line 416 of file sample_mission_cfg.h.

39.7.1.31   CFE_MISSION_ES_CRC_16

`#define CFE_MISSION_ES_CRC_16 2`

CRC (16 bit additive - returns 32 bit total)

Definition at line 325 of file sample_mission_cfg.h.

39.7.1.32   CFE_MISSION_ES_CRC_32

`#define CFE_MISSION_ES_CRC_32 3`

CRC (32 bit additive - returns 32 bit total) (Currently not implemented)

Definition at line 326 of file sample_mission_cfg.h.

39.7.1.33   CFE_MISSION_ES_CRC_8

`#define CFE_MISSION_ES_CRC_8 1`

CRC (8 bit additive - returns 32 bit total) (Currently not implemented)

Definition at line 324 of file sample_mission_cfg.h.

39.7.1.34   CFE_MISSION_ES_DEFAULT_CRC

`#define CFE_MISSION_ES_DEFAULT_CRC CFE_MISSION_ES_CRC_16`

Purpose   Mission Default CRC algorithm

Description:

> Indicates the which CRC algorithm should be used as the default for verifying the contents of Critical Data Stores and when calculating Table Image data integrity values.

Limits

> Currently only CFE_MISSION_ES_CRC_16 is supported (see CFE_MISSION_ES_CRC_16)

Definition at line 340 of file sample_mission_cfg.h.

39.7.1.35   CFE_MISSION_ES_HK_TLM_MSG

```
#define CFE_MISSION_ES_HK_TLM_MSG 0
```

Purpose cFE Portable Message Numbers for Telemetry

Description:

Portable message numbers for the cFE telemetry messages NOTE: cFE MsgIds are the sum of the base numbers and the portable msg numbers.

Limits

Not Applicable

Definition at line 457 of file sample_mission_cfg.h.

39.7.1.36   CFE_MISSION_ES_MAX_APPLICATIONS

```
#define CFE_MISSION_ES_MAX_APPLICATIONS 16
```

Purpose Mission Max Apps in a message

Description:

Indicates the maximum number of apps in a telemetry housekeeping message

This affects the layout of command/telemetry messages but does not affect run time behavior or internal allocation.

Limits

All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

Definition at line 489 of file sample_mission_cfg.h.

39.7.1.37 CFE_MISSION_ES_MAX_SHELL_CMD

```
#define CFE_MISSION_ES_MAX_SHELL_CMD 64
```

Purpose Define Max Shell Command Size for messages

Description:

>   Defines the maximum size in characters of the shell command.

This affects the layout of command/telemetry messages but does not affect run time behavior or internal allocation.

Limits

>   All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 509 of file sample_mission_cfg.h.

39.7.1.38 CFE_MISSION_ES_MAX_SHELL_PKT

```
#define CFE_MISSION_ES_MAX_SHELL_PKT 64
```

Purpose Define Shell Command Telemetry Pkt Segment Size for messages

Description:

>   Defines the size of the shell command tlm packet segments.The shell command output size is dependant on the shell command itself. If the shell output size is greater than the size of the packet defined here, the fsw will generate a series of tlm packets (of the size defined here) that can be reconstructed by the ground system.

This affects the layout of command/telemetry messages but does not affect run time behavior or internal allocation.

Limits

>   All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 534 of file sample_mission_cfg.h.

39.7.1.39   CFE_MISSION_ES_MEMSTATS_TLM_MSG

```
#define CFE_MISSION_ES_MEMSTATS_TLM_MSG 16
```

Definition at line 473 of file sample_mission_cfg.h.

39.7.1.40   CFE_MISSION_ES_PERF_MAX_IDS

```
#define CFE_MISSION_ES_PERF_MAX_IDS 128
```

Purpose   Define Max Number of Performance IDs for messages

Description:

Defines the maximum number of perf ids allowed in command/telemetry messages

This affects the layout of command/telemetry messages but does not affect run time behavior or internal allocation.

Limits

All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

Definition at line 551 of file sample_mission_cfg.h.

39.7.1.41   CFE_MISSION_ES_SEND_HK_MSG

```
#define CFE_MISSION_ES_SEND_HK_MSG 8
```

Definition at line 418 of file sample_mission_cfg.h.

39.7.1.42   CFE_MISSION_ES_SHELL_TLM_MSG

```
#define CFE_MISSION_ES_SHELL_TLM_MSG 15
```

Definition at line 472 of file sample_mission_cfg.h.

39.7.1.43 CFE_MISSION_EVS_CMD_MSG

#define CFE_MISSION_EVS_CMD_MSG 1

Purpose cFE Portable Message Numbers for Commands

Description:

Portable message numbers for the cFE command messages NOTE: cFE MsgIds are the sum of the base numbers and the portable msg numbers.

Limits

Not Applicable

Definition at line 411 of file sample_mission_cfg.h.

39.7.1.44 CFE_MISSION_EVS_HK_TLM_MSG

#define CFE_MISSION_EVS_HK_TLM_MSG 1

Definition at line 458 of file sample_mission_cfg.h.

39.7.1.45 CFE_MISSION_EVS_LONG_EVENT_MSG_MSG

#define CFE_MISSION_EVS_LONG_EVENT_MSG_MSG 8

Definition at line 465 of file sample_mission_cfg.h.

39.7.1.46 CFE_MISSION_EVS_MAX_MESSAGE_LENGTH

#define CFE_MISSION_EVS_MAX_MESSAGE_LENGTH 122

Purpose Maximum Event Message Length

Description:

Indicates the maximum length (in characters) of the formatted text string portion of an event message

Limits

Not Applicable

Definition at line 319 of file sample_mission_cfg.h.

39.7.1.47 CFE_MISSION_EVS_SEND_HK_MSG

```
#define CFE_MISSION_EVS_SEND_HK_MSG 9
```

Definition at line 419 of file sample_mission_cfg.h.

39.7.1.48 CFE_MISSION_EVS_SHORT_EVENT_MSG_MSG

```
#define CFE_MISSION_EVS_SHORT_EVENT_MSG_MSG 9
```

Definition at line 466 of file sample_mission_cfg.h.

39.7.1.49 CFE_MISSION_MAX_API_LEN

```
#define CFE_MISSION_MAX_API_LEN 20
```

Purpose cFE Maximum length for API names within data exchange structures

Description:

The value of this constant dictates the size of filenames within all structures used for external data exchange, such as Software bus messages and table definitions. This is typically the same as OS_MAX_API_LEN but that is OSAL dependent – and as such it definable on a per-processor/OS basis and hence may be different across multiple processors. It is recommended to set this to the value of the largest OS_MAX_API_LEN in use on any CPU on the mission.

This affects only the layout of command/telemetry messages and table definitions; internal allocation may use the platform-specific OS_MAX_API_LEN value.

Limits

All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 663 of file sample_mission_cfg.h.

39.7.1.50 CFE_MISSION_MAX_FILE_LEN

#define CFE_MISSION_MAX_FILE_LEN 20

Purpose cFE Maximum length for filenames within data exchange structures

Description:

> The value of this constant dictates the size of filenames within all structures used for external data exchange, such as Software bus messages and table definitions. This is typically the same as OS_MAX_FILE_LEN but that is O↩
> SAL dependent – and as such it definable on a per-processor/OS basis and hence may be different across multiple processors. It is recommended to set this to the value of the largest OS_MAX_FILE_LEN in use on any CPU on the mission.

This affects only the layout of command/telemetry messages and table definitions; internal allocation may use the platform-specific OS_MAX_FILE_LEN value.

Limits

> All CPUs within the same SB domain (mission) and ground tools must share the same definition. Note this affects the size of messages, so it must not cause any message to exceed the max length.

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 639 of file sample_mission_cfg.h.

39.7.1.51 CFE_MISSION_MAX_PATH_LEN

#define CFE_MISSION_MAX_PATH_LEN 64

Purpose cFE Maximum length for pathnames within data exchange structures

Description:

> The value of this constant dictates the size of pathnames within all structures used for external data exchange, such as Software bus messages and table definitions. This is typically the same as OS_MAX_PATH_LEN but that is OSAL dependent – and as such it definable on a per-processor/OS basis and hence may be different across multiple processors. It is recommended to set this to the value of the largest OS_MAX_PATH_LEN in use on any CPU on the mission.

This affects only the layout of command/telemetry messages and table definitions; internal allocation may use the platform-specific OS_MAX_PATH_LEN value.

Limits

> All CPUs within the same SB domain (mission) and ground tools must share the same definition. Note this affects the size of messages, so it must not cause any message to exceed the max length.

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 614 of file sample_mission_cfg.h.

39.7.1.52 CFE_MISSION_SB_ALLSUBS_TLM_MSG

`#define CFE_MISSION_SB_ALLSUBS_TLM_MSG 13`

Definition at line 470 of file sample_mission_cfg.h.

39.7.1.53 CFE_MISSION_SB_CMD_MSG

`#define CFE_MISSION_SB_CMD_MSG 3`

Definition at line 413 of file sample_mission_cfg.h.

39.7.1.54 CFE_MISSION_SB_HK_TLM_MSG

`#define CFE_MISSION_SB_HK_TLM_MSG 3`

Definition at line 460 of file sample_mission_cfg.h.

39.7.1.55 CFE_MISSION_SB_MAX_PIPES

`#define CFE_MISSION_SB_MAX_PIPES 64`

Purpose Maximum Number of pipes that SB command/telemetry messages may hold

Description:

Dictates the maximum number of unique Pipes the SB message defintions will hold.

This affects the layout of command/telemetry messages but does not affect run time behavior or internal allocation.

Limits

All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

Definition at line 588 of file sample_mission_cfg.h.

39.7.1.56   CFE_MISSION_SB_MAX_SB_MSG_SIZE

#define CFE_MISSION_SB_MAX_SB_MSG_SIZE 32768

Purpose Maximum SB Message Size

Description:

The following definition dictates the maximum message size allowed on the software bus. SB checks the pkt length field in the header of all messages sent. If the pkt length field indicates the message is larger than this define, SB sends an event and rejects the send.

Limits

This parameter has a lower limit of 6 (CCSDS primary header size). There are no restrictions on the upper limit however, the maximum message size is system dependent and should be verified. Total message size values that are checked against this configuration are defined by a 16 bit data word.

Definition at line 106 of file sample_mission_cfg.h.

39.7.1.57   CFE_MISSION_SB_ONESUB_TLM_MSG

#define CFE_MISSION_SB_ONESUB_TLM_MSG 14

Definition at line 471 of file sample_mission_cfg.h.

39.7.1.58   CFE_MISSION_SB_PACKET_TIME_FORMAT

#define CFE_MISSION_SB_PACKET_TIME_FORMAT CFE_MISSION_SB_TIME_32_16_SUBS

Purpose Packet Timestamp Format Selection

Description:

Defines the size, format and contents of the telemetry packet timestamp.

Limits

Must be defined as one of the supported formats listed above

Definition at line 87 of file sample_mission_cfg.h.

39.7.1.59 CFE_MISSION_SB_SEND_HK_MSG

`#define CFE_MISSION_SB_SEND_HK_MSG 11`

Definition at line 421 of file sample_mission_cfg.h.

39.7.1.60 CFE_MISSION_SB_STATS_TLM_MSG

`#define CFE_MISSION_SB_STATS_TLM_MSG 10`

Definition at line 467 of file sample_mission_cfg.h.

39.7.1.61 CFE_MISSION_SB_SUB_RPT_CTRL_MSG

`#define CFE_MISSION_SB_SUB_RPT_CTRL_MSG 14`

Definition at line 425 of file sample_mission_cfg.h.

39.7.1.62 CFE_MISSION_SB_TIME_32_16_SUBS

`#define CFE_MISSION_SB_TIME_32_16_SUBS 1`

32 bits seconds + 16 bits subseconds (units = 2^{-16})

Definition at line 73 of file sample_mission_cfg.h.

39.7.1.63 CFE_MISSION_SB_TIME_32_32_M_20

`#define CFE_MISSION_SB_TIME_32_32_M_20 3`

32 bits seconds + 20 bits microsecs + 12 bits reserved

Definition at line 75 of file sample_mission_cfg.h.

39.7.1.64 CFE_MISSION_SB_TIME_32_32_SUBS

`#define CFE_MISSION_SB_TIME_32_32_SUBS 2`

32 bits seconds + 32 bits subseconds (units = 2^{-32})

Definition at line 74 of file sample_mission_cfg.h.

39.7.1.65   CFE_MISSION_SPACECRAFT_ID

```
#define CFE_MISSION_SPACECRAFT_ID 0x42
```

Purpose Spacecraft ID

Description:

    This defines the value that is returned by the call to CFE_PSP_GetSpacecraftId.

Limits

    The cFE does not place a limit on this configuration paramter. CCSDS allocates 8 bits for this field in the standard VCDU.

Definition at line 52 of file sample_mission_cfg.h.

39.7.1.66   CFE_MISSION_TBL_CMD_MSG

```
#define CFE_MISSION_TBL_CMD_MSG 4
```

Definition at line 414 of file sample_mission_cfg.h.

39.7.1.67   CFE_MISSION_TBL_HK_TLM_MSG

```
#define CFE_MISSION_TBL_HK_TLM_MSG 4
```

Definition at line 461 of file sample_mission_cfg.h.

39.7.1.68   CFE_MISSION_TBL_MAX_FULL_NAME_LEN

```
#define CFE_MISSION_TBL_MAX_FULL_NAME_LEN (CFE_MISSION_TBL_MAX_NAME_LENGTH + CFE_MISSION_MAX_API↩
_LEN + 4)
```

Purpose Maximum Length of Full Table Name in messages

Description:

    Indicates the maximum length (in characters) of the entire table name within software bus messages, in "App↩ Name.TableName" notation.

This affects the layout of command/telemetry messages but does not affect run time behavior or internal allocation.

Limits

    All CPUs within the same SB domain (mission) must share the same definition Note this affects the size of messages, so it must not cause any message to exceed the max length.

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 571 of file sample_mission_cfg.h.

39.7.1.69   CFE_MISSION_TBL_MAX_NAME_LENGTH

```
#define CFE_MISSION_TBL_MAX_NAME_LENGTH 16
```

Purpose   Maximum Table Name Length

Description:

Indicates the maximum length (in characers) of the table name ('TblName') portion of a Full Table Name of the following form: "ApplicationName.TblName"

Limits

This value should be kept as a multiple of 4, to maintain alignment of any possible neighboring fields without implicit padding.

Definition at line 355 of file sample_mission_cfg.h.

39.7.1.70   CFE_MISSION_TBL_REG_TLM_MSG

```
#define CFE_MISSION_TBL_REG_TLM_MSG 12
```

Definition at line 469 of file sample_mission_cfg.h.

39.7.1.71   CFE_MISSION_TBL_SEND_HK_MSG

```
#define CFE_MISSION_TBL_SEND_HK_MSG 12
```

Definition at line 422 of file sample_mission_cfg.h.

39.7.1.72   CFE_MISSION_TIME_1HZ_CMD_MSG

```
#define CFE_MISSION_TIME_1HZ_CMD_MSG 17
```

Definition at line 428 of file sample_mission_cfg.h.

39.7.1.73 CFE_MISSION_TIME_AT_TONE_WAS

```
#define CFE_MISSION_TIME_AT_TONE_WAS true
```

Purpose Default Time and Tone Order

Description:

Time Services may be configured to expect the time at the tone data packet to either precede or follow the tone signal. If the time at the tone data packet follows the tone signal, then the data within the packet describes what the time "was" at the tone. If the time at the tone data packet precedes the tone signal, then the data within the packet describes what the time "will be" at the tone. One, and only one, of the following symbols must be set to true:

- CFE_MISSION_TIME_AT_TONE_WAS
- CFE_MISSION_TIME_AT_TONE_WILL_BE Note: If Time Services is defined as using a simulated tone signal (see CFE_MISSION_TIME_CFG_FAKE_TONE above), then the tone data packet must follow the tone signal.

Limits

Either CFE_MISSION_TIME_AT_TONE_WAS or CFE_MISSION_TIME_AT_TONE_WILL_BE must be set to true. They may not both be true and they may not both be false.

Definition at line 166 of file sample_mission_cfg.h.

39.7.1.74 CFE_MISSION_TIME_AT_TONE_WILL_BE

```
#define CFE_MISSION_TIME_AT_TONE_WILL_BE false
```

Definition at line 167 of file sample_mission_cfg.h.

39.7.1.75 CFE_MISSION_TIME_CFG_DEFAULT_TAI

```
#define CFE_MISSION_TIME_CFG_DEFAULT_TAI true
```

Purpose Default Time Format

Description:

The following definitions select either UTC or TAI as the default (mission specific) time format. Although it is possible for an application to request time in a specific format, most callers should use CFE_TIME_GetTime(), which returns time in the default format. This avoids having to modify each individual caller when the default choice is changed.

Limits

if CFE_MISSION_TIME_CFG_DEFAULT_TAI is defined as true then CFE_MISSION_TIME_CFG_DEFAULT_UTC must be defined as false. if CFE_MISSION_TIME_CFG_DEFAULT_TAI is defined as false then CFE_MISSION← _TIME_CFG_DEFAULT_UTC must be defined as true.

Definition at line 127 of file sample_mission_cfg.h.

39.7.1.76 CFE_MISSION_TIME_CFG_DEFAULT_UTC

`#define CFE_MISSION_TIME_CFG_DEFAULT_UTC false`

Definition at line 128 of file sample_mission_cfg.h.

39.7.1.77 CFE_MISSION_TIME_CFG_FAKE_TONE

`#define CFE_MISSION_TIME_CFG_FAKE_TONE true`

Purpose Default Time Format

Description:

The following definition enables the use of a simulated time at the tone signal using a software bus message.

Limits

Not Applicable

Definition at line 142 of file sample_mission_cfg.h.

39.7.1.78 CFE_MISSION_TIME_CMD_MSG

`#define CFE_MISSION_TIME_CMD_MSG 5`

Definition at line 415 of file sample_mission_cfg.h.

39.7.1.79 CFE_MISSION_TIME_DATA_CMD_MSG

`#define CFE_MISSION_TIME_DATA_CMD_MSG 0`

Purpose cFE Portable Message Numbers for Global Messages

Description:

Portable message numbers for the cFE global messages NOTE: cFE MsgIds are the sum of the base numbers and the portable msg numbers.

Limits

Not Applicable

Definition at line 442 of file sample_mission_cfg.h.

39.7.1.80   CFE_MISSION_TIME_DEF_DELAY_SECS

#define CFE_MISSION_TIME_DEF_DELAY_SECS 0

Definition at line 227 of file sample_mission_cfg.h.

39.7.1.81   CFE_MISSION_TIME_DEF_DELAY_SUBS

#define CFE_MISSION_TIME_DEF_DELAY_SUBS 1000

Definition at line 228 of file sample_mission_cfg.h.

39.7.1.82   CFE_MISSION_TIME_DEF_LEAPS

#define CFE_MISSION_TIME_DEF_LEAPS 32

Definition at line 225 of file sample_mission_cfg.h.

39.7.1.83   CFE_MISSION_TIME_DEF_MET_SECS

#define CFE_MISSION_TIME_DEF_MET_SECS 1000

Purpose Default Time Values

Description:

Default time values are provided to avoid problems due to time calculations performed after startup but before commands can be processed. For example, if the default time format is UTC then it is important that the sum of MET and STCF always exceed the value of Leap Seconds to prevent the UTC time calculation (time = MET + STCF - Leap Seconds) from resulting in a negative (very large) number.

Some past missions have also created known (albeit wrong) default timestamps. For example, assume the epoch is defined as Jan 1, 1970 and further assume the default time values are set to create a timestamp of Jan 1, 2000. Even though the year 2000 timestamps are wrong, it may be of value to keep the time within some sort of bounds acceptable to the software.

Note: Sub-second units are in micro-seconds (0 to 999,999) and all values must be defined

Limits

Not Applicable

Definition at line 219 of file sample_mission_cfg.h.

39.7.1.84 CFE_MISSION_TIME_DEF_MET_SUBS

`#define CFE_MISSION_TIME_DEF_MET_SUBS 0`

Definition at line 220 of file sample_mission_cfg.h.

39.7.1.85 CFE_MISSION_TIME_DEF_STCF_SECS

`#define CFE_MISSION_TIME_DEF_STCF_SECS 1000000`

Definition at line 222 of file sample_mission_cfg.h.

39.7.1.86 CFE_MISSION_TIME_DEF_STCF_SUBS

`#define CFE_MISSION_TIME_DEF_STCF_SUBS 0`

Definition at line 223 of file sample_mission_cfg.h.

39.7.1.87 CFE_MISSION_TIME_DIAG_TLM_MSG

`#define CFE_MISSION_TIME_DIAG_TLM_MSG 6`

Definition at line 463 of file sample_mission_cfg.h.

39.7.1.88 CFE_MISSION_TIME_EPOCH_DAY

`#define CFE_MISSION_TIME_EPOCH_DAY 1`

Definition at line 246 of file sample_mission_cfg.h.

39.7.1.89 CFE_MISSION_TIME_EPOCH_HOUR

`#define CFE_MISSION_TIME_EPOCH_HOUR 0`

Definition at line 247 of file sample_mission_cfg.h.

39.7.1.90   CFE_MISSION_TIME_EPOCH_MINUTE

#define CFE_MISSION_TIME_EPOCH_MINUTE 0

Definition at line 248 of file sample_mission_cfg.h.

39.7.1.91   CFE_MISSION_TIME_EPOCH_SECOND

#define CFE_MISSION_TIME_EPOCH_SECOND 0

Definition at line 249 of file sample_mission_cfg.h.

39.7.1.92   CFE_MISSION_TIME_EPOCH_YEAR

#define CFE_MISSION_TIME_EPOCH_YEAR 1980

Purpose   Default EPOCH Values

Description:

Default ground time epoch values Note: these values are used only by the [CFE_TIME_Print()](#) API function

Limits

Year - must be within 136 years Day - Jan 1 = 1, Feb 1 = 32, etc. Hour - 0 to 23 Minute - 0 to 59 Second - 0 to 59

Definition at line 245 of file sample_mission_cfg.h.

39.7.1.93   CFE_MISSION_TIME_FS_FACTOR

#define CFE_MISSION_TIME_FS_FACTOR 789004800

Purpose   Time File System Factor

Description:

Define the s/c vs file system time conversion constant...

Note: this value is intended for use only by CFE TIME API functions to convert time values based on the ground system epoch (s/c time) to and from time values based on the file system epoch (fs time).

FS time = S/C time + factor S/C time = FS time - factor

Worksheet:

S/C epoch = Jan 1, 2005 (LRO ground system epoch) FS epoch = Jan 1, 1980 (vxWorks DOS file system epoch)

Delta = 25 years, 0 days, 0 hours, 0 minutes, 0 seconds

Leap years = 1980, 1984, 1988, 1992, 1996, 2000, 2004 (divisible by 4 – except if by 100 – unless also by 400)

1 year = 31,536,000 seconds 1 day = 86,400 seconds 1 hour = 3,600 seconds 1 minute = 60 seconds

25 years = 788,400,000 seconds 7 extra leap days = 604,800 seconds

total delta = 789,004,800 seconds

Limits

    Not Applicable

Definition at line 288 of file sample_mission_cfg.h.

39.7.1.94 CFE_MISSION_TIME_HK_TLM_MSG

```
#define CFE_MISSION_TIME_HK_TLM_MSG 5
```

Definition at line 462 of file sample_mission_cfg.h.

39.7.1.95 CFE_MISSION_TIME_MAX_ELAPSED

```
#define CFE_MISSION_TIME_MAX_ELAPSED 200000
```

Definition at line 193 of file sample_mission_cfg.h.

39.7.1.96   CFE_MISSION_TIME_MIN_ELAPSED

#define CFE_MISSION_TIME_MIN_ELAPSED 0

Purpose Min and Max Time Elapsed

Description:

Based on the definition of Time and Tone Order (CFE_MISSION_TIME_AT_TONE_WAS/WILL_BE) either the "time at the tone" signal or data packet will follow the other. This definition sets the valid window of time for the second of the pair to lag behind the first. Time Services will invalidate both the tone and packet if the second does not arrive within this window following the first.

For example, if the data packet follows the tone, it might be valid for the data packet to arrive between zero and 100,000 micro-seconds after the tone. But, if the tone follows the the packet, it might be valid only if the packet arrived between 200,000 and 700,000 micro-seconds before the tone.

Note: units are in micro-seconds

Limits

0 to 999,999 decimal

Definition at line 192 of file sample_mission_cfg.h.

39.7.1.97   CFE_MISSION_TIME_SEND_CMD_MSG

#define CFE_MISSION_TIME_SEND_CMD_MSG 2

Definition at line 443 of file sample_mission_cfg.h.

39.7.1.98   CFE_MISSION_TIME_SEND_HK_MSG

#define CFE_MISSION_TIME_SEND_HK_MSG 13

Definition at line 423 of file sample_mission_cfg.h.

39.7.1.99   CFE_MISSION_TIME_TONE_CMD_MSG

#define CFE_MISSION_TIME_TONE_CMD_MSG 16

Definition at line 427 of file sample_mission_cfg.h.

39.7.1.100 CFE_MISSION_TLM_APPID_BASE1

`#define CFE_MISSION_TLM_APPID_BASE1 0`

Definition at line 388 of file sample_mission_cfg.h.

39.7.1.101 CFE_MISSION_TLM_MID_BASE1

`#define CFE_MISSION_TLM_MID_BASE1 0x0800`

Definition at line 381 of file sample_mission_cfg.h.

39.7.1.102 CFE_MISSION_TLM_MID_BASE_GLOB

`#define CFE_MISSION_TLM_MID_BASE_GLOB 0x0860`

Definition at line 392 of file sample_mission_cfg.h.

39.7.1.103 CFE_SB_ALLSUBS_TLM_MSG

`#define CFE_SB_ALLSUBS_TLM_MSG CFE_MISSION_SB_ALLSUBS_TLM_MSG`

Definition at line 772 of file sample_mission_cfg.h.

39.7.1.104 CFE_SB_CMD_MSG

`#define CFE_SB_CMD_MSG CFE_MISSION_SB_CMD_MSG`

Definition at line 749 of file sample_mission_cfg.h.

39.7.1.105 CFE_SB_HK_TLM_MSG

`#define CFE_SB_HK_TLM_MSG CFE_MISSION_SB_HK_TLM_MSG`

Definition at line 764 of file sample_mission_cfg.h.

39.7.1.106   CFE_SB_MAX_SB_MSG_SIZE

```
#define CFE_SB_MAX_SB_MSG_SIZE CFE_MISSION_SB_MAX_SB_MSG_SIZE
```

Definition at line 706 of file sample_mission_cfg.h.

39.7.1.107   CFE_SB_ONESUB_TLM_MSG

```
#define CFE_SB_ONESUB_TLM_MSG CFE_MISSION_SB_ONESUB_TLM_MSG
```

Definition at line 773 of file sample_mission_cfg.h.

39.7.1.108   CFE_SB_PACKET_TIME_FORMAT

```
#define CFE_SB_PACKET_TIME_FORMAT CFE_MISSION_SB_PACKET_TIME_FORMAT
```

Definition at line 705 of file sample_mission_cfg.h.

39.7.1.109   CFE_SB_SEND_HK_MSG

```
#define CFE_SB_SEND_HK_MSG CFE_MISSION_SB_SEND_HK_MSG
```

Definition at line 755 of file sample_mission_cfg.h.

39.7.1.110   CFE_SB_STATS_TLM_MSG

```
#define CFE_SB_STATS_TLM_MSG CFE_MISSION_SB_STATS_TLM_MSG
```

Definition at line 769 of file sample_mission_cfg.h.

39.7.1.111   CFE_SB_TIME_32_16_SUBS

```
#define CFE_SB_TIME_32_16_SUBS CFE_MISSION_SB_TIME_32_16_SUBS
```

Definition at line 702 of file sample_mission_cfg.h.

39.7.1.112 CFE_SB_TIME_32_32_M_20

#define CFE_SB_TIME_32_32_M_20 CFE_MISSION_SB_TIME_32_32_M_20

Definition at line 704 of file sample_mission_cfg.h.

39.7.1.113 CFE_SB_TIME_32_32_SUBS

#define CFE_SB_TIME_32_32_SUBS CFE_MISSION_SB_TIME_32_32_SUBS

Definition at line 703 of file sample_mission_cfg.h.

39.7.1.114 CFE_SPACECRAFT_ID

#define CFE_SPACECRAFT_ID CFE_MISSION_SPACECRAFT_ID

Definition at line 701 of file sample_mission_cfg.h.

39.7.1.115 CFE_TBL_CMD_MSG

#define CFE_TBL_CMD_MSG CFE_MISSION_TBL_CMD_MSG

Definition at line 750 of file sample_mission_cfg.h.

39.7.1.116 CFE_TBL_HK_TLM_MSG

#define CFE_TBL_HK_TLM_MSG CFE_MISSION_TBL_HK_TLM_MSG

Definition at line 765 of file sample_mission_cfg.h.

39.7.1.117 CFE_TBL_MAX_NAME_LENGTH

#define CFE_TBL_MAX_NAME_LENGTH CFE_MISSION_TBL_MAX_NAME_LENGTH

Definition at line 733 of file sample_mission_cfg.h.

39.7.1.118 CFE_TBL_REG_TLM_MSG

#define CFE_TBL_REG_TLM_MSG CFE_MISSION_TBL_REG_TLM_MSG

Definition at line 771 of file sample_mission_cfg.h.

39.7.1.119 CFE_TBL_SEND_HK_MSG

#define CFE_TBL_SEND_HK_MSG CFE_MISSION_TBL_SEND_HK_MSG

Definition at line 756 of file sample_mission_cfg.h.

39.7.1.120 CFE_TIME_1HZ_CMD_MSG

#define CFE_TIME_1HZ_CMD_MSG CFE_MISSION_TIME_1HZ_CMD_MSG

Definition at line 759 of file sample_mission_cfg.h.

39.7.1.121 CFE_TIME_AT_TONE_WAS

#define CFE_TIME_AT_TONE_WAS CFE_MISSION_TIME_AT_TONE_WAS

Definition at line 710 of file sample_mission_cfg.h.

39.7.1.122 CFE_TIME_AT_TONE_WILL_BE

#define CFE_TIME_AT_TONE_WILL_BE CFE_MISSION_TIME_AT_TONE_WILL_BE

Definition at line 711 of file sample_mission_cfg.h.

39.7.1.123 CFE_TIME_CFG_DEFAULT_TAI

#define CFE_TIME_CFG_DEFAULT_TAI CFE_MISSION_TIME_CFG_DEFAULT_TAI

Definition at line 707 of file sample_mission_cfg.h.

39.7.1.124 CFE_TIME_CFG_DEFAULT_UTC

`#define CFE_TIME_CFG_DEFAULT_UTC CFE_MISSION_TIME_CFG_DEFAULT_UTC`

Definition at line 708 of file sample_mission_cfg.h.

39.7.1.125 CFE_TIME_CFG_FAKE_TONE

`#define CFE_TIME_CFG_FAKE_TONE CFE_MISSION_TIME_CFG_FAKE_TONE`

Definition at line 709 of file sample_mission_cfg.h.

39.7.1.126 CFE_TIME_CMD_MSG

`#define CFE_TIME_CMD_MSG CFE_MISSION_TIME_CMD_MSG`

Definition at line 751 of file sample_mission_cfg.h.

39.7.1.127 CFE_TIME_DATA_CMD_MSG

`#define CFE_TIME_DATA_CMD_MSG CFE_MISSION_TIME_DATA_CMD_MSG`

Definition at line 760 of file sample_mission_cfg.h.

39.7.1.128 CFE_TIME_DEF_DELAY_SECS

`#define CFE_TIME_DEF_DELAY_SECS CFE_MISSION_TIME_DEF_DELAY_SECS`

Definition at line 719 of file sample_mission_cfg.h.

39.7.1.129 CFE_TIME_DEF_DELAY_SUBS

`#define CFE_TIME_DEF_DELAY_SUBS CFE_MISSION_TIME_DEF_DELAY_SUBS`

Definition at line 720 of file sample_mission_cfg.h.

39.7.1.130   CFE_TIME_DEF_LEAPS

#define CFE_TIME_DEF_LEAPS CFE_MISSION_TIME_DEF_LEAPS

Definition at line 718 of file sample_mission_cfg.h.

39.7.1.131   CFE_TIME_DEF_MET_SECS

#define CFE_TIME_DEF_MET_SECS CFE_MISSION_TIME_DEF_MET_SECS

Definition at line 714 of file sample_mission_cfg.h.

39.7.1.132   CFE_TIME_DEF_MET_SUBS

#define CFE_TIME_DEF_MET_SUBS CFE_MISSION_TIME_DEF_MET_SUBS

Definition at line 715 of file sample_mission_cfg.h.

39.7.1.133   CFE_TIME_DEF_STCF_SECS

#define CFE_TIME_DEF_STCF_SECS CFE_MISSION_TIME_DEF_STCF_SECS

Definition at line 716 of file sample_mission_cfg.h.

39.7.1.134   CFE_TIME_DEF_STCF_SUBS

#define CFE_TIME_DEF_STCF_SUBS CFE_MISSION_TIME_DEF_STCF_SUBS

Definition at line 717 of file sample_mission_cfg.h.

39.7.1.135   CFE_TIME_DIAG_TLM_MSG

#define CFE_TIME_DIAG_TLM_MSG CFE_MISSION_TIME_DIAG_TLM_MSG

Definition at line 767 of file sample_mission_cfg.h.

39.7.1.136 CFE_TIME_EPOCH_DAY

#define CFE_TIME_EPOCH_DAY CFE_MISSION_TIME_EPOCH_DAY

Definition at line 722 of file sample_mission_cfg.h.

39.7.1.137 CFE_TIME_EPOCH_HOUR

#define CFE_TIME_EPOCH_HOUR CFE_MISSION_TIME_EPOCH_HOUR

Definition at line 723 of file sample_mission_cfg.h.

39.7.1.138 CFE_TIME_EPOCH_MINUTE

#define CFE_TIME_EPOCH_MINUTE CFE_MISSION_TIME_EPOCH_MINUTE

Definition at line 724 of file sample_mission_cfg.h.

39.7.1.139 CFE_TIME_EPOCH_SECOND

#define CFE_TIME_EPOCH_SECOND CFE_MISSION_TIME_EPOCH_SECOND

Definition at line 725 of file sample_mission_cfg.h.

39.7.1.140 CFE_TIME_EPOCH_YEAR

#define CFE_TIME_EPOCH_YEAR CFE_MISSION_TIME_EPOCH_YEAR

Definition at line 721 of file sample_mission_cfg.h.

39.7.1.141 CFE_TIME_FS_FACTOR

#define CFE_TIME_FS_FACTOR CFE_MISSION_TIME_FS_FACTOR

Definition at line 726 of file sample_mission_cfg.h.

39.7.1.142 CFE_TIME_HK_TLM_MSG

`#define CFE_TIME_HK_TLM_MSG` CFE_MISSION_TIME_HK_TLM_MSG

Definition at line 766 of file sample_mission_cfg.h.

39.7.1.143 CFE_TIME_MAX_ELAPSED

`#define CFE_TIME_MAX_ELAPSED` CFE_MISSION_TIME_MAX_ELAPSED

Definition at line 713 of file sample_mission_cfg.h.

39.7.1.144 CFE_TIME_MIN_ELAPSED

`#define CFE_TIME_MIN_ELAPSED` CFE_MISSION_TIME_MIN_ELAPSED

Definition at line 712 of file sample_mission_cfg.h.

39.7.1.145 CFE_TIME_SEND_CMD_MSG

`#define CFE_TIME_SEND_CMD_MSG` CFE_MISSION_TIME_SEND_CMD_MSG

Definition at line 761 of file sample_mission_cfg.h.

39.7.1.146 CFE_TIME_SEND_HK_MSG

`#define CFE_TIME_SEND_HK_MSG` CFE_MISSION_TIME_SEND_HK_MSG

Definition at line 757 of file sample_mission_cfg.h.

39.7.1.147 CFE_TIME_TONE_CMD_MSG

`#define CFE_TIME_TONE_CMD_MSG` CFE_MISSION_TIME_TONE_CMD_MSG

Definition at line 758 of file sample_mission_cfg.h.

39.7.1.148 CFE_TLM_APPID_BASE_CPU1

`#define CFE_TLM_APPID_BASE_CPU1 CFE_MISSION_TLM_APPID_BASE_CPU1`

Definition at line 737 of file sample_mission_cfg.h.

39.7.1.149 CFE_TLM_APPID_BASE_CPU2

`#define CFE_TLM_APPID_BASE_CPU2 CFE_MISSION_TLM_APPID_BASE_CPU2`

Definition at line 741 of file sample_mission_cfg.h.

39.7.1.150 CFE_TLM_APPID_BASE_CPU3

`#define CFE_TLM_APPID_BASE_CPU3 CFE_MISSION_TLM_APPID_BASE_CPU3`

Definition at line 745 of file sample_mission_cfg.h.

39.7.1.151 CFE_TLM_MID_BASE_CPU1

`#define CFE_TLM_MID_BASE_CPU1 CFE_MISSION_TLM_MID_BASE_CPU1`

Definition at line 735 of file sample_mission_cfg.h.

39.7.1.152 CFE_TLM_MID_BASE_CPU2

`#define CFE_TLM_MID_BASE_CPU2 CFE_MISSION_TLM_MID_BASE_CPU2`

Definition at line 739 of file sample_mission_cfg.h.

39.7.1.153 CFE_TLM_MID_BASE_CPU3

`#define CFE_TLM_MID_BASE_CPU3 CFE_MISSION_TLM_MID_BASE_CPU3`

Definition at line 743 of file sample_mission_cfg.h.

39.7.1.154 CFE_TLM_MID_BASE_GLOB

#define CFE_TLM_MID_BASE_GLOB CFE_MISSION_TLM_MID_BASE_GLOB

Definition at line 747 of file sample_mission_cfg.h.

39.8 sample_perfids.h File Reference

Macros

- #define CFE_MISSION_ES_PERF_EXIT_BIT 31

    bit (31) is reserved by the perf utilities

cFE Performance Monitor IDs (Reserved IDs 0-31)

- #define CFE_MISSION_ES_MAIN_PERF_ID 1

    Performance ID for Executive Services Task.
- #define CFE_MISSION_EVS_MAIN_PERF_ID 2

    Performance ID for Events Services Task.
- #define CFE_MISSION_TBL_MAIN_PERF_ID 3

    Performance ID for Table Services Task.
- #define CFE_MISSION_SB_MAIN_PERF_ID 4

    Performance ID for Software Bus Services Task.
- #define CFE_MISSION_SB_MSG_LIM_PERF_ID 5

    Performance ID for Software Bus Msg Limit Errors.
- #define CFE_MISSION_SB_PIPE_OFLOW_PERF_ID 27

    Performance ID for Software Bus Pipe Overflow Errors.
- #define CFE_MISSION_TIME_MAIN_PERF_ID 6

    Performance ID for Time Services Task.
- #define CFE_MISSION_TIME_TONE1HZISR_PERF_ID 7

    Performance ID for 1 Hz Tone ISR.
- #define CFE_MISSION_TIME_LOCAL1HZISR_PERF_ID 8

    Performance ID for 1 Hz Local ISR.
- #define CFE_MISSION_TIME_SENDMET_PERF_ID 9

    Performance ID for Time ToneSendMET.
- #define CFE_MISSION_TIME_LOCAL1HZTASK_PERF_ID 10

    Performance ID for 1 Hz Local Task.
- #define CFE_MISSION_TIME_TONE1HZTASK_PERF_ID 11

    Performance ID for 1 Hz Tone Task.

39.8.1 Macro Definition Documentation

39.8.1.1 CFE_MISSION_ES_MAIN_PERF_ID

#define CFE_MISSION_ES_MAIN_PERF_ID 1

Performance ID for Executive Services Task.

Definition at line 45 of file sample_perfids.h.

39.8.1.2 CFE_MISSION_ES_PERF_EXIT_BIT

`#define CFE_MISSION_ES_PERF_EXIT_BIT 31`

bit (31) is reserved by the perf utilities

Definition at line 41 of file sample_perfids.h.

39.8.1.3 CFE_MISSION_EVS_MAIN_PERF_ID

`#define CFE_MISSION_EVS_MAIN_PERF_ID 2`

Performance ID for Events Services Task.

Definition at line 46 of file sample_perfids.h.

39.8.1.4 CFE_MISSION_SB_MAIN_PERF_ID

`#define CFE_MISSION_SB_MAIN_PERF_ID 4`

Performance ID for Software Bus Services Task.

Definition at line 48 of file sample_perfids.h.

39.8.1.5 CFE_MISSION_SB_MSG_LIM_PERF_ID

`#define CFE_MISSION_SB_MSG_LIM_PERF_ID 5`

Performance ID for Software Bus Msg Limit Errors.

Definition at line 49 of file sample_perfids.h.

39.8.1.6 CFE_MISSION_SB_PIPE_OFLOW_PERF_ID

`#define CFE_MISSION_SB_PIPE_OFLOW_PERF_ID 27`

Performance ID for Software Bus Pipe Overflow Errors.

Definition at line 50 of file sample_perfids.h.

39.8.1.7 CFE_MISSION_TBL_MAIN_PERF_ID

`#define CFE_MISSION_TBL_MAIN_PERF_ID 3`

Performance ID for Table Services Task.

Definition at line 47 of file sample_perfids.h.

39.8.1.8 CFE_MISSION_TIME_LOCAL1HZISR_PERF_ID

`#define CFE_MISSION_TIME_LOCAL1HZISR_PERF_ID 8`

Performance ID for 1 Hz Local ISR.

Definition at line 55 of file sample_perfids.h.

39.8.1.9 CFE_MISSION_TIME_LOCAL1HZTASK_PERF_ID

`#define CFE_MISSION_TIME_LOCAL1HZTASK_PERF_ID 10`

Performance ID for 1 Hz Local Task.

Definition at line 58 of file sample_perfids.h.

39.8.1.10 CFE_MISSION_TIME_MAIN_PERF_ID

`#define CFE_MISSION_TIME_MAIN_PERF_ID 6`

Performance ID for Time Services Task.

Definition at line 53 of file sample_perfids.h.

39.8.1.11 CFE_MISSION_TIME_SENDMET_PERF_ID

`#define CFE_MISSION_TIME_SENDMET_PERF_ID 9`

Performance ID for Time ToneSendMET.

Definition at line 57 of file sample_perfids.h.

`#define CFE_MISSION_TBL_MAIN_PERF_ID 3`

39.8.1.12 CFE_MISSION_TIME_TONE1HZISR_PERF_ID

```
#define CFE_MISSION_TIME_TONE1HZISR_PERF_ID 7
```

Performance ID for 1 Hz Tone ISR.

Definition at line 54 of file sample_perfids.h.

39.8.1.13 CFE_MISSION_TIME_TONE1HZTASK_PERF_ID

```
#define CFE_MISSION_TIME_TONE1HZTASK_PERF_ID 11
```

Performance ID for 1 Hz Tone Task.

Definition at line 59 of file sample_perfids.h.

39.9 cfe/docs/src/cfe_api.dox File Reference

39.10 cfe/docs/src/cfe_es.dox File Reference

39.11 cfe/docs/src/cfe_evs.dox File Reference

39.12 cfe/docs/src/cfe_glossary.dox File Reference

39.13 cfe/docs/src/cfe_sb.dox File Reference

39.14 cfe/docs/src/cfe_tbl.dox File Reference

39.15 cfe/docs/src/cfe_time.dox File Reference

39.16 cfe/docs/src/cfe_xref.dox File Reference

39.17 cfe/docs/src/cfs_versions.dox File Reference

39.18 cfe/docs/src/main.dox File Reference

39.19 cfe/fsw/cfe-core/src/inc/ccsds.h File Reference

```
#include "common_types.h"
#include "cfe_mission_cfg.h"
```

Data Structures

- struct CCSDS_PriHdr_t
- struct CCSDS_CmdSecHdr_t
- struct CCSDS_TlmSecHdr_t
- struct CCSDS_APIDqualifiers_t
- struct CCSDS_APIDQHdr_t

    CCSDS Primary with APID Qualifier Header Type Definition.

- struct CCSDS_SpacePacket_t
- struct CCSDS_CommandPacket_t
- struct CCSDS_TelemetryPacket_t

Macros

- #define CFE_MAKE_BIG16(n) ((((n) << 8) & 0xFF00) | (((n) >> 8) & 0x00FF))
- #define CFE_MAKE_BIG32(n) ((((n) << 24) & 0xFF000000) | (((n) << 8) & 0x00FF0000) | (((n) >> 8) & 0x0000FF00) | (((n) >> 24) & 0x000000FF))
- #define CCSDS_TIME_SIZE 6
- #define CCSDS_BIG_ENDIAN 0
- #define CCSDS_LITTLE_ENDIAN 1
- #define CCSDS_ENDIAN_MASK 0x0400
- #define CCSDS_NON_PLAYBACK_PKT 0
- #define CCSDS_PLAYBACK_PKT 1
- #define CCSDS_PLAYBACK_PKT_MASK 0x0200
- #define CCSDS_EDS_MASK 0xF800
- #define CCSDS_TLM 0
- #define CCSDS_CMD 1
- #define CCSDS_NO_SEC_HDR 0
- #define CCSDS_HAS_SEC_HDR 1
- #define NUM_CCSDS_APIDS 2048
- #define NUM_CCSDS_PKT_TYPES 2
- #define CCSDS_INIT_SEQ 0
- #define CCSDS_INIT_SEQFLG 3
- #define CCSDS_INIT_FC 0
- #define CCSDS_INIT_CHECKSUM 0
- #define CCSDS_RD_BITS(word, mask, shift) (((word) & mask) >> shift)
- #define CCSDS_WR_BITS(word, mask, shift, value) ((word) = (uint16)(((word) & ~mask | (((value) & (mask >> shift)) << shift)))
- #define CCSDS_RD_SID(phdr) (((phdr).StreamId[0] << 8) + ((phdr).StreamId[1]))
- #define CCSDS_WR_SID(phdr, value)
- #define CCSDS_RD_APID(phdr) (CCSDS_RD_SID(phdr) & 0x07FF)
- #define CCSDS_WR_APID(phdr, value)
- #define CCSDS_RD_SHDR(phdr) (((phdr).StreamId[0] & 0x08) >> 3)
- #define CCSDS_WR_SHDR(phdr, value) ((phdr).StreamId[0] = ((phdr).StreamId[0] & 0xf7) | ((value << 3) & 0x08))
- #define CCSDS_RD_TYPE(phdr) (((phdr).StreamId[0] & 0x10) >> 4)
- #define CCSDS_WR_TYPE(phdr, value) ((phdr).StreamId[0] = ((phdr).StreamId[0] & 0xEF) | ((value << 4) & 0x10))
- #define CCSDS_RD_VERS(phdr) (((phdr).StreamId[0] & 0xE0) >> 5)

- #define CCSDS_WR_VERS(phdr, value) ((phdr).StreamId[0] = ((phdr).StreamId[0] & 0x1F) | ((value << 5) & 0xE0))
- #define CCSDS_RD_SEQ(phdr) ((((phdr).Sequence[0] & 0x3F) << 8) + ((phdr).Sequence[1]))
- #define CCSDS_WR_SEQ(phdr, value)
- #define CCSDS_RD_SEQFLG(phdr) (((phdr).Sequence[0] & 0xC0) >> 6)
- #define CCSDS_WR_SEQFLG(phdr, value) ((phdr).Sequence[0] = ((phdr).Sequence[0] & 0x3F) | ((value << 6) & 0xC0))
- #define CCSDS_RD_LEN(phdr) (((phdr).Length[0] << 8) + (phdr).Length[1] + 7)
- #define CCSDS_WR_LEN(phdr, value)
- #define CCSDS_RD_FC(shdr) CCSDS_RD_BITS((shdr).FunctionCode, 0x7F, 0)
- #define CCSDS_WR_FC(shdr, value) CCSDS_WR_BITS((shdr).FunctionCode, 0x7F, 0, value)
- #define CCSDS_RD_CHECKSUM(shdr) ((shdr).Checksum)
- #define CCSDS_WR_CHECKSUM(shdr, val) ((shdr).Checksum = (val))
- #define CCSDS_RD_EDS_VER(shdr) (((shdr).APIDQSubsystem[0] & 0xF8) >> 3)
- #define CCSDS_RD_ENDIAN(shdr) (((shdr).APIDQSubsystem[0] & 0x04) >> 2)
- #define CCSDS_RD_PLAYBACK(shdr) (((shdr).APIDQSubsystem[0] & 0x02) >> 1)
- #define CCSDS_RD_SUBSYSTEM_ID(shdr) ((((shdr).APIDQSubsystem[0] & 0x01) << 8) + ((shdr).APIDQSubsystem[1]))
- #define CCSDS_RD_SYSTEM_ID(shdr) (((shdr).APIDQSystemId[0] << 8) + ((shdr).APIDQSystemId[1]))
- #define CCSDS_WR_EDS_VER(shdr, val) ((shdr).APIDQSubsystem[0] = ((shdr).APIDQSubsystem[0] & 0x07) | (((val) & 0x1f) << 3))
- #define CCSDS_WR_ENDIAN(shdr, val) ((shdr).APIDQSubsystem[0] = ((shdr).APIDQSubsystem[0] & 0xFB) | (((val) & 0x01) << 2))
- #define CCSDS_WR_PLAYBACK(shdr, val) ((shdr).APIDQSubsystem[0] = ((shdr).APIDQSubsystem[0] & 0xFD) | (((val) & 0x01) << 1))
- #define CCSDS_WR_SUBSYSTEM_ID(shdr, val)
- #define CCSDS_WR_SYSTEM_ID(shdr, val)
- #define CCSDS_CLR_PRI_HDR(phdr)
- #define CCSDS_CLR_SEC_APIDQ(shdr)
- #define CCSDS_CLR_CMDSEC_HDR(shdr)
- #define CCSDS_WR_SEC_HDR_SEC(shdr, value)
- #define CCSDS_RD_SEC_HDR_SEC(shdr)
- #define CCSDS_CLR_TLMSEC_HDR(shdr)
- #define CCSDS_WR_SEC_HDR_SUBSEC(shdr, value)
- #define CCSDS_RD_SEC_HDR_SUBSEC(shdr)
- #define CCSDS_SID_APID(sid) CCSDS_RD_BITS(sid, 0x07FF, 0)
- #define CCSDS_SID_SHDR(sid) CCSDS_RD_BITS(sid, 0x0800, 11)
- #define CCSDS_SID_TYPE(sid) CCSDS_RD_BITS(sid, 0x1000, 12)
- #define CCSDS_SID_VERS(sid) CCSDS_RD_BITS(sid, 0xE000, 13)
- #define CCSDS_INC_SEQ(phdr) CCSDS_WR_SEQ(phdr, (CCSDS_RD_SEQ(phdr)+1))

Typedefs

- typedef CCSDS_CommandPacket_t CCSDS_CmdPkt_t
- typedef CCSDS_TelemetryPacket_t CCSDS_TlmPkt_t

Functions

- void CCSDS_LoadCheckSum (CCSDS_CommandPacket_t ∗PktPtr)
- bool CCSDS_ValidCheckSum (CCSDS_CommandPacket_t ∗PktPtr)
- uint8 CCSDS_ComputeCheckSum (CCSDS_CommandPacket_t ∗PktPtr)

39.19.1   Macro Definition Documentation

39.19.1.1   CCSDS_BIG_ENDIAN

```
#define CCSDS_BIG_ENDIAN 0
```

Definition at line 128 of file ccsds.h.

39.19.1.2   CCSDS_CLR_CMDSEC_HDR

```
#define CCSDS_CLR_CMDSEC_HDR(
                shdr )
```

Value:

```
( (shdr).FunctionCode = CCSDS_INIT_FC,\
    (shdr).Checksum = CCSDS_INIT_CHECKSUM )
```

Definition at line 381 of file ccsds.h.

39.19.1.3   CCSDS_CLR_PRI_HDR

```
#define CCSDS_CLR_PRI_HDR(
                phdr )
```

Value:

```
( (phdr).StreamId[0] = 0,\
    (phdr).StreamId[1] = 0,\
    (phdr).Sequence[0] = (CCSDS_INIT_SEQFLG << 6),\
    (phdr).Sequence[1] = 0,\
    (phdr).Length[0] = 0, \
    (phdr).Length[1] = 0 )
```

Definition at line 366 of file ccsds.h.

39.19.1.4 CCSDS_CLR_SEC_APIDQ

```
#define CCSDS_CLR_SEC_APIDQ(
                shdr )
```

Value:

```
( (shdr).APIDQSubsystem[0] = 0,\
    (shdr).APIDQSubsystem[1] = 0,\
    (shdr).APIDQSystemId[0] = 0,\
    (shdr).APIDQSystemId[1] = 0 )
```

Definition at line 374 of file ccsds.h.

39.19.1.5 CCSDS_CLR_TLMSEC_HDR

```
#define CCSDS_CLR_TLMSEC_HDR(
                shdr )
```

Value:

```
( (shdr).Time[0] = 0,\
    (shdr).Time[1] = 0,\
    (shdr).Time[2] = 0,\
    (shdr).Time[3] = 0,\
    (shdr).Time[4] = 0,\
    (shdr).Time[5] = 0 )
```

Definition at line 399 of file ccsds.h.

39.19.1.6 CCSDS_CMD

```
#define CCSDS_CMD 1
```

Definition at line 227 of file ccsds.h.

39.19.1.7 CCSDS_EDS_MASK

```
#define CCSDS_EDS_MASK 0xF800
```

Definition at line 141 of file ccsds.h.

39.19.1.8   CCSDS_ENDIAN_MASK

```
#define CCSDS_ENDIAN_MASK 0x0400
```

Definition at line 130 of file ccsds.h.

39.19.1.9   CCSDS_HAS_SEC_HDR

```
#define CCSDS_HAS_SEC_HDR 1
```

Definition at line 232 of file ccsds.h.

39.19.1.10   CCSDS_INC_SEQ

```
#define CCSDS_INC_SEQ(
            phdr ) CCSDS_WR_SEQ(phdr, (CCSDS_RD_SEQ(phdr)+1))
```

Definition at line 466 of file ccsds.h.

39.19.1.11   CCSDS_INIT_CHECKSUM

```
#define CCSDS_INIT_CHECKSUM 0
```

Definition at line 249 of file ccsds.h.

39.19.1.12   CCSDS_INIT_FC

```
#define CCSDS_INIT_FC 0
```

Definition at line 247 of file ccsds.h.

39.19.1.13   CCSDS_INIT_SEQ

```
#define CCSDS_INIT_SEQ 0
```

Definition at line 243 of file ccsds.h.

39.19.1.14 CCSDS_INIT_SEQFLG

```
#define CCSDS_INIT_SEQFLG 3
```

Definition at line 245 of file ccsds.h.

39.19.1.15 CCSDS_LITTLE_ENDIAN

```
#define CCSDS_LITTLE_ENDIAN 1
```

Definition at line 129 of file ccsds.h.

39.19.1.16 CCSDS_NO_SEC_HDR

```
#define CCSDS_NO_SEC_HDR 0
```

Definition at line 230 of file ccsds.h.

39.19.1.17 CCSDS_NON_PLAYBACK_PKT

```
#define CCSDS_NON_PLAYBACK_PKT 0
```

Definition at line 134 of file ccsds.h.

39.19.1.18 CCSDS_PLAYBACK_PKT

```
#define CCSDS_PLAYBACK_PKT 1
```

Definition at line 135 of file ccsds.h.

39.19.1.19 CCSDS_PLAYBACK_PKT_MASK

```
#define CCSDS_PLAYBACK_PKT_MASK 0x0200
```

Definition at line 136 of file ccsds.h.

39.19.1.20   CCSDS_RD_APID

```
#define CCSDS_RD_APID(
            phdr ) (CCSDS_RD_SID(phdr) & 0x07FF)
```

Definition at line 292 of file ccsds.h.

39.19.1.21   CCSDS_RD_BITS

```
#define CCSDS_RD_BITS(
            word,
            mask,
            shift ) (((word) & mask) >> shift)
```

Definition at line 261 of file ccsds.h.

39.19.1.22   CCSDS_RD_CHECKSUM

```
#define CCSDS_RD_CHECKSUM(
            shdr ) ((shdr).Checksum)
```

Definition at line 335 of file ccsds.h.

39.19.1.23   CCSDS_RD_EDS_VER

```
#define CCSDS_RD_EDS_VER(
            shdr ) ( ((shdr).APIDQSubsystem[0] & 0xF8) >> 3)
```

Definition at line 343 of file ccsds.h.

39.19.1.24   CCSDS_RD_ENDIAN

```
#define CCSDS_RD_ENDIAN(
            shdr ) ( ((shdr).APIDQSubsystem[0] & 0x04) >> 2)
```

Definition at line 344 of file ccsds.h.

39.19.1.25 CCSDS_RD_FC

```
#define CCSDS_RD_FC(
                shdr ) CCSDS_RD_BITS((shdr).FunctionCode, 0x7F, 0)
```

Definition at line 330 of file ccsds.h.

39.19.1.26 CCSDS_RD_LEN

```
#define CCSDS_RD_LEN(
                phdr ) ( ( (phdr).Length[0] << 8) + (phdr).Length[1] + 7)
```

Definition at line 324 of file ccsds.h.

39.19.1.27 CCSDS_RD_PLAYBACK

```
#define CCSDS_RD_PLAYBACK(
                shdr ) ( ((shdr).APIDQSubsystem[0] & 0x02) >> 1)
```

Definition at line 345 of file ccsds.h.

39.19.1.28 CCSDS_RD_SEC_HDR_SEC

```
#define CCSDS_RD_SEC_HDR_SEC(
                shdr )
```

Value:

```
(((uint32)shdr.Time[0]) << 24) | \
                                      (((uint32)shdr.Time[1]) << 16) | \
                                      (((uint32)shdr.Time[2]) << 8)  | \
                                      ((uint32)shdr.Time[3])
```

Definition at line 391 of file ccsds.h.

39.19.1.29 CCSDS_RD_SEC_HDR_SUBSEC

```
#define CCSDS_RD_SEC_HDR_SUBSEC(
                shdr )
```

Value:

```
(((uint32)shdr.Time[4]) << 8)  | \
                                      ((uint32)shdr.Time[5])
```

Definition at line 411 of file ccsds.h.

39.19.1.30   CCSDS_RD_SEQ

```
#define CCSDS_RD_SEQ(
                phdr ) (((((phdr).Sequence[0] & 0x3F) << 8) + ((phdr).Sequence[1]))
```

Definition at line 313 of file ccsds.h.

39.19.1.31   CCSDS_RD_SEQFLG

```
#define CCSDS_RD_SEQFLG(
                phdr ) (((phdr).Sequence[0] & 0xC0) >> 6)
```

Definition at line 319 of file ccsds.h.

39.19.1.32   CCSDS_RD_SHDR

```
#define CCSDS_RD_SHDR(
                phdr ) (((phdr).StreamId[0] & 0x08) >> 3)
```

Definition at line 298 of file ccsds.h.

39.19.1.33   CCSDS_RD_SID

```
#define CCSDS_RD_SID(
                phdr ) (((phdr).StreamId[0] << 8) + ((phdr).StreamId[1]))
```

Definition at line 286 of file ccsds.h.

39.19.1.34   CCSDS_RD_SUBSYSTEM_ID

```
#define CCSDS_RD_SUBSYSTEM_ID(
                shdr ) ( (((shdr).APIDQSubsystem[0] & 0x01) << 8) + ((shdr).APIDQSubsystem[1]))
```

Definition at line 346 of file ccsds.h.

39.19.1.35   CCSDS_RD_SYSTEM_ID

```
#define CCSDS_RD_SYSTEM_ID(
                shdr ) ( ((shdr).APIDQSystemId[0] << 8) + ((shdr).APIDQSystemId[1]))
```

Definition at line 347 of file ccsds.h.

39.19.1.36 CCSDS_RD_TYPE

```
#define CCSDS_RD_TYPE(
                phdr ) (((phdr).StreamId[0] & 0x10) >> 4)
```

Definition at line 303 of file ccsds.h.

39.19.1.37 CCSDS_RD_VERS

```
#define CCSDS_RD_VERS(
                phdr ) (((phdr).StreamId[0] & 0xE0) >> 5)
```

Definition at line 308 of file ccsds.h.

39.19.1.38 CCSDS_SID_APID

```
#define CCSDS_SID_APID(
                sid ) CCSDS_RD_BITS(sid, 0x07FF, 0)
```

Definition at line 447 of file ccsds.h.

39.19.1.39 CCSDS_SID_SHDR

```
#define CCSDS_SID_SHDR(
                sid ) CCSDS_RD_BITS(sid, 0x0800, 11)
```

Definition at line 450 of file ccsds.h.

39.19.1.40 CCSDS_SID_TYPE

```
#define CCSDS_SID_TYPE(
                sid ) CCSDS_RD_BITS(sid, 0x1000, 12)
```

Definition at line 453 of file ccsds.h.

39.19.1.41 CCSDS_SID_VERS

```
#define CCSDS_SID_VERS(
                sid ) CCSDS_RD_BITS(sid, 0xE000, 13)
```

Definition at line 456 of file ccsds.h.

39.19.1.42   CCSDS_TIME_SIZE

```
#define CCSDS_TIME_SIZE 6
```

Definition at line 53 of file ccsds.h.

39.19.1.43   CCSDS_TLM

```
#define CCSDS_TLM 0
```

Definition at line 225 of file ccsds.h.

39.19.1.44   CCSDS_WR_APID

```
#define CCSDS_WR_APID(
            phdr,
            value )
```

Value:

```
(((( phdr).StreamId[0] = ((phdr).StreamId[0] & 0xF8) | ((value >> 8) & 0x07))) ,\
                              (((phdr).StreamId[1]  = ((value)) & 0xff)) )
```

Definition at line 294 of file ccsds.h.

39.19.1.45   CCSDS_WR_BITS

```
#define CCSDS_WR_BITS(
            word,
            mask,
            shift,
            value ) ((word) = (uint16)(((word) & ~mask) | (((value) & (mask >> shift)) <<
shift)))
```

Definition at line 266 of file ccsds.h.

39.19.1.46   CCSDS_WR_CHECKSUM

```
#define CCSDS_WR_CHECKSUM(
            shdr,
            val ) ((shdr).Checksum = (val))
```

Definition at line 337 of file ccsds.h.

39.19.1.47 CCSDS_WR_EDS_VER

```
#define CCSDS_WR_EDS_VER(
            shdr,
            val ) ( (shdr).APIDQSubsystem[0] = ((shdr).APIDQSubsystem[0] & 0x07) | (((val) &
0x1f) << 3) )
```

Definition at line 349 of file ccsds.h.

39.19.1.48 CCSDS_WR_ENDIAN

```
#define CCSDS_WR_ENDIAN(
            shdr,
            val ) ( (shdr).APIDQSubsystem[0] = ((shdr).APIDQSubsystem[0] & 0xFB) | (((val) &
0x01) << 2) )
```

Definition at line 350 of file ccsds.h.

39.19.1.49 CCSDS_WR_FC

```
#define CCSDS_WR_FC(
            shdr,
            value ) CCSDS_WR_BITS((shdr).FunctionCode, 0x7F, 0, value)
```

Definition at line 332 of file ccsds.h.

39.19.1.50 CCSDS_WR_LEN

```
#define CCSDS_WR_LEN(
            phdr,
            value )
```

Value:

```
((((phdr).Length[0] = ((value) - 7) >> 8)) ,\
                          (((phdr).Length[1] = ((value) - 7) & 0xff)) )
```

Definition at line 326 of file ccsds.h.

39.19.1.51 CCSDS_WR_PLAYBACK

```
#define CCSDS_WR_PLAYBACK(
            shdr,
            val ) ( (shdr).APIDQSubsystem[0] = ((shdr).APIDQSubsystem[0] & 0xFD) | (((val) &
0x01) << 1) )
```

Definition at line 351 of file ccsds.h.

39.19.1.52 CCSDS_WR_SEC_HDR_SEC

```
#define CCSDS_WR_SEC_HDR_SEC(
            shdr,
            value )
```

Value:

```
shdr.Time[0] = ((value>>24) & 0xFF),  \
                                      shdr.Time[1] = ((value>>16) & 0xFF),  \
                                      shdr.Time[2] = ((value>>8)  & 0xFF),  \
                                      shdr.Time[3] = ((value)     & 0xFF)
```

Definition at line 386 of file ccsds.h.

39.19.1.53 CCSDS_WR_SEC_HDR_SUBSEC

```
#define CCSDS_WR_SEC_HDR_SUBSEC(
            shdr,
            value )
```

Value:

```
shdr.Time[4] = ((value>>8)  & 0xFF),  \
                                      shdr.Time[5] = ((value)     & 0xFF)
```

Definition at line 408 of file ccsds.h.

39.19.1.54 CCSDS_WR_SEQ

```
#define CCSDS_WR_SEQ(
            phdr,
            value )
```

Value:

```
(((((phdr).Sequence[0] = ((phdr).Sequence[0] & 0xC0) | ((value >> 8) & 0x3f))) ,\
                          (((phdr).Sequence[1]  = ((value)) & 0xff)) )
```

Definition at line 315 of file ccsds.h.

39.19.1.55 CCSDS_WR_SEQFLG

```
#define CCSDS_WR_SEQFLG(
            phdr,
            value ) ((phdr).Sequence[0] = ((phdr).Sequence[0] & 0x3F) | ((value << 6) & 0xC0) )
```

Definition at line 321 of file ccsds.h.

39.19.1.56 CCSDS_WR_SHDR

```
#define CCSDS_WR_SHDR(
            phdr,
            value ) ((phdr).StreamId[0] = ((phdr).StreamId[0] & 0xf7) | ((value << 3) & 0x08))
```

Definition at line 300 of file ccsds.h.

39.19.1.57 CCSDS_WR_SID

```
#define CCSDS_WR_SID(
            phdr,
            value )
```

Value:

```
( ((phdr).StreamId[0] = (value >> 8)    ) ,\
                              ((phdr).StreamId[1] = (value & 0xff) ) )
```

Definition at line 288 of file ccsds.h.

39.19.1.58 CCSDS_WR_SUBSYSTEM_ID

```
#define CCSDS_WR_SUBSYSTEM_ID(
            shdr,
            val )
```

Value:

```
(((shdr).APIDQSubsystem[0] = ((shdr).APIDQSubsystem[0] & 0xFE) | ((val & 0x0100) >> 8)) ,\
                              ( (shdr).APIDQSubsystem[1] =  (val & 0x00ff)) ) )
```

Definition at line 353 of file ccsds.h.

39.19.1.59   CCSDS_WR_SYSTEM_ID

```
#define CCSDS_WR_SYSTEM_ID(
              shdr,
              val )
```

Value:

```
(((shdr).APIDQSystemId[0] = ((val & 0xff00) >> 8)),\
                              ( (shdr).APIDQSystemId[1] =  (val & 0x00ff)) )
```

Definition at line 356 of file ccsds.h.

39.19.1.60   CCSDS_WR_TYPE

```
#define CCSDS_WR_TYPE(
              phdr,
              value ) ((phdr).StreamId[0] = ((phdr).StreamId[0] & 0xEF) | ((value << 4) & 0x10))
```

Definition at line 305 of file ccsds.h.

39.19.1.61   CCSDS_WR_VERS

```
#define CCSDS_WR_VERS(
              phdr,
              value ) ((phdr).StreamId[0] = ((phdr).StreamId[0] & 0x1F) | ((value << 5) & 0xE0))
```

Definition at line 310 of file ccsds.h.

39.19.1.62   CFE_MAKE_BIG16

```
#define CFE_MAKE_BIG16(
              n ) ( (((n) << 8) & 0xFF00) | (((n) >> 8) & 0x00FF) )
```

Definition at line 45 of file ccsds.h.

39.19.1.63   CFE_MAKE_BIG32

```
#define CFE_MAKE_BIG32(
              n ) ( (((n) << 24) & 0xFF000000) | (((n) << 8) & 0x00FF0000) | (((n) >> 8) & 0x0000↩
FF00) | (((n) >> 24) & 0x000000FF) )
```

Definition at line 46 of file ccsds.h.

39.19.1.64   NUM_CCSDS_APIDS

```
#define NUM_CCSDS_APIDS 2048
```

Definition at line 234 of file ccsds.h.

39.19.1.65   NUM_CCSDS_PKT_TYPES

```
#define NUM_CCSDS_PKT_TYPES 2
```

Definition at line 235 of file ccsds.h.

39.19.2   Typedef Documentation

39.19.2.1   CCSDS_CmdPkt_t

```
typedef CCSDS_CommandPacket_t CCSDS_CmdPkt_t
```

Definition at line 211 of file ccsds.h.

39.19.2.2   CCSDS_TlmPkt_t

```
typedef CCSDS_TelemetryPacket_t CCSDS_TlmPkt_t
```

Definition at line 212 of file ccsds.h.

39.19.3   Function Documentation

39.19.3.1   CCSDS_ComputeCheckSum()

```
uint8 CCSDS_ComputeCheckSum (
            CCSDS_CommandPacket_t * PktPtr )
```

39.19.3.2   CCSDS_LoadCheckSum()

```
void CCSDS_LoadCheckSum (
            CCSDS_CommandPacket_t * PktPtr )
```

39.19.3.3   CCSDS_ValidCheckSum()

```
bool CCSDS_ValidCheckSum (
            CCSDS_CommandPacket_t * PktPtr )
```

39.20   cfe/fsw/cfe-core/src/inc/cfe.h File Reference

```
#include "common_types.h"
#include "osapi.h"
#include "cfe_mission_cfg.h"
#include "cfe_error.h"
#include "cfe_es.h"
#include "cfe_evs.h"
#include "cfe_fs.h"
#include "cfe_sb.h"
#include "cfe_time.h"
#include "cfe_tbl.h"
#include "cfe_psp.h"
```

39.21   cfe/fsw/cfe-core/src/inc/cfe_error.h File Reference

```
#include "osapi.h"
```

Macros

- #define CFE_SEVERITY_BITMASK ((int32)0xc0000000)

   Error Severity Bitmask.
- #define CFE_SEVERITY_SUCCESS ((int32)0x00000000)

   Severity Success.
- #define CFE_SEVERITY_INFO ((int32)0x40000000)

   Severity Info.
- #define CFE_SEVERITY_ERROR ((int32)0xc0000000)

   Severity Error.
- #define CFE_SERVICE_BITMASK ((int32)0x0e000000)

   Error Service Bitmask.
- #define CFE_EVENTS_SERVICE ((int32)0x02000000)

   Event Service.

- #define CFE_EXECUTIVE_SERVICE ((int32)0x04000000)

  Executive Service.
- #define CFE_FILE_SERVICE ((int32)0x06000000)

  File Service.
- #define CFE_GENERIC_SERVICE ((int32)0x08000000)

  Generic Service.
- #define CFE_SOFTWARE_BUS_SERVICE ((int32)0x0a000000)

  Software Bus Service.
- #define CFE_TABLE_SERVICE ((int32)0x0c000000)

  Table Service.
- #define CFE_TIME_SERVICE ((int32)0x0e000000)

  Time Service.
- #define CFE_SUCCESS (0)

  Sucessful execution.
- #define CFE_STATUS_NO_COUNTER_INCREMENT ((int32)0x48000001)

  No Counter Increment.
- #define CFE_STATUS_WRONG_MSG_LENGTH ((int32)0xc8000002)

  Wrong Message Length.
- #define CFE_STATUS_UNKNOWN_MSG_ID ((int32)0xc8000003)

  Unknown Message ID.
- #define CFE_STATUS_BAD_COMMAND_CODE ((int32)0xc8000004)

  Bad Command Code.
- #define CFE_STATUS_NOT_IMPLEMENTED ((int32)0xc800ffff)

  Not Implemented.
- #define CFE_EVS_UNKNOWN_FILTER ((int32)0xc2000001)

  Unknown Filter.
- #define CFE_EVS_APP_NOT_REGISTERED ((int32)0xc2000002)

  Application Not Registered.
- #define CFE_EVS_APP_ILLEGAL_APP_ID ((int32)0xc2000003)

  Illegal Application ID.
- #define CFE_EVS_APP_FILTER_OVERLOAD ((int32)0xc2000004)

  Application Filter Overload.
- #define CFE_EVS_RESET_AREA_POINTER ((int32)0xc2000005)

  Reset Area Pointer Failure.
- #define CFE_EVS_EVT_NOT_REGISTERED ((int32)0xc2000006)

  Event Not Registered.
- #define CFE_EVS_FILE_WRITE_ERROR ((int32)0xc2000007)

  File Write Error.
- #define CFE_EVS_INVALID_PARAMETER ((int32)0xc2000008)

  Invalid Pointer.
- #define CFE_EVS_FUNCTION_DISABLED ((int32)0xc2000009)

  Function Disabled.
- #define CFE_EVS_NOT_IMPLEMENTED ((int32)0xc200ffff)

  Not Implemented.
- #define CFE_ES_ERR_APPID ((int32)0xc4000001)

  Application ID Error.
- #define CFE_ES_ERR_APPNAME ((int32)0xc4000002)

Application Name Error.

• #define CFE_ES_ERR_BUFFER ((int32)0xc4000003)

   Invalid Pointer.

• #define CFE_ES_ERR_APP_CREATE ((int32)0xc4000004)

   Application Create Error.

• #define CFE_ES_ERR_CHILD_TASK_CREATE ((int32)0xc4000005)

   Child Task Create Error.

• #define CFE_ES_ERR_SYS_LOG_FULL ((int32)0xc4000006)

   System Log Full.

• #define CFE_ES_ERR_MEM_HANDLE ((int32)0xc4000007)

   Memory Handle Error.

• #define CFE_ES_ERR_MEM_BLOCK_SIZE ((int32)0xc4000008)

   Memory Block Size Error.

• #define CFE_ES_ERR_LOAD_LIB ((int32)0xc4000009)

   Load Library Error.

• #define CFE_ES_BAD_ARGUMENT ((int32)0xc400000a)

   Bad Argument.

• #define CFE_ES_ERR_CHILD_TASK_REGISTER ((int32)0xc400000b)

   Child Task Register Error.

• #define CFE_ES_ERR_SHELL_CMD ((int32)0xc400000c)

   Shell Command Error.

• #define CFE_ES_CDS_ALREADY_EXISTS ((int32)0x4400000d)

   CDS Already Exists.

• #define CFE_ES_CDS_INSUFFICIENT_MEMORY ((int32)0xc400000e)

   CDS Insufficient Memory.

• #define CFE_ES_CDS_INVALID_NAME ((int32)0xc400000f)

   CDS Invalid Name.

• #define CFE_ES_CDS_INVALID_SIZE ((int32)0xc4000010)

   CDS Invalid Size.

• #define CFE_ES_CDS_REGISTRY_FULL ((int32)0xc4000011)

   CDS Registry Full.

• #define CFE_ES_CDS_INVALID ((int32)0xc4000012)

   CDS Invalid.

• #define CFE_ES_CDS_ACCESS_ERROR ((int32)0xc4000013)

   CDS Access Error.

• #define CFE_ES_FILE_IO_ERR ((int32)0xc4000014)

   File IO Error.

• #define CFE_ES_RST_ACCESS_ERR ((int32)0xc4000015)

   Reset Area Access Error.

• #define CFE_ES_ERR_TASKID ((int32)0xc4000016)

   Task ID Error.

• #define CFE_ES_ERR_APP_REGISTER ((int32)0xc4000017)

   Application Register Error.

• #define CFE_ES_ERR_CHILD_TASK_DELETE ((int32)0xc4000018)

   Child Task Delete Error.

• #define CFE_ES_ERR_CHILD_TASK_DELETE_MAIN_TASK ((int32)0xc4000019)

   Child Task Delete Passed Main Task.

- #define CFE_ES_CDS_BLOCK_CRC_ERR ((int32)0xc400001A)

  CDS Block CRC Error.
- #define CFE_ES_MUT_SEM_DELETE_ERR ((int32)0xc400001B)

  Mutex Semaphore Delete Error.
- #define CFE_ES_BIN_SEM_DELETE_ERR ((int32)0xc400001C)

  Binary Semaphore Delete Error.
- #define CFE_ES_COUNT_SEM_DELETE_ERR ((int32)0xc400001D)

  Counte Semaphore Delete Error.
- #define CFE_ES_QUEUE_DELETE_ERR ((int32)0xc400001E)

  Queue Delete Error.
- #define CFE_ES_FILE_CLOSE_ERR ((int32)0xc400001F)

  File Close Error.
- #define CFE_ES_CDS_WRONG_TYPE_ERR ((int32)0xc4000020)

  CDS Wrong Type Error.
- #define CFE_ES_CDS_NOT_FOUND_ERR ((int32)0xc4000021)

  CDS Not Found Error.
- #define CFE_ES_CDS_OWNER_ACTIVE_ERR ((int32)0xc4000022)

  CDS Owner Active Error.
- #define CFE_ES_APP_CLEANUP_ERR ((int32)0xc4000023)

  Application Cleanup Error.
- #define CFE_ES_TIMER_DELETE_ERR ((int32)0xc4000024)

  Timer Delete Error.
- #define CFE_ES_BUFFER_NOT_IN_POOL ((int32)0xc4000025)

  Buffer Not In Pool.
- #define CFE_ES_TASK_DELETE_ERR ((int32)0xc4000026)

  Task Delete Error.
- #define CFE_ES_OPERATION_TIMED_OUT ((int32)0xc4000027)

  Operation Timed Out.
- #define CFE_ES_LIB_ALREADY_LOADED ((int32)0x44000028)

  Library Already Loaded.
- #define CFE_ES_ERR_SYS_LOG_TRUNCATED ((int32)0x44000028)

  System Log Message Truncated.
- #define CFE_ES_NOT_IMPLEMENTED ((int32)0xc400ffff)

  Not Implemented.
- #define CFE_FS_BAD_ARGUMENT ((int32)0xc6000001)

  Bad Argument.
- #define CFE_FS_INVALID_PATH ((int32)0xc6000002)

  Invalid Path.
- #define CFE_FS_FNAME_TOO_LONG ((int32)0xc6000003)

  Filename Too Long.
- #define CFE_FS_GZIP_BAD_DATA ((int32)0xc6000004)

  DEPRECATED: GZIP File Bad Data.
- #define CFE_FS_GZIP_BAD_CODE_BLOCK ((int32)0xc6000005)

  DEPRECATED: GZIP File Bad Code Block.
- #define CFE_FS_GZIP_NO_MEMORY ((int32)0xc6000006)

  DEPRECATED: GZIP Memory Buffer Exhausted.
- #define CFE_FS_GZIP_CRC_ERROR ((int32)0xc6000007)

    DEPRECATED: GZIP CRC Error.
- #define CFE_FS_GZIP_LENGTH_ERROR ((int32)0xc6000008)

    DEPRECATED: GZIP Length Error.
- #define CFE_FS_GZIP_WRITE_ERROR ((int32)0xc6000009)

    DEPRECATED: GZIP Write Error.
- #define CFE_FS_GZIP_READ_ERROR ((int32)0xc600000A)

    DEPRECATED: GZIP Read Error.
- #define CFE_FS_GZIP_OPEN_OUTPUT ((int32)0xc600000B)

    DEPRECATED: GZIP Open Output Error.
- #define CFE_FS_GZIP_OPEN_INPUT ((int32)0xc600000C)

    DEPRECATED: GZIP Open Input Error.
- #define CFE_FS_GZIP_READ_ERROR_HEADER ((int32)0xc600000D)

    DEPRECATED: GZIP Read Header Error.
- #define CFE_FS_GZIP_INDEX_ERROR ((int32)0xc600000E)

    DEPRECATED: GZIP Index Error.
- #define CFE_FS_GZIP_NON_ZIP_FILE ((int32)0xc600000F)

    DEPRECATED: GZIP Not Zip File.
- #define CFE_FS_NOT_IMPLEMENTED ((int32)0xc600ffff)

    Not Implemented.
- #define CFE_OS_ERROR (OS_ERROR)

    DEPRECATED.
- #define CFE_OS_INVALID_POINTER (OS_INVALID_POINTER)

    DEPRECATED.
- #define CFE_OS_ERROR_ADDRESS_MISALIGNED (OS_ERROR_ADDRESS_MISALIGNED)

    DEPRECATED.
- #define CFE_OS_ERROR_TIMEOUT (OS_ERROR_TIMEOUT)

    DEPRECATED.
- #define CFE_OS_INVALID_INT_NUM (OS_INVALID_INT_NUM)

    DEPRECATED.
- #define CFE_OS_SEM_FAILURE (OS_SEM_FAILURE)

    DEPRECATED.
- #define CFE_OS_SEM_TIMEOUT (OS_SEM_TIMEOUT)

    DEPRECATED.
- #define CFE_OS_QUEUE_EMPTY (OS_QUEUE_EMPTY)

    DEPRECATED.
- #define CFE_OS_QUEUE_FULL (OS_QUEUE_FULL)

    DEPRECATED.
- #define CFE_OS_QUEUE_TIMEOUT (OS_QUEUE_TIMEOUT)

    DEPRECATED.
- #define CFE_OS_QUEUE_INVALID_SIZE (OS_QUEUE_INVALID_SIZE)

    DEPRECATED.
- #define CFE_OS_QUEUE_ID_ERROR (OS_QUEUE_ID_ERROR)

    DEPRECATED.
- #define CFE_OS_ERR_NAME_TOO_LONG (OS_ERR_NAME_TOO_LONG)

    DEPRECATED.
- #define CFE_OS_ERR_NO_FREE_IDS (OS_ERR_NO_FREE_IDS)

    DEPRECATED.

- #define CFE_OS_ERR_NAME_TAKEN (OS_ERR_NAME_TAKEN)

    DEPRECATED.
- #define CFE_OS_ERR_INVALID_ID (OS_ERR_INVALID_ID)

    DEPRECATED.
- #define CFE_OS_ERR_NAME_NOT_FOUND (OS_ERR_NAME_NOT_FOUND)

    DEPRECATED.
- #define CFE_OS_ERR_SEM_NOT_FULL (OS_ERR_SEM_NOT_FULL)

    DEPRECATED.
- #define CFE_OS_ERR_INVALID_PRIORITY (OS_ERR_INVALID_PRIORITY)

    DEPRECATED.
- #define CFE_OS_FS_ERROR (OS_ERROR)

    DEPRECATED.
- #define CFE_OS_FS_ERR_INVALID_POINTER (OS_INVALID_POINTER)

    DEPRECATED.
- #define CFE_OS_FS_ERR_PATH_TOO_LONG (OS_FS_ERR_PATH_TOO_LONG)

    DEPRECATED.
- #define CFE_OS_FS_ERR_NAME_TOO_LONG (OS_FS_ERR_NAME_TOO_LONG)

    DEPRECATED.
- #define CFE_OS_FS_ERR_DRIVE_NOT_CREATED (OS_FS_ERR_DRIVE_NOT_CREATED)

    DEPRECATED.
- #define CFE_OSAPI_NOT_IMPLEMENTED (OS_ERR_NOT_IMPLEMENTED)

    DEPRECATED.
- #define CFE_SB_TIME_OUT ((int32)0xca000001)

    Time Out.
- #define CFE_SB_NO_MESSAGE ((int32)0xca000002)

    No Message.
- #define CFE_SB_BAD_ARGUMENT ((int32)0xca000003)

    Bad Argument.
- #define CFE_SB_MAX_PIPES_MET ((int32)0xca000004)

    Max Pipes Met.
- #define CFE_SB_PIPE_CR_ERR ((int32)0xca000005)

    Pipe Create Error.
- #define CFE_SB_PIPE_RD_ERR ((int32)0xca000006)

    Pipe Read Error.
- #define CFE_SB_MSG_TOO_BIG ((int32)0xca000007)

    Message Too Big.
- #define CFE_SB_BUF_ALOC_ERR ((int32)0xca000008)

    Buffer Allocation Error.
- #define CFE_SB_MAX_MSGS_MET ((int32)0xca000009)

    Max Messages Met.
- #define CFE_SB_MAX_DESTS_MET ((int32)0xca00000a)

    Max Destinations Met.
- #define CFE_SB_NO_SUBSCRIBERS ((int32)0xca00000b)

    No Subscribers.
- #define CFE_SB_INTERNAL_ERR ((int32)0xca00000c)

    Internal Error.
- #define CFE_SB_WRONG_MSG_TYPE ((int32)0xca00000d)

Wrong Message Type.
- #define CFE_SB_BUFFER_INVALID ((int32)0xca00000e)

    Buffer Invalid.
- #define CFE_SB_NO_MSG_RECV ((int32)0xca00000f)

    No Message Recieved.
- #define CFE_SB_NOT_IMPLEMENTED ((int32)0xca00ffff)

    Not Implemented.
- #define CFE_TBL_ERR_INVALID_HANDLE ((int32)0xcc000001)

    Invalid Handle.
- #define CFE_TBL_ERR_INVALID_NAME ((int32)0xcc000002)

    Invalid Name.
- #define CFE_TBL_ERR_INVALID_SIZE ((int32)0xcc000003)

    Invalid Size.
- #define CFE_TBL_INFO_UPDATE_PENDING ((int32)0x4c000004)

    Update Pending.
- #define CFE_TBL_ERR_NEVER_LOADED ((int32)0xcc000005)

    Never Loaded.
- #define CFE_TBL_ERR_REGISTRY_FULL ((int32)0xcc000006)

    Registry Full.
- #define CFE_TBL_WARN_DUPLICATE ((int32)0x4c000007)

    Duplicate Warning.
- #define CFE_TBL_ERR_NO_ACCESS ((int32)0xcc000008)

    No Access.
- #define CFE_TBL_ERR_UNREGISTERED ((int32)0xcc000009)

    Unregistered.
- #define CFE_TBL_ERR_BAD_APP_ID ((int32)0xcc00000A)

    Bad Application ID.
- #define CFE_TBL_ERR_HANDLES_FULL ((int32)0xcc00000B)

    Handles Full.
- #define CFE_TBL_ERR_DUPLICATE_DIFF_SIZE ((int32)0xcc00000C)

    Duplicate Table With Different Size.
- #define CFE_TBL_ERR_DUPLICATE_NOT_OWNED ((int32)0xcc00000D)

    Dupicate Table And Not Owned.
- #define CFE_TBL_INFO_UPDATED ((int32)0x4c00000E)

    Updated.
- #define CFE_TBL_ERR_NO_BUFFER_AVAIL ((int32)0xcc00000F)

    No Buffer Available.
- #define CFE_TBL_ERR_DUMP_ONLY ((int32)0xcc000010)

    Dump Only Error.
- #define CFE_TBL_ERR_ILLEGAL_SRC_TYPE ((int32)0xcc000011)

    Illegal Source Type.
- #define CFE_TBL_ERR_LOAD_IN_PROGRESS ((int32)0xcc000012)

    Load In Progress.
- #define CFE_TBL_ERR_FILE_NOT_FOUND ((int32)0xcc000013)

    File Not Found.
- #define CFE_TBL_ERR_FILE_TOO_LARGE ((int32)0xcc000014)

    File Too Large.

- #define CFE_TBL_WARN_SHORT_FILE ((int32)0x4c000015)

     Short File Warning.
- #define CFE_TBL_ERR_BAD_CONTENT_ID ((int32)0xcc000016)

     Bad Content ID.
- #define CFE_TBL_INFO_NO_UPDATE_PENDING ((int32)0x4c000017)

     No Update Pending.
- #define CFE_TBL_INFO_TABLE_LOCKED ((int32)0x4c000018)

     Table Locked.
- #define CFE_TBL_INFO_VALIDATION_PENDING ((int32)0x4c000019)
- #define CFE_TBL_INFO_NO_VALIDATION_PENDING ((int32)0x4c00001A)
- #define CFE_TBL_ERR_BAD_SUBTYPE_ID ((int32)0xcc00001B)

     Bad Subtype ID.
- #define CFE_TBL_ERR_FILE_SIZE_INCONSISTENT ((int32)0xcc00001C)

     File Size Inconsistent.
- #define CFE_TBL_ERR_NO_STD_HEADER ((int32)0xcc00001D)

     No Standard Header.
- #define CFE_TBL_ERR_NO_TBL_HEADER ((int32)0xcc00001E)

     No Table Header.
- #define CFE_TBL_ERR_FILENAME_TOO_LONG ((int32)0xcc00001F)

     Filename Too Long.
- #define CFE_TBL_ERR_FILE_FOR_WRONG_TABLE ((int32)0xcc000020)

     File For Wrong Table.
- #define CFE_TBL_ERR_LOAD_INCOMPLETE ((int32)0xcc000021)

     Load Incomplete.
- #define CFE_TBL_WARN_PARTIAL_LOAD ((int32)0x4c000022)

     Partial Load Warning.
- #define CFE_TBL_ERR_PARTIAL_LOAD ((int32)0xcc000023)

     Partial Load Error.
- #define CFE_TBL_INFO_DUMP_PENDING ((int32)0x4c000024)

     Dump Pending.
- #define CFE_TBL_ERR_INVALID_OPTIONS ((int32)0xcc000025)

     Invalid Options.
- #define CFE_TBL_WARN_NOT_CRITICAL ((int32)0x4c000026)

     Not Critical Warning.
- #define CFE_TBL_INFO_RECOVERED_TBL ((int32)0x4c000027)

     Recovered Table.
- #define CFE_TBL_ERR_BAD_SPACECRAFT_ID ((int32)0xcc000028)

     Bad Spacecraft ID.
- #define CFE_TBL_ERR_BAD_PROCESSOR_ID ((int32)0xcc000029)

     Bad Processor ID.
- #define CFE_TBL_MESSAGE_ERROR ((int32)0xcc00002a)

     Message Error.
- #define CFE_TBL_ERR_SHORT_FILE ((int32)0xcc00002b)
- #define CFE_TBL_ERR_ACCESS ((int32)0xcc00002c)
- #define CFE_TBL_NOT_IMPLEMENTED ((int32)0xcc00ffff)

     Not Implemented.
- #define CFE_TIME_NOT_IMPLEMENTED ((int32)0xce00ffff)

Not Implemented.

- #define CFE_TIME_INTERNAL_ONLY ((int32)0xce000001)

    Internal Only.

- #define CFE_TIME_OUT_OF_RANGE ((int32)0xce000002)

    Out Of Range.

- #define CFE_TIME_TOO_MANY_SYNCH_CALLBACKS ((int32)0xce000003)

    Too Many Sync Callbacks.

- #define CFE_TIME_CALLBACK_NOT_REGISTERED ((int32)0xce000004)

    Callback Not Registered.

39.21.1 Macro Definition Documentation

39.21.1.1 CFE_EVENTS_SERVICE

```
#define CFE_EVENTS_SERVICE ((int32)0x02000000)
```

Event Service.

Definition at line 99 of file cfe_error.h.

39.21.1.2 CFE_EXECUTIVE_SERVICE

```
#define CFE_EXECUTIVE_SERVICE ((int32)0x04000000)
```

Executive Service.

Definition at line 100 of file cfe_error.h.

39.21.1.3 CFE_FILE_SERVICE

```
#define CFE_FILE_SERVICE ((int32)0x06000000)
```

File Service.

Definition at line 101 of file cfe_error.h.

39.21.1.4 CFE_GENERIC_SERVICE

```
#define CFE_GENERIC_SERVICE ((int32)0x08000000)
```

Generic Service.

Definition at line 102 of file cfe_error.h.

39.21.1.5 CFE_SERVICE_BITMASK

```
#define CFE_SERVICE_BITMASK ((int32)0x0e000000)
```

Error Service Bitmask.

Definition at line 97 of file cfe_error.h.

39.21.1.6 CFE_SEVERITY_BITMASK

```
#define CFE_SEVERITY_BITMASK ((int32)0xc0000000)
```

Error Severity Bitmask.

Definition at line 88 of file cfe_error.h.

39.21.1.7 CFE_SEVERITY_ERROR

```
#define CFE_SEVERITY_ERROR ((int32)0xc0000000)
```

Severity Error.

Definition at line 92 of file cfe_error.h.

39.21.1.8 CFE_SEVERITY_INFO

```
#define CFE_SEVERITY_INFO ((int32)0x40000000)
```

Severity Info.

Definition at line 91 of file cfe_error.h.

39.21.1.9   CFE_SEVERITY_SUCCESS

#define CFE_SEVERITY_SUCCESS (([int32](int32))0x00000000)

Severity Success.

Definition at line 90 of file cfe_error.h.

39.21.1.10   CFE_SOFTWARE_BUS_SERVICE

#define CFE_SOFTWARE_BUS_SERVICE (([int32](int32))0x0a000000)

Software Bus Service.

Definition at line 103 of file cfe_error.h.

39.21.1.11   CFE_TABLE_SERVICE

#define CFE_TABLE_SERVICE (([int32](int32))0x0c000000)

Table Service.

Definition at line 104 of file cfe_error.h.

39.21.1.12   CFE_TIME_SERVICE

#define CFE_TIME_SERVICE (([int32](int32))0x0e000000)

Time Service.

Definition at line 105 of file cfe_error.h.

39.22   cfe/fsw/cfe-core/src/inc/cfe_es.h File Reference

#include "cfe_es_extern_typedefs.h"
#include "cfe_mission_cfg.h"
#include "cfe_perfids.h"

Data Structures

- struct CFE_ES_AppInfo_t

    Application Information.
- struct CFE_ES_TaskInfo_t

    Task Info.
- struct CFE_ES_BlockStats_t

    Block statistics.
- struct CFE_ES_MemPoolStats_t

    Memory Pool Statistics.
- struct CFE_ES_CDSRegDumpRec_t

    CDS Register Dump Record.
- union CFE_ES_PoolAlign_t

    Pool Alignement.

Macros

- #define OS_PRINTF(m, n)
- #define CFE_ES_DBIT(x) (1L << (x)) /∗ Places a one at bit positions 0 thru 31 ∗/
- #define CFE_ES_DTEST(i, x) (((i) & CFE_ES_DBIT(x)) != 0) /∗ true iff bit x of i is set ∗/
- #define CFE_ES_TEST_LONG_MASK(m, s) (CFE_ES_DTEST(m[(s)/32],(s)%32)) /∗ Test a bit within an array of 32-bit integers. ∗/
- #define CFE_ES_MAX_MEMPOOL_BLOCK_SIZES 17
- #define CFE_ES_NO_MUTEX 0

    Indicates that the memory pool selection will not use a semaphore.
- #define CFE_ES_USE_MUTEX 1

    Indicates that the memory pool selection will use a semaphore.
- #define CFE_ES_PROCESSOR_RESET CFE_PSP_RST_TYPE_PROCESSOR
- #define CFE_ES_POWERON_RESET CFE_PSP_RST_TYPE_POWERON
- #define CFE_ES_POWER_CYCLE CFE_PSP_RST_SUBTYPE_POWER_CYCLE
- #define CFE_ES_PUSH_BUTTON CFE_PSP_RST_SUBTYPE_PUSH_BUTTON
- #define CFE_ES_HW_SPECIAL_COMMAND CFE_PSP_RST_SUBTYPE_HW_SPECIAL_COMMAND
- #define CFE_ES_HW_WATCHDOG CFE_PSP_RST_SUBTYPE_HW_WATCHDOG
- #define CFE_ES_RESET_COMMAND CFE_PSP_RST_SUBTYPE_RESET_COMMAND
- #define CFE_ES_EXCEPTION CFE_PSP_RST_SUBTYPE_EXCEPTION
- #define CFE_ES_UNDEFINED_RESET CFE_PSP_RST_SUBTYPE_UNDEFINED_RESET
- #define CFE_ES_HWDEBUG_RESET CFE_PSP_RST_SUBTYPE_HWDEBUG_RESET
- #define CFE_ES_BANKSWITCH_RESET CFE_PSP_RST_SUBTYPE_BANKSWITCH_RESET
- #define CFE_ES_SYSTEM_STATE_UNDEFINED CFE_ES_SystemState_UNDEFINED
- #define CFE_ES_SYSTEM_STATE_EARLY_INIT CFE_ES_SystemState_EARLY_INIT
- #define CFE_ES_SYSTEM_STATE_CORE_STARTUP CFE_ES_SystemState_CORE_STARTUP
- #define CFE_ES_SYSTEM_STATE_CORE_READY CFE_ES_SystemState_CORE_READY
- #define CFE_ES_SYSTEM_STATE_APPS_INIT CFE_ES_SystemState_APPS_INIT
- #define CFE_ES_SYSTEM_STATE_OPERATIONAL CFE_ES_SystemState_OPERATIONAL
- #define CFE_ES_SYSTEM_STATE_SHUTDOWN CFE_ES_SystemState_SHUTDOWN
- #define CFE_ES_APP_RUN CFE_ES_RunStatus_APP_RUN
- #define CFE_ES_APP_EXIT CFE_ES_RunStatus_APP_EXIT
- #define CFE_ES_APP_ERROR CFE_ES_RunStatus_APP_ERROR
- #define CFE_ES_SYS_EXCEPTION CFE_ES_RunStatus_SYS_EXCEPTION

- #define CFE_ES_SYS_RESTART CFE_ES_RunStatus_SYS_RESTART
- #define CFE_ES_SYS_RELOAD CFE_ES_RunStatus_SYS_RELOAD
- #define CFE_ES_SYS_DELETE CFE_ES_RunStatus_SYS_DELETE
- #define CFE_ES_CORE_APP_INIT_ERROR CFE_ES_RunStatus_CORE_APP_INIT_ERROR
- #define CFE_ES_CORE_APP_RUNTIME_ERROR CFE_ES_RunStatus_CORE_APP_RUNTIME_ERROR
- #define CFE_ES_APP_STATE_UNDEFINED CFE_ES_AppState_UNDEFINED
- #define CFE_ES_APP_STATE_EARLY_INIT CFE_ES_AppState_EARLY_INIT
- #define CFE_ES_APP_STATE_LATE_INIT CFE_ES_AppState_LATE_INIT
- #define CFE_ES_APP_STATE_RUNNING CFE_ES_AppState_RUNNING
- #define CFE_ES_APP_STATE_WAITING CFE_ES_AppState_WAITING
- #define CFE_ES_APP_STATE_STOPPED CFE_ES_AppState_STOPPED
- #define CFE_ES_APP_TYPE_CORE CFE_ES_AppType_CORE
- #define CFE_ES_APP_TYPE_EXTERNAL CFE_ES_AppType_EXTERNAL
- #define CFE_ES_LOG_DISCARD CFE_ES_LogMode_DISCARD
- #define CFE_ES_LOG_OVERWRITE CFE_ES_LogMode_OVERWRITE
- #define CFE_ES_APP_EXCEPTION_RESTART_APP CFE_ES_ExceptionAction_RESTART_APP
- #define CFE_ES_APP_EXCEPTION_PROC_RESTART CFE_ES_ExceptionAction_PROC_RESTART
- #define CFE_ES_CORE_LOG_ENTRY CFE_ES_LogEntryType_CORE
- #define CFE_ES_APPLICATION_LOG_ENTRY CFE_ES_LogEntryType_APPLICATION
- #define CFE_ES_STATIC_POOL_TYPE(size) union { CFE_ES_PoolAlign_t Align; uint8 Data[size]; }

    Static Pool Type.
- #define CFE_ES_PerfLogEntry(id) (CFE_ES_PerfLogAdd(id, 0))

    Entry marker for use with Software Performance Analysis Tool.
- #define CFE_ES_PerfLogExit(id) (CFE_ES_PerfLogAdd(id, 1))

    Exit marker for use with Software Performance Analysis Tool.

Reset Type extensions

- #define CFE_ES_APP_RESTART CFE_PSP_RST_TYPE_MAX

Critical Data Store Macros

- #define CFE_ES_CDS_MAX_FULL_NAME_LEN (CFE_MISSION_ES_CDS_MAX_NAME_LENGTH + OS↩
  _MAX_API_NAME + 2)
- #define CFE_ES_CDS_BAD_HANDLE (CFE_ES_CDSHandle_t) 0xFFFF

Typedefs

- typedef cpuaddr CFE_ES_MemHandle_t

    Memory Handle type.
- typedef cpuaddr CFE_ES_CDSHandle_t

    CDS Handle type.
- typedef void(∗ CFE_ES_ChildTaskMainFuncPtr_t) (void)

    Required Prototype of Child Task Main Functions.
- typedef int32(∗ CFE_ES_LibraryEntryFuncPtr_t) (uint32 LibId)

    Required Prototype of Library Initialization Functions.

Functions

- int32 uint32 CFE_ES_CalculateCRC (const void ∗DataPtr, uint32 DataLength, uint32 InputCRC, uint32 TypeCRC)

    Calculate a CRC on a block of memory.
- void CFE_ES_ProcessAsyncEvent (void)

    Notification that an asynchronous event was detected by the underlying OS/PSP.
- int32 CFE_ES_RegisterCDS (CFE_ES_CDSHandle_t ∗HandlePtr, int32 BlockSize, const char ∗Name)

    Reserve space (or re-obtain previously reserved space) in the Critical Data Store (CDS)
- int32 CFE_ES_CopyToCDS (CFE_ES_CDSHandle_t Handle, void ∗DataToCopy)

    Save a block of data in the Critical Data Store (CDS)
- int32 CFE_ES_RestoreFromCDS (void ∗RestoreToMemory, CFE_ES_CDSHandle_t Handle)

    Recover a block of data from the Critical Data Store (CDS)
- int32 CFE_ES_PoolCreateNoSem (CFE_ES_MemHandle_t ∗HandlePtr, uint8 ∗MemPtr, uint32 Size)

    Initializes a memory pool created by an application without using a semaphore during processing.
- int32 CFE_ES_PoolCreate (CFE_ES_MemHandle_t ∗HandlePtr, uint8 ∗MemPtr, uint32 Size)

    Initializes a memory pool created by an application while using a semaphore during processing.
- int32 CFE_ES_PoolCreateEx (CFE_ES_MemHandle_t ∗HandlePtr, uint8 ∗MemPtr, uint32 Size, uint32 Num↩
  BlockSizes, uint32 ∗BlockSizes, uint16 UseMutex)

    Initializes a memory pool created by an application with application specified block sizes.
- int32 CFE_ES_GetPoolBuf (uint32 ∗∗BufPtr, CFE_ES_MemHandle_t HandlePtr, uint32 Size)

    Gets a buffer from the memory pool created by CFE_ES_PoolCreate or CFE_ES_PoolCreateNoSem.
- int32 CFE_ES_GetPoolBufInfo (CFE_ES_MemHandle_t HandlePtr, uint32 ∗BufPtr)

    Gets info on a buffer previously allocated via CFE_ES_GetPoolBuf.
- int32 CFE_ES_PutPoolBuf (CFE_ES_MemHandle_t HandlePtr, uint32 ∗BufPtr)

    Releases a buffer from the memory pool that was previously allocated via CFE_ES_GetPoolBuf.
- int32 CFE_ES_GetMemPoolStats (CFE_ES_MemPoolStats_t ∗BufPtr, CFE_ES_MemHandle_t Handle)

    Extracts the statistics maintained by the memory pool software.
- void CFE_ES_PerfLogAdd (uint32 Marker, uint32 EntryExit)

    Function called by CFE_ES_PerfLogEntry and CFE_ES_PerfLogExit macros.
- int32 CFE_ES_RegisterGenCounter (uint32 ∗CounterIdPtr, const char ∗CounterName)

    Register a generic counter.
- int32 CFE_ES_DeleteGenCounter (uint32 CounterId)

    Delete a generic counter.
- int32 CFE_ES_IncrementGenCounter (uint32 CounterId)

    Increments the specified generic counter.
- int32 CFE_ES_SetGenCount (uint32 CounterId, uint32 Count)

    Set the specified generic counter.
- int32 CFE_ES_GetGenCount (uint32 CounterId, uint32 ∗Count)

    Get the specified generic counter count.
- int32 CFE_ES_GetGenCounterIDByName (uint32 ∗CounterIdPtr, const char ∗CounterName)

    Get the Id associated with a generic counter name.

39.22.1   Macro Definition Documentation

39.22.1.1 CFE_ES_APP_ERROR

#define CFE_ES_APP_ERROR CFE_ES_RunStatus_APP_ERROR

Definition at line 143 of file cfe_es.h.

39.22.1.2 CFE_ES_APP_EXCEPTION_PROC_RESTART

#define CFE_ES_APP_EXCEPTION_PROC_RESTART CFE_ES_ExceptionAction_PROC_RESTART

Definition at line 177 of file cfe_es.h.

39.22.1.3 CFE_ES_APP_EXCEPTION_RESTART_APP

#define CFE_ES_APP_EXCEPTION_RESTART_APP CFE_ES_ExceptionAction_RESTART_APP

Definition at line 176 of file cfe_es.h.

39.22.1.4 CFE_ES_APP_EXIT

#define CFE_ES_APP_EXIT CFE_ES_RunStatus_APP_EXIT

Definition at line 142 of file cfe_es.h.

39.22.1.5 CFE_ES_APP_RESTART

#define CFE_ES_APP_RESTART CFE_PSP_RST_TYPE_MAX

Application only was reset (extend the PSP enumeration here)

Definition at line 80 of file cfe_es.h.

39.22.1.6 CFE_ES_APP_RUN

#define CFE_ES_APP_RUN CFE_ES_RunStatus_APP_RUN

Definition at line 141 of file cfe_es.h.

39.22.1.7   CFE_ES_APP_STATE_EARLY_INIT

#define CFE_ES_APP_STATE_EARLY_INIT CFE_ES_AppState_EARLY_INIT

Definition at line 155 of file cfe_es.h.

39.22.1.8   CFE_ES_APP_STATE_LATE_INIT

#define CFE_ES_APP_STATE_LATE_INIT CFE_ES_AppState_LATE_INIT

Definition at line 156 of file cfe_es.h.

39.22.1.9   CFE_ES_APP_STATE_RUNNING

#define CFE_ES_APP_STATE_RUNNING CFE_ES_AppState_RUNNING

Definition at line 157 of file cfe_es.h.

39.22.1.10   CFE_ES_APP_STATE_STOPPED

#define CFE_ES_APP_STATE_STOPPED CFE_ES_AppState_STOPPED

Definition at line 159 of file cfe_es.h.

39.22.1.11   CFE_ES_APP_STATE_UNDEFINED

#define CFE_ES_APP_STATE_UNDEFINED CFE_ES_AppState_UNDEFINED

Definition at line 154 of file cfe_es.h.

39.22.1.12   CFE_ES_APP_STATE_WAITING

#define CFE_ES_APP_STATE_WAITING CFE_ES_AppState_WAITING

Definition at line 158 of file cfe_es.h.

39.22.1.13   CFE_ES_APP_TYPE_CORE

`#define CFE_ES_APP_TYPE_CORE CFE_ES_AppType_CORE`

Definition at line 164 of file cfe_es.h.

39.22.1.14   CFE_ES_APP_TYPE_EXTERNAL

`#define CFE_ES_APP_TYPE_EXTERNAL CFE_ES_AppType_EXTERNAL`

Definition at line 165 of file cfe_es.h.

39.22.1.15   CFE_ES_APPLICATION_LOG_ENTRY

`#define CFE_ES_APPLICATION_LOG_ENTRY CFE_ES_LogEntryType_APPLICATION`

Definition at line 183 of file cfe_es.h.

39.22.1.16   CFE_ES_BANKSWITCH_RESET

`#define CFE_ES_BANKSWITCH_RESET CFE_PSP_RST_SUBTYPE_BANKSWITCH_RESET`

Definition at line 125 of file cfe_es.h.

39.22.1.17   CFE_ES_CDS_BAD_HANDLE

`#define CFE_ES_CDS_BAD_HANDLE (CFE_ES_CDSHandle_t) 0xFFFF`

Definition at line 90 of file cfe_es.h.

39.22.1.18   CFE_ES_CDS_MAX_FULL_NAME_LEN

`#define CFE_ES_CDS_MAX_FULL_NAME_LEN (CFE_MISSION_ES_CDS_MAX_NAME_LENGTH + OS_MAX_API_NAME + 2)`

Maximum length allowed for CDS name.
NOTE: "+2" is for NULL Character and "." (i.e. - "AppName.CDSName")

Definition at line 88 of file cfe_es.h.

39.22.1.19   CFE_ES_CORE_APP_INIT_ERROR

#define CFE_ES_CORE_APP_INIT_ERROR CFE_ES_RunStatus_CORE_APP_INIT_ERROR

Definition at line 148 of file cfe_es.h.

39.22.1.20   CFE_ES_CORE_APP_RUNTIME_ERROR

#define CFE_ES_CORE_APP_RUNTIME_ERROR CFE_ES_RunStatus_CORE_APP_RUNTIME_ERROR

Definition at line 149 of file cfe_es.h.

39.22.1.21   CFE_ES_CORE_LOG_ENTRY

#define CFE_ES_CORE_LOG_ENTRY CFE_ES_LogEntryType_CORE

Definition at line 182 of file cfe_es.h.

39.22.1.22   CFE_ES_DBIT

```
#define CFE_ES_DBIT(
          x ) (1L << (x)) /* Places a one at bit positions 0 thru 31 */
```

Definition at line 60 of file cfe_es.h.

39.22.1.23   CFE_ES_DTEST

```
#define CFE_ES_DTEST(
          i,
          x ) (((i) & CFE_ES_DBIT(x)) != 0) /* true iff bit x of i is set */
```

Definition at line 61 of file cfe_es.h.

39.22.1.24   CFE_ES_EXCEPTION

#define CFE_ES_EXCEPTION CFE_PSP_RST_SUBTYPE_EXCEPTION

Definition at line 122 of file cfe_es.h.

39.22.1.25   CFE_ES_HW_SPECIAL_COMMAND

#define CFE_ES_HW_SPECIAL_COMMAND CFE_PSP_RST_SUBTYPE_HW_SPECIAL_COMMAND

Definition at line 119 of file cfe_es.h.

39.22.1.26   CFE_ES_HW_WATCHDOG

#define CFE_ES_HW_WATCHDOG CFE_PSP_RST_SUBTYPE_HW_WATCHDOG

Definition at line 120 of file cfe_es.h.

39.22.1.27   CFE_ES_HWDEBUG_RESET

#define CFE_ES_HWDEBUG_RESET CFE_PSP_RST_SUBTYPE_HWDEBUG_RESET

Definition at line 124 of file cfe_es.h.

39.22.1.28   CFE_ES_LOG_DISCARD

#define CFE_ES_LOG_DISCARD CFE_ES_LogMode_DISCARD

Definition at line 170 of file cfe_es.h.

39.22.1.29   CFE_ES_LOG_OVERWRITE

#define CFE_ES_LOG_OVERWRITE CFE_ES_LogMode_OVERWRITE

Definition at line 171 of file cfe_es.h.

39.22.1.30   CFE_ES_MAX_MEMPOOL_BLOCK_SIZES

#define CFE_ES_MAX_MEMPOOL_BLOCK_SIZES 17

Max number of size divisions allowed in a memory pool

Definition at line 63 of file cfe_es.h.

39.22.1.31   CFE_ES_NO_MUTEX

#define CFE_ES_NO_MUTEX 0

Indicates that the memory pool selection will not use a semaphore.

Definition at line 93 of file cfe_es.h.

39.22.1.32   CFE_ES_POWER_CYCLE

#define CFE_ES_POWER_CYCLE CFE_PSP_RST_SUBTYPE_POWER_CYCLE

Definition at line 117 of file cfe_es.h.

39.22.1.33   CFE_ES_POWERON_RESET

#define CFE_ES_POWERON_RESET CFE_PSP_RST_TYPE_POWERON

Definition at line 115 of file cfe_es.h.

39.22.1.34   CFE_ES_PROCESSOR_RESET

#define CFE_ES_PROCESSOR_RESET CFE_PSP_RST_TYPE_PROCESSOR

Definition at line 114 of file cfe_es.h.

39.22.1.35   CFE_ES_PUSH_BUTTON

#define CFE_ES_PUSH_BUTTON CFE_PSP_RST_SUBTYPE_PUSH_BUTTON

Definition at line 118 of file cfe_es.h.

39.22.1.36   CFE_ES_RESET_COMMAND

#define CFE_ES_RESET_COMMAND CFE_PSP_RST_SUBTYPE_RESET_COMMAND

Definition at line 121 of file cfe_es.h.

39.22.1.37   CFE_ES_STATIC_POOL_TYPE

```
#define CFE_ES_STATIC_POOL_TYPE(
              size ) union { CFE_ES_PoolAlign_t Align; uint8 Data[size]; }
```

Static Pool Type.

A macro to help instantiate static memory pools that are correctly aligned. This resolves to a union type that contains a member called "Data" that will be correctly aligned to be a memory pool and sized according to the argument.

Definition at line 344 of file cfe_es.h.

39.22.1.38   CFE_ES_SYS_DELETE

```
#define CFE_ES_SYS_DELETE CFE_ES_RunStatus_SYS_DELETE
```

Definition at line 147 of file cfe_es.h.

39.22.1.39   CFE_ES_SYS_EXCEPTION

```
#define CFE_ES_SYS_EXCEPTION CFE_ES_RunStatus_SYS_EXCEPTION
```

Definition at line 144 of file cfe_es.h.

39.22.1.40   CFE_ES_SYS_RELOAD

```
#define CFE_ES_SYS_RELOAD CFE_ES_RunStatus_SYS_RELOAD
```

Definition at line 146 of file cfe_es.h.

39.22.1.41   CFE_ES_SYS_RESTART

```
#define CFE_ES_SYS_RESTART CFE_ES_RunStatus_SYS_RESTART
```

Definition at line 145 of file cfe_es.h.

39.22.1.42   CFE_ES_SYSTEM_STATE_APPS_INIT

```
#define CFE_ES_SYSTEM_STATE_APPS_INIT CFE_ES_SystemState_APPS_INIT
```

Definition at line 134 of file cfe_es.h.

39.22.1.43   CFE_ES_SYSTEM_STATE_CORE_READY

#define CFE_ES_SYSTEM_STATE_CORE_READY CFE_ES_SystemState_CORE_READY

Definition at line 133 of file cfe_es.h.

39.22.1.44   CFE_ES_SYSTEM_STATE_CORE_STARTUP

#define CFE_ES_SYSTEM_STATE_CORE_STARTUP CFE_ES_SystemState_CORE_STARTUP

Definition at line 132 of file cfe_es.h.

39.22.1.45   CFE_ES_SYSTEM_STATE_EARLY_INIT

#define CFE_ES_SYSTEM_STATE_EARLY_INIT CFE_ES_SystemState_EARLY_INIT

Definition at line 131 of file cfe_es.h.

39.22.1.46   CFE_ES_SYSTEM_STATE_OPERATIONAL

#define CFE_ES_SYSTEM_STATE_OPERATIONAL CFE_ES_SystemState_OPERATIONAL

Definition at line 135 of file cfe_es.h.

39.22.1.47   CFE_ES_SYSTEM_STATE_SHUTDOWN

#define CFE_ES_SYSTEM_STATE_SHUTDOWN CFE_ES_SystemState_SHUTDOWN

Definition at line 136 of file cfe_es.h.

39.22.1.48   CFE_ES_SYSTEM_STATE_UNDEFINED

#define CFE_ES_SYSTEM_STATE_UNDEFINED CFE_ES_SystemState_UNDEFINED

Definition at line 130 of file cfe_es.h.

39.22.1.49 CFE_ES_TEST_LONG_MASK

```
#define CFE_ES_TEST_LONG_MASK(
            m,
            s ) (CFE_ES_DTEST(m[(s)/32],(s)%32)) /* Test a bit within an array of 32-bit integers.
*/
```

Definition at line 62 of file cfe_es.h.

39.22.1.50 CFE_ES_UNDEFINED_RESET

```
#define CFE_ES_UNDEFINED_RESET CFE_PSP_RST_SUBTYPE_UNDEFINED_RESET
```

Definition at line 123 of file cfe_es.h.

39.22.1.51 CFE_ES_USE_MUTEX

```
#define CFE_ES_USE_MUTEX 1
```

Indicates that the memory pool selection will use a semaphore.

Definition at line 94 of file cfe_es.h.

39.22.1.52 OS_PRINTF

```
#define OS_PRINTF(
            m,
            n )
```

Definition at line 57 of file cfe_es.h.

39.22.2 Typedef Documentation

39.22.2.1 CFE_ES_CDSHandle_t

```
typedef cpuaddr CFE_ES_CDSHandle_t
```

CDS Handle type.

Data type used to hold Handles of Critical Data Stores. See CFE_ES_RegisterCDS

Definition at line 302 of file cfe_es.h.

39.22.2.2   CFE_ES_ChildTaskMainFuncPtr_t

typedef void(* CFE_ES_ChildTaskMainFuncPtr_t) (void)

Required Prototype of Child Task Main Functions.

Definition at line 319 of file cfe_es.h.

39.22.2.3   CFE_ES_LibraryEntryFuncPtr_t

typedef int32(* CFE_ES_LibraryEntryFuncPtr_t) (uint32 LibId)

Required Prototype of Library Initialization Functions.

Definition at line 320 of file cfe_es.h.

39.22.2.4   CFE_ES_MemHandle_t

typedef cpuaddr CFE_ES_MemHandle_t

Memory Handle type.

Data type used to hold Handles of Memory Pools created via CFE_ES_PoolCreate and CFE_ES_PoolCreateNoSem

Definition at line 199 of file cfe_es.h.

39.23   cfe/fsw/cfe-core/src/inc/cfe_es_events.h File Reference

Macros

- #define CFE_ES_MAX_EID 92
- #define CFE_ES_INIT_INF_EID 1 /∗ start up message "informational" ∗/

    'cFE ES Initialized'
- #define CFE_ES_INITSTATS_INF_EID 2

    'cFE Version %d.%d.%d chksm %d, OSAL Version %d.%d'
- #define CFE_ES_NOOP_INF_EID 3 /∗ processed command "informational" ∗/

    'No-op command'
- #define CFE_ES_RESET_INF_EID 4

    'Reset Counters command'
- #define CFE_ES_SHELL_INF_EID 5

    'Invoked shell command %s'
- #define CFE_ES_START_INF_EID 6

    'Started %s from %s, AppID = %d'
- #define CFE_ES_STOP_DBG_EID 7

    'Stop Application %s Initiated.'

- #define CFE_ES_STOP_INF_EID 8

  'Stop Application %s Completed.'
- #define CFE_ES_RESTART_APP_DBG_EID 9

  'Restart Application %s Initiated.'
- #define CFE_ES_RESTART_APP_INF_EID 10

  'Restart Application %s Completed.'
- #define CFE_ES_RELOAD_APP_DBG_EID 11

  'Reload Application %s Initiated.'
- #define CFE_ES_RELOAD_APP_INF_EID 12

  'Reload Application %s Completed.'
- #define CFE_ES_EXIT_APP_INF_EID 13

  'Exit Application %s Completed.'
- #define CFE_ES_ERREXIT_APP_INF_EID 14

  'Exit Application %s Completed.'
- #define CFE_ES_ONE_APP_EID 15

  'Sent %s application data'
- #define CFE_ES_ALL_APPS_EID 16

  'App Info file written to %s, Entries=%d, FileSize=%d'
- #define CFE_ES_SYSLOG1_INF_EID 17

  'Cleared Executive Services log data'
- #define CFE_ES_SYSLOG2_EID 18

  '%s written:Size=%d,Entries=%d'
- #define CFE_ES_ERLOG1_INF_EID 19

  'Cleared mode log data'
- #define CFE_ES_ERLOG2_EID 20

  '%s written:Size=%d'
- #define CFE_ES_MID_ERR_EID 21 /∗ invalid command packet "error" ∗/

  'Invalid command pipe message ID: 0x%X'
- #define CFE_ES_CC1_ERR_EID 22

  'Invalid ground command code: ID = 0x%X, CC = %d'
- #define CFE_ES_LEN_ERR_EID 23

  'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'
- #define CFE_ES_BOOT_ERR_EID 24 /∗ command specific "error" ∗/

  'Invalid cFE restart type %d'
- #define CFE_ES_SHELL_ERR_EID 25

  'Failed to invoke shell command %s, rc = %08X'
- #define CFE_ES_START_ERR_EID 26

  'Failed to start %s from %s, RC = %08X'
- #define CFE_ES_START_INVALID_FILENAME_ERR_EID 27

  'CFE_ES_StartAppCmd: invalid filename: %s'
- #define CFE_ES_START_INVALID_ENTRY_POINT_ERR_EID 28

  'CFE_ES_StartAppCmd: App Entry Point is NULL.'
- #define CFE_ES_START_NULL_APP_NAME_ERR_EID 29

  'CFE_ES_StartAppCmd: App Name is NULL.'
- #define CFE_ES_START_STACK_ERR_EID 30

  'CFE_ES_StartAppCmd: Stack size is less than system Minimum: %d.'
- #define CFE_ES_START_PRIORITY_ERR_EID 31

'CFE_ES_StartAppCmd: Priority is too large: %d.'

- #define CFE_ES_START_EXC_ACTION_ERR_EID 32

    'CFE_ES_StartAppCmd: Invalid Exception Action: %d.'

- #define CFE_ES_ERREXIT_APP_ERR_EID 33

    'Exit Application %s on Error Failed: CleanUpApp Error 0x%08X.'

- #define CFE_ES_STOP_ERR1_EID 35

    'Stop Application %s Failed, RC = 0x%08X'

- #define CFE_ES_STOP_ERR2_EID 36

    'Stop Application %s, GetAppIDByName failed. RC = 0x%08X.'

- #define CFE_ES_STOP_ERR3_EID 37

    'Stop Application %s Failed: CleanUpApp Error 0x%08X.'

- #define CFE_ES_RESTART_APP_ERR1_EID 38

    'Restart Application %s Failed, RC = 0x%08X'

- #define CFE_ES_RESTART_APP_ERR2_EID 39

    'Restart Application %s, GetAppIDByName failed. RC = 0x%08X.'

- #define CFE_ES_RESTART_APP_ERR3_EID 40

    'Restart Application %s Failed: AppCreate Error 0x%08X.'

- #define CFE_ES_RESTART_APP_ERR4_EID 41

    'Restart Application %s Failed: CleanUpApp Error 0x%08X.'

- #define CFE_ES_RELOAD_APP_ERR1_EID 42

    'Failed to reload Application %s, rc = %08X'

- #define CFE_ES_RELOAD_APP_ERR2_EID 43

    'Reload Application %s, GetAppIDByName failed. RC = 0x%08X.'

- #define CFE_ES_RELOAD_APP_ERR3_EID 44

    'Reload Application %s Failed: AppCreate Error 0x%08X.'

- #define CFE_ES_RELOAD_APP_ERR4_EID 45

    'Reload Application %s Failed: CleanUpApp Error 0x%08X.'

- #define CFE_ES_EXIT_APP_ERR_EID 46

    'Exit Application %s Failed: CleanUpApp Error 0x%08X.'

- #define CFE_ES_PCR_ERR1_EID 47

    'ES_ProcControlReq: Invalid State (EXCEPTION) Application %s.'

- #define CFE_ES_PCR_ERR2_EID 48

    'ES_ProcControlReq: Unknown State (%d) Application %s.'

- #define CFE_ES_ONE_ERR_EID 49

    'Failed to send %s application data, RC = %08X'

- #define CFE_ES_ONE_APPID_ERR_EID 50

    'Failed to send %s application data: GetAppIDByName Failed, RC = 0x%08X'

- #define CFE_ES_OSCREATE_ERR_EID 51

    'Failed to write App Info file, OS_creat returned %d'

- #define CFE_ES_WRHDR_ERR_EID 52

    'Failed to write App Info file, WriteHdr rtnd %08X, exp %d'

- #define CFE_ES_TASKWR_ERR_EID 53

    'Failed to write App Info file, Task write RC = 0x%08X, exp %d'

- #define CFE_ES_SYSLOG2_ERR_EID 55

    'Error creating file %s, stat=0x%x'

- #define CFE_ES_ERLOG2_ERR_EID 56

    'Error creating file %s, stat=0x%x'

  'CDS '%s' not deleted because owning app is active'
- #define CFE_ES_TLM_POOL_STATS_INFO_EID 81

  'Successfully telemetered memory pool stats for 0x%08X'
- #define CFE_ES_INVALID_POOL_HANDLE_ERR_EID 82

  'Cannot telemeter memory pool stats. Illegal Handle (0x%08X)'
- #define CFE_ES_CDS_REG_DUMP_INF_EID 83

  'Successfully dumped CDS Registry to '%s':Size=%d,Entries=%d'
- #define CFE_ES_CDS_DUMP_ERR_EID 84

  'Error writing CDS Registry to '%s', Status=0x%08X'
- #define CFE_ES_WRITE_CFE_HDR_ERR_EID 85

  'Error writing cFE File Header to '%s', Status=0x%08X'
- #define CFE_ES_CREATING_CDS_DUMP_ERR_EID 86

  'Error creating CDS dump file '%s', Status=0x%08X'
- #define CFE_ES_TASKINFO_EID 87

  'Task Info file written to %s, Entries=%d, FileSize=%d'
- #define CFE_ES_TASKINFO_OSCREATE_ERR_EID 88

  'Failed to write Task Info file, OS_creat returned %d'
- #define CFE_ES_TASKINFO_WRHDR_ERR_EID 89

  'Failed to write Task Info file, WriteHdr rtnd %08X, exp %d'
- #define CFE_ES_TASKINFO_WR_ERR_EID 90

  'Failed to write Task Info file, Task write RC = 0x%08X, exp %d'
- #define CFE_ES_VERSION_INF_EID 91

  'Mission s.s, s, s'
- #define CFE_ES_BUILD_INF_EID 92

  'Build s s'
- #define CFE_ES_ERLOG_PENDING_ERR_EID 93

  'Error log write to file %s already in progress'

39.23.1 Macro Definition Documentation

39.23.1.1 CFE_ES_ALL_APPS_EID

#define CFE_ES_ALL_APPS_EID 16

'App Info file written to %s, Entries=%d, FileSize=%d'

Event Message 'App Info file written to %s, Entries=%d, FileSize=%d'

Type: DEBUG

Cause:

This event message is issued upon successful completion of the cFE Executive Services Query All Applications command

The 's' field identifies the name of the file to which all Executive Services Application data has been written. The Entries field identifies, in decimal, the number of Applications whose data was written and the FileSize field gives the total number of bytes written to the file.

Definition at line 301 of file cfe_es_events.h.

39.23.1.2 CFE_ES_BOOT_ERR_EID

```
#define CFE_ES_BOOT_ERR_EID 24 /* command specific "error" */
```
```
'Invalid cFE restart type %d'
```

Event Message 'Invalid cFE restart type %d'

Type: ERROR

Cause:

This event message is issued when the cFE Executive Services receives a cFE Restart Command whose parameter identifying the restart type is not equal to either CFE_PSP_RST_TYPE_PROCESSOR or CFE_PSP_RST_TYPE_P↩ OWERON.

The 'd' field identifies the numeric, in decimal, of the restart type found in the received cFE Restart Command Packet.

Definition at line 433 of file cfe_es_events.h.

39.23.1.3 CFE_ES_BUILD_INF_EID

```
#define CFE_ES_BUILD_INF_EID 92
```
```
'Build s s'
```

Event Message 'Build s s'

Type: INFORMATION

Cause:

This event message is always automatically issued when the Executive Services Task completes its Initialization, and as part of the Noop command.

The Build field identifies the build date, time, hostname and user identifier of the build host machine for the current running binary. The first string is the build date/time, and the second string is formatted as "user@hostname"

By default, if not specified/overridden, the default values of these variables will be: BUILDDATE ==> the output of "date +%Y%m%d%H%M" HOSTNAME ==> the output of "hostname" USER ==> the output of "whoami"

The values can be overridden by setting an environment variable with the names above to the value desired for the field when running "make".

Definition at line 1503 of file cfe_es_events.h.

39.23.1.4 CFE_ES_CC1_ERR_EID

#define CFE_ES_CC1_ERR_EID 22

'Invalid ground command code: ID = 0x%X, CC = %d'

Event Message 'Invalid ground command code: ID = 0x%X, CC = %d'

Type: ERROR

Cause:

This event message is generated when a message with the CFE_ES_CMD_MID message ID has arrived but whose Command Code is not one of the command codes specified in cfe_es.h . This problem is most likely to occur when:

1. A Message ID meant for another Application became corrupted and was set equal to CFE_ES_CMD_MID.

2. The Command Code field in the Message became corrupted.

3. The command database at the ground station has been corrupted.

The ID field in the event message specifies the Message ID (in hex) and the CC field specifies the Command Code (in decimal) found in the message.

Definition at line 398 of file cfe_es_events.h.

39.23.1.5 CFE_ES_CDS_DELETE_ERR_EID

#define CFE_ES_CDS_DELETE_ERR_EID 76

'Error while deleting '%s' from CDS, See SysLog.(Err=0x%08X)'

Event Message 'Error while deleting '%s' from CDS, See SysLog.(Err=0x%08X)'

Type: ERROR

Cause:

This event message is generated when an Executive Services Delete CDS Command fails to cleanly remove the specified CDS.

The 's' field identifies the name of the CDS that was attempted to be deleted the Err field specifies, in hex, the error code.

Definition at line 1231 of file cfe_es_events.h.

39.23.1.6 CFE_ES_CDS_DELETE_TBL_ERR_EID

`#define CFE_ES_CDS_DELETE_TBL_ERR_EID 79`

`'CDS '%s' is a Critical Table CDS. Must be deleted via TBL Command'`

Event Message `'CDS '%s' is a Critical Table CDS. Must be deleted via TBL Command'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Delete CDS Command specifies a name for a CDS that is a Critical Table image. Critical Table images can only be deleted via a Table Services command (CFE_TBL_DELE↩ TE_CDS_CC).

The '`s`' field identifies the name of the CDS that was attempted to be deleted.

Definition at line 1278 of file cfe_es_events.h.

39.23.1.7 CFE_ES_CDS_DELETED_INFO_EID

`#define CFE_ES_CDS_DELETED_INFO_EID 78`

`'Successfully removed '%s' from CDS'`

Event Message `'Successfully removed '%s' from CDS'`

Type: INFORMATION

Cause:

This event message is generated when an Executive Services Delete CDS Command is successfully completed.

The '`s`' field identifies the name of the CDS that was deleted.

Definition at line 1261 of file cfe_es_events.h.

39.23.1.8   CFE_ES_CDS_DUMP_ERR_EID

#define CFE_ES_CDS_DUMP_ERR_EID 84

'Error writing CDS Registry to '%s', Status=0x%08X'

Event Message 'Error writing CDS Registry to '%s', Status=0x%08X'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Critical Data Store Registry Command was being performed and it encountered a filesystem write error while writing a CDS Registry record.

The 's' field identifies the CDS Registry Dump Filename. The '08X' field identifies the error code returned from OS_write that caused the command to abort.

Definition at line 1364 of file cfe_es_events.h.

39.23.1.9   CFE_ES_CDS_NAME_ERR_EID

#define CFE_ES_CDS_NAME_ERR_EID 77

'Unable to locate '%s' in CDS Registry'

Event Message 'Unable to locate '%s' in CDS Registry'

Type: ERROR

Cause:

This event message is generated when an Executive Services Delete CDS Command specifies a name for a CDS that cannot be found in the CDS Registry.

The 's' field identifies the name of the CDS that was attempted to be deleted.

Definition at line 1246 of file cfe_es_events.h.

39.23.1.10 CFE_ES_CDS_OWNER_ACTIVE_EID

`#define CFE_ES_CDS_OWNER_ACTIVE_EID 80`

`'CDS '%s' not deleted because owning app is active'`

Event Message `'CDS '%s' not deleted because owning app is active'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Delete CDS Command specifies a name for a CDS whose prefix name identifies an application that is still registered in the system. CDSs can only be deleted when their owning applications have been removed from the system.

The `'s'` field identifies the name of the CDS that was attempted to be deleted.

Definition at line 1296 of file cfe_es_events.h.

39.23.1.11 CFE_ES_CDS_REG_DUMP_INF_EID

`#define CFE_ES_CDS_REG_DUMP_INF_EID 83`

`'Successfully dumped CDS Registry to '%s':Size=%d,Entries=%d'`

Event Message `'Successfully dumped CDS Registry to '%s':Size=%d,Entries=%d'`

Type: DEBUG

Cause:

This event message is generated when an Executive Services Dump Critical Data Store Registry Command is successfully executed. The specified file should have been created and contains the CDS Registry Entries.

The `'s'` field identifies the CDS Registry Dump Filename. The first `'d'` field specifies the size of the file (in bytes) The second `'d'` field specifies the number of CDS Registry Records that were written

Definition at line 1347 of file cfe_es_events.h.

39.23.1.12 CFE_ES_CDS_REGISTER_ERR_EID

```
#define CFE_ES_CDS_REGISTER_ERR_EID 69
```

```
'%s Failed to Register CDS '%s', Status=0x%08X'
```

Event Message `'%s Failed to Register CDS '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated whenever an Application calls the CFE_ES_RegisterCDS API and fails to successfully create the desired CDS.

The first `'s'` field identifies the name of the Application which made the API call, the second `'s'` field specifies the name of the CDS as requested by the Application and the `Status` field provides the error code which identifies in more detail the nature of the failure (See return codes for the CFE_ES_RegisterCDS API).

Definition at line 1142 of file cfe_es_events.h.

39.23.1.13 CFE_ES_CREATING_CDS_DUMP_ERR_EID

```
#define CFE_ES_CREATING_CDS_DUMP_ERR_EID 86
```

```
'Error creating CDS dump file '%s', Status=0x%08X'
```

Event Message `'Error creating CDS dump file '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Critical Data Store Registry Command is unable to create the specified file on the onboard filesystem.

The `'s'` field identifies the CDS Registry Dump Filename. The `'08X'` field identifies error code returned by the API OS_creat.

Definition at line 1397 of file cfe_es_events.h.

39.23.1.14 CFE_ES_ERLOG1_INF_EID

```
#define CFE_ES_ERLOG1_INF_EID 19
```

```
'Cleared mode log data'
```

Event Message `'Cleared mode log data'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of the cFE Executive Services Clear Exception Reset Log command

Definition at line 342 of file cfe_es_events.h.

39.23.1.15 CFE_ES_ERLOG2_EID

```
#define CFE_ES_ERLOG2_EID 20
```

```
'%s written:Size=%d'
```

Event Message `'%s written:Size=%d'`

Type: DEBUG

Cause:

This event message is generated when the Exception Reset Log has been successfully written to a file after receiving the cFE Executive Services Write Executive Services Exception Reset Log command

The `'s'` field identifies the name of the file written to and the `Size` field specifies, in decimal, the number of bytes written to the file.

Definition at line 358 of file cfe_es_events.h.

```
#define CFE_ES_ERLOG1_INF_EID 19
```

39.23.1.16 CFE_ES_ERLOG2_ERR_EID

#define CFE_ES_ERLOG2_ERR_EID 56

'Error creating file %s, stat=0x%x'

Event Message 'Error creating file %s, stat=0x%x'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Exception Reset Log Command fails while attempting to create the specified file.

The 's' field identifies the name of the file that was attempted to be created and the stat field specifies, in hex, the error code returned by the OS_creat API.

Definition at line 950 of file cfe_es_events.h.

39.23.1.17 CFE_ES_ERLOG_PENDING_ERR_EID

#define CFE_ES_ERLOG_PENDING_ERR_EID 93

'Error log write to file %s already in progress'

Event Message 'Error log write to file %s already in progress'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Exception Reset Log Command is received before a previously-issued command has finished executing

Definition at line 1517 of file cfe_es_events.h.

39.23.1.18 CFE_ES_ERR_SYSLOGMODE_EID

`#define CFE_ES_ERR_SYSLOGMODE_EID 71`

`'Set OverWriteSysLog Command:  Invalid Mode setting = %d'`

Event Message `'Set OverWriteSysLog Command:  Invalid Mode setting = %d'`

Type: ERROR

Cause:

This event message is generated upon unsuccessful completion of an Executive Services Set System Log Overwrite Mode Command .

The `setting` field identifies the illegal Overwrite Mode found in the command message. The mode must be either CFE_ES_LogMode_OVERWRITE (0) or CFE_ES_LogMode_DISCARD (1).

Definition at line 1172 of file cfe_es_events.h.

39.23.1.19 CFE_ES_ERREXIT_APP_ERR_EID

`#define CFE_ES_ERREXIT_APP_ERR_EID 33`

`'Exit Application %s on Error Failed:  CleanUpApp Error 0x%08X.'`

Event Message `'Exit Application %s on Error Failed:  CleanUpApp Error 0x%08X.'`

Type: ERROR

Cause:

This event message is generated when ES is completing the processing of the CFE_ES_ExitApp API call with the CF↩E_ES_RunStatus_APP_ERROR parameter and the call to CFE_ES_CleanUpApp fails. At this point the Application will likely be stopped or deleted, but it may be in an unknown state.

The `'s'` field identifies the name of the Application which was attempted to be reloaded and the `RC` field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 587 of file cfe_es_events.h.

39.23.1.20   CFE_ES_ERREXIT_APP_INF_EID

```
#define CFE_ES_ERREXIT_APP_INF_EID 14
```

'Exit Application %s Completed.'

Event Message 'Exit Application %s Completed.'

Type: INFORMATION

Cause:

This event message is issued when the cFE finishes exiting/cleaning up an application that called the CFE_ES_ExitApp API with an ERROR condition. When an App calls this API, with the CFE_ES_RunStatus_APP_ERROR parameter, it indicates that the Application exited due to an error condition. The details of the error that occurred should be given by the Application through an event message, System Log entry, or both. The request is recorded and the Executive Services App will actually delete cFE Application before issuing this event message.

The 's' field identifies the name of the Application that was exited.

Definition at line 268 of file cfe_es_events.h.

39.23.1.21   CFE_ES_EXIT_APP_ERR_EID

```
#define CFE_ES_EXIT_APP_ERR_EID 46
```

'Exit Application %s Failed: CleanUpApp Error 0x%08X.'

Event Message 'Exit Application %s Failed: CleanUpApp Error 0x%08X.'

Type: ERROR

Cause:

This event message is generated when ES is completing the processing of the CFE_ES_ExitApp API call and the call to CFE_ES_CleanUpApp fails. At this point the Application will likely be stopped or deleted, but it may be in an unknown state.

The 's' field identifies the name of the Application which was attempted to be reloaded and the RC field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 810 of file cfe_es_events.h.

39.23.1.22   CFE_ES_EXIT_APP_INF_EID

`#define CFE_ES_EXIT_APP_INF_EID 13`

`'Exit Application %s Completed.'`

Event Message `'Exit Application %s Completed.'`

Type: INFORMATION

Cause:

This event message is issued when the cFE finishes exiting/cleaning up an application that called the CFE_ES_ExitApp API with the CFE_ES_RunStatus_APP_EXIT parameter. When an App calls this API, the request is recorded and the Executive Services App will actually delete cFE Application before issuing this event message.

The `'s'` field identifies the name of the Application that was exited.

Definition at line 248 of file cfe_es_events.h.

39.23.1.23   CFE_ES_FILEWRITE_ERR_EID

`#define CFE_ES_FILEWRITE_ERR_EID 74`

`'File write,byte cnt err,file %s,request=%d,actual=%d'`

Event Message `'File write,byte cnt err,file %s,request=%d,actual=%d'`

Type: ERROR

Cause:

This event message is generated in response to any command requesting information to be written to a file and whose data is not completely written to the specified file.

The `file` field identifies the filename of the file to which the data failed to write completely, the `request` field specifies, in decimal, the number of bytes that were attempted to be written and the `actual` field indicates, in decimal, the actual number of bytes written to the file.

Definition at line 1215 of file cfe_es_events.h.

39.23.1.24   CFE_ES_INIT_INF_EID

#define CFE_ES_INIT_INF_EID 1 /* start up message "informational" */

'cFE ES Initialized'

Event Message 'cFE ES Initialized'

Type: INFORMATION

Cause:

This event message is always automatically issued when the Executive Services Task completes its Initialization.

Definition at line 62 of file cfe_es_events.h.

39.23.1.25   CFE_ES_INITSTATS_INF_EID

#define CFE_ES_INITSTATS_INF_EID 2

'cFE Version %d.%d.%d chksm %d, OSAL Version %d.%d'

Event Message 'cFE Version %d.%d.%d chksm %d, OSAL Version %d.%d'

Type: INFORMATION

Cause:

This event message is always automatically issued when the Executive Services Task completes its Initialization.

The `Version` field identifies the tagged version for the cFE Build, the `chksm` field provides the 16-bit checksum of the cFE Build and the `OSAL Version` field identifies the version of the OS Abstraction Layer on which this particular version of the cFE was built.

Definition at line 78 of file cfe_es_events.h.

39.23.1.26 CFE_ES_INVALID_POOL_HANDLE_ERR_EID

`#define CFE_ES_INVALID_POOL_HANDLE_ERR_EID 82`

`'Cannot telemeter memory pool stats.  Illegal Handle (0x%08X)'`

Event Message `'Cannot telemeter memory pool stats.  Illegal Handle (0x%08X)'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Telemeter Memory Statistics Command specifies a memory pool handle that is invalid. A handle is determined to be invalid when any of the following are true:

1. The handle does not contain a value that is an integral multiple of 4

2. The handle does not specify a valid area of memory

3. The handle does not point to an area of memory that contains the handle itself

4. The handle does not point to an area of memory whose Size field is an integral multiple of 4

5. The handle does not point to an area of memory whose End field is equal to the Start plus the Size

The `'08X'` field identifies the handle that was found in the command.

Definition at line 1329 of file cfe_es_events.h.

39.23.1.27 CFE_ES_LEN_ERR_EID

`#define CFE_ES_LEN_ERR_EID 23`

`'Invalid cmd length:  ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'`

Event Message `'Invalid cmd length:  ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'`

Type: ERROR

Cause:

This event message is generated when a message with the CFE_ES_CMD_MID message ID has arrived but whose packet length does not match the expected length for the specified command code.

The `ID` field in the event message specifies the Message ID (in hex), the `CC` field specifies the Command Code (in decimal), the `Exp` Len field specified the Expected Length (in decimal), and `Len` specifies the message Length (in decimal) found in the message.

Definition at line 416 of file cfe_es_events.h.

39.23.1.28   CFE_ES_MAX_EID

`#define CFE_ES_MAX_EID 92`

Definition at line 46 of file cfe_es_events.h.

39.23.1.29   CFE_ES_MID_ERR_EID

`#define CFE_ES_MID_ERR_EID 21 /* invalid command packet "error" */`

`'Invalid command pipe message ID: 0x%X'`

Event Message `'Invalid command pipe message ID: 0x%X'`

Type: ERROR

Cause:

This event message is generated when a message has arrived on the cFE Executive Services Application's Message Pipe that has a Message ID that is neither CFE_ES_SEND_HK_MID or CFE_ES_CMD_MID. Most likely, the cFE Software Bus routing table has become corrupt and is sending messages targeted for other Applications to the cFE Executive Services Application.

The `ID` field in the event message identifies the message ID (in hex) that was found in the message.

Definition at line 377 of file cfe_es_events.h.

39.23.1.30   CFE_ES_NOOP_INF_EID

`#define CFE_ES_NOOP_INF_EID 3 /* processed command "informational" */`

`'No-op command'`

Event Message `'No-op command'`

Type: INFORMATION

Cause:

This event message is always automatically issued in response to a cFE Executive Services NO-OP command

Definition at line 90 of file cfe_es_events.h.

39.23.1.31   CFE_ES_ONE_APP_EID

```
#define CFE_ES_ONE_APP_EID 15
```

```
'Sent %s application data'
```

Event Message `'Sent %s application data'`

Type: DEBUG

Cause:

This event message is issued upon successful completion of the cFE Executive Services Query One Application command

The '`s`' field identifies the name of the Application whose Executive Services Application information has been telemetered.

Definition at line 284 of file cfe_es_events.h.

39.23.1.32   CFE_ES_ONE_APPID_ERR_EID

```
#define CFE_ES_ONE_APPID_ERR_EID 50
```

```
'Failed to send %s application data:  GetAppIDByName Failed, RC = 0x%08X'
```

Event Message `'Failed to send %s application data:  GetAppIDByName Failed, RC = 0x%08X'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Request Application Data Command failed.

The '`s`' field identifies the name of the Application whose data was attempted to be telemetered and the `rc` field identifies the error code, in hex, that may identify the precise reason for the failure.

Definition at line 873 of file cfe_es_events.h.

39.23.1.33   CFE_ES_ONE_ERR_EID

#define CFE_ES_ONE_ERR_EID 49

'Failed to send %s application data, RC = %08X'

Event Message 'Failed to send %s application data, RC = %08X'

Type: ERROR

Cause:

This event message is generated when an Executive Services Request Application Data Command failed.

The 's' field identifies the name of the Application whose data was attempted to be telemetered and the rc field identifies the error code, in hex, that may identify the precise reason for the failure.

Definition at line 857 of file cfe_es_events.h.

39.23.1.34   CFE_ES_OSCREATE_ERR_EID

#define CFE_ES_OSCREATE_ERR_EID 51

'Failed to write App Info file, OS_creat returned %d'

Event Message 'Failed to write App Info file, OS_creat returned %d'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Application Data Command fails to create the dump file.

The 'd' parameter identifies, in decimal, the error code returned by OS_creat when the attempt was made to create the file.

Definition at line 889 of file cfe_es_events.h.

Generated by Doxygen

39.23.1.35 CFE_ES_PCR_ERR1_EID

```
#define CFE_ES_PCR_ERR1_EID 47
```

```
'ES_ProcControlReq:  Invalid State (EXCEPTION) Application %s.'
```

Event Message `'ES_ProcControlReq:  Invalid State (EXCEPTION) Application %s.'`

Type: ERROR

Cause:

This event message is generated when ES is processing it's internal Application table and encounters an App with the EXCEPTION state. Because exceptions are supposed to be processed immediately, this is an invalid state and should not happen. It may indicate some sort of memory corruption or other problem.

Definition at line 824 of file cfe_es_events.h.

39.23.1.36 CFE_ES_PCR_ERR2_EID

```
#define CFE_ES_PCR_ERR2_EID 48
```

```
'ES_ProcControlReq:  Unknown State ( %d ) Application %s.'
```

Event Message `'ES_ProcControlReq:  Unknown State ( %d ) Application %s.'`

Type: ERROR

Cause:

This event message is generated when ES is processing it's internal Application table and encounters an App with an unknown state. If this message occurs, it might be an indication of a memory corruption or other problem.

Definition at line 841 of file cfe_es_events.h.

39.23.1.37 CFE_ES_PERF_DATAWRITTEN_EID

`#define CFE_ES_PERF_DATAWRITTEN_EID 68`

`'%s written:Size=%d,EntryCount=%d'`

Event Message `'%s written:Size=%d,EntryCount=%d'`

Type: DEBUG

Cause:

This event message is generated when the Performance Log has been successfully written to a file after receiving the cFE Executive Services Stop Performance Analyzer Data Collection Command

The `'s'` field identifies the name of the file written to, the `Size` field specifies, in decimal, the number of bytes written to the file and the `EntryCount` field identifies the number of data entries that were written.

Definition at line 1125 of file cfe_es_events.h.

39.23.1.38 CFE_ES_PERF_FILTMSKCMD_EID

`#define CFE_ES_PERF_FILTMSKCMD_EID 63`

`'Set Performance Filter Mask command'`

Event Message `'Set Performance Filter Mask command'`

Type: DEBUG

Cause:

This event message is generated in response to receiving an Executive Services Set Performance Analyzer Filter Mask Command .

Definition at line 1042 of file cfe_es_events.h.

`#define CFE_ES_PERF_DATAWRITTEN_EID 68`

39.23.1.39 CFE_ES_PERF_FILTMSKERR_EID

`#define CFE_ES_PERF_FILTMSKERR_EID 64`

`'Error:Performance Filter Mask Index value greater than CFE_ES_PERF_32BIT_WO←`
`RDS_IN_MASK (which is a whole number derived from CFE_PLATFORM_ES_PERF_MAX_IDS`
`/ 32)'`

Event Message `'Error:Performance Filter Mask Index value greater than CFE_ES_PE←`
`RF_32BIT_WORDS_IN_MASK (which is a whole number derived from CFE_←`
`PLATFORM_ES_PERF_MAX_IDS / 32)'`

Type: ERROR

Cause:

This event message is generated in response to receiving an Executive Services Set Performance Analyzer Filter Mask Command .

Definition at line 1059 of file cfe_es_events.h.

39.23.1.40 CFE_ES_PERF_LOG_ERR_EID

`#define CFE_ES_PERF_LOG_ERR_EID 67`

`'Error creating file %s, stat=%d'`

Event Message `'Error creating file %s, stat=%d'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Stop Performance Analyzer Data Collection Command fails to create the associated logic analyzer dump file.

The `'s'` field identifies the name of the file that was attempted to be created and the `stat` field specifies, in decimal, the error code returned by the OS_creat API.

Definition at line 1107 of file cfe_es_events.h.

39.23.1.41   CFE_ES_PERF_STARTCMD_EID

#define CFE_ES_PERF_STARTCMD_EID 57

'Start collecting performance data command, trigger mode = d'

Event Message 'Start collecting performance data command, trigger mode = d'

Type: DEBUG

Cause:

This event message is generated in response to receiving an Executive Services Start Performance Analyzer Data Collection Command

The 'd' field identifies the requested trigger mode as defined by CFE_ES_PerfMode_t.

Definition at line 964 of file cfe_es_events.h.

39.23.1.42   CFE_ES_PERF_STARTCMD_ERR_EID

#define CFE_ES_PERF_STARTCMD_ERR_EID 58

'Cannot start collecting performance data,perf data write in progress'

Event Message 'Cannot start collecting performance data,perf data write in progress'

Type: ERROR

Cause:

This event message is generated in response to receiving an Executive Services Start Performance Analyzer Data Collection Command

Definition at line 976 of file cfe_es_events.h.

39.23.1.43 CFE_ES_PERF_STARTCMD_TRIG_ERR_EID

`#define CFE_ES_PERF_STARTCMD_TRIG_ERR_EID 59`

`'Cannot start collecting performance data, trigger mode (d) out of range (d to d)'`

Event Message `'Cannot start collecting performance data, trigger mode (d) out of range (d to d)'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Start Performance Analyzer Data Collection Command command is received with a bad value for the requested trigger mode.

The first `'d'` field identifies the received trigger mode value as defined by CFE_ES_PerfMode_t. The second and third `'d'` fields specify the valid range of values for the trigger mode.

Definition at line 993 of file cfe_es_events.h.

39.23.1.44 CFE_ES_PERF_STOPCMD_EID

`#define CFE_ES_PERF_STOPCMD_EID 60`

`'Perf Stop Cmd Rcvd,%s will write %d entries.%dmS dly every %d entries'`

Event Message `'Perf Stop Cmd Rcvd,%s will write %d entries.%dmS dly every %d entries'`

Type: DEBUG

Cause:

This event message is generated upon receipt of a successful Performance Data Stop Command after receiving the cFE Executive Services Stop Performance Analyzer Data Collection Command

The `'s'` field identifies the name of the file write task that has begun execution. The first `'d'` identifies the total number of performance entries(in decimal) that will be written to the file. A performance data entry is defined by an unsigned 32 bit data point and an unsigned 64 bit time stamp. The second `'d'` identifies the millisecond delay between writes and the third `'d'` identifies the number of entries written (in decimal) between delays.

Definition at line 1013 of file cfe_es_events.h.

39.23.1.45   CFE_ES_PERF_STOPCMD_ERR2_EID

#define CFE_ES_PERF_STOPCMD_ERR2_EID 62

'Stop performance data cmd ignored,perf data write in progress'

Event Message 'Stop performance data cmd ignored,perf data write in progress'

Type: ERROR

Cause:

This event message is generated upon receipt of an unsuccessful Performance Data Stop Command after receiving the cFE Executive Services Stop Performance Analyzer Data Collection Command

Definition at line 1028 of file cfe_es_events.h.

39.23.1.46   CFE_ES_PERF_TRIGMSKCMD_EID

#define CFE_ES_PERF_TRIGMSKCMD_EID 65

'Set Performance Trigger Mask command'

Event Message 'Set Performance Trigger Mask command'

Type: DEBUG

Cause:

This event message is generated in response to receiving an Executive Services Set Performance Analyzer Trigger Mask Command .

Definition at line 1073 of file cfe_es_events.h.

39.23.1.47 CFE_ES_PERF_TRIGMSKERR_EID

`#define CFE_ES_PERF_TRIGMSKERR_EID 66`

`'Error:  Performance Trigger Mask Index value greater than CFE_ES_PERF_32BIT_↩`
`WORDS_IN_MASK (which is a whole number derived from CFE_PLATFORM_ES_PERF_MAX_↩`
`IDS / 32)'`

Event Message `'Error:  Performance Trigger Mask Index value greater than CFE_ES↩`
`_PERF_32BIT_WORDS_IN_MASK (which is a whole number derived from C↩`
`FE_PLATFORM_ES_PERF_MAX_IDS / 32)'`

Type: ERROR

Cause:

This event message is generated in response to receiving an Executive Services Set Performance Analyzer Trigger Mask Command .

Definition at line 1090 of file cfe_es_events.h.

39.23.1.48 CFE_ES_RELOAD_APP_DBG_EID

`#define CFE_ES_RELOAD_APP_DBG_EID 11`

`'Reload Application %s Initiated.'`

Event Message `'Reload Application %s Initiated.'`

Type: DEBUG

Cause:

This event message is issued upon successful processing of the cFE Executive Services Reload Application command Note that when this event is displayed, the Application is not reloaded. ES has accepted the request to reload the application, and it will be reloaded after the app exits it's main loop, or times out.

The `'s'` field identifies the name of the Application that will be reloaded.

Definition at line 216 of file cfe_es_events.h.

39.23.1.49   CFE_ES_RELOAD_APP_ERR1_EID

#define CFE_ES_RELOAD_APP_ERR1_EID 42

'Failed to reload Application %s, rc = %08X'

Event Message 'Failed to reload Application %s, rc = %08X'

Type: ERROR

Cause:

This event message is generated when an Executive Services Reload Application Command fails.

The 's' field identifies the name of the Application which was attempted to be reloaded and the rc field identifies the error code, in hex, that may identify the precise reason for the failure.

Definition at line 736 of file cfe_es_events.h.

39.23.1.50   CFE_ES_RELOAD_APP_ERR2_EID

#define CFE_ES_RELOAD_APP_ERR2_EID 43

'Reload Application %s, GetAppIDByName failed. RC = 0x%08X.'

Event Message 'Reload Application %s, GetAppIDByName failed. RC = 0x%08X.'

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services Reload Application Command which fails. This message is for a specific failure when the call to CFE_ES_GetAppIDByName fails. The application will not be reloaded at this point.

The 's' field identifies the name of the Application which was attempted to be reloaded and the RC field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 754 of file cfe_es_events.h.

39.23.1.51 CFE_ES_RELOAD_APP_ERR3_EID

`#define CFE_ES_RELOAD_APP_ERR3_EID 44`

`'Reload Application %s Failed:  AppCreate Error 0x%08X.'`

[Event Message](#) `'Reload Application %s Failed:  AppCreate Error 0x%08X.'`

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services [Reload Application Command](#) which fails. This message is for a specific failure when the call to CFE_ES_AppCreate fails. The application will not be reloaded at this point.

The `'s'` field identifies the name of the Application which was attempted to be reloaded and the RC field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 773 of file cfe_es_events.h.

39.23.1.52 CFE_ES_RELOAD_APP_ERR4_EID

`#define CFE_ES_RELOAD_APP_ERR4_EID 45`

`'Reload Application %s Failed:  CleanUpApp Error 0x%08X.'`

[Event Message](#) `'Reload Application %s Failed:  CleanUpApp Error 0x%08X.'`

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services [Reload Application Command](#) which fails. This message is for a specific failure when the call to CFE_ES_CleanUpApp fails. The application will not be reloaded at this point, and will likely be deleted or in an unknown state.

The `'s'` field identifies the name of the Application which was attempted to be reloaded and the RC field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 792 of file cfe_es_events.h.

39.23.1.53   CFE_ES_RELOAD_APP_INF_EID

#define CFE_ES_RELOAD_APP_INF_EID 12

'Reload Application %s Completed.'

Event Message 'Reload Application %s Completed.'

Type: INFORMATION

Cause:

This event message is issued when the cFE finishes Reloading the cFE Application That was started when the Restart Application command was issued.

The 's' field identifies the name of the Application that was reloaded.

Definition at line 232 of file cfe_es_events.h.

39.23.1.54   CFE_ES_RESET_INF_EID

#define CFE_ES_RESET_INF_EID 4

'Reset Counters command'

Event Message 'Reset Counters command'

Type: INFORMATION

Cause:

This event message is always automatically issued in response to a cFE Executive Services Reset Counters command

Definition at line 102 of file cfe_es_events.h.

39.23.1.55 CFE_ES_RESET_PR_COUNT_EID

`#define CFE_ES_RESET_PR_COUNT_EID 72`

`'Reset Processor Reset Count to Zero'`

Event Message `'Reset Processor Reset Count to Zero'`

Type: INFORMATION

Cause:

This event message is always generated in response to the Executive Services Set Processor Reset Counter to Zero Command .

Definition at line 1184 of file cfe_es_events.h.

39.23.1.56 CFE_ES_RESTART_APP_DBG_EID

`#define CFE_ES_RESTART_APP_DBG_EID 9`

`'Restart Application %s Initiated.'`

Event Message `'Restart Application %s Initiated.'`

Type: DEBUG

Cause:

This event message is issued upon successful processing of the cFE Executive Services Restart Application command Note that when this event is displayed, the Application is not restarted. ES has accepted the request to restart the application, and it will be restarted after the app exits it's main loop, or times out.

The `'s'` field identifies the name of the Application that will be restarted.

Definition at line 182 of file cfe_es_events.h.

39.23.1.57   CFE_ES_RESTART_APP_ERR1_EID

#define CFE_ES_RESTART_APP_ERR1_EID 38

'Restart Application %s Failed, RC = 0x%08X'

Event Message 'Restart Application %s Failed, RC = 0x%08X'

Type: ERROR

Cause:

This event message is generated when an Executive Services Restart Application Command fails.

The 's' field identifies the name of the Application which was attempted to be reset and the rc field identifies the error code, in hex, that may identify the precise reason for the failure.

Definition at line 660 of file cfe_es_events.h.

39.23.1.58   CFE_ES_RESTART_APP_ERR2_EID

#define CFE_ES_RESTART_APP_ERR2_EID 39

'Restart Application %s, GetAppIDByName failed. RC = 0x%08X.'

Event Message 'Restart Application %s, GetAppIDByName failed. RC = 0x%08X.'

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services Restart Application Command which fails. This message is for a specific failure when the call to CFE_ES_GetAppIDByName fails. The application will not be restarted at this point.

The 's' field identifies the name of the Application which was attempted to be restarted and the RC field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 678 of file cfe_es_events.h.

39.23.1.59   CFE_ES_RESTART_APP_ERR3_EID

`#define CFE_ES_RESTART_APP_ERR3_EID 40`

`'Restart Application %s Failed:  AppCreate Error 0x%08X.'`

Event Message `'Restart Application %s Failed:  AppCreate Error 0x%08X.'`

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services Restart Application Command which fails. This message is for a specific failure when the call to CFE_ES_AppCreate fails. The application will not be restarted at this point.

The `'s'` field identifies the name of the Application which was attempted to be restarted and the `RC` field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 700 of file cfe_es_events.h.

39.23.1.60   CFE_ES_RESTART_APP_ERR4_EID

`#define CFE_ES_RESTART_APP_ERR4_EID 41`

`'Restart Application %s Failed:  CleanUpApp Error 0x%08X.'`

Event Message `'Restart Application %s Failed:  CleanUpApp Error 0x%08X.'`

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services Restart Application Command which fails. This message is for a specific failure when the call to CFE_ES_CleanUpApp fails. The application will not be restarted at this point, but will likely be deleted or in an unknown state.

The `'s'` field identifies the name of the Application which was attempted to be restarted and the `RC` field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 719 of file cfe_es_events.h.

39.23.1.61 CFE_ES_RESTART_APP_INF_EID

#define CFE_ES_RESTART_APP_INF_EID 10

'Restart Application %s Completed.'

Event Message 'Restart Application %s Completed.'

Type: INFORMATION

Cause:

This event message is issued when the cFE finishes Restarting the cFE Application That was started when the Restart Application command was issued.

The 's' field identifies the name of the Application that was reloaded.

Definition at line 197 of file cfe_es_events.h.

39.23.1.62 CFE_ES_SET_MAX_PR_COUNT_EID

#define CFE_ES_SET_MAX_PR_COUNT_EID 73

'Maximum Processor Reset Count set to: %d'

Event Message 'Maximum Processor Reset Count set to: %d'

Type: INFORMATION

Cause:

This event message is always generated in response to the Executive Services Set Maximum Processor Reset Limit Command .

The 'd' field identifies, in decimal, the number of Processor Resets that will need to occur before a Power-On Reset is automatically performed.

Definition at line 1199 of file cfe_es_events.h.

39.23.1.63 CFE_ES_SHELL_ERR_EID

`#define CFE_ES_SHELL_ERR_EID 25`

`'Failed to invoke shell command %s, rc = %08X'`

Event Message `'Failed to invoke shell command %s, rc = %08X'`

Type: ERROR

Cause:

This event message is generated whenever the cFE Executive Services receives an OS Shell command, via the Executive Services Shell Command , and the underlying OS returns an error code.

The 's' field in the message identifies the shell command string that was issued and the `rc` field displays the shell's return code, in hex.

Definition at line 449 of file cfe_es_events.h.

39.23.1.64 CFE_ES_SHELL_INF_EID

`#define CFE_ES_SHELL_INF_EID 5`

`'Invoked shell command %s'`

Event Message `'Invoked shell command %s'`

Type: INFORMATION

Cause:

This event message is always automatically issued in response to a cFE Executive Services Shell Command

The `'s'` string contains the actual shell command string issued.

Definition at line 116 of file cfe_es_events.h.

39.23.1.65   CFE_ES_START_ERR_EID

#define CFE_ES_START_ERR_EID 26

'Failed to start %s from %s, RC = %08X'

Event Message 'Failed to start %s from %s, RC = %08X'

Type: ERROR

Cause:

This event message is generated for an error encountered in response to an Executive Services Start Application Command .

This message is a general failure when the command passes the parameter validation, but fails when a call to CFE_↩
ES_AppCreate is called.

The 's' term identifies the name of the Application that was attempted to start. The second 's' field specifies the file from which the Application was loaded. The 'X' field is the return code returned by the CFE_ES_AppCreate.

Definition at line 468 of file cfe_es_events.h.

39.23.1.66   CFE_ES_START_EXC_ACTION_ERR_EID

#define CFE_ES_START_EXC_ACTION_ERR_EID 32

'CFE_ES_StartAppCmd: Invalid Exception Action: %d.'

Event Message 'CFE_ES_StartAppCmd: Invalid Exception Action: %d.'

Type: ERROR

Cause:

This event message is generated for an error encountered in response to an Executive Services Start Application Command .

This message reports a command failure when the Application Exception Action parameter is invalid. The valid options for this parameter are: 0 = Application will restart on an exception 1 = Application cause a processor restart on exception.

The 'd' term identifies the Exception Action parameter that was given in the command.

Definition at line 570 of file cfe_es_events.h.

39.23.1.67 CFE_ES_START_INF_EID

`#define CFE_ES_START_INF_EID 6`

`'Started %s from %s, AppID = %d'`

Event Message `'Started %s from %s, AppID = %d'`

Type: INFORMATION

Cause:

This event message is automatically issued upon successful completion of a cFE Executive Services Start Application command

The first `'s'` string identifies the name of the started Application, the second `'s'` string identifies the filename from which the Application was loaded and the `AppId` field specifies the Application ID assigned to the newly started Application by the cFE Executive Services.

Definition at line 133 of file cfe_es_events.h.

39.23.1.68 CFE_ES_START_INVALID_ENTRY_POINT_ERR_EID

`#define CFE_ES_START_INVALID_ENTRY_POINT_ERR_EID 28`

`'CFE_ES_StartAppCmd:  App Entry Point is NULL.'`

Event Message `'CFE_ES_StartAppCmd:  App Entry Point is NULL.'`

Type: ERROR

Cause:

This event message is generated for an error encountered in response to an Executive Services Start Application Command .

This message reports a command failure when the Start Appplication Command is given a NULL Application Entry Point parameter. The command must contain an application entry point string. (Example: "SC_AppMain").

Definition at line 502 of file cfe_es_events.h.

39.23.1.69   CFE_ES_START_INVALID_FILENAME_ERR_EID

#define CFE_ES_START_INVALID_FILENAME_ERR_EID 27

'CFE_ES_StartAppCmd: invalid filename: %s'

Event Message 'CFE_ES_StartAppCmd: invalid filename: %s'

Type: ERROR

Cause:

This event message is generated for an error encountered in response to an Executive Services Start Application Command .

This message reports a command failure when the Start Appplication Command is given an invalid filename. (Either NULL or too short to be a valid cFE file name).

The 's' term identifies the invalid filename that was sent with the command.

Definition at line 485 of file cfe_es_events.h.

39.23.1.70   CFE_ES_START_NULL_APP_NAME_ERR_EID

#define CFE_ES_START_NULL_APP_NAME_ERR_EID 29

'CFE_ES_StartAppCmd: App Name is NULL.'

Event Message 'CFE_ES_StartAppCmd: App Name is NULL.'

Type: ERROR

Cause:

This event message is generated for an error encountered in response to an Executive Services Start Application Command .

This message reports a command failure when the Start Appplication Command is given a NULL Application Name parameter. The command must contain an application name string.

Definition at line 517 of file cfe_es_events.h.

39.23.1.71 CFE_ES_START_PRIORITY_ERR_EID

#define CFE_ES_START_PRIORITY_ERR_EID 31

'CFE_ES_StartAppCmd: Priority is too large: %d.'

Event Message 'CFE_ES_StartAppCmd: Priority is too large: %d.'

Type: ERROR

Cause:

This event message is generated for an error encountered in response to an Executive Services Start Application Command .

This message reports a command failure when the Application priority greater than the maximum priority for a Task defined by the OS Abstraction Layer (256).

The 'd' term identifies the priority that was given in the command.

Definition at line 551 of file cfe_es_events.h.

39.23.1.72 CFE_ES_START_STACK_ERR_EID

#define CFE_ES_START_STACK_ERR_EID 30

'CFE_ES_StartAppCmd: Stack size is less than system Minimum: %d.'

Event Message 'CFE_ES_StartAppCmd: Stack size is less than system Minimum: %d.'

Type: ERROR

Cause:

This event message is generated for an error encountered in response to an Executive Services Start Application Command .

This message reports a command failure when the Application Stack Size parameter is less than the default stack size defined in the cfe_platform_cfg.h file: CFE_PLATFORM_ES_DEFAULT_STACK_SIZE.

The 'd' term identifies the size of the stack that was given in the command.

Definition at line 534 of file cfe_es_events.h.

39.23.1.73 CFE_ES_STOP_DBG_EID

#define CFE_ES_STOP_DBG_EID 7

'Stop Application %s Initiated.'

Event Message 'Stop Application %s Initiated.'

Type: DEBUG

Cause:

This event message is issued upon successful processing of the cFE Executive Services Stop Application command Note that when this event is displayed, the Application is not deleted. ES has accepted the request to delete the application, and it will be deleted after the app exits it's main loop, or times out.

The 's' field identifies the name of the Application that will be stopped.

Definition at line 150 of file cfe_es_events.h.

39.23.1.74 CFE_ES_STOP_ERR1_EID

#define CFE_ES_STOP_ERR1_EID 35

'Stop Application %s Failed, RC = 0x%08X'

Event Message 'Stop Application %s Failed, RC = 0x%08X'

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services Stop Application Command which fails.

The 's' field identifies the name of the Application which was attempted to be stopped and the rc field identifies the error code, in hex, that may identify the precise reason for the failure.

Definition at line 603 of file cfe_es_events.h.

39.23.1.75 CFE_ES_STOP_ERR2_EID

`#define CFE_ES_STOP_ERR2_EID 36`

`'Stop Application %s, GetAppIDByName failed.  RC = 0x%08X.'`

Event Message `'Stop Application %s, GetAppIDByName failed.  RC = 0x%08X.'`

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services Stop Application Command which fails. This message is for a specific failure when the call to CFE_ES_GetAppIDByName fails. The application will not be deleted at this point.

The `'s'` field identifies the name of the Application which was attempted to be stopped and the `RC` field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 621 of file cfe_es_events.h.

39.23.1.76 CFE_ES_STOP_ERR3_EID

`#define CFE_ES_STOP_ERR3_EID 37`

`'Stop Application %s Failed:  CleanUpApp Error 0x%08X.'`

Event Message `'Stop Application %s Failed:  CleanUpApp Error 0x%08X.'`

Type: ERROR

Cause:

This event message is generated upon receipt of an Executive Services Stop Application Command which fails. This message is for a specific failure when the call to CFE_ES_GetAppIDByName fails. The application will not be deleted at this point.

The `'s'` field identifies the name of the Application which was attempted to be stopped and the `RC` field identifies the error code, in hex, that will identify the precise reason for the failure.

Definition at line 643 of file cfe_es_events.h.

39.23.1.77   CFE_ES_STOP_INF_EID

#define CFE_ES_STOP_INF_EID 8

'Stop Application %s Completed.'

Event Message 'Stop Application %s Completed.'

Type: INFORMATION

Cause:

This event message is issued when the cFE finishes deleting the cFE Application That was started when the [Stop Application command](#) was issued.

The 's' field identifies the name of the Application that was stopped.

Definition at line 165 of file cfe_es_events.h.

39.23.1.78   CFE_ES_SYSLOG1_INF_EID

#define CFE_ES_SYSLOG1_INF_EID 17

'Cleared Executive Services log data'

Event Message 'Cleared Executive Services log data'

Type: INFORMATION

Cause:

This event message is generated upon successful completion of the cFE Executive Services [Clear System Log command](#)

Definition at line 313 of file cfe_es_events.h.

39.23.1.79 CFE_ES_SYSLOG2_EID

```
#define CFE_ES_SYSLOG2_EID 18
```

```
'%s written:Size=%d,Entries=%d'
```

Event Message '%s written:Size=%d,Entries=%d'

Type: DEBUG

Cause:

This event message is generated when the System Log has been successfully written to a file after receiving the cFE Executive Services Write Executive Services System Log command

The 's' field identifies the name of the file written to, the Size field specifies, in decimal, the number of bytes written to the file and the Entries field identifies the number of System Log messages that were written.

Definition at line 330 of file cfe_es_events.h.

39.23.1.80 CFE_ES_SYSLOG2_ERR_EID

```
#define CFE_ES_SYSLOG2_ERR_EID 55
```

```
'Error creating file %s, stat=0x%x'
```

Event Message 'Error creating file %s, stat=0x%x'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump System Log Command fails while attempting to create the specified file.

The 's' field identifies the name of the file that was attempted to be created and the stat field specifies, in hex, the error code returned by the OS_creat API.

Definition at line 935 of file cfe_es_events.h.

39.23.1.81   CFE_ES_SYSLOGMODE_EID

#define CFE_ES_SYSLOGMODE_EID 70

'Set OverWriteSysLog Command Received with Mode setting = %d'

Event Message 'Set OverWriteSysLog Command Received with Mode setting = %d'

Type: DEBUG

Cause:

This event message is generated upon successful completion of an Executive Services Set System Log Overwrite Mode Command .

The setting field identifies the newly chosen Overwrite Mode and should be equal to either CFE_ES_LogMode_↩ OVERWRITE or CFE_ES_LogMode_DISCARD.

Definition at line 1157 of file cfe_es_events.h.

39.23.1.82   CFE_ES_TASKINFO_EID

#define CFE_ES_TASKINFO_EID 87

'Task Info file written to %s, Entries=%d, FileSize=%d'

Event Message 'Task Info file written to %s, Entries=%d, FileSize=%d'

Type: DEBUG

Cause:

This event message is issued upon successful completion of the cFE Executive Services Query All Tasks command

The 's' field identifies the name of the file to which all Executive Services Task data has been written. The Entries field identifies, in decimal, the number of Tasks whose data was written and the FileSize field gives the total number of bytes written to the file.

Definition at line 1415 of file cfe_es_events.h.

39.23.1.83   CFE_ES_TASKINFO_OSCREATE_ERR_EID

`#define CFE_ES_TASKINFO_OSCREATE_ERR_EID 88`

`'Failed to write Task Info file, OS_creat returned %d'`

Event Message `'Failed to write Task Info file, OS_creat returned %d'`

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Task Data Command fails to create the dump file.

The `'d'` parameter identifies, in decimal, the error code returned by OS_creat when the attempt was made to create the file.

Definition at line 1431 of file cfe_es_events.h.

39.23.1.84   CFE_ES_TASKINFO_WR_ERR_EID

`#define CFE_ES_TASKINFO_WR_ERR_EID 90`

`'Failed to write Task Info file, Task write RC = 0x%08X, exp %d'`

Event Message `'Failed to write Task Info file, Task write RC = 0x%08X, exp %d'`

Type: ERROR

Cause:

This event message is generated whenever an Executive Services Dump Tasks Data Command fails while writing Tasks data to the specified file.

The `rtnd` field contains, in hex, the error code returned from the OS_write API. The expected return value is identified, in decimal, in the `exp` field.

Definition at line 1462 of file cfe_es_events.h.

39.23.1.85   CFE_ES_TASKINFO_WRHDR_ERR_EID

#define CFE_ES_TASKINFO_WRHDR_ERR_EID 89

'Failed to write Task Info file, WriteHdr rtnd %08X, exp %d'

Event Message 'Failed to write Task Info file, WriteHdr rtnd %08X, exp %d'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Task Data Command fails while writing the cFE Standard File Header.

The rtnd field contains the error code returned by the CFE_FS_WriteHeader API. Nominally, the returned result should have been equal to the exp field (i.e. - sizeof(CFE_FS_Header_t)).

Definition at line 1446 of file cfe_es_events.h.

39.23.1.86   CFE_ES_TASKWR_ERR_EID

#define CFE_ES_TASKWR_ERR_EID 53

'Failed to write App Info file, Task write RC = 0x%08X, exp %d'

Event Message 'Failed to write App Info file, Task write RC = 0x%08X, exp %d'

Type: ERROR

Cause:

This event message is generated whenever an Executive Services Dump Application Data Command fails while writing Application data to the specified file.

The rtnd field contains, in hex, the error code returned from the OS_write API. The expected return value is identified, in decimal, in the exp field.

Definition at line 920 of file cfe_es_events.h.

39.23.1.87 CFE_ES_TLM_POOL_STATS_INFO_EID

```
#define CFE_ES_TLM_POOL_STATS_INFO_EID 81
```

```
'Successfully telemetered memory pool stats for 0x%08X'
```

Event Message `'Successfully telemetered memory pool stats for 0x%08X'`

Type: DEBUG

Cause:

This event message is generated following successful execution of the Telemeter Memory Statistics Command .

Definition at line 1308 of file cfe_es_events.h.

39.23.1.88 CFE_ES_VERSION_INF_EID

```
#define CFE_ES_VERSION_INF_EID 91
```

```
'Mission s.s, s, s'
```

Event Message `'Mission s.s, s, s'`

Type: INFORMATION

Cause:

This event message is always automatically issued when the Executive Services Task completes its Initialization

The `Mission` field identifies the tagged build identifiers and configuration name. If available, this will also indicate the revision control identifiers for CFE and OSAL that this binary was built with.

Definition at line 1479 of file cfe_es_events.h.

39.23.1.89   CFE_ES_WRHDR_ERR_EID

#define CFE_ES_WRHDR_ERR_EID 52

'Failed to write App Info file, WriteHdr rtnd %08X, exp %d'

Event Message 'Failed to write App Info file, WriteHdr rtnd %08X, exp %d'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Application Data Command fails while writing the cFE Standard File Header.

The rtnd field contains the error code returned by the CFE_FS_WriteHeader API. Nominally, the returned result should have been equal to the exp field (i.e. - sizeof(CFE_FS_Header_t)).

Definition at line 904 of file cfe_es_events.h.

39.23.1.90   CFE_ES_WRITE_CFE_HDR_ERR_EID

#define CFE_ES_WRITE_CFE_HDR_ERR_EID 85

'Error writing cFE File Header to '%s', Status=0x%08X'

Event Message 'Error writing cFE File Header to '%s', Status=0x%08X'

Type: ERROR

Cause:

This event message is generated when an Executive Services Dump Critical Data Store Registry Command command successfully created the CDS Dump File onboard but encountered an error while writing the standard cFE File Header to the file.

The 's' field identifies the CDS Registry Dump Filename. The '08X' field identifies error code returned by the API CFE_FS_WriteHeader.

Definition at line 1381 of file cfe_es_events.h.

39.24 cfe/fsw/cfe-core/src/inc/cfe_es_extern_typedefs.h File Reference

```
#include "common_types.h"
```

Typedefs

- typedef uint8 CFE_ES_LogMode_Enum_t

  Identifies handling of log messages after storage is filled.
- typedef uint8 CFE_ES_ExceptionAction_Enum_t

  Identifies action to take if exception occurs.
- typedef uint8 CFE_ES_AppType_Enum_t

  Identifies type of CFE application.
- typedef uint32 CFE_ES_RunStatus_Enum_t

  Run Status and Exit Status identifiers.
- typedef uint32 CFE_ES_SystemState_Enum_t

  The overall cFE System State.
- typedef uint8 CFE_ES_LogEntryType_Enum_t

  Type of entry in the Error and Reset (ER) Log.
- typedef uint32 CFE_ES_AppState_Enum_t

  Application Run State.

Enumerations

- enum CFE_ES_LogMode { CFE_ES_LogMode_OVERWRITE = 0, CFE_ES_LogMode_DISCARD = 1 }

  Label definitions associated with CFE_ES_LogMode_Enum_t.
- enum CFE_ES_ExceptionAction { CFE_ES_ExceptionAction_RESTART_APP = 0, CFE_ES_ExceptionAction↩
  _PROC_RESTART = 1 }

  Label definitions associated with CFE_ES_ExceptionAction_Enum_t.
- enum CFE_ES_AppType { CFE_ES_AppType_CORE = 1, CFE_ES_AppType_EXTERNAL = 2 }

  Label definitions associated with CFE_ES_AppType_Enum_t.
- enum CFE_ES_RunStatus {
  CFE_ES_RunStatus_UNDEFINED = 0, CFE_ES_RunStatus_APP_RUN = 1, CFE_ES_RunStatus_APP_EXIT =
  2, CFE_ES_RunStatus_APP_ERROR = 3,
  CFE_ES_RunStatus_SYS_EXCEPTION = 4, CFE_ES_RunStatus_SYS_RESTART = 5, CFE_ES_RunStatus↩
  _SYS_RELOAD = 6, CFE_ES_RunStatus_SYS_DELETE = 7,
  CFE_ES_RunStatus_CORE_APP_INIT_ERROR = 8, CFE_ES_RunStatus_CORE_APP_RUNTIME_ERROR =
  9, CFE_ES_RunStatus_MAX }

  Label definitions associated with CFE_ES_RunStatus_Enum_t.
- enum CFE_ES_SystemState {
  CFE_ES_SystemState_UNDEFINED = 0, CFE_ES_SystemState_EARLY_INIT = 1, CFE_ES_SystemState_C↩
  ORE_STARTUP = 2, CFE_ES_SystemState_CORE_READY = 3,
  CFE_ES_SystemState_APPS_INIT = 4, CFE_ES_SystemState_OPERATIONAL = 5, CFE_ES_SystemState_↩
  SHUTDOWN = 6, CFE_ES_SystemState_MAX }

  Label definitions associated with CFE_ES_SystemState_Enum_t.
- enum CFE_ES_LogEntryType { CFE_ES_LogEntryType_CORE = 1, CFE_ES_LogEntryType_APPLICATION =
  2 }

Label definitions associated with CFE_ES_LogEntryType_Enum_t.

- enum CFE_ES_AppState {
  CFE_ES_AppState_UNDEFINED = 0, CFE_ES_AppState_EARLY_INIT = 1, CFE_ES_AppState_LATE_INIT =
  2, CFE_ES_AppState_RUNNING = 3,
  CFE_ES_AppState_WAITING = 4, CFE_ES_AppState_STOPPED = 5, CFE_ES_AppState_MAX }

  Label definitions associated with CFE_ES_AppState_Enum_t.

39.24.1 Typedef Documentation

39.24.1.1 CFE_ES_AppState_Enum_t

typedef uint32 CFE_ES_AppState_Enum_t

Application Run State.

The normal progression of APP states: UNDEFINED -> EARLY_INIT -> LATE_INIT -> RUNNING -> WAITING ->
STOPPED

Note

These are defined in order so that relational comparisons e.g. if (STATEA < STATEB) are possible

See also

enum CFE_ES_AppState

Definition at line 325 of file cfe_es_extern_typedefs.h.

39.24.1.2 CFE_ES_AppType_Enum_t

typedef uint8 CFE_ES_AppType_Enum_t

Identifies type of CFE application.

See also

enum CFE_ES_AppType

Definition at line 111 of file cfe_es_extern_typedefs.h.

39.24.1.3 CFE_ES_ExceptionAction_Enum_t

typedef uint8 CFE_ES_ExceptionAction_Enum_t

Identifies action to take if exception occurs.

See also

> enum CFE_ES_ExceptionAction

Definition at line 85 of file cfe_es_extern_typedefs.h.

39.24.1.4 CFE_ES_LogEntryType_Enum_t

typedef uint8 CFE_ES_LogEntryType_Enum_t

Type of entry in the Error and Reset (ER) Log.

See also

> enum CFE_ES_LogEntryType

Definition at line 269 of file cfe_es_extern_typedefs.h.

39.24.1.5 CFE_ES_LogMode_Enum_t

typedef uint8 CFE_ES_LogMode_Enum_t

Identifies handling of log messages after storage is filled.

See also

> enum CFE_ES_LogMode

Definition at line 59 of file cfe_es_extern_typedefs.h.

39.24.1.6 CFE_ES_RunStatus_Enum_t

typedef uint32 CFE_ES_RunStatus_Enum_t

Run Status and Exit Status identifiers.

See also

> enum CFE_ES_RunStatus

Definition at line 182 of file cfe_es_extern_typedefs.h.

39.24.1.7   CFE_ES_SystemState_Enum_t

typedef uint32 CFE_ES_SystemState_Enum_t

The overall cFE System State.

These values are used with the CFE_ES_WaitForSystemState API call to synchronize application startup.

Note

These are defined in order so that relational comparisons e.g. if (STATEA < STATEB) are possible

See also

enum CFE_ES_SystemState

Definition at line 242 of file cfe_es_extern_typedefs.h.

39.24.2   Enumeration Type Documentation

39.24.2.1   CFE_ES_AppState

enum CFE_ES_AppState

Label definitions associated with CFE_ES_AppState_Enum_t.

Enumerator

CFE_ES_AppState_UNDEFINED	Initial state before app thread is started.
CFE_ES_AppState_EARLY_INIT	App thread has started, app performing early initialization of its own data.
CFE_ES_AppState_LATE_INIT	Early/Local initialization is complete. First sync point.
CFE_ES_AppState_RUNNING	All initialization is complete. Second sync point.
CFE_ES_AppState_WAITING	Application is waiting on a Restart/Reload/Delete request.
CFE_ES_AppState_STOPPED	Application is stopped.
CFE_ES_AppState_MAX	Reserved entry, marker for the maximum state.

Definition at line 275 of file cfe_es_extern_typedefs.h.

39.24.2.2   CFE_ES_AppType

enum CFE_ES_AppType

Label definitions associated with CFE_ES_AppType_Enum_t.

Enumerator

CFE_ES_AppType_CORE	CFE core application.
CFE_ES_AppType_EXTERNAL	CFE external application.

Definition at line 91 of file cfe_es_extern_typedefs.h.

39.24.2.3 CFE_ES_ExceptionAction

enum CFE_ES_ExceptionAction

Label definitions associated with CFE_ES_ExceptionAction_Enum_t.

Enumerator

CFE_ES_ExceptionAction_RESTART_APP	Restart application if exception occurs.
CFE_ES_ExceptionAction_PROC_RESTART	Restart processor if exception occurs.

Definition at line 65 of file cfe_es_extern_typedefs.h.

39.24.2.4 CFE_ES_LogEntryType

enum CFE_ES_LogEntryType

Label definitions associated with CFE_ES_LogEntryType_Enum_t.

Enumerator

CFE_ES_LogEntryType_CORE	Log entry from a core subsystem.
CFE_ES_LogEntryType_APPLICATION	Log entry from an application.

Definition at line 249 of file cfe_es_extern_typedefs.h.

39.24.2.5 CFE_ES_LogMode

enum CFE_ES_LogMode

Label definitions associated with CFE_ES_LogMode_Enum_t.

Enumerator

CFE_ES_LogMode_OVERWRITE	Overwrite Log Mode.
CFE_ES_LogMode_DISCARD	Discard Log Mode.

Definition at line 39 of file cfe_es_extern_typedefs.h.

39.24.2.6   CFE_ES_RunStatus

enum CFE_ES_RunStatus

Label definitions associated with CFE_ES_RunStatus_Enum_t.

Enumerator

CFE_ES_RunStatus_UNDEFINED	Reserved value, should not be used.
CFE_ES_RunStatus_APP_RUN	Indicates that the Application should continue to run.
CFE_ES_RunStatus_APP_EXIT	Indicates that the Application wants to exit normally.
CFE_ES_RunStatus_APP_ERROR	Indicates that the Application is quitting with an error.
CFE_ES_RunStatus_SYS_EXCEPTION	The cFE App caused an exception.
CFE_ES_RunStatus_SYS_RESTART	The system is requesting a restart of the cFE App.
CFE_ES_RunStatus_SYS_RELOAD	The system is requesting a reload of the cFE App.
CFE_ES_RunStatus_SYS_DELETE	The system is requesting that the cFE App is stopped.
CFE_ES_RunStatus_CORE_APP_INIT_ERROR	Indicates that the Core Application could not Init.
CFE_ES_RunStatus_CORE_APP_RUNTIME_ERROR	Indicates that the Core Application had a runtime failure.
CFE_ES_RunStatus_MAX	Reserved value, marker for the maximum state.

Definition at line 117 of file cfe_es_extern_typedefs.h.

39.24.2.7   CFE_ES_SystemState

enum CFE_ES_SystemState

Label definitions associated with CFE_ES_SystemState_Enum_t.

Enumerator

CFE_ES_SystemState_UNDEFINED	reserved
CFE_ES_SystemState_EARLY_INIT	single threaded mode while setting up CFE itself
CFE_ES_SystemState_CORE_STARTUP	core apps (CFE_ES_ObjectTable) are starting (multi-threaded)
CFE_ES_SystemState_CORE_READY	core is ready, starting other external apps/libraries (if any)
CFE_ES_SystemState_APPS_INIT	startup apps have all completed their early init, but not necessarily operational yet
CFE_ES_SystemState_OPERATIONAL	normal operation mode; all apps are RUNNING
CFE_ES_SystemState_SHUTDOWN	reserved for future use, all apps would be STOPPED
CFE_ES_SystemState_MAX	Reserved value, marker for the maximum state.

Definition at line 188 of file cfe_es_extern_typedefs.h.

39.25   cfe/fsw/cfe-core/src/inc/cfe_es_msg.h File Reference

```
#include "cfe.h"
#include "cfe_es.h"
```

Data Structures

- struct CFE_ES_NoArgsCmd_t

    Generic "no arguments" command.

- struct CFE_ES_RestartCmd_Payload_t

    Restart cFE Command.

- struct CFE_ES_Restart_t
- struct CFE_ES_ShellCmd_Payload_t

    DEPRECATED: Shell Command.

- struct CFE_ES_Shell_t
- struct CFE_ES_FileNameCmd_Payload_t

    Payload format for commands which accept a single file name.

- struct CFE_ES_FileNameCmd_t
- struct CFE_ES_OverWriteSysLogCmd_Payload_t

    Overwrite/Discard System Log Configuration Command.

- struct CFE_ES_OverWriteSyslog_t
- struct CFE_ES_StartAppCmd_Payload_t

    Start Application Command.

- struct CFE_ES_StartApp_t
- struct CFE_ES_AppNameCmd_Payload_t

    Command Structure for Commands requiring just an Application Name.

- struct CFE_ES_AppNameCmd_t
- struct CFE_ES_AppReloadCmd_Payload_t

    Reload Application Command.

- struct CFE_ES_ReloadApp_t
- struct CFE_ES_SetMaxPRCountCmd_Payload_t

    Set Maximum Processor Reset Count Command.

- struct CFE_ES_SetMaxPRCount_t
- struct CFE_ES_DeleteCDSCmd_Payload_t

    Delete Critical Data Store Command.

- struct CFE_ES_DeleteCDS_t
- struct CFE_ES_StartPerfCmd_Payload_t

    Start Performance Analyzer Command.

- struct CFE_ES_StartPerfData_t
- struct CFE_ES_StopPerfCmd_Payload_t

    Stop Performance Analyzer Command.

- struct CFE_ES_StopPerfData_t
- struct CFE_ES_SetPerfFilterMaskCmd_Payload_t

Set Performance Analyzer Filter Mask Command.

- struct CFE_ES_SetPerfFilterMask_t
- struct CFE_ES_SetPerfTrigMaskCmd_Payload_t

    Set Performance Analyzer Trigger Mask Command.

- struct CFE_ES_SetPerfTriggerMask_t
- struct CFE_ES_SendMemPoolStatsCmd_Payload_t

    Telemeter Memory Pool Statistics Command.

- struct CFE_ES_SendMemPoolStats_t
- struct CFE_ES_DumpCDSRegistryCmd_Payload_t

    Dump CDS Registry Command.

- struct CFE_ES_DumpCDSRegistry_t
- struct CFE_ES_OneAppTlm_Payload_t
- struct CFE_ES_OneAppTlm_t
- struct CFE_ES_PoolStatsTlm_Payload_t
- struct CFE_ES_MemStatsTlm_t
- struct CFE_ES_HousekeepingTlm_Payload_t
- struct CFE_ES_HousekeepingTlm_t
- struct CFE_ES_ShellPacket_Payload_t
- struct CFE_ES_ShellTlm_t

Macros

Executive Services Command Codes

- #define CFE_ES_NOOP_CC 0
- #define CFE_ES_RESET_COUNTERS_CC 1
- #define CFE_ES_RESTART_CC 2
- #define CFE_ES_SHELL_CC 3
- #define CFE_ES_START_APP_CC 4
- #define CFE_ES_STOP_APP_CC 5
- #define CFE_ES_RESTART_APP_CC 6
- #define CFE_ES_RELOAD_APP_CC 7
- #define CFE_ES_QUERY_ONE_CC 8
- #define CFE_ES_QUERY_ALL_CC 9
- #define CFE_ES_CLEAR_SYSLOG_CC 10
- #define CFE_ES_WRITE_SYSLOG_CC 11
- #define CFE_ES_CLEAR_ER_LOG_CC 12
- #define CFE_ES_WRITE_ER_LOG_CC 13
- #define CFE_ES_START_PERF_DATA_CC 14
- #define CFE_ES_STOP_PERF_DATA_CC 15
- #define CFE_ES_SET_PERF_FILTER_MASK_CC 16
- #define CFE_ES_SET_PERF_TRIGGER_MASK_CC 17
- #define CFE_ES_OVER_WRITE_SYSLOG_CC 18
- #define CFE_ES_RESET_PR_COUNT_CC 19
- #define CFE_ES_SET_MAX_PR_COUNT_CC 20
- #define CFE_ES_DELETE_CDS_CC 21
- #define CFE_ES_SEND_MEM_POOL_STATS_CC 22
- #define CFE_ES_DUMP_CDS_REGISTRY_CC 23
- #define CFE_ES_QUERY_ALL_TASKS_CC 24

Typedefs

- typedef CFE_ES_NoArgsCmd_t CFE_ES_Noop_t
- typedef CFE_ES_NoArgsCmd_t CFE_ES_ResetCounters_t
- typedef CFE_ES_NoArgsCmd_t CFE_ES_ClearSyslog_t
- typedef CFE_ES_NoArgsCmd_t CFE_ES_ClearERLog_t
- typedef CFE_ES_NoArgsCmd_t CFE_ES_ResetPRCount_t
- typedef CFE_ES_FileNameCmd_t CFE_ES_QueryAll_t
- typedef CFE_ES_FileNameCmd_t CFE_ES_QueryAllTasks_t
- typedef CFE_ES_FileNameCmd_t CFE_ES_WriteSyslog_t
- typedef CFE_ES_FileNameCmd_t CFE_ES_WriteERLog_t
- typedef CFE_ES_AppNameCmd_t CFE_ES_StopApp_t
- typedef CFE_ES_AppNameCmd_t CFE_ES_RestartApp_t
- typedef CFE_ES_AppNameCmd_t CFE_ES_QueryOne_t
- typedef CFE_ES_HousekeepingTlm_t CFE_ES_HkPacket_t
- typedef CFE_ES_ShellTlm_t CFE_ES_ShellPacket_t
- typedef CFE_ES_MemStatsTlm_t CFE_ES_PoolStatsTlm_t

39.25.1 Macro Definition Documentation

39.25.1.1 CFE_ES_CLEAR_ER_LOG_CC

```
#define CFE_ES_CLEAR_ER_LOG_CC 12
```

Name Clears the contents of the Exeception and Reset Log

Description

This command causes the contents of the Executive Services Exception and Reset Log to be cleared.

Command Mnemonic(s) $sc_$cpu_ES_ClearERLog

Command Structure

CFE_ES_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_ERLOG1_INF_EID informational event message will be generated.
- **$sc_$cpu_ES_ERLOGINDEX -** Index into Exception Reset Log goes to zero

Error Conditions

This command may fail for the following reason(s):

• The command packet length is incorrect

Evidence of failure may be found in the following telemetry:

• **$sc_$cpu_ES_CMDEC -** command error counter will increment

• A command specific error event message is issued for all error cases

Criticality

This command is not dangerous. However, any previously logged data will be lost.

See also

CFE_ES_CLEAR_SYSLOG_CC, CFE_ES_WRITE_SYSLOG_CC, CFE_ES_WRITE_ER_LOG_CC

Definition at line 605 of file cfe_es_msg.h.

39.25.1.2 CFE_ES_CLEAR_SYSLOG_CC

#define CFE_ES_CLEAR_SYSLOG_CC 10

Name Clear Executive Services System Log

Description

This command clears the contents of the Executive Services System Log.

Command Mnemonic(s) $sc_$cpu_ES_ClearSysLog

Command Structure

CFE_ES_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

• **$sc_$cpu_ES_CMDPC -** command execution counter will increment

• The CFE_ES_SYSLOG1_INF_EID informational event message will be generated.

• **$sc_$cpu_ES_SYSLOGBYTEUSED -** System Log Bytes Used will go to zero

• **$sc_$cpu_ES_SYSLOGENTRIES -** Number of System Log Entries will go to zero

Error Conditions

This command may fail for the following reason(s):

• The command packet length is incorrect

Evidence of failure may be found in the following telemetry:

• **$sc_$cpu_ES_CMDEC -** command error counter will increment

• A command specific error event message is issued for all error cases

Criticality

This command is not dangerous. However, any previously logged data will be lost.

Definition at line 525 of file cfe_es_msg.h.

39.25.1.3 CFE_ES_DELETE_CDS_CC

```
#define CFE_ES_DELETE_CDS_CC 21
```

Name Delete Critical Data Store

Description

This command allows the user to delete a Critical Data Store that was created by an Application that is now no longer executing.

Command Mnemonic(s) $sc_$cpu_ES_DeleteCDS

Command Structure

CFE_ES_DeleteCDS_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_CDS_DELETED_INFO_EID informational event message will be generated.
- The specified CDS should no longer appear in a CDS Registry dump generated upon receipt of the CFE_↩
ES_DUMP_CDS_REGISTRY_CC command

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The specified CDS is the CDS portion of a Critical Table. See CFE_TBL_DELETE_CDS_CC.
- The specified CDS is not found in the CDS Registry
- The specified CDS is associated with an Application that is still active
- An error occurred while accessing the CDS memory (see the System Log for more details)

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not critical because it is not possible to delete a CDS that is associated with an active application. However, deleting a CDS does eliminate any "history" that an application may be wishing to keep.

See also

CFE_ES_DUMP_CDS_REGISTRY_CC, CFE_TBL_DELETE_CDS_CC

Definition at line 977 of file cfe_es_msg.h.

39.25.1.4   CFE_ES_DUMP_CDS_REGISTRY_CC

#define CFE_ES_DUMP_CDS_REGISTRY_CC 23

Name Dump Critical Data Store Registry to a File

Description

>   This command allows the user to dump the Critical Data Store Registry to an onboard file.

Command Mnemonic(s) $sc_$cpu_ES_WriteCDS2File

Command Structure

>   CFE_ES_DumpCDSRegistry_t

Command Verification

>   Successful execution of this command may be verified with the following telemetry:
>
>   - **$sc_$cpu_ES_CMDPC -** command execution counter will increment
>   - The CFE_ES_CDS_REG_DUMP_INF_EID debug event message will be generated.
>   - The file specified in the command (or the default specified by the CFE_PLATFORM_ES_DEFAULT_CDS_↩ REG_DUMP_FILE configuration parameter) will be updated with the lastest information.

Error Conditions

>   This command may fail for the following reason(s):
>
>   - Error occurred while trying to create the dump file

>   Evidence of failure may be found in the following telemetry:

>   - **$sc_$cpu_ES_CMDEC -** command error counter will increment
>   - A command specific error event message is issued for all error cases

Criticality

>   This command is not inherently dangerous. It will create a new file in the file system (or overwrite an existing one) and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

>   CFE_ES_DELETE_CDS_CC, CFE_TBL_DELETE_CDS_CC

Definition at line 1060 of file cfe_es_msg.h.

39.25.1.5 CFE_ES_NOOP_CC

```
#define CFE_ES_NOOP_CC 0
```

Name Executive Services No-Op

Description

This command performs no other function than to increment the command execution counter. The command may be used to verify general aliveness of the Executive Services task.

Command Mnemonic(s) $sc_$cpu_ES_NOOP

Command Structure

CFE_ES_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_NOOP_INF_EID informational event message will be generated

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- the CFE_ES_LEN_ERR_EID error event message will be generated

Criticality

None

See also

Definition at line 82 of file cfe_es_msg.h.

39.25.1.6   CFE_ES_OVER_WRITE_SYSLOG_CC

#define CFE_ES_OVER_WRITE_SYSLOG_CC 18

Name Set Executive Services System Log Mode to Discard/Overwrite

Description

This command allows the user to configure the Executive Services to either discard new System Log messages when it is full or to overwrite the oldest messages.

Command Mnemonic(s) $sc_$cpu_ES_OverwriteSysLogMode

Command Structure

CFE_ES_OverWriteSyslog_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- **$sc_$cpu_ES_SYSLOGMODE -** Current System Log Mode should reflect the commanded value
- The CFE_ES_SYSLOGMODE_EID debug event message will be generated.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The desired mode is neither CFE_ES_LogMode_OVERWRITE or CFE_ES_LogMode_DISCARD

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

None. (It should be noted that "Overwrite" mode would allow a message identifying the cause of a problem to be lost by a subsequent flood of additional messages).

See also

CFE_ES_CLEAR_SYSLOG_CC, CFE_ES_WRITE_SYSLOG_CC

Definition at line 853 of file cfe_es_msg.h.

39.25.1.7 CFE_ES_QUERY_ALL_CC

```
#define CFE_ES_QUERY_ALL_CC 9
```

Name Writes all Executive Services Information on All Applications to a File

Description

This command takes the information kept by Executive Services on all of the registered applications and writes it to the specified file.

Command Mnemonic(s) $sc_$cpu_ES_WriteAppInfo2File

Command Structure

CFE_ES_FileNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_ALL_APPS_EID debug event message will be generated.
- The file specified in the command (or the default specified by the CFE_PLATFORM_ES_DEFAULT_APP_↩ LOG_FILE configuration parameter) will be updated with the lastest information.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- An Error occurs while trying to write to the file

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous. It will create a new file in the file system (or overwrite an existing one) and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

CFE_ES_QUERY_ONE_CC, CFE_ES_QUERY_ALL_TASKS_CC

Definition at line 487 of file cfe_es_msg.h.

39.25.1.8   CFE_ES_QUERY_ALL_TASKS_CC

#define CFE_ES_QUERY_ALL_TASKS_CC 24

Name Writes a list of All Executive Services Tasks to a File

Description

This command takes the information kept by Executive Services on all of the registered tasks and writes it to the specified file.

Command Mnemonic(s) $sc_$cpu_ES_WriteTaskInfo2File

Command Structure

CFE_ES_FileNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_TASKINFO_EID debug event message will be generated.
- The file specified in the command (or the default specified by the CFE_PLATFORM_ES_DEFAULT_TASK↩ _LOG_FILE configuration parameter) will be updated with the lastest information.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- An Error occurs while trying to write to the file

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous. It will create a new file in the file system (or overwrite an existing one) and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

CFE_ES_QUERY_ALL_CC, CFE_ES_QUERY_ONE_CC

Definition at line 1102 of file cfe_es_msg.h.

39.25.1.9 CFE_ES_QUERY_ONE_CC

```
#define CFE_ES_QUERY_ONE_CC 8
```

Name Request Executive Services Information on a Specified Application

Description

This command takes the information kept by Executive Services on the specified application and telemeters it to the ground.

Command Mnemonic(s) $sc_$cpu_ES_QueryApp

Command Structure

CFE_ES_AppNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_ONE_APP_EID debug event message will be generated. NOTE: This event message only identifies that the act of stopping the application has begun, not that is has completed.
- Receipt of the CFE_ES_OneAppTlm_t telemetry packet

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The specified application name is not recognized as an active application

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

None

See also

CFE_ES_QUERY_ALL_CC, CFE_ES_QUERY_ALL_TASKS_CC

Definition at line 445 of file cfe_es_msg.h.

39.25.1.10   CFE_ES_RELOAD_APP_CC

#define CFE_ES_RELOAD_APP_CC 7

[Name](#) Stops, Unloads, Loads from a File and Restarts an Application

Description

> This command halts and removes the specified Application from the system. Then it immediately loads the Application from the command specified file and restarts it. This command is especially useful for restarting a Command Ingest Application since once it has been stopped, no further commands can come in to restart it.

[Command Mnemonic(s)](#) $sc_$cpu_ES_ReloadApp

Command Structure

> [CFE_ES_ReloadApp_t](#)

Command Verification

> Successful execution of this command may be verified with the following telemetry:
> - **$sc_$cpu_ES_CMDPC -** command execution counter will increment
> - The [CFE_ES_RELOAD_APP_DBG_EID](#) debug event message will be generated. NOTE: This event message only identifies that the act of stopping the application has begun, not that is has completed.

Error Conditions

> This command may fail for the following reason(s):
> - The command packet length is incorrect
> - The specified application name is not recognized as an active application
> - The specified application is one of the cFE's Core applications (ES, EVS, SB, TBL, TIME)

> Evidence of failure may be found in the following telemetry:

> - **$sc_$cpu_ES_CMDEC -** command error counter will increment
> - A command specific error event message is issued for all error cases
> - Additional information on the reason for command failure may be found in the System Log

Criticality

> This command is not inherently dangerous, however the restarting of certain applications (e.g. - Spacecraft Attitude and Control) may have a detrimental effect on the spacecraft.

See also

> [CFE_ES_START_APP_CC,](#) [CFE_ES_STOP_APP_CC,](#) [CFE_ES_RESTART_APP_CC](#)

Definition at line 407 of file cfe_es_msg.h.

39.25.1.11 CFE_ES_RESET_COUNTERS_CC

#define CFE_ES_RESET_COUNTERS_CC 1

Name Executive Services Reset Counters

Description

This command resets the following counters within the Executive Services housekeeping telemetry:

- Command Execution Counter
- Command Error Counter

Command Mnemonic(s) $sc_$cpu_ES_ResetCtrs

Command Structure

CFE_ES_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_RESET_INF_EID informational event message will be generated

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- the CFE_ES_LEN_ERR_EID error event message will be generated

Criticality

This command is not inherently dangerous. However, it is possible for ground systems and on-board safing procedures to be designed such that they react to changes in the counter values that are reset by this command.

See also

CFE_ES_RESET_PR_COUNT_CC

Definition at line 121 of file cfe_es_msg.h.

39.25.1.12   CFE_ES_RESET_PR_COUNT_CC

#define CFE_ES_RESET_PR_COUNT_CC 19

Name Resets the Processor Reset Counter to Zero

Description

This command allows the user to reset the Processor Reset Counter to zero. The Processor Reset Counter counts the number of Processor Resets that have occurred so as to identify when a Processor Reset should automatically be upgraded to a full Power-On Reset.

Command Mnemonic(s) $sc_$cpu_ES_ResetPRCnt

Command Structure

CFE_ES_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- **$sc_$cpu_ES_ProcResetCnt -** Current number of processor resets will go to zero
- The CFE_ES_RESET_PR_COUNT_EID informational event message will be generated.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment

- A command specific error event message is issued for all error cases

Criticality

This command is not critical. The only impact would be that the system would have to have more processor resets before an automatic power-on reset occurred.

See also

CFE_ES_SET_MAX_PR_COUNT_CC, CFE_ES_RESET_COUNTERS_CC

Definition at line 893 of file cfe_es_msg.h.

39.25.1.13 CFE_ES_RESTART_APP_CC

`#define CFE_ES_RESTART_APP_CC 6`

[Name] Stops and Restarts an Application

Description

This command halts and restarts the specified Application. This command does **NOT** reload the application from the onboard filesystem.

[Command Mnemonic(s)] $sc_$cpu_ES_ResetApp

Command Structure

[CFE_ES_AppNameCmd_t]

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The [CFE_ES_RESTART_APP_DBG_EID] debug event message will be generated. NOTE: This event message only identifies that the act of stopping the application has begun, not that is has completed.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The specified application name is not recognized as an active application
- The specified application is one of the cFE's Core applications (ES, EVS, SB, TBL, TIME)

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases
- Additional information on the reason for command failure may be found in the System Log

Criticality

This command is not inherently dangerous, however the restarting of certain applications (e.g. - Spacecraft Attitude and Control) may have a detrimental effect on the spacecraft.

See also

[CFE_ES_START_APP_CC], [CFE_ES_STOP_APP_CC], [CFE_ES_RELOAD_APP_CC]

Definition at line 361 of file cfe_es_msg.h.

39.25.1.14   CFE_ES_RESTART_CC

#define CFE_ES_RESTART_CC 2

Name Executive Services Processor / Power-On Reset

Description

This command restarts the cFE in one of two modes. The Power-On Reset will cause the cFE to restart as though
the power were first applied to the processor. The Processor Reset will attempt to retain the contents of the volatile
disk and the contents of the Critical Data Store. NOTE: If a requested Processor Reset should cause the Processor
Reset Counter (**$sc_$cpu_ES_ProcResetCnt)** to exceed OR EQUAL the limit CFE_PLATFORM_ES_MAX↩
_PROCESSOR_RESETS (which is reported in housekeeping telemetry as **$sc_$cpu_ES_MaxProcResets)**,
the command is **AUTOMATICALLY** upgraded to a Power-On Reset.

Command Mnemonic(s) $sc_$cpu_ES_ProcessorReset, $sc_$cpu_ES_PowerOnReset

Command Structure

CFE_ES_RestartCmd_Payload_t

Command Verification

Successful execution of this command (as a Processor Reset) may be verified with the following telemetry:

- **$sc_$cpu_ES_ProcResetCnt -** processor reset counter will increment
- New entries in the Exception Reset Log and System Log can be found
  NOTE: Verification of a Power-On Reset is shown through the loss of data nominally retained through a
  Processor Reset
  NOTE: Since the reset of the processor resets the command execution counter (**$sc_$cpu_ES_CMDPC)**,
  this counter **CANNOT** be used to verify command execution.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The Restart Type was not a recognized value.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- the CFE_ES_BOOT_ERR_EID error event message will be generated

Criticality

This command is, by definition, dangerous. Significant loss of data will occur. All processes and the cFE itself will
be stopped and restarted. With the Power-On reset option, all data on the volatile disk and the contents of the
Critical Data Store will be lost.

See also

CFE_ES_RESET_PR_COUNT_CC, CFE_ES_SET_MAX_PR_COUNT_CC

Definition at line 171 of file cfe_es_msg.h.

39.25.1.15   CFE_ES_SEND_MEM_POOL_STATS_CC

```
#define CFE_ES_SEND_MEM_POOL_STATS_CC 22
```

Name Telemeter Memory Pool Statistics

Description

This command allows the user to obtain a snapshot of the statistics maintained for a specified memory pool.

Command Mnemonic(s) $sc_$cpu_ES_PoolStats

Command Structure

CFE_ES_SendMemPoolStats_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_TLM_POOL_STATS_INFO_EID debug event message will be generated.
- The Memory Pool Statistics Telemetry Packet is produced

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The specified handle is not associated with a known memory pool
- The specified handle caused a processor exception because it improperly identified a segment of memory

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

An incorrect Memory Pool Handle value can cause a system crash. Extreme care should be taken to ensure the memory handle value used in the command is correct.

See also

Definition at line 1019 of file cfe_es_msg.h.

39.25.1.16   CFE_ES_SET_MAX_PR_COUNT_CC

#define CFE_ES_SET_MAX_PR_COUNT_CC 20

Name Configure the Maximum Number of Processor Resets before a Power-On Reset

Description

This command allows the user to specify the number of Processor Resets that are allowed before the next Processor Reset is upgraded to a Power-On Reset.

Command Mnemonic(s) $sc_$cpu_ES_SetMaxPRCnt

Command Structure

CFE_ES_SetMaxPRCount_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- **$sc_$cpu_ES_MaxProcResets -** Current maximum number of processor resets before an automatic power-on reset will go to the command specified value.
- The CFE_ES_SET_MAX_PR_COUNT_EID informational event message will be generated.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

If the operator were to set the Maximum Processor Reset Count to too high a value, the processor would require an inordinate number of consecutive processor resets before an automatic power-on reset would occur. This could potentially leave the spacecraft without any control for a significant amount of time if a processor reset fails to clear a problem.

See also

CFE_ES_RESET_PR_COUNT_CC

Definition at line 934 of file cfe_es_msg.h.

39.25.1.17 CFE_ES_SET_PERF_FILTER_MASK_CC

```
#define CFE_ES_SET_PERF_FILTER_MASK_CC 16
```

Name Set Performance Analyzer's Filter Masks

Description

This command sets the Performance Analyzer's Filter Masks.

Command Mnemonic(s) $sc_$cpu_ES_LAFilterMask

Command Structure

CFE_ES_SetPerfFilterMask_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- **$sc_$cpu_ES_PerfFltrMask[MaskCnt]** - the current performance filter mask value(s) should reflect the commanded value
- The CFE_ES_PERF_FILTMSKCMD_EID debug event message will be generated.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The Filter Mask ID number is out of range

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

Changing the filter masks may cause a small change in the Performance Analyzer's CPU utilization.

See also

CFE_ES_START_PERF_DATA_CC, CFE_ES_STOP_PERF_DATA_CC, CFE_ES_SET_PERF_TRIGGER_M↩
ASK_CC

Definition at line 774 of file cfe_es_msg.h.

39.25.1.18   CFE_ES_SET_PERF_TRIGGER_MASK_CC

#define CFE_ES_SET_PERF_TRIGGER_MASK_CC 17

Name Set Performance Analyzer's Trigger Masks

Description

This command sets the Performance Analyzer's Trigger Masks.

Command Mnemonic(s) $sc_$cpu_ES_LATriggerMask

Command Structure

CFE_ES_SetPerfTriggerMask_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- **$sc_$cpu_ES_PerfTrigMask[MaskCnt**] - the current performance trigger mask value(s) should reflect the commanded value
- The CFE_ES_PERF_TRIGMSKCMD_EID debug event message will be generated.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The Trigger Mask ID number is out of range

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

Changing the trigger masks may cause a small change in the Performance Analyzer's CPU utilization.

See also

CFE_ES_START_PERF_DATA_CC, CFE_ES_STOP_PERF_DATA_CC, CFE_ES_SET_PERF_FILTER_MA↩
SK_CC

Definition at line 812 of file cfe_es_msg.h.

39.25.1.19   CFE_ES_SHELL_CC

```
#define CFE_ES_SHELL_CC 3
```

Name DEPRECATED: Executive Services O/S Shell Command

Deprecated

Description

This command passes an ASCII string as a command line to the underlying realtime operating system shell. Any response to the command is both written to the shell command output file and sent as a series of shell command output telemetry packets.

If the shell command output filename argument is empty, then CFE_PLATFORM_ES_DEFAULT_SHELL_FILENAME will be used as the filename.

Command Mnemonic(s) $sc_$cpu$_ES_Shell

Command Structure

CFE_ES_Shell_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_SHELL_INF_EID informational event message will be generated

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- Failure to create the shell command output file
- The shell command started with `ES_` but was not one of the recognized cFE shell commands
- There was an error while performing a OS_lseek on the shell command output file
- There was an error while redirecting the shell command response to the shell command output file

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- the CFE_ES_SHELL_ERR_EID error event message will be generated
- Additional information on the error should be found in the System Log

Criticality

This command should be used with caution. Interfering with the operation of the underlying realtime operating system can cause significant problems.

See also

Definition at line 221 of file cfe_es_msg.h.

39.25.1.20   CFE_ES_START_APP_CC

`#define CFE_ES_START_APP_CC 4`

Name Load and Start an Application

Description

This command starts the specified application with the specified start address, stack size, etc options.

Command Mnemonic(s) $sc_$cpu_ES_StartApp

Command Structure

CFE_ES_StartApp_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_START_INF_EID informational event message will be generated

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The specified application filename string is either a NULL string or less than four characters in length
- The specified application entry point is a NULL string
- The specified application name is a NULL string
- The specified stack size is less than CFE_PLATFORM_ES_DEFAULT_STACK_SIZE
- The specified priority is greater than MAX_PRIORITY (as defined in osapi.c)
- The specified exception action is neither CFE_ES_ExceptionAction_RESTART_APP (0) or CFE_ES_↩
  ExceptionAction_PROC_RESTART (1)
- The Operating System was unable to load the specified application file

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous although system resources could be taxed beyond their limits with the starting of erroneous or invalid applications.

See also

CFE_ES_STOP_APP_CC, CFE_ES_RESTART_APP_CC, CFE_ES_RELOAD_APP_CC

Definition at line 268 of file cfe_es_msg.h.

39.25.1.21 CFE_ES_START_PERF_DATA_CC

```
#define CFE_ES_START_PERF_DATA_CC 14
```

Name Start Performance Analyzer

Description

This command causes the Performance Analyzer to begin collecting data using the specified trigger mode.

Command Mnemonic(s) $sc_$cpu_ES_StartLAData

Command Structure

CFE_ES_StartPerfData_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- **$sc_$cpu_ES_PerfState -** Current performance analyzer state will change to either WAITING FOR TRIGGER or, if conditions are appropriate fast enough, TRIGGERED.
- **$sc_$cpu_ES_PerfMode -** Performance Analyzer Mode will change to the commanded trigger mode (TRIGGER START, TRIGGER CENTER, or TRIGGER END).
- **$sc_$cpu_ES_PerfTrigCnt -** Performance Trigger Count will go to zero
- **$sc_$cpu_ES_PerfDataStart -** Data Start Index will go to zero
- **$sc_$cpu_ES_PerfDataEnd -** Data End Index will go to zero
- **$sc_$cpu_ES_PerfDataCnt -** Performance Data Counter will go to zero
- The CFE_ES_PERF_STARTCMD_EID debug event message will be generated.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- A previous CFE_ES_STOP_PERF_DATA_CC command has not completely finished.
- An invalid trigger mode is requested.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous but may cause a small increase in CPU utilization as the performance analyzer data is collected.

See also

CFE_ES_STOP_PERF_DATA_CC, CFE_ES_SET_PERF_FILTER_MASK_CC, CFE_ES_SET_PERF_TRIGG↩ER_MASK_CC

Definition at line 693 of file cfe_es_msg.h.

39.25.1.22   CFE_ES_STOP_APP_CC

#define CFE_ES_STOP_APP_CC 5

Name Stop and Unload Application

Description

This command halts and removes the specified Application from the system. **NOTE:** This command should never be used on the Command Ingest application. This would prevent further commands from entering the system. If Command Ingest needs to be stopped and restarted, use CFE_ES_RESTART_APP_CC or CFE_ES_RELOAD↩ _APP_CC.

Command Mnemonic(s) $sc_$cpu_ES_StopApp

Command Structure

CFE_ES_AppNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_STOP_DBG_EID debug event message will be generated. NOTE: This event message only identifies that the stop has been started, not that is has completed.
- Once the stop has successfully completed, the list of Applications and Tasks created in response to the **$sc_$cpu_ES_WriteAppInfo2File, $sc_$cpu_ES_WriteTaskInfo2File should** no longer contain the specified application.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- The specified application name is not recognized as an active application
- The specified application is one of the cFE's Core applications (ES, EVS, SB, TBL, TIME)

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases
- Additional information on the reason for command failure may be found in the System Log

Criticality

This command is not inherently dangerous, however the removal of certain applications (e.g. - Spacecraft Attitude and Control) may have a detrimental effect on the spacecraft.

See also

CFE_ES_START_APP_CC, CFE_ES_RESTART_APP_CC, CFE_ES_RELOAD_APP_CC

Definition at line 318 of file cfe_es_msg.h.

39.25.1.23   CFE_ES_STOP_PERF_DATA_CC

#define CFE_ES_STOP_PERF_DATA_CC 15

Name Stop Performance Analyzer

Description

This command stops the Performance Analyzer from collecting any more data.

Command Mnemonic(s) $sc_$cpu_ES_StopLAData

Command Structure

CFE_ES_StopPerfData_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- **$sc_$cpu_ES_PerfState -** Current performance analyzer state will change to IDLE.
- The CFE_ES_PERF_STOPCMD_EID debug event message will be generated.
- The file specified in the command (or the default specified by the CFE_PLATFORM_ES_DEFAULT_PERF↩ _DUMP_FILENAME configuration parameter) will be updated with the lastest information.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- A previous Stop Performance Analyzer command is still in process
- An error occurred while spawning the child task responsible for dumping the Performance Analyzer data to a file

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous. An additional low priority child task will be spawned, however, to dump the performance analyzer data to a file.

See also

CFE_ES_START_PERF_DATA_CC, CFE_ES_SET_PERF_FILTER_MASK_CC, CFE_ES_SET_PERF_TRIG↩ GER_MASK_CC

Definition at line 736 of file cfe_es_msg.h.

39.25.1.24   CFE_ES_WRITE_ER_LOG_CC

```
#define CFE_ES_WRITE_ER_LOG_CC 13
```

Name Writes Exeception and Reset Log to a File

Description

This command causes the contents of the Executive Services Exception and Reset Log to be written to the specified file.

Command Mnemonic(s) $sc_$cpu_ES_WriteERLog2File

Command Structure

CFE_ES_FileNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_ERLOG2_EID debug event message will be generated.
- The file specified in the command (or the default specified by the CFE_PLATFORM_ES_DEFAULT_ER_L↩
  OG_FILE configuration parameter) will be updated with the lastest information.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- An Error occurs while trying to write to the file

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous. It will create a new file in the file system (or overwrite an existing one) and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

CFE_ES_CLEAR_SYSLOG_CC, CFE_ES_WRITE_SYSLOG_CC, CFE_ES_CLEAR_ER_LOG_CC

Definition at line 647 of file cfe_es_msg.h.

39.25.1.25 CFE_ES_WRITE_SYSLOG_CC

#define CFE_ES_WRITE_SYSLOG_CC 11

Name Writes contents of Executive Services System Log to a File

Description

This command causes the contents of the Executive Services System Log to be written to a log file.

Command Mnemonic(s) $sc_$cpu_ES_WriteSysLog2File

Command Structure

CFE_ES_FileNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_ES_CMDPC -** command execution counter will increment
- The CFE_ES_SYSLOG2_EID debug event message will be generated.
- The file specified in the command (or the default specified by the CFE_PLATFORM_ES_DEFAULT_SYSL↩
OG_FILE configuration parameter) will be updated with the lastest information.

Error Conditions

This command may fail for the following reason(s):

- The command packet length is incorrect
- An Error occurs while trying to write to the file

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_ES_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous. It will create a new file in the file system (or overwrite an existing one) and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

CFE_ES_CLEAR_SYSLOG_CC, CFE_ES_CLEAR_ER_LOG_CC, CFE_ES_WRITE_ER_LOG_CC, CFE_ES↩
_OVER_WRITE_SYSLOG_CC

Definition at line 568 of file cfe_es_msg.h.

39.25.2 Typedef Documentation

39.25.2.1 CFE_ES_ClearERLog_t

typedef CFE_ES_NoArgsCmd_t CFE_ES_ClearERLog_t

Definition at line 1137 of file cfe_es_msg.h.

39.25.2.2 CFE_ES_ClearSyslog_t

typedef CFE_ES_NoArgsCmd_t CFE_ES_ClearSyslog_t

Definition at line 1136 of file cfe_es_msg.h.

39.25.2.3 CFE_ES_HkPacket_t

typedef CFE_ES_HousekeepingTlm_t CFE_ES_HkPacket_t

Definition at line 1620 of file cfe_es_msg.h.

39.25.2.4 CFE_ES_Noop_t

typedef CFE_ES_NoArgsCmd_t CFE_ES_Noop_t

Definition at line 1134 of file cfe_es_msg.h.

39.25.2.5 CFE_ES_PoolStatsTlm_t

typedef CFE_ES_MemStatsTlm_t CFE_ES_PoolStatsTlm_t

Definition at line 1622 of file cfe_es_msg.h.

39.25.2.6 CFE_ES_QueryAll_t

typedef CFE_ES_FileNameCmd_t CFE_ES_QueryAll_t

Definition at line 1209 of file cfe_es_msg.h.

39.25.2.7 CFE_ES_QueryAllTasks_t

typedef CFE_ES_FileNameCmd_t CFE_ES_QueryAllTasks_t

Definition at line 1210 of file cfe_es_msg.h.

39.25.2.8 CFE_ES_QueryOne_t

typedef CFE_ES_AppNameCmd_t CFE_ES_QueryOne_t

Definition at line 1286 of file cfe_es_msg.h.

39.25.2.9 CFE_ES_ResetCounters_t

typedef CFE_ES_NoArgsCmd_t CFE_ES_ResetCounters_t

Definition at line 1135 of file cfe_es_msg.h.

39.25.2.10 CFE_ES_ResetPRCount_t

typedef CFE_ES_NoArgsCmd_t CFE_ES_ResetPRCount_t

Definition at line 1138 of file cfe_es_msg.h.

39.25.2.11 CFE_ES_RestartApp_t

typedef CFE_ES_AppNameCmd_t CFE_ES_RestartApp_t

Definition at line 1285 of file cfe_es_msg.h.

39.25.2.12 CFE_ES_ShellPacket_t

typedef CFE_ES_ShellTlm_t CFE_ES_ShellPacket_t

Definition at line 1621 of file cfe_es_msg.h.

39.25.2.13   CFE_ES_StopApp_t

typedef CFE_ES_AppNameCmd_t CFE_ES_StopApp_t

Definition at line 1284 of file cfe_es_msg.h.

39.25.2.14   CFE_ES_WriteERLog_t

typedef CFE_ES_FileNameCmd_t CFE_ES_WriteERLog_t

Definition at line 1212 of file cfe_es_msg.h.

39.25.2.15   CFE_ES_WriteSyslog_t

typedef CFE_ES_FileNameCmd_t CFE_ES_WriteSyslog_t

Definition at line 1211 of file cfe_es_msg.h.

39.26   cfe/fsw/cfe-core/src/inc/cfe_evs.h File Reference

```
#include "cfe_evs_extern_typedefs.h"
#include "common_types.h"
#include "cfe_time.h"
#include "cfe_evs_msg.h"
#include "osapi.h"
#include "cfe_sb.h"
```

Data Structures

- struct CFE_EVS_BinFilter_t

  Event message filter defintion structure.

Macros

- #define CFE_EVS_BINARY_FILTER CFE_EVS_EventFilter_BINARY
- #define CFE_EVS_PORT1 CFE_EVS_EventOutput_PORT1
- #define CFE_EVS_PORT2 CFE_EVS_EventOutput_PORT2
- #define CFE_EVS_PORT3 CFE_EVS_EventOutput_PORT3
- #define CFE_EVS_PORT4 CFE_EVS_EventOutput_PORT4
- #define CFE_EVS_DEBUG CFE_EVS_EventType_DEBUG
- #define CFE_EVS_INFORMATION CFE_EVS_EventType_INFORMATION
- #define CFE_EVS_ERROR CFE_EVS_EventType_ERROR
- #define CFE_EVS_CRITICAL CFE_EVS_EventType_CRITICAL

Common Event Filter Mask Values

- #define CFE_EVS_NO_FILTER 0x0000

  Stops any filtering. All messages are sent.
- #define CFE_EVS_FIRST_ONE_STOP 0xFFFF

  Sends the first event. All remaining messages are filtered.
- #define CFE_EVS_FIRST_TWO_STOP 0xFFFE

  Sends the first 2 events. All remaining messages are filtered.
- #define CFE_EVS_FIRST_4_STOP 0xFFFC

  Sends the first 4 events. All remaining messages are filtered.
- #define CFE_EVS_FIRST_8_STOP 0xFFF8

  Sends the first 8 events. All remaining messages are filtered.
- #define CFE_EVS_FIRST_16_STOP 0xFFF0

  Sends the first 16 events. All remaining messages are filtered.
- #define CFE_EVS_FIRST_32_STOP 0xFFE0

  Sends the first 32 events. All remaining messages are filtered.
- #define CFE_EVS_FIRST_64_STOP 0xFFC0

  Sends the first 64 events. All remaining messages are filtered.
- #define CFE_EVS_EVERY_OTHER_ONE 0x0001

  Sends every other event.
- #define CFE_EVS_EVERY_OTHER_TWO 0x0002

  Sends two, filters one, sends two, filters one, etc.
- #define CFE_EVS_EVERY_FOURTH_ONE 0x0003

  Sends every fourth event message. All others are filtered.

Functions

- int32 CFE_EVS_Register (void ∗Filters, uint16 NumFilteredEvents, uint16 FilterScheme)

  Register an application for receiving event services.
- int32 CFE_EVS_Unregister (void)

  Cleanup internal structures used by the event manager for the calling Application.
- int32 CFE_EVS_SendEvent (uint16 EventID, uint16 EventType, const char ∗Spec,...) OS_PRINTF(3

  Generate a software event.
- int32 int32 CFE_EVS_SendEventWithAppID (uint16 EventID, uint16 EventType, uint32 AppID, const char ∗Spec,...) OS_PRINTF(4

  Generate a software event given the specified Application ID.
- int32 int32 int32 CFE_EVS_SendTimedEvent (CFE_TIME_SysTime_t Time, uint16 EventID, uint16 EventType, const char ∗Spec,...) OS_PRINTF(4

  Generate a software event with a specific time tag.
- int32 CFE_EVS_ResetFilter (int16 EventID)

  Resets the calling application's event filter for a single event ID.
- int32 CFE_EVS_ResetAllFilters (void)

  Resets all of the calling application's event filters.

39.26.1   Macro Definition Documentation

39.26.1.1   CFE_EVS_BINARY_FILTER

#define CFE_EVS_BINARY_FILTER CFE_EVS_EventFilter_BINARY

Definition at line 88 of file cfe_evs.h.

39.26.1.2   CFE_EVS_CRITICAL

#define CFE_EVS_CRITICAL CFE_EVS_EventType_CRITICAL

Definition at line 104 of file cfe_evs.h.

39.26.1.3   CFE_EVS_DEBUG

#define CFE_EVS_DEBUG CFE_EVS_EventType_DEBUG

Definition at line 101 of file cfe_evs.h.

39.26.1.4   CFE_EVS_ERROR

#define CFE_EVS_ERROR CFE_EVS_EventType_ERROR

Definition at line 103 of file cfe_evs.h.

39.26.1.5   CFE_EVS_EVERY_FOURTH_ONE

#define CFE_EVS_EVERY_FOURTH_ONE 0x0003

Sends every fourth event message. All others are filtered.

Definition at line 74 of file cfe_evs.h.

39.26.1.6 CFE_EVS_EVERY_OTHER_ONE

```
#define CFE_EVS_EVERY_OTHER_ONE 0x0001
```

Sends every other event.

Definition at line 72 of file cfe_evs.h.

39.26.1.7 CFE_EVS_EVERY_OTHER_TWO

```
#define CFE_EVS_EVERY_OTHER_TWO 0x0002
```

Sends two, filters one, sends two, filters one, etc.

Definition at line 73 of file cfe_evs.h.

39.26.1.8 CFE_EVS_FIRST_16_STOP

```
#define CFE_EVS_FIRST_16_STOP 0xFFF0
```

Sends the first 16 events. All remaining messages are filtered.

Definition at line 69 of file cfe_evs.h.

39.26.1.9 CFE_EVS_FIRST_32_STOP

```
#define CFE_EVS_FIRST_32_STOP 0xFFE0
```

Sends the first 32 events. All remaining messages are filtered.

Definition at line 70 of file cfe_evs.h.

39.26.1.10 CFE_EVS_FIRST_4_STOP

```
#define CFE_EVS_FIRST_4_STOP 0xFFFC
```

Sends the first 4 events. All remaining messages are filtered.

Definition at line 67 of file cfe_evs.h.

39.26.1.11   CFE_EVS_FIRST_64_STOP

#define CFE_EVS_FIRST_64_STOP 0xFFC0

Sends the first 64 events. All remaining messages are filtered.

Definition at line 71 of file cfe_evs.h.

39.26.1.12   CFE_EVS_FIRST_8_STOP

#define CFE_EVS_FIRST_8_STOP 0xFFF8

Sends the first 8 events. All remaining messages are filtered.

Definition at line 68 of file cfe_evs.h.

39.26.1.13   CFE_EVS_FIRST_ONE_STOP

#define CFE_EVS_FIRST_ONE_STOP 0xFFFF

Sends the first event. All remaining messages are filtered.

Definition at line 65 of file cfe_evs.h.

39.26.1.14   CFE_EVS_FIRST_TWO_STOP

#define CFE_EVS_FIRST_TWO_STOP 0xFFFE

Sends the first 2 events. All remaining messages are filtered.

Definition at line 66 of file cfe_evs.h.

39.26.1.15   CFE_EVS_INFORMATION

#define CFE_EVS_INFORMATION CFE_EVS_EventType_INFORMATION

Definition at line 102 of file cfe_evs.h.

39.26.1.16 CFE_EVS_NO_FILTER

```
#define CFE_EVS_NO_FILTER 0x0000
```

Stops any filtering. All messages are sent.

Definition at line 64 of file cfe_evs.h.

39.26.1.17 CFE_EVS_PORT1

```
#define CFE_EVS_PORT1 CFE_EVS_EventOutput_PORT1
```

Definition at line 93 of file cfe_evs.h.

39.26.1.18 CFE_EVS_PORT2

```
#define CFE_EVS_PORT2 CFE_EVS_EventOutput_PORT2
```

Definition at line 94 of file cfe_evs.h.

39.26.1.19 CFE_EVS_PORT3

```
#define CFE_EVS_PORT3 CFE_EVS_EventOutput_PORT3
```

Definition at line 95 of file cfe_evs.h.

39.26.1.20 CFE_EVS_PORT4

```
#define CFE_EVS_PORT4 CFE_EVS_EventOutput_PORT4
```

Definition at line 96 of file cfe_evs.h.

39.27   cfe/fsw/cfe-core/src/inc/cfe_evs_events.h File Reference

Macros

- #define CFE_EVS_MAX_EID 43
- #define CFE_EVS_NOOP_EID 0 /∗ Noop event identifier ∗/

  'No-op command'
- #define CFE_EVS_STARTUP_EID 1

  'cFE EVS Initialized'
- #define CFE_EVS_ERR_WRLOGFILE_EID 2

  'Write Log File Command Error: OS_write = 0x%08X, filename = %s'
- #define CFE_EVS_ERR_CRLOGFILE_EID 3

  'Write Log File Command Error: OS_creat = 0x%08X, filename = %s'
- #define CFE_EVS_ERR_MSGID_EID 5

  'Invalid command packet, Message ID = 0x%08X'
- #define CFE_EVS_ERR_EVTIDNOREGS_EID 6

  '%s Event ID %d not registered for filtering: CC = %lu'
- #define CFE_EVS_ERR_APPNOREGS_EID 7

  '%s not registered with EVS: CC = %lu'
- #define CFE_EVS_ERR_ILLAPPIDRANGE_EID 8

  'Illegal application ID %d retrieved for %s: CC = %lu'
- #define CFE_EVS_ERR_NOAPPIDFOUND_EID 9

  'Unable to retrieve application ID for %s: CC = %lu'
- #define CFE_EVS_ERR_ILLEGALFMTMOD_EID 10

  'Set Event Format Mode Command: Invalid Event Format Mode = 0x%02x'
- #define CFE_EVS_ERR_MAXREGSFILTER_EID 11

  'Add Filter Command: number of registered filters has reached max = %d'
- #define CFE_EVS_ERR_WRDATFILE_EID 12

  'Write App Data Command Error: OS_write = 0x%08X, filename = %s'
- #define CFE_EVS_ERR_CRDATFILE_EID 13

  'Write App Data Command Error: OS_creat = 0x%08X, filename = %s'
- #define CFE_EVS_ERR_CC_EID 15

  'Invalid command code - ID = 0x%08x, CC = %d'
- #define CFE_EVS_RSTCNT_EID 16

  'Reset Counters Command Received'
- #define CFE_EVS_SETFILTERMSK_EID 17

  'Set Filter Mask Command Received with AppName=%s, EventID=0x%08x, Mask=0x%04x'
- #define CFE_EVS_ENAPORT_EID 18

  'Enable Ports Command Received with Port Bit Mask = 0x%02x'
- #define CFE_EVS_DISPORT_EID 19

  'Disable Ports Command Received with Port Bit Mask = 0x%02x'
- #define CFE_EVS_ENAEVTTYPE_EID 20

  'Enable Event Type Command Received with Event Type Bit Mask = 0x%02x'
- #define CFE_EVS_DISEVTTYPE_EID 21

  'Disable Event Type Command Received with Event Type Bit Mask = 0x%02x'
- #define CFE_EVS_SETEVTFMTMOD_EID 22

  'Set Event Format Mode Command Received with Mode = 0x%02x'

- #define CFE_EVS_ENAAPPEVTTYPE_EID 23

  'Enable App Event Type Command Received with AppName = %s, EventType Bit Mask = 0x%02x'

- #define CFE_EVS_DISAPPENTTYPE_EID 24

  'Disable App Event Type Command Received with AppName = %s, EventType Bit Mask = 0x%02x'

- #define CFE_EVS_ENAAPPEVT_EID 25

  'Enable App Events Command Received with AppName = %s'

- #define CFE_EVS_DISAPPEVT_EID 26

  'Disable App Events Command Received with AppName = %s'

- #define CFE_EVS_RSTEVTCNT_EID 27

  'Reset Event Counter Command Received with AppName = %s'

- #define CFE_EVS_RSTFILTER_EID 28

  'Reset Filter Command Received with AppName = %s, EventID = 0x%08x'

- #define CFE_EVS_RSTALLFILTER_EID 29

  'Reset All Filters Command Received with AppName = %s'

- #define CFE_EVS_ADDFILTER_EID 30

  'Add Filter Command Received with AppName = %s, EventID = 0x%08x, Mask = 0x%04x'

- #define CFE_EVS_DELFILTER_EID 31

  'Delete Filter Command Received with AppName = %s, EventID = 0x%08x'

- #define CFE_EVS_WRDAT_EID 32

  'Write App Data Command: %d application data entries written to %s'

- #define CFE_EVS_WRLOG_EID 33

  'Write Log File Command: %d event log entries written to %s'

- #define CFE_EVS_NO_LOGSET_EID 34

  'Set Log Mode Command: Event Log is Disabled'

- #define CFE_EVS_NO_LOGCLR_EID 35

  'Clear Log Command: Event Log is Disabled'

- #define CFE_EVS_NO_LOGWR_EID 36

  'Write Log Command: Event Log is Disabled'

- #define CFE_EVS_EVT_FILTERED_EID 37

  'Add Filter Command:AppName = %s, EventID = 0x%08x is already registered for filtering'

- #define CFE_EVS_LOGMODE_EID 38

  'Set Log Mode Command Error: Log Mode = %d'

- #define CFE_EVS_ERR_LOGMODE_EID 39

  'Set Log Mode Command Error: Log Mode = %d'

- #define CFE_EVS_ERR_INVALID_BITMASK_EID 40

  'Bit Mask = 0x%X out of range: CC = %lu'

- #define CFE_EVS_ERR_UNREGISTERED_EVS_APP 41

  'App %s not registered with Event Services. Unable to send event'

- #define CFE_EVS_FILTER_MAX_EID 42

  'Max filter count reached, AppName = %s, EventID = 0x%08x: Filter locked until reset'

- #define CFE_EVS_LEN_ERR_EID 43

  'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

39.27.1   Macro Definition Documentation

39.27.1.1   CFE_EVS_ADDFILTER_EID

#define CFE_EVS_ADDFILTER_EID 30

'Add Filter Command Received with AppName = %s, EventID = 0x%08x, Mask = 0x%04x'

[Event Message](#) 'Add Filter Command Received with AppName = %s, EventID = 0x%08x, Mask = 0x%04x'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Add Filter" command.

The `AppName` field identifies the Application who is getting the new filter, the `EventID` field identifies the Event Identifier, in hex, that is getting the filter, and the `Mask` field specifies, in hex, what the binary filter mask has been set to.

Definition at line 490 of file cfe_evs_events.h.

39.27.1.2   CFE_EVS_DELFILTER_EID

#define CFE_EVS_DELFILTER_EID 31

'Delete Filter Command Received with AppName = %s, EventID = 0x%08x'

[Event Message](#) 'Delete Filter Command Received with AppName = %s, EventID = 0x%08x'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Delete Filter" command.

The `AppName` field identifies the Application who is getting the filter removed, the `EventID` field identifies the Event Identifier, in hex, whose filter is being deleted.

Definition at line 504 of file cfe_evs_events.h.

39.27.1.3 CFE_EVS_DISAPPENTTYPE_EID

`#define CFE_EVS_DISAPPENTTYPE_EID 24`

`'Disable App Event Type Command Received with AppName = %s, EventType Bit Mask = 0x%02x'`

Event Message `'Disable App Event Type Command Received with AppName = %s, Event↩`
`                Type Bit Mask = 0x%02x'`

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Disable Application Event Types" command.

The `AppName` field identifies the Application whose Event Type Disable status has changed and the `Mask` field specifies (in hex) the Event Types that have been disabled. Mask bits are defined by CFE_EVS_DEBUG_BIT, CFE_EVS_↩ INFORMATION_BIT, CFE_EVS_ERROR_BIT and CFE_EVS_CRITICAL_BIT.

Definition at line 409 of file cfe_evs_events.h.

39.27.1.4 CFE_EVS_DISAPPEVT_EID

`#define CFE_EVS_DISAPPEVT_EID 26`

`'Disable App Events Command Received with AppName = %s'`

Event Message `'Disable App Events Command Received with AppName = %s'`

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Disable Application Events" command.

The `AppName` field identifies the Application whose Events have been Disabled.

Definition at line 435 of file cfe_evs_events.h.

39.27.1.5   CFE_EVS_DISEVTTYPE_EID

#define CFE_EVS_DISEVTTYPE_EID 21

'Disable Event Type Command Received with Event Type Bit Mask = 0x%02x'

Event Message 'Disable Event Type Command Received with Event Type Bit Mask = 0x%02x'

Type: DEBUG

Cause:

This event message is issued upon successful processing of the "Disable Event Type" command.

The Mask field identifies the Event Types that are disabled. Mask bits are defined by CFE_EVS_DEBUG_BIT, CFE_↩EVS_INFORMATION_BIT, CFE_EVS_ERROR_BIT and CFE_EVS_CRITICAL_BIT.

Definition at line 363 of file cfe_evs_events.h.

39.27.1.6   CFE_EVS_DISPORT_EID

#define CFE_EVS_DISPORT_EID 19

'Disable Ports Command Received with Port Bit Mask = 0x%02x'

Event Message 'Disable Ports Command Received with Port Bit Mask = 0x%02x'

Type: DEBUG

Cause:

This event message is issued upon successful processing of the "Disable Ports" command.

The Mask field identifies (in hex) the ports are to be disabled. Mask bits are defined by CFE_EVS_PORT1_BIT, CFE_EVS_PORT2_BIT, CFE_EVS_PORT3_BIT and CFE_EVS_PORT4_BIT.

Definition at line 333 of file cfe_evs_events.h.

39.27.1.7 CFE_EVS_ENAAPPEVT_EID

```
#define CFE_EVS_ENAAPPEVT_EID 25
```

```
'Enable App Events Command Received with AppName = %s'
```

Event Message `'Enable App Events Command Received with AppName = %s'`

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Enable Application Events" command.

The `AppName` field identifies the Application whose Events have been Enabled.

Definition at line 422 of file cfe_evs_events.h.

39.27.1.8 CFE_EVS_ENAAPPEVTTYPE_EID

```
#define CFE_EVS_ENAAPPEVTTYPE_EID 23
```

```
'Enable App Event Type Command Received with AppName = %s, EventType Bit Mask
= 0x%02x'
```

Event Message `'Enable App Event Type Command Received with AppName = %s, Event↩`
`Type Bit Mask = 0x%02x'`

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Enable Application Event Types" command.

The `AppName` field identifies the Application whose Event Type Enable status has changed and the `Mask` field specifies (in hex) the Event Types that have been enabled. Mask bits are defined by CFE_EVS_DEBUG_BIT, CFE_EVS_INF↩ORMATION_BIT, CFE_EVS_ERROR_BIT and CFE_EVS_CRITICAL_BIT.

Definition at line 393 of file cfe_evs_events.h.

39.27.1.9   CFE_EVS_ENAEVTTYPE_EID

#define CFE_EVS_ENAEVTTYPE_EID 20

'Enable Event Type Command Received with Event Type Bit Mask = 0x%02x'

Event Message 'Enable Event Type Command Received with Event Type Bit Mask = 0x%02x'

Type: DEBUG

Cause:

This event message is issued upon successful processing of the "Enable Event Type" command.

The `Mask` field identifies the Event Types that are enabled. Mask bits are defined by CFE_EVS_DEBUG_BIT, CFE_↩
EVS_INFORMATION_BIT, CFE_EVS_ERROR_BIT and CFE_EVS_CRITICAL_BIT.

Definition at line 348 of file cfe_evs_events.h.

39.27.1.10   CFE_EVS_ENAPORT_EID

#define CFE_EVS_ENAPORT_EID 18

'Enable Ports Command Received with Port Bit Mask = 0x%02x'

Event Message 'Enable Ports Command Received with Port Bit Mask = 0x%02x'

Type: DEBUG

Cause:

This event message is issued upon successful processing of the "Enable Ports" command.

The `Mask` field identifies the ports that are enabled. Mask bits are defined by CFE_EVS_PORT1_BIT, CFE_EVS_P↩
ORT2_BIT, CFE_EVS_PORT3_BIT and CFE_EVS_PORT4_BIT.

Definition at line 319 of file cfe_evs_events.h.

39.27.1.11 CFE_EVS_ERR_APPNOREGS_EID

```
#define CFE_EVS_ERR_APPNOREGS_EID 7
```

'%s not registered with EVS: CC = %lu'

Event Message '%s not registered with EVS: CC = %lu'

Type: ERROR

Cause:

This event message is generated when the specified command identifies an Application that has not been registered with the cFE Event Services.

The CC field contains the Command Code whose processing resulted in the generation of the event message. Possible values are CFE_EVS_SET_FILTER_CC, CFE_EVS_ENABLE_APP_EVENT_TYPE_CC, CFE_EVS_DISABLE_APP↩
_EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENTS_CC, CFE_EVS_DISABLE_APP_EVENTS_CC, CFE_EV↩
S_RESET_APP_COUNTER_CC, CFE_EVS_RESET_FILTER_CC, CFE_EVS_RESET_ALL_FILTERS_CC, CFE_E↩
VS_ADD_EVENT_FILTER_CC, or CFE_EVS_DELETE_EVENT_FILTER_CC.

Definition at line 157 of file cfe_evs_events.h.

39.27.1.12 CFE_EVS_ERR_CC_EID

```
#define CFE_EVS_ERR_CC_EID 15
```

'Invalid command code – ID = 0x%08x, CC = %d'

Event Message 'Invalid command code – ID = 0x%08x, CC = %d'

Type: ERROR

Cause:

This event message is generated when a message with the CFE_EVS_CMD_MID message ID has arrived but whose Command Code is not one of the specified accepted command codes specified. This problem is most likely to occur when:

1. A Message ID meant for another Application became corrupted and was set equal to CFE_EVS_CMD_MID.

2. The Command Code field in the Message became corrupted.

3. The command database at the ground station has been corrupted.

The ID field in the event message specifies the Message ID (in hex) and the CC field specifies the Command Code (in decimal) found in the message.

Definition at line 278 of file cfe_evs_events.h.

39.27.1.13 CFE_EVS_ERR_CRDATFILE_EID

#define CFE_EVS_ERR_CRDATFILE_EID 13

'Write App Data Command Error: OS_creat = 0x%08X, filename = %s'

Event Message 'Write App Data Command Error: OS_creat = 0x%08X, filename = %s'

Type: ERROR

Cause:

This event message is generated when a filesystem error occurred when attempting to create the file that is to hold the event registry data.

The message text identifies the registry filename and specifies the return value, in hex, from the system function call. The expected return value is a file handle, which in this case should be a relatively small positive number. Error codes are negative.

Definition at line 258 of file cfe_evs_events.h.

39.27.1.14 CFE_EVS_ERR_CRLOGFILE_EID

#define CFE_EVS_ERR_CRLOGFILE_EID 3

'Write Log File Command Error: OS_creat = 0x%08X, filename = %s'

Event Message 'Write Log File Command Error: OS_creat = 0x%08X, filename = %s'

Type: ERROR

Cause:

This event message is generated when a filesystem error occurred when attempting to create the file that is to hold the event message log.

The message text identifies the event log filename and specifies the return value, in hex, from the system function call. The expected return value is a file handle, which in this case should be a relatively small positive number. Error codes are negative.

Definition at line 104 of file cfe_evs_events.h.

39.27.1.15 CFE_EVS_ERR_EVTIDNOREGS_EID

`#define CFE_EVS_ERR_EVTIDNOREGS_EID 6`

`'%s Event ID %d not registered for filtering:  CC = %lu'`

Event Message `'%s Event ID %d not registered for filtering:  CC = %lu'`

Type: ERROR

Cause:

This event message is generated when the specified command identifies an Application and Event ID combination that is not found in the Events Registry.

The `%s` string contains the command specified Application Name the `Event ID` field identifies the command specified EventID (in decimal) that was not found in the Events Registry. The `CC` field specifies the Command Code whose processing generated the event message. It can be equal to either CFE_EVS_SET_FILTER_CC, CFE_EVS_RESE←↩ T_FILTER_CC, or CFE_EVS_DELETE_EVENT_FILTER_CC.

Definition at line 140 of file cfe_evs_events.h.

39.27.1.16 CFE_EVS_ERR_ILLAPPIDRANGE_EID

`#define CFE_EVS_ERR_ILLAPPIDRANGE_EID 8`

`'Illegal application ID %d retrieved for %s:  CC = %lu'`

Event Message `'Illegal application ID %d retrieved for %s:  CC = %lu'`

Type: ERROR

Cause:

This event message is generated when the specified command identifies an Application whose name is found in the Events Registry but does not appear to be properly registered with the cFE Executive Services.

The `CC` field contains the Command Code whose processing resulted in the generation of the event message. Possible values are CFE_EVS_SET_FILTER_CC, CFE_EVS_ENABLE_APP_EVENT_TYPE_CC, CFE_EVS_DISABLE_APP←↩ _EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENTS_CC, CFE_EVS_DISABLE_APP_EVENTS_CC, CFE_EV←↩ S_RESET_APP_COUNTER_CC, CFE_EVS_RESET_FILTER_CC, CFE_EVS_RESET_ALL_FILTERS_CC, CFE_E←↩ VS_ADD_EVENT_FILTER_CC, or CFE_EVS_DELETE_EVENT_FILTER_CC.

Definition at line 174 of file cfe_evs_events.h.

39.27.1.17   CFE_EVS_ERR_ILLEGALFMTMOD_EID

```
#define CFE_EVS_ERR_ILLEGALFMTMOD_EID 10
```

```
'Set Event Format Mode Command:  Invalid Event Format Mode = 0x%02x'
```

Event Message `'Set Event Format Mode Command:  Invalid Event Format Mode = 0x%02x'`

Type: ERROR

Cause:

This event message is generated when a "Set Event Format Mode" command message has arrived and the CFE_↩
EVS_SetLogMode_Payload_t::LogMode field is equal to neither CFE_EVS_MsgFormat_SHORT or CFE_EVS_Msg↩
Format_LONG. These are the only allowed values for the mode field.

The `Mode` field in the event message identifies the Mode value (in hex) that was found in the message.

Definition at line 208 of file cfe_evs_events.h.

39.27.1.18   CFE_EVS_ERR_INVALID_BITMASK_EID

```
#define CFE_EVS_ERR_INVALID_BITMASK_EID 40
```

```
'Bit Mask = 0x%X out of range:  CC = %lu'
```

Event Message `'Bit Mask = 0x%X out of range:  CC = %lu'`

Type: ERROR

Cause:

This event message is generated when the bit mask passed in is equal to zero or greater than 0x0F, because a bit mask
of zero does nothing, and a bitmask of greater than 0x0F is invalid.

Definition at line 641 of file cfe_evs_events.h.

39.27.1.19 CFE_EVS_ERR_LOGMODE_EID

`#define CFE_EVS_ERR_LOGMODE_EID 39`

`'Set Log Mode Command Error:  Log Mode = %d'`

Event Message `'Set Log Mode Command Error:  Log Mode = %d`

Type: ERROR

Cause:

This event message is generated when a "Set Log Mode" command is received that specifies an invalid Log Mode command argument.

The event text identifies the invalid Log Mode command argument. Valid Log Mode command arguments are: CFE_↩ EVS_LOG_OVERWRITE or CFE_EVS_LOG_DISCARD.

Definition at line 629 of file cfe_evs_events.h.

39.27.1.20 CFE_EVS_ERR_MAXREGSFILTER_EID

`#define CFE_EVS_ERR_MAXREGSFILTER_EID 11`

`'Add Filter Command:  number of registered filters has reached max = %d'`

Event Message `'Add Filter Command:  number of registered filters has reached max = %d'`

Type: ERROR

Cause:

This event message is generated upon receipt of an "Add Filter" command and the specified Application has already reached the maximum number of filters allowed (CFE_PLATFORM_EVS_MAX_EVENT_FILTERS).

The `max` field in the event message identifies the maximum number of event filters allowed per Application. This value should be equal to the configuration parameter CFE_PLATFORM_EVS_MAX_EVENT_FILTERS.

Definition at line 225 of file cfe_evs_events.h.

39.27.1.21   CFE_EVS_ERR_MSGID_EID

#define CFE_EVS_ERR_MSGID_EID 5

'Invalid command packet, Message ID = 0x%08X'

Event Message 'Invalid command packet, Message ID = 0x%08X'

Type: ERROR

Cause:

This event message is generated when a message has arrived on the cFE Event Services Application's Message Pipe that has a Message ID that is neither CFE_EVS_CMD_MID or CFE_EVS_SEND_HK_MID. Most likely, the cFE Software Bus routing table has become corrupt and is sending messages targeted for other Applications to the cFE Event Services Application.

The ID field in the event message identifies the message ID (in hex) that was found in the message.

Definition at line 123 of file cfe_evs_events.h.

39.27.1.22   CFE_EVS_ERR_NOAPPIDFOUND_EID

#define CFE_EVS_ERR_NOAPPIDFOUND_EID 9

'Unable to retrieve application ID for %s: CC = %lu'

Event Message 'Unable to retrieve application ID for %s: CC = %lu'

Type: ERROR

Cause:

This event message is generated when the specified command contains an Application name that is apparently found in the Events Registry but does not appear to be registered with the cFE Executive Services.

The CC field contains the Command Code whose processing resulted in the generation of the event message. Possible values are CFE_EVS_SET_FILTER_CC, CFE_EVS_ENABLE_APP_EVENT_TYPE_CC, CFE_EVS_DISABLE_APP↩ _EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENTS_CC, CFE_EVS_DISABLE_APP_EVENTS_CC, CFE_EV↩ S_RESET_APP_COUNTER_CC, CFE_EVS_RESET_FILTER_CC, CFE_EVS_RESET_ALL_FILTERS_CC, CFE_E↩ VS_ADD_EVENT_FILTER_CC, or CFE_EVS_DELETE_EVENT_FILTER_CC.

Definition at line 191 of file cfe_evs_events.h.

39.27.1.23 CFE_EVS_ERR_UNREGISTERED_EVS_APP

```
#define CFE_EVS_ERR_UNREGISTERED_EVS_APP 41
```

'App %s not registered with Event Services. Unable to send event'

Event Message 'App %s not registered with Event Services. Unable to send event'

Type: ERROR

Cause:

This event message is generated when an event message has been requested to be sent by an Application that has not registered itself with cFE Event Services.

Definition at line 653 of file cfe_evs_events.h.

39.27.1.24 CFE_EVS_ERR_WRDATFILE_EID

```
#define CFE_EVS_ERR_WRDATFILE_EID 12
```

'Write App Data Command Error: OS_write = 0x%08X, filename = %s'

Event Message 'Write App Data Command Error: OS_write = 0x%08X, filename = %s'

Type: ERROR

Cause:

This event message is generated when a filesystem error occurred while writing the contents of the event registry to a file.

The message text identifies the registry filename and specifies the return value, in hex, from the system function call. The expected return value is the number of bytes written, which in this case should be equal to the size of a CFE_EV←↩ S_AppDataFile_t structure. Error codes are negative.

Definition at line 242 of file cfe_evs_events.h.

39.27.1.25   CFE_EVS_ERR_WRLOGFILE_EID

#define CFE_EVS_ERR_WRLOGFILE_EID 2

'Write Log File Command Error: OS_write = 0x%08X, filename = %s'

Event Message 'Write Log File Command Error: OS_write = 0x%08X, filename = %s'

Type: ERROR

Cause:

This event message is generated when a filesystem error occurred while writing the contents of the event message log to a file.

The message text identifies the event log filename and specifies the return value, in hex, from the system function call. The expected return value is the number of bytes written, which in this case should be equal to the size of a CFE_EVS_LongEventTlm_t structure. Error codes are negative.

Definition at line 88 of file cfe_evs_events.h.

39.27.1.26   CFE_EVS_EVT_FILTERED_EID

#define CFE_EVS_EVT_FILTERED_EID 37

'Add Filter Command:AppName = %s, EventID = 0x%08x is already registered for
filtering'

Event Message 'Add Filter Command:AppName = %s, EventID = 0x%08x is already registered
           for filtering'

Type: ERROR

Cause:

This event message is generated when an "Add Filter" command was received specifying an Event ID that has already had a filter added.

The AppName field identifies the Application whose filter was to be added and the EventID field identifies, in hex, the Event ID that the command was trying to add a filter for.

Definition at line 600 of file cfe_evs_events.h.

39.27.1.27 CFE_EVS_FILTER_MAX_EID

#define CFE_EVS_FILTER_MAX_EID 42

'Max filter count reached, AppName = %s, EventID = 0x%08x: Filter locked until reset'

Event Message 'Max filter count reached, AppName = %s, EventID = 0x%08x: Filter locked until reset'

Type: INFORMATIONAL

Cause:

This event message is generated when the filtering count for a specific App and Event ID reaches CFE_EVS_MAX_↩ FILTER_COUNT The filtered event will no longer be received until the reset counter is reset via a "Reset an Event Filter for an Application" or a "Reset All Event Filters for an Application"

The AppName field identifies the Application and the EventID field identifies, in hex, the Event ID for the filter whose maxium was reached.

Definition at line 670 of file cfe_evs_events.h.

39.27.1.28 CFE_EVS_LEN_ERR_EID

#define CFE_EVS_LEN_ERR_EID 43

'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

Event Message 'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

Type: ERROR

Cause:

This event message is generated when a message with the CFE_EVS_CMD_MID message ID has arrived but whose packet length does not match the expected length for the specified command code.

The ID field in the event message specifies the Message ID (in hex), the CC field specifies the Command Code (in decimal), the Exp Len field specified the Expected Length (in decimal), and Len specifies the message Length (in decimal) found in the message.

Definition at line 688 of file cfe_evs_events.h.

39.27.1.29   CFE_EVS_LOGMODE_EID

#define CFE_EVS_LOGMODE_EID 38

'Set Log Mode Command Error: Log Mode = %d'

Event Message 'Set Log Mode Command Error: Log Mode = %d'

Type: DEBUG

Cause:

This event message is generated when a "Set Log Mode" command is completed successfully.

The event text identifies the Log Mode command argument. Valid Log Mode command arguments are: CFE_EVS_L↩
OG_OVERWRITE or CFE_EVS_LOG_DISCARD.

Definition at line 614 of file cfe_evs_events.h.

39.27.1.30   CFE_EVS_MAX_EID

#define CFE_EVS_MAX_EID 43

Definition at line 45 of file cfe_evs_events.h.

39.27.1.31   CFE_EVS_NO_LOGCLR_EID

#define CFE_EVS_NO_LOGCLR_EID 35

'Clear Log Command: Event Log is Disabled'

Event Message 'Clear Log Command: Event Log is Disabled'

Type: ERROR

Cause:

This event message is generated upon receipt of a "Clear Log" command when the use of the Event Log has been
disabled. To enable the Event Log, the cFE code must be compiled for the target with the **CFE_PLATFORM_EVS_**↩
LOG_ON macro defined. The EVS task must also succeed during task initialization in acquiring a pointer to the cFE
reset area and in the creation of a serializing semaphore to control access to the Event Log.

Definition at line 568 of file cfe_evs_events.h.

39.27.1.32 CFE_EVS_NO_LOGSET_EID

`#define CFE_EVS_NO_LOGSET_EID 34`

`'Set Log Mode Command:  Event Log is Disabled'`

Event Message `'Set Log Mode Command:  Event Log is Disabled'`

Type: ERROR

Cause:

This event message is generated upon receipt of a "Set Log Mode" command when the use of the Event Log has been disabled. To enable the Event Log, the cFE code must be compiled for the target with the **CFE_PLATFORM_EVS_↩ LOG_ON** macro defined. The EVS task must also succeed during task initialization in acquiring a pointer to the cFE reset area and in the creation of a serializing semaphore to control access to the Event Log.

Definition at line 551 of file cfe_evs_events.h.

39.27.1.33 CFE_EVS_NO_LOGWR_EID

`#define CFE_EVS_NO_LOGWR_EID 36`

`'Write Log Command:  Event Log is Disabled'`

Event Message `'Write Log Command:  Event Log is Disabled'`

Type: ERROR

Cause:

This event message is generated upon receipt of a "Write Log" command when the use of the Event Log has been disabled. To enable the Event Log, the cFE code must be compiled for the target with the **CFE_PLATFORM_EVS_↩ LOG_ON** macro defined. The EVS task must also succeed during task initialization in acquiring a pointer to the cFE reset area and in the creation of a serializing semaphore to control access to the Event Log.

Definition at line 585 of file cfe_evs_events.h.

39.27.1.34   CFE_EVS_NOOP_EID

#define CFE_EVS_NOOP_EID 0 /* Noop event identifier */

'No-op command'

Event Message 'No-op command'

Type: INFORMATION

Cause:

This event message is always automatically issued in response to a cFE Event Services NO-OP command

Definition at line 59 of file cfe_evs_events.h.

39.27.1.35   CFE_EVS_RSTALLFILTER_EID

#define CFE_EVS_RSTALLFILTER_EID 29

'Reset All Filters Command Received with AppName = %s'

Event Message 'Reset All Filters Command Received with AppName = %s'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Reset Application Event Message Filters" command.

The AppName field identifies the Application whose entire set of Event Filters has been reset.

Definition at line 475 of file cfe_evs_events.h.

39.27.1.36 CFE_EVS_RSTCNT_EID

#define CFE_EVS_RSTCNT_EID 16

'Reset Counters Command Received'

Event Message 'Reset Counters Command Received'

Type: DEBUG

Cause:

This event message is always automatically issued in response to a cFE Event Services Reset Counters command

Definition at line 290 of file cfe_evs_events.h.

39.27.1.37 CFE_EVS_RSTEVTCNT_EID

#define CFE_EVS_RSTEVTCNT_EID 27

'Reset Event Counter Command Received with AppName = %s'

Event Message 'Reset Event Counter Command Received with AppName = %s'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Reset Application Event Counter" command.

The AppName field identifies the Application whose Event Counter has been reset.

Definition at line 448 of file cfe_evs_events.h.

39.27.1.38   CFE_EVS_RSTFILTER_EID

#define CFE_EVS_RSTFILTER_EID 28

'Reset Filter Command Received with AppName = %s, EventID = 0x%08x'

Event Message 'Reset Filter Command Received with AppName = %s, EventID = 0x%08x'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Reset Application Event Message Filter" command.

The AppName field identifies the Application whose Event Message Filter has been reset and the EventID field identifies the specific event message whose filter has been reset.

Definition at line 462 of file cfe_evs_events.h.

39.27.1.39   CFE_EVS_SETEVTFMTMOD_EID

#define CFE_EVS_SETEVTFMTMOD_EID 22

'Set Event Format Mode Command Received with Mode = 0x%02x'

Event Message 'Set Event Format Mode Command Received with Mode = 0x%02x'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Set Event Format Mode" command.

The Mode field contains the newly chosen Event Format Mode (specified in hex). Acceptable values for this parameter are: CFE_EVS_MsgFormat_SHORT or CFE_EVS_MsgFormat_LONG

Definition at line 377 of file cfe_evs_events.h.

39.27.1.40 CFE_EVS_SETFILTERMSK_EID

#define CFE_EVS_SETFILTERMSK_EID 17

'Set Filter Mask Command Received with AppName=%s, EventID=0x%08x, Mask=0x%04x'

Event Message 'Set Filter Mask Command Received with AppName=%s, EventID=0x%08x, Mask=0x%04x'

Type: DEBUG

Cause:

This event message is issued upon successful processing of a Set Filter Mask command.

The `AppName` field identifies the Application whose Filter Mask has been changed. The `EventID` field identifies the Event whose Filter Mask has been changed. The `Mask` field identifies the new Mask value associated with the specified event.

Definition at line 305 of file cfe_evs_events.h.

39.27.1.41 CFE_EVS_STARTUP_EID

#define CFE_EVS_STARTUP_EID 1

'cFE EVS Initialized'

Event Message 'cFE EVS Initialized'

Type: INFORMATION

Cause:

This event message is always automatically issued when the Event Services Task completes its Initialization.

Definition at line 71 of file cfe_evs_events.h.

39.27.1.42   CFE_EVS_WRDAT_EID

#define CFE_EVS_WRDAT_EID 32

'Write App Data Command: %d application data entries written to %s'

Event Message 'Write App Data Command: %d application data entries written to
                %s'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Write Event Services Application Information to File" command.

The message text identifies the event log filename and specifies the number, in decimal, of events written to the file.

Definition at line 519 of file cfe_evs_events.h.

39.27.1.43   CFE_EVS_WRLOG_EID

#define CFE_EVS_WRLOG_EID 33

'Write Log File Command: %d event log entries written to %s'

Event Message 'Write Log File Command: %d event log entries written to %s'

Type: DEBUG

Cause:

This event message is generated upon successful completion of the "Write Event Log to File" command.

The message text identifies the event log filename and specifies the number, in decimal, of events written to the file.

Definition at line 534 of file cfe_evs_events.h.

39.28   cfe/fsw/cfe-core/src/inc/cfe_evs_extern_typedefs.h File Reference

```
#include "common_types.h"
```

Typedefs

- typedef uint8 CFE_EVS_MsgFormat_Enum_t

    Identifies format of log messages.
- typedef uint8 CFE_EVS_LogMode_Enum_t

    Identifies handling of log messages after storage is filled.
- typedef uint16 CFE_EVS_EventType_Enum_t

    Identifies type of event message.
- typedef uint8 CFE_EVS_EventFilter_Enum_t

    Identifies event filter schemes.
- typedef uint8 CFE_EVS_EventOutput_Enum_t

    Identifies event output port.

Enumerations

- enum CFE_EVS_MsgFormat { CFE_EVS_MsgFormat_SHORT = 0, CFE_EVS_MsgFormat_LONG = 1 }

    Label definitions associated with CFE_EVS_MsgFormat_Enum_t.
- enum CFE_EVS_LogMode { CFE_EVS_LogMode_OVERWRITE = 0, CFE_EVS_LogMode_DISCARD = 1 }

    Label definitions associated with CFE_EVS_LogMode_Enum_t.
- enum CFE_EVS_EventType { CFE_EVS_EventType_DEBUG = 1, CFE_EVS_EventType_INFORMATION = 2, CFE_EVS_EventType_ERROR = 3, CFE_EVS_EventType_CRITICAL = 4 }

    Label definitions associated with CFE_EVS_EventType_Enum_t.
- enum CFE_EVS_EventFilter { CFE_EVS_EventFilter_BINARY = 0 }

    Label definitions associated with CFE_EVS_EventFilter_Enum_t.
- enum CFE_EVS_EventOutput { CFE_EVS_EventOutput_PORT1 = 1, CFE_EVS_EventOutput_PORT2 = 2, C↩ FE_EVS_EventOutput_PORT3 = 3, CFE_EVS_EventOutput_PORT4 = 4 }

    Label definitions associated with CFE_EVS_EventOutput_Enum_t.

39.28.1   Typedef Documentation

39.28.1.1   CFE_EVS_EventFilter_Enum_t

```
typedef uint8 CFE_EVS_EventFilter_Enum_t
```

Identifies event filter schemes.

See also

    enum CFE_EVS_EventFilter

Definition at line 142 of file cfe_evs_extern_typedefs.h.

39.28.1.2   CFE_EVS_EventOutput_Enum_t

typedef uint8 CFE_EVS_EventOutput_Enum_t

Identifies event output port.

See also

>   enum CFE_EVS_EventOutput

Definition at line 178 of file cfe_evs_extern_typedefs.h.

39.28.1.3   CFE_EVS_EventType_Enum_t

typedef uint16 CFE_EVS_EventType_Enum_t

Identifies type of event message.

See also

>   enum CFE_EVS_EventType

Definition at line 121 of file cfe_evs_extern_typedefs.h.

39.28.1.4   CFE_EVS_LogMode_Enum_t

typedef uint8 CFE_EVS_LogMode_Enum_t

Identifies handling of log messages after storage is filled.

See also

>   enum CFE_EVS_LogMode

Definition at line 85 of file cfe_evs_extern_typedefs.h.

39.28.1.5   CFE_EVS_MsgFormat_Enum_t

typedef uint8 CFE_EVS_MsgFormat_Enum_t

Identifies format of log messages.

See also

>   enum CFE_EVS_MsgFormat

Definition at line 59 of file cfe_evs_extern_typedefs.h.

39.28.2   Enumeration Type Documentation

39.28.2.1   CFE_EVS_EventFilter

enum CFE_EVS_EventFilter

Label definitions associated with CFE_EVS_EventFilter_Enum_t.

Enumerator

CFE_EVS_EventFilter_BINARY	Binary event filter.

Definition at line 127 of file cfe_evs_extern_typedefs.h.

39.28.2.2 CFE_EVS_EventOutput

enum CFE_EVS_EventOutput

Label definitions associated with CFE_EVS_EventOutput_Enum_t.

Enumerator

CFE_EVS_EventOutput_PORT1	Output Port 1.
CFE_EVS_EventOutput_PORT2	Output Port 2.
CFE_EVS_EventOutput_PORT3	Output Port 3.
CFE_EVS_EventOutput_PORT4	Output Port 4.

Definition at line 148 of file cfe_evs_extern_typedefs.h.

39.28.2.3 CFE_EVS_EventType

enum CFE_EVS_EventType

Label definitions associated with CFE_EVS_EventType_Enum_t.

Enumerator

CFE_EVS_EventType_DEBUG	Events that are intended only for debugging, not nominal operations.
CFE_EVS_EventType_INFORMATION	Events that identify a state change or action that is not an error.
CFE_EVS_EventType_ERROR	Events that identify an error but are not catastrophic (e.g. - bad command.
CFE_EVS_EventType_CRITICAL	Events that identify errors that are unrecoverable autonomously.

Definition at line 91 of file cfe_evs_extern_typedefs.h.

39.28.2.4 CFE_EVS_LogMode

enum CFE_EVS_LogMode

Label definitions associated with CFE_EVS_LogMode_Enum_t.

Enumerator

CFE_EVS_LogMode_OVERWRITE	Overwrite Log Mode.
CFE_EVS_LogMode_DISCARD	Discard Log Mode.

Definition at line 65 of file cfe_evs_extern_typedefs.h.

39.28.2.5   CFE_EVS_MsgFormat

enum CFE_EVS_MsgFormat

Label definitions associated with CFE_EVS_MsgFormat_Enum_t.

Enumerator

CFE_EVS_MsgFormat_SHORT	Short Format Messages.
CFE_EVS_MsgFormat_LONG	Long Format Messages.

Definition at line 39 of file cfe_evs_extern_typedefs.h.

39.29   cfe/fsw/cfe-core/src/inc/cfe_evs_msg.h File Reference

```
#include "common_types.h"
#include "cfe_evs_extern_typedefs.h"
#include "cfe_time.h"
#include "cfe_sb.h"
#include "cfe_es.h"
```

Data Structures

- struct CFE_EVS_NoArgsCmd_t

    Command with no additional arguments.
- struct CFE_EVS_LogFileCmd_Payload_t

    Write Event Log to File Command.
- struct CFE_EVS_WriteLogDataFile_t
- struct CFE_EVS_AppDataCmd_Payload_t

    Write Event Services Application Information to File Command.
- struct CFE_EVS_WriteAppDataFile_t
- struct CFE_EVS_SetLogMode_Payload_t

    Set Event Format Mode or Set Log Mode Commands.
- struct CFE_EVS_SetLogMode_t
- struct CFE_EVS_SetEventFormatMode_Payload_t

Macros

Event Services Command Codes

- #define CFE_EVS_DISABLE_APP_EVENTS_CC 8
- #define CFE_EVS_RESET_APP_COUNTER_CC 9
- #define CFE_EVS_SET_FILTER_CC 10
- #define CFE_EVS_ENABLE_PORTS_CC 11
- #define CFE_EVS_DISABLE_PORTS_CC 12
- #define CFE_EVS_RESET_FILTER_CC 13
- #define CFE_EVS_RESET_ALL_FILTERS_CC 14
- #define CFE_EVS_ADD_EVENT_FILTER_CC 15
- #define CFE_EVS_DELETE_EVENT_FILTER_CC 16
- #define CFE_EVS_WRITE_APP_DATA_FILE_CC 17
- #define CFE_EVS_WRITE_LOG_DATA_FILE_CC 18
- #define CFE_EVS_SET_LOG_MODE_CC 19
- #define CFE_EVS_CLEAR_LOG_CC 20

Typedefs

- typedef CFE_EVS_NoArgsCmd_t CFE_EVS_Noop_t
- typedef CFE_EVS_NoArgsCmd_t CFE_EVS_ResetCounters_t
- typedef CFE_EVS_NoArgsCmd_t CFE_EVS_ClearLog_t
- typedef CFE_EVS_BitMaskCmd_t CFE_EVS_EnablePorts_t
- typedef CFE_EVS_BitMaskCmd_t CFE_EVS_DisablePorts_t
- typedef CFE_EVS_BitMaskCmd_t CFE_EVS_EnableEventType_t
- typedef CFE_EVS_BitMaskCmd_t CFE_EVS_DisableEventType_t
- typedef CFE_EVS_AppNameCmd_t CFE_EVS_EnableAppEvents_t
- typedef CFE_EVS_AppNameCmd_t CFE_EVS_DisableAppEvents_t
- typedef CFE_EVS_AppNameCmd_t CFE_EVS_ResetAppCounter_t
- typedef CFE_EVS_AppNameCmd_t CFE_EVS_ResetAllFilters_t
- typedef CFE_EVS_AppNameEventIDCmd_t CFE_EVS_ResetFilter_t
- typedef CFE_EVS_AppNameEventIDCmd_t CFE_EVS_DeleteEventFilter_t
- typedef CFE_EVS_AppNameBitMaskCmd_t CFE_EVS_EnableAppEventType_t
- typedef CFE_EVS_AppNameBitMaskCmd_t CFE_EVS_DisableAppEventType_t
- typedef CFE_EVS_AppNameEventIDMaskCmd_t CFE_EVS_AddEventFilter_t
- typedef CFE_EVS_AppNameEventIDMaskCmd_t CFE_EVS_SetFilter_t
- typedef CFE_EVS_LongEventTlm_t CFE_EVS_Packet_t
- typedef CFE_EVS_HousekeepingTlm_t CFE_EVS_TlmPkt_t

39.29.1   Macro Definition Documentation

39.29.1.1   CFE_EVS_ADD_EVENT_FILTER_CC

```
#define CFE_EVS_ADD_EVENT_FILTER_CC 15
```

Name Add Application Event Filter

Description

This command adds the given filter for the given application identifier and event identifier. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_AddEvtFltr

Command Structure

> CFE_EVS_AppNameEventIDMaskCmd_t

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
> - The generation of CFE_EVS_ADDFILTER_EID debug event message

Error Conditions

> This command may fail for the following reason(s):
>
> - Invalid SB message (command) length
> - Application selected is not registered to receive Event Service
> - Application ID is out of range
>   Evidence of failure may be found in the following telemetry:
>   - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
>   - An Error specific event message

Criticality

> None.

See also

> CFE_EVS_SET_FILTER_CC, CFE_EVS_RESET_FILTER_CC, CFE_EVS_RESET_ALL_FILTERS_CC, CFE↩
> _EVS_DELETE_EVENT_FILTER_CC

Definition at line 720 of file cfe_evs_msg.h.

39.29.1.2 CFE_EVS_CLEAR_LOG_CC

```
#define CFE_EVS_CLEAR_LOG_CC 20
```

Name Clear Event Log

Description

> This command clears the contents of the local event log.

Command Mnemonic(s) $sc_$cpu_EVS_ClrLog

Command Structure

   [CFE_TBL_NoArgsCmd_t](#)

Command Verification

   Successful execution of this command may be verified with the following telemetry:

   • **$sc_$cpu_EVS_CMDPC -** command execution counter will increment

Error Conditions

   This command may fail for the following reason(s):

   • Invalid SB message (command) length

     Evidence of failure may be found in the following telemetry:

     – **$sc_$cpu_EVS_CMDEC -** command error counter will increment

     – An Error specific event message

Criticality

   Clearing the local event log is not particularly hazardous, as the result may be making available space to record valuable event data. However, inappropriately clearing the local event log could result in a loss of critical information. Note: the event log is a back-up log to the on-board recorder.

See also

   [CFE_EVS_WRITE_LOG_DATA_FILE_CC](#), [CFE_EVS_SET_LOG_MODE_CC](#)

Definition at line 897 of file cfe_evs_msg.h.

39.29.1.3   CFE_EVS_CRITICAL_BIT


```
#define CFE_EVS_CRITICAL_BIT 0x0008
```

Definition at line 904 of file cfe_evs_msg.h.

39.29.1.4   CFE_EVS_DEBUG_BIT


```
#define CFE_EVS_DEBUG_BIT 0x0001
```

Definition at line 901 of file cfe_evs_msg.h.

39.29.1.5 CFE_EVS_DELETE_EVENT_FILTER_CC

```
#define CFE_EVS_DELETE_EVENT_FILTER_CC 16
```

Name Delete Application Event Filter

Description

This command removes the given filter for the given application identifier and event identifier. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_DelEvtFltr

Command Structure

CFE_EVS_AppNameEventIDCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_DELFILTER_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Application selected is not registered to receive Event Service
- Application ID is out of range
  Evidence of failure may be found in the following telemetry:
  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

None.

See also

CFE_EVS_SET_FILTER_CC, CFE_EVS_RESET_FILTER_CC, CFE_EVS_RESET_ALL_FILTERS_CC, CFE↩_EVS_ADD_EVENT_FILTER_CC

Definition at line 756 of file cfe_evs_msg.h.

39.29.1.6   CFE_EVS_DISABLE_APP_EVENT_TYPE_CC

```
#define CFE_EVS_DISABLE_APP_EVENT_TYPE_CC 6
```

[Name](#) Disable Application Event Type

Description

> This command disables the command specified event type for the command specified application, preventing the application from sending event messages of the command specified event type through Event Service. An Event Type is defined to be a classification of an Event Message such as debug, informational, critical, and error. Note: In order for this command to take effect, applications must be registered for Event Service.

[Command Mnemonic(s)](#) $sc_$cpu_EVS_DisAppEvtType, $sc_$cpu_EVS_DisAppEvtTypeMask

Command Structure

> [CFE_EVS_AppNameBitMaskCmd_t](#) The following bit positions apply to structure member named 'BitMask'. Bit 0 - Debug Bit 1 - Informational Bit 2 - Error Bit 3 - Critical A one in a bit position means the event type will be disabled (or filtered) for the specified application. A zero in a bit position means the filtering state is unchanged for the specified application.

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
> - The generation of [CFE_EVS_DISAPPENTTYPE_EID](#) debug event message
> - The clearing of the Event Type Active Flag in The Event Type Active Flag in EVS App Data File

Error Conditions

> This command may fail for the following reason(s):
>
> - Invalid Event Type Selection
>   Evidence of failure may be found in the following telemetry:
>   - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
>   - An Error specific event message

Criticality

> Disabling an application's event type is not particularly hazardous, as the result may be shutting off unnecessary event messages and possible event flooding of the system. However, inappropriately disabling an application's event type could result in a loss of critical information and missed behavior for the ground system.

See also

> [CFE_EVS_ENABLE_EVENT_TYPE_CC](#), [CFE_EVS_DISABLE_EVENT_TYPE_CC](#), [CFE_EVS_ENABLE_AP↩](#) [P_EVENT_TYPE_CC](#), [CFE_EVS_ENABLE_APP_EVENTS_CC](#), [CFE_EVS_DISABLE_APP_EVENTS_CC](#)

Definition at line 370 of file cfe_evs_msg.h.

39.29.1.7 CFE_EVS_DISABLE_APP_EVENTS_CC

```
#define CFE_EVS_DISABLE_APP_EVENTS_CC 8
```

Name Disable Event Services for an Application

Description

This command disables the command specified application from sending events through Event Service. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_DisAppEvGen

Command Structure

CFE_EVS_AppNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_DISAPPEVT_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Application selected is not registered to receive Event Service
- Application ID is out of range

  Evidence of failure may be found in the following telemetry:

  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

Disabling an application's events is not particularly hazardous, as the result may be shutting off unnecessary event messages and possible event flooding of the system. However, inappropriately disabling an application's events could result in a loss of critical information and missed behavior for the ground system.

See also

CFE_EVS_ENABLE_EVENT_TYPE_CC, CFE_EVS_DISABLE_EVENT_TYPE_CC, CFE_EVS_ENABLE_AP←
P_EVENT_TYPE_CC, CFE_EVS_DISABLE_APP_EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENTS_CC

Definition at line 452 of file cfe_evs_msg.h.

39.29.1.8   CFE_EVS_DISABLE_EVENT_TYPE_CC

```
#define CFE_EVS_DISABLE_EVENT_TYPE_CC 3
```

Name Disable Event Type

Description

This command disables the command specified Event Type preventing event messages of this type to be sent through Event Service. An Event Type is defined to be a classification of an Event Message such as debug, informational, error and critical. This command is a global disable of a particular event type, it applies to all applications.

Command Mnemonic(s) $sc_$cpu_EVS_DisEventType, $sc_$cpu_EVS_DisEventTypeMask

Command Structure

CFE_EVS_BitMaskCmd_t The following bit positions apply to structure member named 'BitMask'. Bit 0 - Debug Bit 1 - Informational Bit 2 - Error Bit 3 - Critical A one in a bit position means the event type will be disabled (or filtered). A zero in a bit position means the filtering state is unchanged.

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment

- The generation of CFE_EVS_DISEVTTYPE_EID debug message

Error Conditions

This command may fail for the following reason(s):

- Invalid Event Type selection

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_EVS_CMDEC -** command error counter will increment

- An Error specific event message

Criticality

Disabling an event type is not particularly hazardous, as the result may be shutting off unnecessary event messages and possible event flooding of the system. However, inappropriately disabling an event type could result in a loss of critical information and missed behavior for the ground system.

See also

CFE_EVS_ENABLE_EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENT_TYPE_CC, CFE_EVS_DISABL↩
E_APP_EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENTS_CC, CFE_EVS_DISABLE_APP_EVENTS_CC

Definition at line 216 of file cfe_evs_msg.h.

39.29.1.9 CFE_EVS_DISABLE_PORTS_CC

```
#define CFE_EVS_DISABLE_PORTS_CC 12
```

Name Disable Event Services Output Ports

Description

This command disables the specified port from outputting event messages.

Command Mnemonic(s) $sc_$cpu_EVS_DisPort, $sc_$cpu_EVS_DisPortMask

Command Structure

CFE_EVS_BitMaskCmd_t The following bit positions apply to structure member named 'BitMask'. Bit 0 - Port 1 Bit 1 - Port 2 Bit 2 - Port 3 Bit 3 - Port 4 A one in a bit position means the port will be disabled. A zero in a bit position means the port state is unchanged.

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_DISPORT_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Invalid PORT selection
  Evidence of failure may be found in the following telemetry:
  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

None.

See also

CFE_EVS_ENABLE_PORTS_CC

Definition at line 612 of file cfe_evs_msg.h.

39.29.1.10   CFE_EVS_ENABLE_APP_EVENT_TYPE_CC

#define CFE_EVS_ENABLE_APP_EVENT_TYPE_CC 5

Name   Enable Application Event Type

Description

This command enables the command specified event type for the command specified application, allowing the application to send event messages of the command specified event type through Event Service. An Event Type is defined to be a classification of an Event Message such as debug, informational, critical, and error. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_EnaAppEvtType, $sc_$cpu_EVS_EnaAppEvtTypeMask

Command Structure

CFE_EVS_AppNameBitMaskCmd_t The following bit positions apply to structure member named 'BitMask'. Bit 0 - Debug Bit 1 - Informational Bit 2 - Error Bit 3 - Critical A one in a bit position means the event type will be enabled (or unfiltered) for the specified application. A zero in a bit position means the filtering state is unchanged for the specified application.

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_ENAAPPEVTTYPE_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid Event Type Selection
  Evidence of failure may be found in the following telemetry:
  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

Enabling an application event type is not particularly hazardous, as the result may be turning on necessary event messages and communication to the ground system. However, inappropriately enabling an application's event type could result in flooding of the ground system.

See also

CFE_EVS_ENABLE_EVENT_TYPE_CC, CFE_EVS_DISABLE_EVENT_TYPE_CC, CFE_EVS_DISABLE_AP↩
P_EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENTS_CC, CFE_EVS_DISABLE_APP_EVENTS_CC

Definition at line 318 of file cfe_evs_msg.h.

39.29.1.11 CFE_EVS_ENABLE_APP_EVENTS_CC

```
#define CFE_EVS_ENABLE_APP_EVENTS_CC 7
```

Name Enable Event Services for an Application

Description

This command enables the command specified application to send events through the Event Service. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_EnaAppEvGen

Command Structure

CFE_EVS_AppNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_ENAAPPEVT_EID debug event message
- The setting of the Active Flag in The Active Flag in EVS App Data File

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Application selected is not registered to receive Event Service
- Application ID is out of range
  Evidence of failure may be found in the following telemetry:

  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

Enabling an application events is not particularly hazardous, as the result may be turning on necessary event messages and communication to the ground system. However, inappropriately enabling an application's events could result in flooding of the ground system.

See also

CFE_EVS_ENABLE_EVENT_TYPE_CC, CFE_EVS_DISABLE_EVENT_TYPE_CC, CFE_EVS_ENABLE_AP↩
P_EVENT_TYPE_CC, CFE_EVS_DISABLE_APP_EVENT_TYPE_CC, CFE_EVS_DISABLE_APP_EVENTS_↩
CC

Definition at line 411 of file cfe_evs_msg.h.

39.29.1.12   CFE_EVS_ENABLE_EVENT_TYPE_CC

#define CFE_EVS_ENABLE_EVENT_TYPE_CC 2

Name Enable Event Type

Description

> This command enables the command specified Event Type allowing event messages of this type to be sent through Event Service. An Event Type is defined to be a classification of an Event Message such as debug, informational, error and critical. This command is a global enable of a particular event type, it applies to all applications.

Command Mnemonic(s) $sc_$cpu_EVS_EnaEventType, $sc_$cpu_EVS_EnaEventTypeMask

Command Structure

> CFE_EVS_BitMaskCmd_t The following bit positions apply to structure member named 'BitMask'. Bit 0 - Debug Bit 1 - Informational Bit 2 - Error Bit 3 - Critical A one in a bit position means the event type will be enabled (or unfiltered). A zero in a bit position means the filtering state is unchanged.

Command Verification

> Successful execution of this command may be verified with the following telemetry:

> - **$sc_$cpu_EVS_CMDPC -** command execution counter will increment

> - The generation of CFE_EVS_ENAEVTTYPE_EID debug message

Error Conditions

> This command may fail for the following reason(s):

Invalid Event Type selection

Evidence of failure may be found in the following telemetry:

> - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
> - An Error specific event message

Criticality

> Enabling an event type is not particularly hazardous, as the result may be turning on necessary event messages and communication to the ground system. However, inappropriately enabling an event type could result in flooding of the system.

See also

> CFE_EVS_DISABLE_EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENT_TYPE_CC, CFE_EVS_DISABL↩ E_APP_EVENT_TYPE_CC, CFE_EVS_ENABLE_APP_EVENTS_CC, CFE_EVS_DISABLE_APP_EVENTS_CC

Definition at line 166 of file cfe_evs_msg.h.

39.29.1.13 CFE_EVS_ENABLE_PORTS_CC

```
#define CFE_EVS_ENABLE_PORTS_CC 11
```

Name Enable Event Services Output Ports

Description

This command enables the command specified port to output event messages

Command Mnemonic(s) $sc_$cpu_EVS_EnaPort, $sc_$cpu_EVS_EnaPortMask

Command Structure

CFE_EVS_BitMaskCmd_t The following bit positions apply to structure member named 'BitMask'. Bit 0 - Port 1 Bit 1 - Port 2 Bit 2 - Port 3 Bit 3 - Port 4 A one in a bit position means the port will be enabled. A zero in a bit position means the port state is unchanged.

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_ENAPORT_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Invalid PORT selection
  Evidence of failure may be found in the following telemetry:
  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

None.

See also

CFE_EVS_DISABLE_PORTS_CC

Definition at line 572 of file cfe_evs_msg.h.

39.29.1.14   CFE_EVS_ERROR_BIT

```
#define CFE_EVS_ERROR_BIT 0x0004
```

Definition at line 903 of file cfe_evs_msg.h.

39.29.1.15   CFE_EVS_HK_TLM_LNGTH

```
#define CFE_EVS_HK_TLM_LNGTH sizeof(CFE_EVS_TlmPkt_t)
```

Definition at line 1251 of file cfe_evs_msg.h.

39.29.1.16   CFE_EVS_INFORMATION_BIT

```
#define CFE_EVS_INFORMATION_BIT 0x0002
```

Definition at line 902 of file cfe_evs_msg.h.

39.29.1.17   CFE_EVS_LOG_DISCARD

```
#define CFE_EVS_LOG_DISCARD 1
```

Definition at line 914 of file cfe_evs_msg.h.

39.29.1.18   CFE_EVS_LOG_OVERWRITE

```
#define CFE_EVS_LOG_OVERWRITE 0
```

Definition at line 913 of file cfe_evs_msg.h.

39.29.1.19 CFE_EVS_NOOP_CC

```
#define CFE_EVS_NOOP_CC 0
```

Name Event Services No-Op

Description

This command performs no other function than to increment the command execution counter. The command may be used to verify general aliveness of the Event Services task.

Command Mnemonic(s) $sc_$cpu_EVS_NOOP

Command Structure

CFE_TBL_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The CFE_EVS_NOOP_EID informational event message will be generated

Error Conditions

There are no error conditions for this command. If the Event Services receives the command, the event is sent (although it may be filtered by EVS itself) and the counter is incremented unconditionally.

Criticality

None

See also

Definition at line 80 of file cfe_evs_msg.h.

39.29.1.20 CFE_EVS_PORT1_BIT

```
#define CFE_EVS_PORT1_BIT 0x0001
```

Definition at line 907 of file cfe_evs_msg.h.

39.29.1.21   CFE_EVS_PORT2_BIT

`#define CFE_EVS_PORT2_BIT 0x0002`

Definition at line 908 of file cfe_evs_msg.h.

39.29.1.22   CFE_EVS_PORT3_BIT

`#define CFE_EVS_PORT3_BIT 0x0004`

Definition at line 909 of file cfe_evs_msg.h.

39.29.1.23   CFE_EVS_PORT4_BIT

`#define CFE_EVS_PORT4_BIT 0x0008`

Definition at line 910 of file cfe_evs_msg.h.

39.29.1.24   CFE_EVS_RESET_ALL_FILTERS_CC

`#define CFE_EVS_RESET_ALL_FILTERS_CC 14`

Name Reset All Event Filters for an Application

Description

This command resets all of the command specified applications event filters. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_RstAllFltrs

Command Structure

CFE_EVS_AppNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_RSTALLFILTER_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Application selected is not registered to receive Event Service
- Application ID is out of range

  Evidence of failure may be found in the following telemetry:

  – **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  – An Error specific event message

Criticality

None.

See also

CFE_EVS_SET_FILTER_CC, CFE_EVS_RESET_FILTER_CC, CFE_EVS_ADD_EVENT_FILTER_CC, CFE_↩
EVS_DELETE_EVENT_FILTER_CC

Definition at line 684 of file cfe_evs_msg.h.

39.29.1.25 CFE_EVS_RESET_APP_COUNTER_CC

```
#define CFE_EVS_RESET_APP_COUNTER_CC 9
```

Name Reset Application Event Counters

Description

This command sets the command specified application's event counter to zero. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_RstAppCtrs

Command Structure

CFE_EVS_AppNameCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_RSTEVTCNT_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Application selected is not registered to receive Event Service

- Application ID is out of range

  Evidence of failure may be found in the following telemetry:

  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

This command is not inherently dangerous. However, it is possible for ground systems and on-board safing procedures to be designed such that they react to changes in the counter value that is reset by this command.

See also

CFE_EVS_RESET_COUNTERS_CC

Definition at line 490 of file cfe_evs_msg.h.

39.29.1.26   CFE_EVS_RESET_COUNTERS_CC

#define CFE_EVS_RESET_COUNTERS_CC 1

Name Event Services Reset Counters

Description

This command resets the following counters within the Event Services housekeeping telemetry:

- Command Execution Counter ($sc_$cpu_EVS_CMDPC)
- Command Error Counter ($sc_$cpu_EVS_CMDEC)

Command Mnemonic(s) $sc_$cpu_EVS_ResetCtrs

Command Structure

CFE_TBL_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The CFE_EVS_RSTCNT_EID debug event message will be generated

Error Conditions

There are no error conditions for this command. If the Event Services receives the command, the event is sent (although it may be filtered by EVS) and the counter is incremented unconditionally.

Criticality

This command is not inherently dangerous. However, it is possible for ground systems and on-board safing procedures to be designed such that they react to changes in the counter values that are reset by this command.

See also

CFE_EVS_RESET_APP_COUNTER_CC

Definition at line 117 of file cfe_evs_msg.h.

39.29.1.27 CFE_EVS_RESET_FILTER_CC

```
#define CFE_EVS_RESET_FILTER_CC 13
```

[Name](#) Reset an Event Filter for an Application

Description

This command resets the command specified application's event filter for the command specified event ID. Note: In order for this command to take effect, applications must be registered for Event Service.

[Command Mnemonic(s)](#) $sc_$cpu_EVS_RstBinFltrCtr

Command Structure

[CFE_EVS_AppNameEventIDCmd_t](#)

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of [CFE_EVS_RSTFILTER_EID](#) debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Application selected is not registered to receive Event Service
- Application ID is out of range

  Evidence of failure may be found in the following telemetry:

  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

None.

See also

[CFE_EVS_SET_FILTER_CC](#), [CFE_EVS_RESET_ALL_FILTERS_CC](#), [CFE_EVS_ADD_EVENT_FILTER_CC](#), [CFE_EVS_DELETE_EVENT_FILTER_CC](#)

Definition at line 648 of file cfe_evs_msg.h.

39.29.1.28   CFE_EVS_SET_EVENT_FORMAT_MODE_CC

#define CFE_EVS_SET_EVENT_FORMAT_MODE_CC 4

Name Set Event Format Mode

Description

This command sets the event format mode to the command specified value. The event format mode may be either short or long. A short event format detaches the Event Data from the event message and only includes the following information in the event packet: Processor ID, Application ID, Event ID, and Event Type. Refer to section 5.3.3.4 for a description of the Event Service event packet contents. Event Data is defined to be data describing an Event that is supplied to the cFE Event Service. ASCII text strings are used as the primary format for Event Data because heritage ground systems use string compares as the basis for their automated alert systems. Two systems, ANSR and SERS were looked at for interface definitions. The short event format is used to accommodate experiences with limited telemetry bandwidth. The long event format includes all event information included within the short format along with the Event Data.

Command Mnemonic(s) $sc_$cpu_EVS_SetEvtFmt

Command Structure

CFE_EVS_SetLogMode_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment

- The generation of CFE_EVS_SETEVTFMTMOD_EID debug message

Error Conditions

This command may fail for the following reason(s): Invalid SB message (command) length Invalid MODE selection

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_EVS_CMDEC -** command error counter will increment

- An Error specific event message

Criticality

Setting the event format mode is not particularly hazardous, as the result may be saving necessary bandwidth. However, inappropriately setting the event format mode could result in a loss of information and missed behavior for the ground system

See also

Definition at line 265 of file cfe_evs_msg.h.

39.29.1.29 CFE_EVS_SET_FILTER_CC

```
#define CFE_EVS_SET_FILTER_CC 10
```

Name Set Application Event Filter

Description

This command sets the command specified application's event filter mask to the command specified value for the command specified event. Note: In order for this command to take effect, applications must be registered for Event Service.

Command Mnemonic(s) $sc_$cpu_EVS_SetBinFltrMask

Command Structure

CFE_EVS_AppNameEventIDMaskCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_SETFILTERMSK_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Application selected is not registered to receive Event Service
- Application ID is out of range
  Evidence of failure may be found in the following telemetry:
  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

Setting an application event filter mask is not particularly hazardous, as the result may be shutting off unnecessary event messages and possible event flooding of the system. However, inappropriately setting an application's event filter mask could result in a loss of critical information and missed behavior for the ground system or flooding of the ground system.

See also

CFE_EVS_RESET_FILTER_CC, CFE_EVS_RESET_ALL_FILTERS_CC, CFE_EVS_ADD_EVENT_FILTER_↩ CC, CFE_EVS_DELETE_EVENT_FILTER_CC

Definition at line 532 of file cfe_evs_msg.h.

39.29.1.30   CFE_EVS_SET_LOG_MODE_CC

```
#define CFE_EVS_SET_LOG_MODE_CC 19
```

Name Set Logging Mode

Description

This command sets the logging mode to the command specified value.

Command Mnemonic(s) $sc_$cpu_EVS_SetLogMode

Command Structure

CFE_EVS_SetLogMode_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_LOGMODE_EID debug event message

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length
- Invalid MODE selected

  Evidence of failure may be found in the following telemetry:

  – **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  – An Error specific event message

Criticality

Setting the event logging mode is not particularly hazardous, as the result may be saving valuable event data. However, inappropriately setting the log mode could result in a loss of critical information. Note: the event log is a back-up log to the on-board recorder.

See also

CFE_EVS_WRITE_LOG_DATA_FILE_CC, CFE_EVS_CLEAR_LOG_CC

Definition at line 862 of file cfe_evs_msg.h.

39.29.1.31   CFE_EVS_WRITE_APP_DATA_FILE_CC

```
#define CFE_EVS_WRITE_APP_DATA_FILE_CC 17
```

Name Write Event Services Application Information to File

Description

This command writes all application data to a file for all applications that have registered with the EVS. The application data includes the Application ID, Active Flag, Event Count, Event Types Active Flag, and Filter Data.

Command Mnemonic(s) $sc_$cpu_EVS_WriteAppData2File

Command Structure

CFE_EVS_WriteAppDataFile_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of CFE_EVS_WRDAT_EID debug event message
- The generation of the file written to

Error Conditions

This command may fail for the following reason(s):

- Invalid SB message (command) length

  Evidence of failure may be found in the following telemetry:

  - **$sc_$cpu_EVS_CMDEC -** command error counter will increment
  - An Error specific event message

Criticality

Writing a file is not particularly hazardous, but if proper file management is not taken, then the file system can fill up if this command is used repeatedly.

See also

CFE_EVS_WRITE_LOG_DATA_FILE_CC, CFE_EVS_SET_LOG_MODE_CC

Definition at line 792 of file cfe_evs_msg.h.

39.29.1.32   CFE_EVS_WRITE_LOG_DATA_FILE_CC

#define CFE_EVS_WRITE_LOG_DATA_FILE_CC 18

[Name](#) Write Event Log to File

Description

    This command requests the Event Service to generate a file containing the contents of the local event log.

[Command Mnemonic(s)](#) $sc_$cpu_EVS_WriteLog2File

Command Structure

    [CFE_EVS_WriteLogDataFile_t](#)

Command Verification

    Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_EVS_CMDPC -** command execution counter will increment
- The generation of [CFE_EVS_WRLOG_EID](#) debug event message

Error Conditions

    This command may fail for the following reason(s):

- Invalid SB message (command) length

      Evidence of failure may be found in the following telemetry:

    – **$sc_$cpu_EVS_CMDEC -** command error counter will increment
    – An Error specific event message

Criticality

    Writing a file is not particularly hazardous, but if proper file management is not taken, then the file system can fill up if this command is used repeatedly.

See also

    [CFE_EVS_WRITE_APP_DATA_FILE_CC](#), [CFE_EVS_SET_LOG_MODE_CC](#), [CFE_EVS_CLEAR_LOG_CC](#)

Definition at line 826 of file cfe_evs_msg.h.

39.29.2   Typedef Documentation

39.29.2.1 CFE_EVS_AddEventFilter_t

typedef CFE_EVS_AppNameEventIDMaskCmd_t CFE_EVS_AddEventFilter_t

Definition at line 1122 of file cfe_evs_msg.h.

39.29.2.2 CFE_EVS_ClearLog_t

typedef CFE_EVS_NoArgsCmd_t CFE_EVS_ClearLog_t

Definition at line 932 of file cfe_evs_msg.h.

39.29.2.3 CFE_EVS_DeleteEventFilter_t

typedef CFE_EVS_AppNameEventIDCmd_t CFE_EVS_DeleteEventFilter_t

Definition at line 1072 of file cfe_evs_msg.h.

39.29.2.4 CFE_EVS_DisableAppEvents_t

typedef CFE_EVS_AppNameCmd_t CFE_EVS_DisableAppEvents_t

Definition at line 1046 of file cfe_evs_msg.h.

39.29.2.5 CFE_EVS_DisableAppEventType_t

typedef CFE_EVS_AppNameBitMaskCmd_t CFE_EVS_DisableAppEventType_t

Definition at line 1097 of file cfe_evs_msg.h.

39.29.2.6 CFE_EVS_DisableEventType_t

typedef CFE_EVS_BitMaskCmd_t CFE_EVS_DisableEventType_t

Definition at line 1022 of file cfe_evs_msg.h.

39.29.2.7   CFE_EVS_DisablePorts_t

typedef CFE_EVS_BitMaskCmd_t CFE_EVS_DisablePorts_t

Definition at line 1020 of file cfe_evs_msg.h.

39.29.2.8   CFE_EVS_EnableAppEvents_t

typedef CFE_EVS_AppNameCmd_t CFE_EVS_EnableAppEvents_t

Definition at line 1045 of file cfe_evs_msg.h.

39.29.2.9   CFE_EVS_EnableAppEventType_t

typedef CFE_EVS_AppNameBitMaskCmd_t CFE_EVS_EnableAppEventType_t

Definition at line 1096 of file cfe_evs_msg.h.

39.29.2.10   CFE_EVS_EnableEventType_t

typedef CFE_EVS_BitMaskCmd_t CFE_EVS_EnableEventType_t

Definition at line 1021 of file cfe_evs_msg.h.

39.29.2.11   CFE_EVS_EnablePorts_t

typedef CFE_EVS_BitMaskCmd_t CFE_EVS_EnablePorts_t

Definition at line 1019 of file cfe_evs_msg.h.

39.29.2.12   CFE_EVS_Noop_t

typedef CFE_EVS_NoArgsCmd_t CFE_EVS_Noop_t

Definition at line 930 of file cfe_evs_msg.h.

39.29.2.13   CFE_EVS_Packet_t

typedef CFE_EVS_LongEventTlm_t CFE_EVS_Packet_t

Definition at line 1247 of file cfe_evs_msg.h.

39.29.2.14   CFE_EVS_ResetAllFilters_t

typedef CFE_EVS_AppNameCmd_t CFE_EVS_ResetAllFilters_t

Definition at line 1048 of file cfe_evs_msg.h.

39.29.2.15   CFE_EVS_ResetAppCounter_t

typedef CFE_EVS_AppNameCmd_t CFE_EVS_ResetAppCounter_t

Definition at line 1047 of file cfe_evs_msg.h.

39.29.2.16   CFE_EVS_ResetCounters_t

typedef CFE_EVS_NoArgsCmd_t CFE_EVS_ResetCounters_t

Definition at line 931 of file cfe_evs_msg.h.

39.29.2.17   CFE_EVS_ResetFilter_t

typedef CFE_EVS_AppNameEventIDCmd_t CFE_EVS_ResetFilter_t

Definition at line 1071 of file cfe_evs_msg.h.

39.29.2.18   CFE_EVS_SetFilter_t

typedef CFE_EVS_AppNameEventIDMaskCmd_t CFE_EVS_SetFilter_t

Definition at line 1123 of file cfe_evs_msg.h.

39.29.2.19 CFE_EVS_TlmPkt_t

typedef CFE_EVS_HousekeepingTlm_t CFE_EVS_TlmPkt_t

Definition at line 1248 of file cfe_evs_msg.h.

39.30 cfe/fsw/cfe-core/src/inc/cfe_fs.h File Reference

```
#include "cfe_fs_extern_typedefs.h"
#include "common_types.h"
#include "cfe_time.h"
```

Macros

- #define CFE_FS_ES_ERLOG_SUBTYPE CFE_FS_SubType_ES_ERLOG
- #define CFE_FS_ES_SYSLOG_SUBTYPE CFE_FS_SubType_ES_SYSLOG
- #define CFE_FS_ES_QUERYALL_SUBTYPE CFE_FS_SubType_ES_QUERYALL
- #define CFE_FS_ES_PERFDATA_SUBTYPE CFE_FS_SubType_ES_PERFDATA
- #define CFE_FS_ES_SHELL_SUBTYPE CFE_FS_SubType_ES_SHELL
- #define CFE_FS_ES_CDS_REG_SUBTYPE CFE_FS_SubType_ES_CDS_REG
- #define CFE_FS_TBL_REG_SUBTYPE CFE_FS_SubType_TBL_REG
- #define CFE_FS_TBL_IMG_SUBTYPE CFE_FS_SubType_TBL_IMG
- #define CFE_FS_EVS_APPDATA_SUBTYPE CFE_FS_SubType_EVS_APPDATA
- #define CFE_FS_EVS_EVENTLOG_SUBTYPE CFE_FS_SubType_EVS_EVENTLOG
- #define CFE_FS_SB_PIPEDATA_SUBTYPE CFE_FS_SubType_SB_PIPEDATA
- #define CFE_FS_SB_ROUTEDATA_SUBTYPE CFE_FS_SubType_SB_ROUTEDATA
- #define CFE_FS_SB_MAPDATA_SUBTYPE CFE_FS_SubType_SB_MAPDATA
- #define CFE_FS_ES_QUERYALLTASKS_SUBTYPE CFE_FS_SubType_ES_QUERYALLTASKS

Functions

- int32 CFE_FS_ReadHeader (CFE_FS_Header_t ∗Hdr, int32 FileDes)

    Read the contents of the Standard cFE File Header.
- void CFE_FS_InitHeader (CFE_FS_Header_t ∗Hdr, const char ∗Description, uint32 SubType)

    Initializes the contents of the Standard cFE File Header.
- int32 CFE_FS_WriteHeader (int32 FileDes, CFE_FS_Header_t ∗Hdr)

    Write the specified Standard cFE File Header to the specified file.
- int32 CFE_FS_SetTimestamp (int32 FileDes, CFE_TIME_SysTime_t NewTimestamp)

    Modifies the Time Stamp field in the Standard cFE File Header for the specified file.
- bool CFE_FS_IsGzFile (const char ∗FileName)

    DEPRECATED; Determines if a file is a Gzip/compressed file.
- int32 CFE_FS_Decompress (const char ∗SourceFile, const char ∗DestinationFile)

    DEPRECATED; Decompresses the source file to the destination file.
- int32 CFE_FS_GetUncompressedFile (char ∗OutputNameBuffer, uint32 OutputNameBufferSize, const char ∗GzipFileName, const char ∗TempDir)

    DEPRECATED; Decompresses the source file to a temporary file created in the temp dir.
- int32 CFE_FS_ExtractFilenameFromPath (const char ∗OriginalPath, char ∗FileNameOnly)

    Extracts the filename from a unix style path and filename string.

39.30.1 Macro Definition Documentation

39.30.1.1 CFE_FS_ES_CDS_REG_SUBTYPE

#define CFE_FS_ES_CDS_REG_SUBTYPE CFE_FS_SubType_ES_CDS_REG

Definition at line 61 of file cfe_fs.h.

39.30.1.2 CFE_FS_ES_ERLOG_SUBTYPE

#define CFE_FS_ES_ERLOG_SUBTYPE CFE_FS_SubType_ES_ERLOG

Definition at line 56 of file cfe_fs.h.

39.30.1.3 CFE_FS_ES_PERFDATA_SUBTYPE

#define CFE_FS_ES_PERFDATA_SUBTYPE CFE_FS_SubType_ES_PERFDATA

Definition at line 59 of file cfe_fs.h.

39.30.1.4 CFE_FS_ES_QUERYALL_SUBTYPE

#define CFE_FS_ES_QUERYALL_SUBTYPE CFE_FS_SubType_ES_QUERYALL

Definition at line 58 of file cfe_fs.h.

39.30.1.5 CFE_FS_ES_QUERYALLTASKS_SUBTYPE

#define CFE_FS_ES_QUERYALLTASKS_SUBTYPE CFE_FS_SubType_ES_QUERYALLTASKS

Definition at line 69 of file cfe_fs.h.

39.30.1.6 CFE_FS_ES_SHELL_SUBTYPE

#define CFE_FS_ES_SHELL_SUBTYPE CFE_FS_SubType_ES_SHELL

Definition at line 60 of file cfe_fs.h.

39.30.1.7   CFE_FS_ES_SYSLOG_SUBTYPE

#define CFE_FS_ES_SYSLOG_SUBTYPE CFE_FS_SubType_ES_SYSLOG

Definition at line 57 of file cfe_fs.h.

39.30.1.8   CFE_FS_EVS_APPDATA_SUBTYPE

#define CFE_FS_EVS_APPDATA_SUBTYPE CFE_FS_SubType_EVS_APPDATA

Definition at line 64 of file cfe_fs.h.

39.30.1.9   CFE_FS_EVS_EVENTLOG_SUBTYPE

#define CFE_FS_EVS_EVENTLOG_SUBTYPE CFE_FS_SubType_EVS_EVENTLOG

Definition at line 65 of file cfe_fs.h.

39.30.1.10   CFE_FS_SB_MAPDATA_SUBTYPE

#define CFE_FS_SB_MAPDATA_SUBTYPE CFE_FS_SubType_SB_MAPDATA

Definition at line 68 of file cfe_fs.h.

39.30.1.11   CFE_FS_SB_PIPEDATA_SUBTYPE

#define CFE_FS_SB_PIPEDATA_SUBTYPE CFE_FS_SubType_SB_PIPEDATA

Definition at line 66 of file cfe_fs.h.

39.30.1.12   CFE_FS_SB_ROUTEDATA_SUBTYPE

#define CFE_FS_SB_ROUTEDATA_SUBTYPE CFE_FS_SubType_SB_ROUTEDATA

Definition at line 67 of file cfe_fs.h.

39.30.1.13 CFE_FS_TBL_IMG_SUBTYPE

```
#define CFE_FS_TBL_IMG_SUBTYPE CFE_FS_SubType_TBL_IMG
```

Definition at line 63 of file cfe_fs.h.

39.30.1.14 CFE_FS_TBL_REG_SUBTYPE

```
#define CFE_FS_TBL_REG_SUBTYPE CFE_FS_SubType_TBL_REG
```

Definition at line 62 of file cfe_fs.h.

39.31 cfe/fsw/cfe-core/src/inc/cfe_fs_extern_typedefs.h File Reference

```
#include "common_types.h"
```

Data Structures

- struct CFE_FS_Header_t

    Standard cFE File header structure definition.

Macros

- #define CFE_FS_HDR_DESC_MAX_LEN 32

    Max length of description field in a standard cFE File Header.
- #define CFE_FS_FILE_CONTENT_ID 0x63464531

    Magic Number for cFE compliant files (= 'cFE1')

Typedefs

- typedef uint32 CFE_FS_SubType_Enum_t

    Content descriptor for File Headers.

Enumerations

- enum CFE_FS_SubType {
  CFE_FS_SubType_ES_ERLOG = 1, CFE_FS_SubType_ES_SYSLOG = 2, CFE_FS_SubType_ES_QUERYALL
  = 3, CFE_FS_SubType_ES_PERFDATA = 4,
  CFE_FS_SubType_ES_SHELL = 5, CFE_FS_SubType_ES_CDS_REG = 6, CFE_FS_SubType_TBL_REG = 9,
  CFE_FS_SubType_TBL_IMG = 8,
  CFE_FS_SubType_EVS_APPDATA = 15, CFE_FS_SubType_EVS_EVENTLOG = 16, CFE_FS_SubType_SB↩
  _PIPEDATA = 20, CFE_FS_SubType_SB_ROUTEDATA = 21,
  CFE_FS_SubType_SB_MAPDATA = 22, CFE_FS_SubType_ES_QUERYALLTASKS = 23 }

    Label definitions associated with CFE_FS_SubType_Enum_t.

39.31.1   Macro Definition Documentation

39.31.1.1   CFE_FS_FILE_CONTENT_ID

#define CFE_FS_FILE_CONTENT_ID 0x63464531

Magic Number for cFE compliant files (= 'cFE1')

Definition at line 47 of file cfe_fs_extern_typedefs.h.

39.31.1.2   CFE_FS_HDR_DESC_MAX_LEN

#define CFE_FS_HDR_DESC_MAX_LEN 32

Max length of description field in a standard cFE File Header.

Definition at line 45 of file cfe_fs_extern_typedefs.h.

39.31.2   Typedef Documentation

39.31.2.1   CFE_FS_SubType_Enum_t

typedef uint32 CFE_FS_SubType_Enum_t

Content descriptor for File Headers.

See also

> enum CFE_FS_SubType

Definition at line 217 of file cfe_fs_extern_typedefs.h.

39.31.3   Enumeration Type Documentation

39.31.3.1   CFE_FS_SubType

enum CFE_FS_SubType

Label definitions associated with CFE_FS_SubType_Enum_t.

Enumerator

CFE_FS_SubType_ES_ERLOG	Executive Services Exception/Reset Log Type. Executive Services Exception/Reset Log File which is generated in response to a $sc_$cpu_ES_WriteERLog2File command.
CFE_FS_SubType_ES_SYSLOG	Executive Services System Log Type. Executive Services System Log File which is generated in response to a $sc_$cpu_ES_WriteSysLog2File command.
CFE_FS_SubType_ES_QUERYALL	Executive Services Information on All Applications File. Executive Services Information on All Applications File which is generated in response to a $sc_$cpu_ES_WriteAppInfo2File command.
CFE_FS_SubType_ES_PERFDATA	Executive Services Performance Data File. Executive Services Performance Analyzer Data File which is generated in response to a $sc_$cpu_ES_StopLAData command.
CFE_FS_SubType_ES_SHELL	Executive Services Shell Response File. Executive Services Shell Response Data File which is generated in response to a $sc_$cpu$_ES_Shell command.
CFE_FS_SubType_ES_CDS_REG	Executive Services Critical Data Store Registry Dump File. Executive Services Critical Data Store Registry Dump File which is generated in response to a $sc_$cpu_ES_WriteCDS2File command.
CFE_FS_SubType_TBL_REG	Table Services Registry Dump File. Table Services Registry Dump File which is generated in response to a $sc_$cpu_TBL_WriteReg2File command.
CFE_FS_SubType_TBL_IMG	Table Services Table Image File. Table Services Table Image File which is generated either on the ground or in response to a $sc_$cpu_TBL_DUMP command.
CFE_FS_SubType_EVS_APPDATA	Event Services Application Data Dump File. Event Services Application Data Dump File which is generated in response to a $sc_$cpu_EVS_WriteAppData2File command.
CFE_FS_SubType_EVS_EVENTLOG	Event Services Local Event Log Dump File. Event Services Local Event Log Dump File which is generated in response to a $sc_$cpu_EVS_WriteLog2File command.
CFE_FS_SubType_SB_PIPEDATA	Software Bus Pipe Data Dump File. Software Bus Pipe Data Dump File which is generated in response to a $sc_$cpu_SB_WritePipe2File command.
CFE_FS_SubType_SB_ROUTEDATA	Software Bus Message Routing Data Dump File. Software Bus Message Routing Data Dump File which is generated in response to a $sc_$cpu_SB_WriteRouting2File command.
CFE_FS_SubType_SB_MAPDATA	Software Bus Message Mapping Data Dump File. Software Bus Message Mapping Data Dump File which is generated in response to a $sc_$cpu_SB_WriteMap2File command.
CFE_FS_SubType_ES_QUERYALLTASKS	Executive Services Query All Tasks Data File. Executive Services Query All Tasks Data File which is generated in response to a $sc_$cpu_ES_WriteTaskInfo2File command.

Definition at line 54 of file cfe_fs_extern_typedefs.h.

39.32   cfe/fsw/cfe-core/src/inc/cfe_sb.h File Reference

```
#include "cfe_sb_extern_typedefs.h"
#include "osconfig.h"
#include "cfe_psp.h"
#include "common_types.h"
#include "cfe_mission_cfg.h"
#include "ccsds.h"
#include "cfe_time.h"
```

Data Structures

- union CFE_SB_Msg_t

    Generic Software Bus Message Type Definition.

- union CFE_SB_CmdHdr_t

    Generic Software Bus Command Header Type Definition.

- union CFE_SB_TlmHdr_t

    Generic Software Bus Telemetry Header Type Definition.

- struct CFE_SB_Qos_t

    Quality Of Service Type Definition.

- struct CFE_SB_SenderId_t

    Message Sender Identification Type Definition.

Macros

- #define CFE_SB_POLL 0

    Option used with CFE_SB_RcvMsg to request immediate pipe status.

- #define CFE_SB_PEND_FOREVER -1

    Option used with CFE_SB_RcvMsg to force a wait for next message.

- #define CFE_SB_SUB_ENTRIES_PER_PKT 20

    Configuration parameter used by SBN App.

- #define CFE_SB_SUBSCRIPTION 0

    Subtype specifier used in CFE_SB_SingleSubscriptionTlm_t by SBN App.

- #define CFE_SB_UNSUBSCRIPTION 1

    Subtype specified used in CFE_SB_SingleSubscriptionTlm_t by SBN App.

- #define CFE_SB_MSGID_WRAP_VALUE(val) ((CFE_SB_MsgId_t)(val))

    Translation macro to convert from MsgId integer values to opaque/abstract API values.

- #define CFE_SB_MSGID_UNWRAP_VALUE(mid) ((CFE_SB_MsgId_Atom_t)(mid))

    Translation macro to convert to MsgId integer values from opaque/abstract API values.

- #define CFE_SB_MSGID_RESERVED CFE_SB_MSGID_WRAP_VALUE(-1)

    Reserved value for CFE_SB_MsgId_t that will not match any valid MsgId.

- #define CFE_SB_INVALID_MSG_ID CFE_SB_MSGID_RESERVED

    A literal of the CFE_SB_MsgId_t type representing an invalid ID.

- #define CFE_SB_PKTTYPE_INVALID 0

    CFE_SB_GetPktType response if message type can not be determined

- #define CFE_SB_PKTTYPE_CMD 1

    CFE_SB_GetPktType response for command packets

- #define CFE_SB_PKTTYPE_TLM 2

    CFE_SB_GetPktType response for telemetry packets

- #define CFE_BIT(x) (1 << (x))

    Places a one at bit positions 0 - 31.

- #define CFE_SET(i, x) ((i) |= CFE_BIT(x))

    Sets bit x of i.

- #define CFE_CLR(i, x) ((i) &= ∼CFE_BIT(x))

    Clears bit x of i.

- #define CFE_TST(i, x) (((i) & CFE_BIT(x)) != 0)

    true(non zero) if bit x of i is set

- #define CFE_SB_SET_MEMADDR(msgdst, src) msgdst = (cpuaddr)src

    Set memory address within SB Message.

- #define CFE_SB_GET_MEMADDR(msgsrc) (cpuaddr)msgsrc

    Get memory address from SB Message.

- #define CFE_SB_PIPEOPTS_IGNOREMINE 0x00000001

    Messages sent by the app that owns this pipe will not be sent to this pipe.

- #define CFE_SB_CMD_HDR_SIZE (sizeof(CFE_SB_CmdHdr_t))

    Size of CFE_SB_CmdHdr_t in bytes.

- #define CFE_SB_TLM_HDR_SIZE (sizeof(CFE_SB_TlmHdr_t))

    Size of CFE_SB_TlmHdr_t in bytes.

Typedefs

- typedef uint32 CFE_SB_TimeOut_t

    CFE_SB_TimeOut_t to primitive type definition.

- typedef uint8 CFE_SB_PipeId_t

    CFE_SB_PipeId_t to primitive type definition.

- typedef CFE_SB_Msg_t ∗ CFE_SB_MsgPtr_t

    CFE_SB_MsgPtr_t defined as a pointer to an SB Message.

- typedef uint8 ∗ CFE_SB_MsgPayloadPtr_t

    CFE_SB_MsgPayloadPtr_t defined as an opaque pointer to a message Payload portion.

- typedef cpuaddr CFE_SB_ZeroCopyHandle_t

    CFE_SB_ZeroCopyHandle_t to primitive type definition.

Functions

- int32 CFE_SB_CreatePipe (CFE_SB_PipeId_t ∗PipeIdPtr, uint16 Depth, const char ∗PipeName)

    Creates a new software bus pipe.

- int32 CFE_SB_DeletePipe (CFE_SB_PipeId_t PipeId)

    Delete a software bus pipe.

- int32 CFE_SB_SetPipeOpts (CFE_SB_PipeId_t PipeId, uint8 Opts)

    Set options on a pipe.

- int32 CFE_SB_GetPipeOpts (CFE_SB_PipeId_t PipeId, uint8 ∗OptPtr)

    Get options on a pipe.

- int32 CFE_SB_GetPipeName (char ∗PipeNameBuf, size_t PipeNameSize, CFE_SB_PipeId_t PipeId)

Get the pipe name for a given id.

- int32 CFE_SB_GetPipeIdByName (CFE_SB_PipeId_t ∗PipeIdPtr, const char ∗PipeName)

    Get pipe id by pipe name.

- int32 CFE_SB_SubscribeEx (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId, CFE_SB_Qos_t Quality, uint16 MsgLim)

    Subscribe to a message on the software bus.

- int32 CFE_SB_Subscribe (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId)

    Subscribe to a message on the software bus with default parameters.

- int32 CFE_SB_SubscribeLocal (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId, uint16 MsgLim)

    Subscribe to a message while keeping the request local to a cpu.

- int32 CFE_SB_Unsubscribe (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId)

    Remove a subscription to a message on the software bus.

- int32 CFE_SB_UnsubscribeLocal (CFE_SB_MsgId_t MsgId, CFE_SB_PipeId_t PipeId)

    Remove a subscription to a message on the software bus on the current CPU.

- int32 CFE_SB_SendMsg (CFE_SB_Msg_t ∗MsgPtr)

    Send a software bus message.

- int32 CFE_SB_PassMsg (CFE_SB_Msg_t ∗MsgPtr)

    Passes a software bus message.

- int32 CFE_SB_RcvMsg (CFE_SB_MsgPtr_t ∗BufPtr, CFE_SB_PipeId_t PipeId, int32 TimeOut)

    Receive a message from a software bus pipe.

- CFE_SB_Msg_t ∗ CFE_SB_ZeroCopyGetPtr (uint16 MsgSize, CFE_SB_ZeroCopyHandle_t ∗BufferHandle)

    Get a buffer pointer to use for "zero copy" SB sends.

- int32 CFE_SB_ZeroCopyReleasePtr (CFE_SB_Msg_t ∗Ptr2Release, CFE_SB_ZeroCopyHandle_t Buffer↩
Handle)

    Release an unused "zero copy" buffer pointer.

- int32 CFE_SB_ZeroCopySend (CFE_SB_Msg_t ∗MsgPtr, CFE_SB_ZeroCopyHandle_t BufferHandle)

    Send an SB message in "zero copy" mode.

- int32 CFE_SB_ZeroCopyPass (CFE_SB_Msg_t ∗MsgPtr, CFE_SB_ZeroCopyHandle_t BufferHandle)

    Pass an SB message in "zero copy" mode.

- void CFE_SB_InitMsg (void ∗MsgPtr, CFE_SB_MsgId_t MsgId, uint16 Length, bool Clear)

    Initialize a buffer for a software bus message.

- void CFE_SB_SetMsgId (CFE_SB_MsgPtr_t MsgPtr, CFE_SB_MsgId_t MsgId)

    Sets the message ID of a software bus message.

- void CFE_SB_SetUserDataLength (CFE_SB_MsgPtr_t MsgPtr, uint16 DataLength)

    Sets the length of user data in a software bus message.

- void CFE_SB_SetTotalMsgLength (CFE_SB_MsgPtr_t MsgPtr, uint16 TotalLength)

    Sets the total length of a software bus message.

- int32 CFE_SB_SetMsgTime (CFE_SB_MsgPtr_t MsgPtr, CFE_TIME_SysTime_t Time)

    Sets the time field in a software bus message.

- void CFE_SB_TimeStampMsg (CFE_SB_MsgPtr_t MsgPtr)

    Sets the time field in a software bus message with the current spacecraft time.

- int32 CFE_SB_SetCmdCode (CFE_SB_MsgPtr_t MsgPtr, uint16 CmdCode)

    Sets the command code field in a software bus message.

- int32 CFE_SB_MessageStringSet (char ∗DestStringPtr, const char ∗SourceStringPtr, uint32 DestMaxSize, uint32 SourceMaxSize)

    Copies a string into a software bus message.

- void ∗ CFE_SB_GetUserData (CFE_SB_MsgPtr_t MsgPtr)

Get a pointer to the user data portion of a software bus message.

- CFE_SB_MsgId_t CFE_SB_GetMsgId (const CFE_SB_Msg_t *MsgPtr)

    Get the message ID of a software bus message.

- uint16 CFE_SB_GetUserDataLength (const CFE_SB_Msg_t *MsgPtr)

    Gets the length of user data in a software bus message.

- uint16 CFE_SB_GetTotalMsgLength (const CFE_SB_Msg_t *MsgPtr)

    Gets the total length of a software bus message.

- uint16 CFE_SB_GetCmdCode (CFE_SB_MsgPtr_t MsgPtr)

    Gets the command code field from a software bus message.

- CFE_TIME_SysTime_t CFE_SB_GetMsgTime (CFE_SB_MsgPtr_t MsgPtr)

    Gets the time field from a software bus message.

- uint32 CFE_SB_GetLastSenderId (CFE_SB_SenderId_t **Ptr, CFE_SB_PipeId_t PipeId)

    Retrieve the application Info of the sender for the last message.

- int32 CFE_SB_MessageStringGet (char *DestStringPtr, const char *SourceStringPtr, const char *DefaultString, uint32 DestMaxSize, uint32 SourceMaxSize)

    Copies a string out of a software bus message.

- uint16 CFE_SB_GetChecksum (CFE_SB_MsgPtr_t MsgPtr)

    Gets the checksum field from a software bus message.

- void CFE_SB_GenerateChecksum (CFE_SB_MsgPtr_t MsgPtr)

    Calculates and sets the checksum of a software bus message.

- bool CFE_SB_ValidateChecksum (CFE_SB_MsgPtr_t MsgPtr)

    Validates the checksum of a software bus message.

- bool CFE_SB_IsValidMsgId (CFE_SB_MsgId_t MsgId)

    Identifies whether a given CFE_SB_MsgId_t is valid.

- static bool CFE_SB_MsgId_Equal (CFE_SB_MsgId_t MsgId1, CFE_SB_MsgId_t MsgId2)

    Identifies whether two CFE_SB_MsgId_t values are equal.

- static CFE_SB_MsgId_Atom_t CFE_SB_MsgIdToValue (CFE_SB_MsgId_t MsgId)

    Converts a CFE_SB_MsgId_t to a normal integer.

- static CFE_SB_MsgId_t CFE_SB_ValueToMsgId (CFE_SB_MsgId_Atom_t MsgIdValue)

    Converts a normal integer into a CFE_SB_MsgId_t.

- uint32 CFE_SB_GetPktType (CFE_SB_MsgId_t MsgId)

    Identifies packet type given message ID.

Variables

- CFE_SB_Qos_t CFE_SB_Default_Qos

    Defines a default priority and reliabilty for off-board routing.

39.32.1 Macro Definition Documentation

39.32.1.1   CFE_BIT

```
#define CFE_BIT(
              x ) (1 << (x))
```

Places a one at bit positions 0 - 31.

Definition at line 117 of file cfe_sb.h.

39.32.1.2   CFE_CLR

```
#define CFE_CLR(
              i,
              x ) ((i) &= ~CFE_BIT(x))
```

Clears bit x of i.

Definition at line 119 of file cfe_sb.h.

39.32.1.3   CFE_SB_CMD_HDR_SIZE

```
#define CFE_SB_CMD_HDR_SIZE (sizeof(CFE_SB_CmdHdr_t))
```

Size of CFE_SB_CmdHdr_t in bytes.

Definition at line 169 of file cfe_sb.h.

39.32.1.4   CFE_SB_GET_MEMADDR

```
#define CFE_SB_GET_MEMADDR(
              msgsrc ) (cpuaddr)msgsrc
```

Get memory address from SB Message.

Macro that should be used to get memory addresses from software bus messages. This is the inverse operation of CFE_SB_SET_MEMADDR.

Definition at line 138 of file cfe_sb.h.

39.32.1.5 CFE_SB_INVALID_MSG_ID

`#define CFE_SB_INVALID_MSG_ID` CFE_SB_MSGID_RESERVED

A literal of the CFE_SB_MsgId_t type representing an invalid ID.

This value should be used for runtime initialization of CFE_SB_MsgId_t values.

Note

> This may be a compound literal in a future revision. Per C99, compound literals are lvalues, not rvalues, so this value should not be used in static/compile-time data initialization. For static data initialization purposes (rvalue), CFE_SB_MSGID_RESERVED should be used instead. However, in the current implementation, they are equivalent.

Definition at line 103 of file cfe_sb.h.

39.32.1.6 CFE_SB_MSGID_RESERVED

`#define CFE_SB_MSGID_RESERVED` CFE_SB_MSGID_WRAP_VALUE(-1)

Reserved value for CFE_SB_MsgId_t that will not match any valid MsgId.

This rvalue macro can be used for static/compile-time data initialization to ensure that the initialized value does not alias to a valid MsgId object.

Definition at line 90 of file cfe_sb.h.

39.32.1.7 CFE_SB_MSGID_UNWRAP_VALUE

```
#define CFE_SB_MSGID_UNWRAP_VALUE(
              mid ) ((CFE_SB_MsgId_Atom_t)(mid))
```

Translation macro to convert to MsgId integer values from opaque/abstract API values.

This conversion exists in macro form to allow compile-time evaluation for constants, and should not be used directly in application code.

For applications, use the CFE_SB_MsgIdToValue() inline function instead.

See also

> CFE_SB_MsgIdToValue()

Definition at line 82 of file cfe_sb.h.

Referenced by CFE_SB_MsgId_Equal(), and CFE_SB_MsgIdToValue().

39.32.1.8   CFE_SB_MSGID_WRAP_VALUE

```
#define CFE_SB_MSGID_WRAP_VALUE(
                val ) ((CFE_SB_MsgId_t)(val))
```

Translation macro to convert from MsgId integer values to opaque/abstract API values.

This conversion exists in macro form to allow compile-time evaluation for constants, and should not be used directly in application code.

For applications, use the CFE_SB_ValueToMsgId() inline function instead.

See also

> CFE_SB_ValueToMsgId()

Definition at line 70 of file cfe_sb.h.

Referenced by CFE_SB_ValueToMsgId().

39.32.1.9   CFE_SB_PEND_FOREVER

```
#define CFE_SB_PEND_FOREVER -1
```

Option used with CFE_SB_RcvMsg to force a wait for next message.

Definition at line 51 of file cfe_sb.h.

39.32.1.10   CFE_SB_PIPEOPTS_IGNOREMINE

```
#define CFE_SB_PIPEOPTS_IGNOREMINE 0x00000001
```

Messages sent by the app that owns this pipe will not be sent to this pipe.

Definition at line 143 of file cfe_sb.h.

39.32.1.11   CFE_SB_POLL

```
#define CFE_SB_POLL 0
```

Option used with CFE_SB_RcvMsg to request immediate pipe status.

Definition at line 50 of file cfe_sb.h.

39.32.1.12 CFE_SB_SET_MEMADDR

```
#define CFE_SB_SET_MEMADDR(
            msgdst,
            src ) msgdst = (cpuaddr)src
```

Set memory address within SB Message.

Macro that should be used to set memory addresses within software bus messages. For now this does a straight copy, but in a future revision this may translate the raw memory address into a "safe" integer value. This is particularly important if the message is to be sent off this CPU.

Definition at line 130 of file cfe_sb.h.

39.32.1.13 CFE_SB_SUB_ENTRIES_PER_PKT

```
#define CFE_SB_SUB_ENTRIES_PER_PKT 20
```

Configuration parameter used by SBN App.

Definition at line 52 of file cfe_sb.h.

39.32.1.14 CFE_SB_SUBSCRIPTION

```
#define CFE_SB_SUBSCRIPTION 0
```

Subtype specifier used in CFE_SB_SingleSubscriptionTlm_t by SBN App.

Definition at line 53 of file cfe_sb.h.

39.32.1.15 CFE_SB_TLM_HDR_SIZE

```
#define CFE_SB_TLM_HDR_SIZE (sizeof(CFE_SB_TlmHdr_t))
```

Size of CFE_SB_TlmHdr_t in bytes.

Definition at line 170 of file cfe_sb.h.

39.32.1.16 CFE_SB_UNSUBSCRIPTION

```
#define CFE_SB_UNSUBSCRIPTION 1
```

Subtype specified used in CFE_SB_SingleSubscriptionTlm_t by SBN App.

Definition at line 54 of file cfe_sb.h.

39.32.1.17   CFE_SET

```
#define CFE_SET(
              i,
              x ) ((i) |= CFE_BIT(x))
```

Sets bit x of i.

Definition at line 118 of file cfe_sb.h.

39.32.1.18   CFE_TST

```
#define CFE_TST(
              i,
              x ) (((i) & CFE_BIT(x)) != 0)
```

true(non zero) if bit x of i is set

Definition at line 120 of file cfe_sb.h.

39.32.2   Typedef Documentation

39.32.2.1   CFE_SB_MsgPayloadPtr_t

```
typedef uint8* CFE_SB_MsgPayloadPtr_t
```

CFE_SB_MsgPayloadPtr_t defined as an opaque pointer to a message Payload portion.

Definition at line 190 of file cfe_sb.h.

39.32.2.2   CFE_SB_MsgPtr_t

```
typedef CFE_SB_Msg_t* CFE_SB_MsgPtr_t
```

CFE_SB_MsgPtr_t defined as a pointer to an SB Message.

Definition at line 187 of file cfe_sb.h.

39.32.2.3   CFE_SB_PipeId_t

typedef uint8 CFE_SB_PipeId_t

CFE_SB_PipeId_t to primitive type definition.

Software Bus pipe identifier used in many SB APIs

Definition at line 184 of file cfe_sb.h.

39.32.2.4   CFE_SB_TimeOut_t

typedef uint32 CFE_SB_TimeOut_t

CFE_SB_TimeOut_t to primitive type definition.

Internally used by SB in the CFE_SB_RcvMsg API. Translated from the input parmater named TimeOut which specifies the maximum time in milliseconds that the caller wants to wait for a message.

Definition at line 178 of file cfe_sb.h.

39.32.2.5   CFE_SB_ZeroCopyHandle_t

typedef cpuaddr CFE_SB_ZeroCopyHandle_t

CFE_SB_ZeroCopyHandle_t to primitive type definition.

Software Zero Copy handle used in many SB APIs

Definition at line 196 of file cfe_sb.h.

39.32.3   Variable Documentation

39.32.3.1   CFE_SB_Default_Qos

CFE_SB_Qos_t CFE_SB_Default_Qos

Defines a default priority and reliabilty for off-board routing.

39.33   cfe/fsw/cfe-core/src/inc/cfe_sb_events.h File Reference

Macros

- #define CFE_SB_MAX_EID 67
- #define CFE_SB_INIT_EID 1

    'cFE SB Initialized'
- #define CFE_SB_CR_PIPE_BAD_ARG_EID 2

    'CreatePipeErr:Bad Input Arg:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'
- #define CFE_SB_MAX_PIPES_MET_EID 3

    'CreatePipeErr:Max Pipes(%d)In Use.app %s'
- #define CFE_SB_CR_PIPE_ERR_EID 4

    'CreatePipeErr:OS_QueueCreate returned %d,app %s'
- #define CFE_SB_PIPE_ADDED_EID 5

    'Pipe Created:name %s,id %d,app %s'
- #define CFE_SB_SETPIPEOPTS_ID_ERR_EID 55

    'SetPipeOptsErr:Invalid pipe id (%d).app %s'
- #define CFE_SB_SETPIPEOPTS_OWNER_ERR_EID 56

    'SetPipeOptsErr:Caller not owner (%d).app %s'
- #define CFE_SB_SETPIPEOPTS_EID 57

    'SetPipeOpts: Options set (%d). app %s'
- #define CFE_SB_GETPIPEOPTS_ID_ERR_EID 58

    'GetPipeOptsErr:Invalid pipe id (%d).app %s'
- #define CFE_SB_GETPIPEOPTS_PTR_ERR_EID 59

    'GetPipeOptsErr:Invalid opts ptr.app %s'
- #define CFE_SB_GETPIPEOPTS_EID 60

    'GetPipeOpts: Options retrieved. app %s'
- #define CFE_SB_GETPIPENAME_EID 62

    'GetPipeName: Name retrieved. NameOut %s,Id %d, app %s'
- #define CFE_SB_GETPIPENAME_NULL_PTR_EID 63

    'GetPipeName: Null ptr error. Id %d, app %s'
- #define CFE_SB_GETPIPENAME_ID_ERR_EID 64

    'GetPipeName: Id error. NameOut %s,Id %d, app %s'
- #define CFE_SB_GETPIPEIDBYNAME_EID 65

    'GetPipeIdByName: ID retrieved. Name %s,IdOut 0x%x, app %s'
- #define CFE_SB_GETPIPEIDBYNAME_NULL_ERR_EID 66

    'GetPipeIdByName Err:Bad input argument,Name 0x%x,IdOut 0xx,App %s'
- #define CFE_SB_GETPIPEIDBYNAME_NAME_ERR_EID 67

    'GetPipeIdByName Err:Name not found,Name %s,IdOut 0xx,App %s'
- #define CFE_SB_SUB_ARG_ERR_EID 6

    'Subscribe Err:Bad Arg,MsgId 0x%x,PipeId %d,app %s,scope %d'
- #define CFE_SB_DUP_SUBSCRIP_EID 7

    'Duplicate Subscription,MsgId 0x%x on %s pipe,app %s'
- #define CFE_SB_MAX_MSGS_MET_EID 8

    'Subscribe Err:Max Msgs(%d)In Use,MsgId 0x%x,pipe %s,app %s'
- #define CFE_SB_MAX_DESTS_MET_EID 9

    'Subscribe Err:Max Dests(%d)In Use For Msg 0x%x,pipe %s,app %s'

'Enbl Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'
- #define CFE_SB_DSBL_RTE1_EID 36

  'Disable Route Cmd:Route does not exist,Msg 0x%x,Pipe %d'
- #define CFE_SB_DSBL_RTE2_EID 37

  'Route Disabled,Msg 0x%x,Pipe %d'
- #define CFE_SB_DSBL_RTE3_EID 38

  'Disable Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'
- #define CFE_SB_SND_RTG_EID 39

  '%s written:Size=%d,Entries=%d'
- #define CFE_SB_SND_RTG_ERR1_EID 40

  'Error creating file %s, stat=0x%x'
- #define CFE_SB_GLS_INV_CALLER_EID 41

  'SB GetLastSender Err:Caller(%s) is not the owner of pipe %d'
- #define CFE_SB_BAD_CMD_CODE_EID 42

  'Invalid Cmd, Unexpected Command Code %d'
- #define CFE_SB_BAD_MSGID_EID 43

  'Invalid Cmd, Unexpected Msg Id: 0x%04x'
- #define CFE_SB_FULL_SUB_PKT_EID 44

  'Full Sub Pkt %d Sent,Entries=%d,Stat=0x%x
  '
- #define CFE_SB_PART_SUB_PKT_EID 45

  'Partial Sub Pkt %d Sent,Entries=%d,Stat=0x%x'
- #define CFE_SB_DEL_PIPE_ERR1_EID 46

  'Pipe Delete Error:Bad Argument,PipedId %d,Requestor %s,Idx %d,Stat %d'
- #define CFE_SB_PIPE_DELETED_EID 47

  'Pipe Deleted:id %d,owner %s'
- #define CFE_SB_SUBSCRIPTION_REMOVED_EID 48

  'Subscription Removed:Msg 0x%x on pipe %d,app %s'
- #define CFE_SB_FILEWRITE_ERR_EID 49

  'File write,byte cnt err,file %s,request=%d,actual=%d'
- #define CFE_SB_SUB_INV_PIPE_EID 50

  'Subscribe Err:Invalid Pipe Id,Msg=0x%x,PipeId=%d,App %s'
- #define CFE_SB_SUB_INV_CALLER_EID 51

  'Subscribe Err:Caller(%s) is not the owner of pipe %d, Msg=0x%x'
- #define CFE_SB_UNSUB_INV_PIPE_EID 52

  'Unsubscribe Err:Invalid Pipe Id Msg=0x%x,Pipe=%d,app=%s'
- #define CFE_SB_UNSUB_INV_CALLER_EID 53

  'Unsubscribe Err:Caller(%s) is not the owner of pipe %d,Msg=0x%x'
- #define CFE_SB_DEL_PIPE_ERR2_EID 54

  'Pipe Delete Error:Caller(%s) is not the owner of pipe %d'
- #define CFE_SB_LEN_ERR_EID 61

  'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'
- #define CFE_SB_CR_PIPE_NAME_TAKEN_EID 62

  'CreatePipeErr:Name Taken:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'
- #define CFE_SB_CR_PIPE_NO_FREE_EID 63

  'CreatePipeErr:No Free:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'

39.33.1 Macro Definition Documentation

39.33.1.1 CFE_SB_BAD_CMD_CODE_EID

```
#define CFE_SB_BAD_CMD_CODE_EID 42
```

```
'Invalid Cmd, Unexpected Command Code %d'
```

Event Message `'Invalid Cmd, Unexpected Command Code %d'`

Type: ERROR

Cause:

This error event message is issued when the SB receives a cmd that has an unexpected cmd code.

Definition at line 738 of file cfe_sb_events.h.

39.33.1.2 CFE_SB_BAD_MSGID_EID

```
#define CFE_SB_BAD_MSGID_EID 43
```

```
'Invalid Cmd, Unexpected Msg Id:  0x%04x'
```

Event Message `'Invalid Cmd, Unexpected Msg Id:  0x%04x'`

Type: ERROR

Cause:

This error event message is issued when the SB receives a msg that has an unexpected msg id.

Definition at line 750 of file cfe_sb_events.h.

39.33.1.3   CFE_SB_BAD_PIPEID_EID

#define CFE_SB_BAD_PIPEID_EID 19

'Rcv Err:PipeId %d does not exist,app %s'

Event Message 'Rcv Err:PipeId %d does not exist,app %s'

Type: ERROR

Cause:

This error event message is issued when an invalid PipeId is passed into the CFE_SB_RcvMsg API. The SB Pipe Table shows all valid PipeIds and may be viewed for verification.

Definition at line 458 of file cfe_sb_events.h.

39.33.1.4   CFE_SB_CMD0_RCVD_EID

#define CFE_SB_CMD0_RCVD_EID 28

'No-op Cmd Rcvd'

Event Message 'No-op Cmd Rcvd'

Type: INFORMATION

Cause:

This info event message is issued in response an SB NO-OP command

Definition at line 557 of file cfe_sb_events.h.

39.33.1.5 CFE_SB_CMD1_RCVD_EID

#define CFE_SB_CMD1_RCVD_EID 29

'Reset Counters Cmd Rcvd'

Event Message 'Reset Counters Cmd Rcvd'

Type: DEBUG

Cause:

This debug event message is issued in response an SB Reset Counters command

Definition at line 568 of file cfe_sb_events.h.

39.33.1.6 CFE_SB_CR_PIPE_BAD_ARG_EID

#define CFE_SB_CR_PIPE_BAD_ARG_EID 2

'CreatePipeErr:Bad Input Arg:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'

Event Message 'CreatePipeErr:Bad Input Arg:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_CreatePipe API receives a bad argument. In this case, a bad argument is defined by the following: A NULL PipeIdPtr, PipeDepth = 0 and PipeDepth > cfg param CFE_PLATFOR↩
M_SB_MAX_PIPE_DEPTH

Definition at line 75 of file cfe_sb_events.h.

39.33.1.7   CFE_SB_CR_PIPE_ERR_EID

#define CFE_SB_CR_PIPE_ERR_EID 4

'CreatePipeErr:OS_QueueCreate returned %d,app %s'

Event Message 'CreatePipeErr:OS_QueueCreate returned %d,app %s'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_CreatePipe API is called and the OS returns an error when the OS returns an error from the OS_QueueCreate API. The error status returned by the OS is displayed in the event. Most commonly, this event is displayed as a result of trying to create pipes with the same name.

Definition at line 102 of file cfe_sb_events.h.

39.33.1.8   CFE_SB_CR_PIPE_NAME_TAKEN_EID

#define CFE_SB_CR_PIPE_NAME_TAKEN_EID 62

'CreatePipeErr:Name Taken:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'

Event Message 'CreatePipeErr:Name Taken:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_CreatePipe API tries to create a pipe with a name that is in use.

Definition at line 922 of file cfe_sb_events.h.

39.33.1.9 CFE_SB_CR_PIPE_NO_FREE_EID

#define CFE_SB_CR_PIPE_NO_FREE_EID 63

'CreatePipeErr:No Free:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'

Event Message 'CreatePipeErr:No Free:app=%s,ptr=0x%x,depth=%d,maxdepth=%d'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_CreatePipe API is unable to create a queue because there are no queues free.

Definition at line 934 of file cfe_sb_events.h.

39.33.1.10 CFE_SB_DEL_PIPE_ERR1_EID

#define CFE_SB_DEL_PIPE_ERR1_EID 46

'Pipe Delete Error:Bad Argument,PipedId %d,Requestor %s,Idx %d,Stat %d'

Event Message 'Pipe Delete Error:Bad Argument,PipedId %d,Requestor %s,Idx %d,Stat %d'

Type: ERROR

Cause:

This error event message is issued from CFE_SB_DeletePipeFull when an invalid pipe ID is passed in

Definition at line 788 of file cfe_sb_events.h.

39.33.1.11 CFE_SB_DEL_PIPE_ERR2_EID

```
#define CFE_SB_DEL_PIPE_ERR2_EID 54
```

```
'Pipe Delete Error:Caller(%s) is not the owner of pipe %d'
```

Event Message `'Pipe Delete Error:Caller(%s) is not the owner of pipe %d'`

Type: ERROR

Cause:

This error event message is issued when the [CFE_SB_DeletePipe](#) API is called by a task that is not the owner of the pipe. Pipes may be deleted only by the task that created the pipe or ES(for cleanup purposes).

Definition at line 892 of file cfe_sb_events.h.

39.33.1.12 CFE_SB_DEST_BLK_ERR_EID

```
#define CFE_SB_DEST_BLK_ERR_EID 20
```

```
'Subscribe Err:Request for Destination Blk failed for Msg 0x%x,Pipe %s'
```

Event Message `'Subscribe Err:Request for Destination Blk failed for Msg 0x%x,Pipe %s'`

Type: ERROR

Cause:

This error event message is issued when the SB receives an error from the memory pool in the attempt to obtain a new destination block. Then memory pool statistics may be viewed by sending the related ES command.

Definition at line 472 of file cfe_sb_events.h.

39.33.1.13 CFE_SB_DSBL_RTE1_EID

```
#define CFE_SB_DSBL_RTE1_EID 36
```

```
'Disable Route Cmd:Route does not exist,Msg 0x%x,Pipe %d'
```

Event Message `'Disable Route Cmd:Route does not exist,Msg 0x%x,Pipe %d'`

Type: ERROR

Cause:

This error event message is issued when SB receives a cmd to disable a route that does not exist in the routing table. A route is defined by a MsgId, PipeId pair.

Definition at line 657 of file cfe_sb_events.h.

39.33.1.14 CFE_SB_DSBL_RTE2_EID

```
#define CFE_SB_DSBL_RTE2_EID 37
```

```
'Route Disabled,Msg 0x%x,Pipe %d'
```

Event Message `'Route Disabled,Msg 0x%x,Pipe %d'`

Type: DEBUG

Cause:

This debug event message is issued when SB receives a cmd to disable a route and the request is successfully executed.

Definition at line 669 of file cfe_sb_events.h.

39.33.1.15   CFE_SB_DSBL_RTE3_EID

#define CFE_SB_DSBL_RTE3_EID 38

'Disable Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'

Event Message 'Disable Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'

Type: ERROR

Cause:

This error event message is issued when SB receives a cmd to disable a route and the MsgId or PipeId does not pass the validation checks. The MsgId must be less than cfg param CFE_PLATFORM_SB_HIGHEST_VALID_MSGID. The PipeId must exist and be less than cfg param CFE_PLATFORM_SB_MAX_PIPES. The SB pipe table may be viewed to verify the PipeId existence.

Definition at line 684 of file cfe_sb_events.h.

39.33.1.16   CFE_SB_DUP_SUBSCRIP_EID

#define CFE_SB_DUP_SUBSCRIP_EID 7

'Duplicate Subscription,MsgId 0x%x on %s pipe,app %s'

Event Message 'Duplicate Subscription,MsgId 0x%x on %s pipe,app %s'

Type: INFORMATION

Cause:

This info event message is issued when a subscription request is received that already exists in the routing table. A duplicate subscription is defined by a matching MsgId and PipeId. No other parameters are used in detecting a duplicate subscription. NOTE: By default, SB filters this event. The EVS filter algorithm allows the first event to pass through the filter, but all subsequent events with this event id will be filtered. A command must be sent to unfilter this event if the user desires to see it.

Definition at line 284 of file cfe_sb_events.h.

39.33.1.17 CFE_SB_ENBL_RTE1_EID

```
#define CFE_SB_ENBL_RTE1_EID 33
```

```
'Enbl Route Cmd:Route does not exist.Msg 0x%x,Pipe %d'
```

Event Message `'Enbl Route Cmd:Route does not exist.Msg 0x%x,Pipe %d'`

Type: ERROR

Cause:

This error event message is issued when SB receives a cmd to enable a route that does not exist in the routing table. A route is defined by a MsgId, PipeId pair.

Definition at line 618 of file cfe_sb_events.h.

39.33.1.18 CFE_SB_ENBL_RTE2_EID

```
#define CFE_SB_ENBL_RTE2_EID 34
```

```
'Enabling Route,Msg 0x%x,Pipe %d'
```

Event Message `'Enabling Route,Msg 0x%x,Pipe %d'`

Type: DEBUG

Cause:

This debug event message is issued when SB receives a cmd to enable a route and the request is successfully executed.

Definition at line 630 of file cfe_sb_events.h.

39.33.1.19   CFE_SB_ENBL_RTE3_EID

```
#define CFE_SB_ENBL_RTE3_EID 35
```

'Enbl Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'

Event Message 'Enbl Route Cmd:Invalid Param.Msg 0x%x,Pipe %d'

Type: ERROR

Cause:

This error event message is issued when SB receives a cmd to enable a route and the MsgId or PipeId does not pass the validation checks. The MsgId must be less than cfg param CFE_PLATFORM_SB_HIGHEST_VALID_MSGID. The PipeId must exist and be less than cfg param CFE_PLATFORM_SB_MAX_PIPES. The SB pipe table may be viewed to verify the PipeId existence.

Definition at line 645 of file cfe_sb_events.h.

39.33.1.20   CFE_SB_FILEWRITE_ERR_EID

```
#define CFE_SB_FILEWRITE_ERR_EID 49
```

'File write,byte cnt err,file %s,request=%d,actual=%d'

Event Message 'File write,byte cnt err,file %s,request=%d,actual=%d'

Type: ERROR

Cause:

This error event message is issued when one of many SB's file write operations is unsuccessful. This event is a result of CFE_FS_WriteHeader or OS_write returning something other than the number of bytes requested to be written. The requested value and the return value are displayed in the event.

Definition at line 826 of file cfe_sb_events.h.

39.33.1.21 CFE_SB_FULL_SUB_PKT_EID

```
#define CFE_SB_FULL_SUB_PKT_EID 44
```

```
'Full Sub Pkt %d Sent,Entries=%d,Stat=0x%x
'
```

Event Message 'Full Sub Pkt %d Sent,Entries=%d,Stat=0x%x
'

Type: DEBUG

Cause:

This debug event message is issued in response to the 'Send Previous Subscriptions' command and a full pkt segment is sent.

Definition at line 763 of file cfe_sb_events.h.

39.33.1.22 CFE_SB_GET_BUF_ERR_EID

```
#define CFE_SB_GET_BUF_ERR_EID 16
```

```
'Send Err:Request for Buffer Failed.  MsgId 0x%x,app %s,size %d'
```

Event Message 'Send Err:Request for Buffer Failed. MsgId 0x%x,app %s,size %d'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API fails to receive the necessary buffer memory from the ES memory pool. This could be an indication that the cfg param CFE_PLATFORM_SB_BUF_MEMORY_BYTES is set too low. To check this, send SB cmd to dump the SB statistics pkt and view the buffer memory parameters.

Definition at line 413 of file cfe_sb_events.h.

39.33.1.23   CFE_SB_GETPIPEIDBYNAME_EID

`#define CFE_SB_GETPIPEIDBYNAME_EID 65`

`'GetPipeIdByName:  ID retrieved.  Name %s,IdOut 0x%x, app %s'`

Event Message `'GetPipeIdByName:  ID retrieved.  Name %s,IdOut 0x%x, app %s'`

Type: DEBUG

Cause:

This debug event is generated when id is retrieved by name.

Definition at line 228 of file cfe_sb_events.h.

39.33.1.24   CFE_SB_GETPIPEIDBYNAME_NAME_ERR_EID

`#define CFE_SB_GETPIPEIDBYNAME_NAME_ERR_EID 67`

`'GetPipeIdByName Err:Name not found,Name %s,IdOut 0xx,App %s'`

Event Message `'GetPipeIdByName Err:Name not found,Name %s,IdOut 0xx,App %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_GetPipeIdByName API receives an invalid name.

Definition at line 252 of file cfe_sb_events.h.

39.33.1.25 CFE_SB_GETPIPEIDBYNAME_NULL_ERR_EID

```
#define CFE_SB_GETPIPEIDBYNAME_NULL_ERR_EID 66
```

'GetPipeIdByName Err:Bad input argument,Name 0x%x,IdOut 0xx,App %s'

Event Message 'GetPipeIdByName Err:Bad input argument,Name 0x%x,IdOut 0xx,App %s'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_GetPipeIdByName API receives a NULL ptr as an argument.

Definition at line 240 of file cfe_sb_events.h.

39.33.1.26 CFE_SB_GETPIPENAME_EID

```
#define CFE_SB_GETPIPENAME_EID 62
```

'GetPipeName: Name retrieved. NameOut %s,Id %d, app %s'

Event Message 'GetPipeName: Name retrieved. NameOut %s,Id %d, app %s'

Type: DEBUG

Cause:

This debug event is generated when name is retrieved by id.

Definition at line 195 of file cfe_sb_events.h.

39.33.1.27   CFE_SB_GETPIPENAME_ID_ERR_EID

```
#define CFE_SB_GETPIPENAME_ID_ERR_EID 64
```

'GetPipeName: Id error. NameOut %s,Id %d, app %s'

Event Message 'GetPipeName: Id error. NameOut %s,Id %d, app %s'

Type: ERROR

Cause:

This debug event is generated when name is retrieved by id.

Definition at line 217 of file cfe_sb_events.h.

39.33.1.28   CFE_SB_GETPIPENAME_NULL_PTR_EID

```
#define CFE_SB_GETPIPENAME_NULL_PTR_EID 63
```

'GetPipeName: Null ptr error. Id %d, app %s'

Event Message 'GetPipeName: Null ptr error. Id %d, app %s'

Type: ERROR

Cause:

This debug event is generated when the name buffer ptr is null.

Definition at line 206 of file cfe_sb_events.h.

39.33.1.29 CFE_SB_GETPIPEOPTS_EID

`#define CFE_SB_GETPIPEOPTS_EID 60`

`'GetPipeOpts:  Options retrieved.  app %s'`

Event Message `'GetPipeOpts:  Options retrieved.  app %s'`

Type: DEBUG

Cause:

This debug event is generated when options are retrieved.

Definition at line 184 of file cfe_sb_events.h.

39.33.1.30 CFE_SB_GETPIPEOPTS_ID_ERR_EID

`#define CFE_SB_GETPIPEOPTS_ID_ERR_EID 58`

`'GetPipeOptsErr:Invalid pipe id (%d).app %s'`

Event Message `'GetPipeOptsErr:Invalid pipe id (%d).app %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_GetPipeOpts API is called and the PipeID is invalid.

Definition at line 161 of file cfe_sb_events.h.

39.33.1.31   CFE_SB_GETPIPEOPTS_PTR_ERR_EID

```
#define CFE_SB_GETPIPEOPTS_PTR_ERR_EID 59
```

'GetPipeOptsErr:Invalid opts ptr.app %s'

Event Message 'GetPipeOptsErr:Invalid opts ptr.app %s'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_GetPipeOpts API is called and the pointer is invalid.

Definition at line 173 of file cfe_sb_events.h.

39.33.1.32   CFE_SB_GLS_INV_CALLER_EID

```
#define CFE_SB_GLS_INV_CALLER_EID 41
```

'SB GetLastSender Err:Caller(%s) is not the owner of pipe %d'

Event Message 'SB GetLastSender Err:Caller(%s) is not the owner of pipe %d'

Type: ERROR

Cause:

This error event message is issued when the caller of CFE_SB_GetLastSenderId is not the owner of the given pipe Id.

Definition at line 725 of file cfe_sb_events.h.

39.33.1.33 CFE_SB_INIT_EID

`#define CFE_SB_INIT_EID 1`

`'cFE SB Initialized'`

Event Message `'cFE SB Initialized'`

Type: INFORMATION

Cause:

This event message is issued when the Software Bus Task completes its initialization.

Definition at line 62 of file cfe_sb_events.h.

39.33.1.34 CFE_SB_LEN_ERR_EID

`#define CFE_SB_LEN_ERR_EID 61`

`'Invalid cmd length:  ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'`

Event Message `'Invalid cmd length:  ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'`

Type: ERROR

Cause:

This event message is generated when a message with the CFE_SB_CMD_MID message ID has arrived but whose packet length does not match the expected length for the specified command code.

The `ID` field in the event message specifies the Message ID (in hex), the `CC` field specifies the Command Code (in decimal), the `Exp Len` field specified the Expected Length (in decimal), and `Len` specifies the message Length (in decimal) found in the message.

Definition at line 910 of file cfe_sb_events.h.

39.33.1.35   CFE_SB_LSTSNDER_ERR1_EID

```
#define CFE_SB_LSTSNDER_ERR1_EID 30
```

'SB GetLastSender Err:Rcvd Null Ptr,Pipe=d,App=s'

Event Message 'SB GetLastSender Err:Rcvd Null Ptr,Pipe=d,App=s'

Type: ERROR

Cause:

This error event message is issued when SB receives a Null pointer from the caller of CFE_SB_GetLastSenderId.

Definition at line 581 of file cfe_sb_events.h.

39.33.1.36   CFE_SB_LSTSNDER_ERR2_EID

```
#define CFE_SB_LSTSNDER_ERR2_EID 31
```

'SB GetLastSender Err:Rcvd Invalid Pipe=d,App=s'

Event Message 'SB GetLastSender Err:Rcvd Invalid Pipe=d,App=s'

Type: ERROR

Cause:

This error event message is issued when SB receives an invalid pipe from the caller of CFE_SB_GetLastSenderId.

Definition at line 593 of file cfe_sb_events.h.

39.33.1.37 CFE_SB_MAX_DESTS_MET_EID

`#define CFE_SB_MAX_DESTS_MET_EID 9`

`'Subscribe Err:Max Dests(%d)In Use For Msg 0x%x,pipe %s,app %s'`

Event Message `'Subscribe Err:Max Dests(%d)In Use For Msg 0x%x,pipe %s,app %s'`

Type: ERROR

Cause:

This error event message is issued when a subscription request is received and all destinations for that MsgId are in use. The number of destinations per msgid is a configuration parameter named CFE_PLATFORM_SB_MAX_DEST↩ _PER_PKT. A destination is defined as a pipe.

Definition at line 315 of file cfe_sb_events.h.

39.33.1.38 CFE_SB_MAX_EID

`#define CFE_SB_MAX_EID 67`

Definition at line 43 of file cfe_sb_events.h.

39.33.1.39 CFE_SB_MAX_MSGS_MET_EID

`#define CFE_SB_MAX_MSGS_MET_EID 8`

`'Subscribe Err:Max Msgs(%d)In Use,MsgId 0x%x,pipe %s,app %s'`

Event Message `'Subscribe Err:Max Msgs(%d)In Use,MsgId 0x%x,pipe %s,app %s'`

Type: ERROR

Cause:

This error event message is issued when one of the SB subscribe APIs are called with a new MsgId, and SB cannot accommodate the new MsgId because the maximum number of MsgIds are in use. The maximum number of MsgIds is defined by cfg param CFE_PLATFORM_SB_MAX_MSG_IDS. This cfg param dictates the number of elements in the SB routing table. There is one element per MsgId. The user may monitor the routing table utilization figures (msgids currently in use, high water mark and max allowed) by sending the SB cmd to dump the SB statistics data.

Definition at line 301 of file cfe_sb_events.h.

39.33.1.40   CFE_SB_MAX_PIPES_MET_EID

#define CFE_SB_MAX_PIPES_MET_EID 3

'CreatePipeErr:Max Pipes(%d)In Use.app %s'

Event Message 'CreatePipeErr:Max Pipes(%d)In Use.app %s'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_CreatePipe API is called and the maximum number of pipes
(defined by cfg param CFE_PLATFORM_SB_MAX_PIPES) are in use.

Definition at line 87 of file cfe_sb_events.h.

39.33.1.41   CFE_SB_MSG_TOO_BIG_EID

#define CFE_SB_MSG_TOO_BIG_EID 15

'Send Err:Msg Too Big MsgId=0x%x,app=%s,size=%d,MaxSz=%d'

Event Message 'Send Err:Msg Too Big MsgId=0x%x,app=%s,size=%d,MaxSz=%d'

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API is called and the packet length field in the message
header implies that the message size exceeds the max size defined by mission cfg param CFE_MISSION_SB_MAX↩
_SB_MSG_SIZE. The request to send the message is denied, there is no partial packet sent.

Definition at line 399 of file cfe_sb_events.h.

39.33.1.42   CFE_SB_MSGID_LIM_ERR_EID

`#define CFE_SB_MSGID_LIM_ERR_EID 17`

`'Send Err:Msg Limit Err MsgId 0x%x,pipe %s,sender %s'`

Event Message `'Send Err:Msg Limit Err MsgId 0x%x,pipe %s,sender %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API cannot route the MsgId (displayed in event) to the pipe (displayed in the event) because the pipe currently contains the maximum number of messages of this type (Msg↩ Id). This is typically an indication that the receiver is not reading its pipe fast enough, or at all. A less typical scenerio is that the sender is sending a burst of pkts of this type (or MsgId) and the receiver (owner of 'pipe') cannot keep up. The subscriber of the message dictates this limit count in the 'MsgLim' parameter of the CFE_SB_SubscribeEx API or uses the default value of 4 if using the CFE_SB_Subscribe API.

Definition at line 432 of file cfe_sb_events.h.

39.33.1.43   CFE_SB_PART_SUB_PKT_EID

`#define CFE_SB_PART_SUB_PKT_EID 45`

`'Partial Sub Pkt %d Sent,Entries=%d,Stat=0x%x'`

Event Message `'Partial Sub Pkt %d Sent,Entries=%d,Stat=0x%x'`

Type: DEBUG

Cause:

This debug event message is issued in response to the 'Send Previous Subscriptions' command and a partial pkt segment is sent.

Definition at line 775 of file cfe_sb_events.h.

39.33.1.44   CFE_SB_PIPE_ADDED_EID

#define CFE_SB_PIPE_ADDED_EID 5

'Pipe Created:name %s,id %d,app %s'

Event Message 'Pipe Created:name %s,id %d,app %s'

Type: DEBUG

Cause:

This debug event message is issued when a pipe was successfully created in the CFE_SB_CreatePipe API.

Definition at line 114 of file cfe_sb_events.h.

39.33.1.45   CFE_SB_PIPE_DELETED_EID

#define CFE_SB_PIPE_DELETED_EID 47

'Pipe Deleted:id %d,owner %s'

Event Message 'Pipe Deleted:id %d,owner %s'

Type: DEBUG

Cause:

This debug event message is issued when the CFE_SB_DeletePipe API is called and the request is successfully completed.

Definition at line 800 of file cfe_sb_events.h.

39.33.1.46   CFE_SB_Q_FULL_ERR_EID

```
#define CFE_SB_Q_FULL_ERR_EID 25
```

```
'Pipe Overflow,MsgId 0x%x,pipe %s,stat 0x%x,app %s'
```

Event Message `'Pipe Overflow,MsgId 0x%x,pipe %s,stat 0x%x,app %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API is called and encounters an error when attempting to write the msg to the destination pipe (which is an underlying queue). This could indicate that the owner of the pipe is not readings its messages fast enough or at all. It may also mean that the pipe depth is not deep enough. The pipe depth is an input parameter to the CFE_SB_CreatePipe API.

Definition at line 514 of file cfe_sb_events.h.

39.33.1.47   CFE_SB_Q_RD_ERR_EID

```
#define CFE_SB_Q_RD_ERR_EID 27
```

```
'Pipe Read Err,pipe %s,app %s,stat 0x%x'
```

Event Message `'Pipe Read Err,pipe %s,app %s,stat 0x%x'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API is called and encounters an error when attempting to read the msg from the destination pipe (which is an underlying queue). More precisely, the OS API OS_QueueGet has returned an unexpected error. The return code is displayed in the event. For more information, the user may look up the return code in the OSAL documention or source code.

Definition at line 546 of file cfe_sb_events.h.

39.33.1.48   CFE_SB_Q_WR_ERR_EID

```
#define CFE_SB_Q_WR_ERR_EID 26
```

```
'Pipe Write Err,MsgId 0x%x,pipe %s,stat 0x%x,app %s'
```

Event Message `'Pipe Write Err,MsgId 0x%x,pipe %s,stat 0x%x,app %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API is called and encounters an error when attempting to write the msg to the destination pipe (which is an underlying queue). More precisely, the OS API OS_QueuePut has returned an unexpected error. The return code is displayed in the event. For more information, the user may look up the return code in the OSAL documention or source code.

Definition at line 530 of file cfe_sb_events.h.

39.33.1.49   CFE_SB_RCV_BAD_ARG_EID

```
#define CFE_SB_RCV_BAD_ARG_EID 18
```

```
'Rcv Err:Bad Input Arg:BufPtr 0x%x,pipe %d,t/o %d,app %s'
```

Event Message `'Rcv Err:Bad Input Arg:BufPtr 0x%x,pipe %d,t/o %d,app %s'`

Type: ERROR

Cause:

This error event message is issued when an invalid paramter is passed into the CFE_SB_RcvMsg API. Two possibile problems would be the first parameter (∗BufPtr) being NULL or the third paramter (TimeOut) being less than -1.

Definition at line 445 of file cfe_sb_events.h.

39.33.1.50 CFE_SB_SEND_BAD_ARG_EID

`#define CFE_SB_SEND_BAD_ARG_EID 13`

`'Send Err:Bad input argument,Arg 0x%x,App %s'`

Event Message `'Send Err:Bad input argument,Arg 0x%x,App %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API receives an invalid (possibly NULL) ptr as an argument.

Definition at line 367 of file cfe_sb_events.h.

39.33.1.51 CFE_SB_SEND_INV_MSGID_EID

`#define CFE_SB_SEND_INV_MSGID_EID 21`

`'Send Err:Invalid msgid in msg,MsgId 0x%x,App %s'`

Event Message `'Send Err:Invalid msgid in msg,MsgId 0x%x,App %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SendMsg API is called and the SB discovers that the message to send has a msg id that is invalid. It may be due to a msg id that is greater than cfg parameter CFE_PLATFORM_S↩ B_HIGHEST_VALID_MSGID

Definition at line 486 of file cfe_sb_events.h.

39.33.1.52   CFE_SB_SEND_NO_SUBS_EID

#define CFE_SB_SEND_NO_SUBS_EID 14

'No subscribers for MsgId 0x%x,sender %s'

Event Message 'No subscribers for MsgId 0x%x,sender %s'

Type: INFORMATION

Cause:

This info event message is issued when the CFE_SB_SendMsg API is called and there are no subscribers (therefore no destinations) for the message to be sent. Each time the SB detects this situation, the corresponding SB telemetry point is incremented.. NOTE: By default, SB filters this event. The EVS filter algorithm allows the first event to pass through the filter, but all subsequent events with this event id will be filtered. A command must be sent to unfilter this event if the user desires to see it.

Definition at line 385 of file cfe_sb_events.h.

39.33.1.53   CFE_SB_SETPIPEOPTS_EID

#define CFE_SB_SETPIPEOPTS_EID 57

'SetPipeOpts: Options set (%d). app %s'

Event Message 'SetPipeOpts: Options set (%d). app %s'

Type: DEBUG

Cause:

This debug event is generated when options are set.

Definition at line 149 of file cfe_sb_events.h.

39.33.1.54 CFE_SB_SETPIPEOPTS_ID_ERR_EID

`#define CFE_SB_SETPIPEOPTS_ID_ERR_EID 55`

`'SetPipeOptsErr:Invalid pipe id (%d).app %s'`

Event Message `'SetPipeOptsErr:Invalid pipe id (%d).app %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SetPipeOpts API is called and the PipeID is invalid.

Definition at line 126 of file cfe_sb_events.h.

39.33.1.55 CFE_SB_SETPIPEOPTS_OWNER_ERR_EID

`#define CFE_SB_SETPIPEOPTS_OWNER_ERR_EID 56`

`'SetPipeOptsErr:Caller not owner (%d).app %s'`

Event Message `'SetPipeOptsErr:Caller not owner (%d).app %s'`

Type: ERROR

Cause:

This error event message is issued when the CFE_SB_SetPipeOpts API is called and the pipe is owned by another app ID.

Definition at line 138 of file cfe_sb_events.h.

39.33.1.56   CFE_SB_SND_RTG_EID

#define CFE_SB_SND_RTG_EID 39

'%s written:Size=%d,Entries=%d'

Event Message '%s written:Size=%d,Entries=%d'

Type: DEBUG

Cause:

This debug event message is issued after the SB routing info file, pipe info file or the map info file is written and closed. This is done is response to the SB 'Send Routing Info' cmd, the SB 'Send pipe Info' cmd or the SB 'Send Map Info' cmd, respectively.

Definition at line 698 of file cfe_sb_events.h.

39.33.1.57   CFE_SB_SND_RTG_ERR1_EID

#define CFE_SB_SND_RTG_ERR1_EID 40

'Error creating file %s, stat=0x%x'

Event Message 'Error creating file %s, stat=0x%x'

Type: ERROR

Cause:

This error event message is issued when the SB 'Send Routing Info' cmd is received and the file create fails. The event displays the status received from the OS.

Definition at line 712 of file cfe_sb_events.h.

39.33.1.58 CFE_SB_SND_STATS_EID

`#define CFE_SB_SND_STATS_EID 32`

`'Software Bus Statistics packet sent'`

Event Message `'Software Bus Statistics packet sent'`

Type: DEBUG

Cause:

This debug event message is issued when SB receives a cmd to send the SB statistics pkt.

Definition at line 606 of file cfe_sb_events.h.

39.33.1.59 CFE_SB_SUB_ARG_ERR_EID

`#define CFE_SB_SUB_ARG_ERR_EID 6`

`'Subscribe Err:Bad Arg,MsgId 0x%x,PipeId %d,app %s,scope %d'`

Event Message `'Subscribe Err:Bad Arg,MsgId 0x%x,PipeId %d,app %s,scope %d'`

Type: ERROR

Cause:

This error event message is issued when one of the Subscribe API's are called with an invalid MsgId. An invalid MsgId is defined as being greater than the cfg param CFE_PLATFORM_SB_HIGHEST_VALID_MSGID.

Definition at line 266 of file cfe_sb_events.h.

39.33.1.60   CFE_SB_SUB_INV_CALLER_EID

#define CFE_SB_SUB_INV_CALLER_EID 51

'Subscribe Err:Caller(%s) is not the owner of pipe %d, Msg=0x%x'

Event Message 'Subscribe Err:Caller(%s) is not the owner of pipe %d, Msg=0x%x'

Type: ERROR

Cause:

This error event message is issued when one of the SB subscribe API's are called and the requestor is not the owner of the pipe. Only the owner of the pipe may subscribe to messages on the pipe.

Definition at line 852 of file cfe_sb_events.h.

39.33.1.61   CFE_SB_SUB_INV_PIPE_EID

#define CFE_SB_SUB_INV_PIPE_EID 50

'Subscribe Err:Invalid Pipe Id,Msg=0x%x,PipeId=%d,App %s'

Event Message 'Subscribe Err:Invalid Pipe Id,Msg=0x%x,PipeId=%d,App %s'

Type: ERROR

Cause:

This error event message is issued when the input PipeId has a value that is not listed in the pipe table. This typically means that the pipe does not exist. The pipe table may be viewed for verification.

Definition at line 839 of file cfe_sb_events.h.

39.33.1.62 CFE_SB_SUBSCRIPTION_RCVD_EID

```
#define CFE_SB_SUBSCRIPTION_RCVD_EID 10
```

```
'Subscription Rcvd:MsgId 0x%x on %s(%d),app %s'
```

Event Message `'Subscription Rcvd:MsgId 0x%x on %s(%d),app %s'`

Type: DEBUG

Cause:

This debug event message is issued when a subscription is successfully made through one of the SB Subscribe API's

Definition at line 327 of file cfe_sb_events.h.

39.33.1.63 CFE_SB_SUBSCRIPTION_REMOVED_EID

```
#define CFE_SB_SUBSCRIPTION_REMOVED_EID 48
```

```
'Subscription Removed:Msg 0x%x on pipe %d,app %s'
```

Event Message `'Subscription Removed:Msg 0x%x on pipe %d,app %s'`

Type: DEBUG

Cause:

This debug event message is issued when CFE_SB_Unsubscribe API is called and the request is successfully completed.

Definition at line 812 of file cfe_sb_events.h.

39.33.1.64   CFE_SB_SUBSCRIPTION_RPT_EID

#define CFE_SB_SUBSCRIPTION_RPT_EID 22

'Sending Subscription Report Msg=0x%x,Pipe=%d,Stat=0x%x'

[Event Message](#) 'Sending Subscription Report Msg=0x%x,Pipe=%d,Stat=0x%x'

Type: DEBUG

Cause:

This debug event message is issued when SB subscription reporting is enabled, (which is disabled by default) and a subscription is successfully received.

Definition at line 498 of file cfe_sb_events.h.

39.33.1.65   CFE_SB_UNSUB_ARG_ERR_EID

#define CFE_SB_UNSUB_ARG_ERR_EID 11

'UnSubscribe Err:Bad Arg,MsgId 0x%x,PipeId %d,app %s,scope %d'

[Event Message](#) 'UnSubscribe Err:Bad Arg,MsgId 0x%x,PipeId %d,app %s,scope %d'

Type: ERROR

Cause:

This error event message is issued when a request to unsubscribe fails due to an invalid msgid or an invalid pipeid in one of SB's unsubscribe API's. The msgid must be less than cfg param [CFE_PLATFORM_SB_HIGHEST_VALID_MSGID](#) and the pipeid must have been created and have a value less than cfg param [CFE_PLATFORM_SB_MAX_PIPES](#). The SB pipe table may be viewed to verify its value or existence.

Definition at line 342 of file cfe_sb_events.h.

39.33.1.66 CFE_SB_UNSUB_INV_CALLER_EID

#define CFE_SB_UNSUB_INV_CALLER_EID 53

'Unsubscribe Err:Caller(%s) is not the owner of pipe %d,Msg=0x%x'

Event Message 'Unsubscribe Err:Caller(%s) is not the owner of pipe %d,Msg=0x%x'

Type: ERROR

Cause:

This error event message is issued when one of the SB unsubscribe API's are called and the requestor is not the owner of the pipe (or ES). Only the owner of the pipe(or ES for cleanup purposes)may unsubscribe messages from a pipe.

Definition at line 879 of file cfe_sb_events.h.

39.33.1.67 CFE_SB_UNSUB_INV_PIPE_EID

#define CFE_SB_UNSUB_INV_PIPE_EID 52

'Unsubscribe Err:Invalid Pipe Id Msg=0x%x,Pipe=%d,app=%s'

Event Message 'Unsubscribe Err:Invalid Pipe Id Msg=0x%x,Pipe=%d,app=%s'

Type: ERROR

Cause:

This error event message is issued when one of the SB unsubscribe API's are called and the input parameter PipeId is not listed in the pipe table. This typically means that the pipe does not exist. The pipe table may be viewed for verification.

Definition at line 866 of file cfe_sb_events.h.

39.33.1.68   CFE_SB_UNSUB_NO_SUBS_EID

```
#define CFE_SB_UNSUB_NO_SUBS_EID 12
```

'Unsubscribe Err:No subs for Msg 0x%x on %s,app %s'

Event Message 'Unsubscribe Err:No subs for Msg 0x%x on %s,app %s'

Type: INFORMATION

Cause:

This info event message is issued when a request to unsubscribe fails due to a non existent msgid/pipeid combination in the SB routing table. The SB routing table may be viewed to see a list of valid msgid/pipeid combinations.

Definition at line 355 of file cfe_sb_events.h.

39.34   cfe/fsw/cfe-core/src/inc/cfe_sb_extern_typedefs.h File Reference

```
#include "common_types.h"
#include "cfe_mission_cfg.h"
```

Typedefs

- typedef uint8 CFE_SB_QosPriority_Enum_t
    Selects the priorty level for message routing.
- typedef uint8 CFE_SB_QosReliability_Enum_t
    Selects the reliability level for message routing.
- typedef uint16 CFE_SB_MsgRouteIdx_Atom_t
    An integer type that should be used for indexing into the Routing Table.
- typedef uint16 CFE_SB_MsgId_Atom_t
    CFE_SB_MsgId_Atom_t primitive type definition.
- typedef CFE_SB_MsgId_Atom_t CFE_SB_MsgId_t
    CFE_SB_MsgId_t type definition.

Enumerations

- enum CFE_SB_QosPriority { CFE_SB_QosPriority_LOW = 0, CFE_SB_QosPriority_HIGH = 1 }
    Label definitions associated with CFE_SB_QosPriority_Enum_t.
- enum CFE_SB_QosReliability { CFE_SB_QosReliability_LOW = 0, CFE_SB_QosReliability_HIGH = 1 }
    Label definitions associated with CFE_SB_QosReliability_Enum_t.

39.34.1 Typedef Documentation

39.34.1.1 CFE_SB_MsgId_Atom_t

typedef uint16 CFE_SB_MsgId_Atom_t

CFE_SB_MsgId_Atom_t primitive type definition.

This is an integer type capable of holding any Message ID value

Definition at line 101 of file cfe_sb_extern_typedefs.h.

39.34.1.2 CFE_SB_MsgId_t

typedef CFE_SB_MsgId_Atom_t CFE_SB_MsgId_t

CFE_SB_MsgId_t type definition.

Software Bus message identifier used in many SB APIs

Currently this is directly mapped to the underlying holding type (not wrapped) for compatibility with existing usage semantics in apps (mainly switch/case statements)

Note

> In a future version it could become a type-safe wrapper similar to the route index, to avoid message IDs getting mixed between other integer values.

Definition at line 115 of file cfe_sb_extern_typedefs.h.

39.34.1.3 CFE_SB_MsgRouteIdx_Atom_t

typedef uint16 CFE_SB_MsgRouteIdx_Atom_t

An integer type that should be used for indexing into the Routing Table.

Definition at line 91 of file cfe_sb_extern_typedefs.h.

39.34.1.4   CFE_SB_QosPriority_Enum_t

typedef uint8 CFE_SB_QosPriority_Enum_t

Selects the priorty level for message routing.

See also

> enum CFE_SB_QosPriority

Definition at line 60 of file cfe_sb_extern_typedefs.h.

39.34.1.5   CFE_SB_QosReliability_Enum_t

typedef uint8 CFE_SB_QosReliability_Enum_t

Selects the reliability level for message routing.

See also

> enum CFE_SB_QosReliability

Definition at line 86 of file cfe_sb_extern_typedefs.h.

39.34.2   Enumeration Type Documentation

39.34.2.1   CFE_SB_QosPriority

enum CFE_SB_QosPriority

Label definitions associated with CFE_SB_QosPriority_Enum_t.

Enumerator

CFE_SB_QosPriority_LOW	Normal priority level.
CFE_SB_QosPriority_HIGH	High priority.

Definition at line 40 of file cfe_sb_extern_typedefs.h.

39.34.2.2   CFE_SB_QosReliability

enum CFE_SB_QosReliability

Label definitions associated with CFE_SB_QosReliability_Enum_t.

Enumerator

CFE_SB_QosReliability_LOW	Normal (best-effort) reliability.
CFE_SB_QosReliability_HIGH	High reliability.

Definition at line 66 of file cfe_sb_extern_typedefs.h.

39.35   cfe/fsw/cfe-core/src/inc/cfe_sb_msg.h File Reference

```
#include "common_types.h"
#include "cfe_sb.h"
#include "cfe_es.h"
```

Data Structures

- struct CFE_SB_WriteFileInfoCmd_Payload_t

    Write File Info Commands.
- struct CFE_SB_WriteFileInfoCmd_t
- struct CFE_SB_RouteCmd_Payload_t

    Enable/Disable Route Commands.
- struct CFE_SB_RouteCmd_t
- struct CFE_SB_HousekeepingTlm_Payload_t
- struct CFE_SB_HousekeepingTlm_t
- struct CFE_SB_PipeDepthStats_t

    SB Pipe Depth Statistics.
- struct CFE_SB_StatsTlm_Payload_t
- struct CFE_SB_StatsTlm_t
- struct CFE_SB_RoutingFileEntry_t

    SB Routing File Entry.
- struct CFE_SB_MsgMapFileEntry_t

    SB Map File Entry.
- struct CFE_SB_SingleSubscriptionTlm_Payload_t
- struct CFE_SB_SingleSubscriptionTlm_t
- struct CFE_SB_SubEntries_t

    SB Previous Subscriptions Entry.
- struct CFE_SB_AllSubscriptionsTlm_Payload_t
- struct CFE_SB_AllSubscriptionsTlm_t

Macros

- #define CFE_SB_NOOP_CC 0
- #define CFE_SB_RESET_COUNTERS_CC 1
- #define CFE_SB_SEND_SB_STATS_CC 2
- #define CFE_SB_SEND_ROUTING_INFO_CC 3
- #define CFE_SB_ENABLE_ROUTE_CC 4
- #define CFE_SB_DISABLE_ROUTE_CC 5
- #define CFE_SB_SEND_PIPE_INFO_CC 7
- #define CFE_SB_SEND_MAP_INFO_CC 8
- #define CFE_SB_ENABLE_SUB_REPORTING_CC 9
- #define CFE_SB_DISABLE_SUB_REPORTING_CC 10
- #define CFE_SB_SEND_PREV_SUBS_CC 11

Typedefs

- typedef CFE_SB_CmdHdr_t CFE_SB_Noop_t
- typedef CFE_SB_CmdHdr_t CFE_SB_ResetCounters_t
- typedef CFE_SB_CmdHdr_t CFE_SB_EnableSubReporting_t
- typedef CFE_SB_CmdHdr_t CFE_SB_DisableSubReporting_t
- typedef CFE_SB_CmdHdr_t CFE_SB_SendSbStats_t
- typedef CFE_SB_CmdHdr_t CFE_SB_SendPrevSubs_t
- typedef CFE_SB_WriteFileInfoCmd_t CFE_SB_SendRoutingInfo_t
- typedef CFE_SB_WriteFileInfoCmd_t CFE_SB_SendPipeInfo_t
- typedef CFE_SB_WriteFileInfoCmd_t CFE_SB_SendMapInfo_t
- typedef CFE_SB_RouteCmd_t CFE_SB_EnableRoute_t
- typedef CFE_SB_RouteCmd_t CFE_SB_DisableRoute_t
- typedef CFE_SB_HousekeepingTlm_t CFE_SB_HKMsg_t
- typedef CFE_SB_StatsTlm_t CFE_SB_StatMsg_t
- typedef CFE_SB_AllSubscriptionsTlm_t CFE_SB_PrevSubMsg_t
- typedef CFE_SB_SingleSubscriptionTlm_t CFE_SB_SubRprtMsg_t

39.35.1   Macro Definition Documentation

39.35.1.1   CFE_SB_DISABLE_ROUTE_CC

```
#define CFE_SB_DISABLE_ROUTE_CC 5
```

Name Disable Software Bus Route

Description

This command will disable a particular destination. The destination is specified in terms of MsgID and PipeID. The MsgId and PipeID are parmaters in the command. All destinations are enabled by default.

Command Mnemonic(s) $sc_$cpu_SB_DisRoute

Command Structure

CFE_SB_RouteCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_SB_CMDPC -** command execution counter will increment

- View routing information CFE_SB_SEND_ROUTING_INFO_CC to verify enable/disable state change

- The CFE_SB_DSBL_RTE2_EID debug event message will be generated. All debug events are filtered by default.

- Destination will stop receiving messages.

Error Conditions

An Error may occur if the MsgId or PipeId parmaters do not pass validation or the destination does not exist.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_SB_CMDEC -** command error counter will increment

- A command specific error event message is issued for all error cases. See CFE_SB_DSBL_RTE1_EID or CF←↪E_SB_DSBL_RTE3_EID

Criticality

This command is not intended to be used in nominal conditions. It is possible to get into a state where a destination cannot be re-enabled without reseting the processor. For instance, sending this command with CFE_SB_CMD←↪_MID and the SB_Cmd_Pipe would inhibit any ground commanding to the software bus until the processor was reset. There are similar problems that may occur when using this command.

See also

CFE_SB_SEND_ROUTING_INFO_CC, CFE_SB_ENABLE_ROUTE_CC, CFE_SB_RouteCmd_t

Definition at line 277 of file cfe_sb_msg.h.

39.35.1.2   CFE_SB_DISABLE_SUB_REPORTING_CC

```
#define CFE_SB_DISABLE_SUB_REPORTING_CC 10
```

Name Disable Subscription Reporting Command

Description

This command will disable subscription reporting and is intended to be used only by the CFS SBN (Software Bus
Networking) Application. It is not intended to be sent from the ground or used by operations. When subscription
reporting is enabled, SB will generate and send a software bus packet for each subscription received. The software
bus packet that is sent contains the information received in the subscription API. This subscription report is neeeded
by SBN if offboard routing is required.

Command Mnemonic(s) $sc_$cpu_SB_DisSubRptg

Command Structure

CFE_SB_CmdHdr_t

Command Verification

Successful execution of this command will result in the suppression of packets (with the CFE_SB_ONESUB_TL↩
M_MID MsgId) for each subscription received by SB through the subscription APIs.

Error Conditions

None

Criticality

None

See also

CFE_SB_SingleSubscriptionTlm_t, CFE_SB_ENABLE_SUB_REPORTING_CC, CFE_SB_SEND_PREV_SUB↩
S_CC

Definition at line 432 of file cfe_sb_msg.h.

39.35.1.3   CFE_SB_ENABLE_ROUTE_CC

`#define CFE_SB_ENABLE_ROUTE_CC 4`

Name Enable Software Bus Route

Description

This command will enable a particular destination. The destination is specified in terms of MsgID and PipeID. The MsgId and PipeID are parmaters in the command. All destinations are enabled by default. This command is needed only after a CFE_SB_DISABLE_ROUTE_CC command is used.

Command Mnemonic(s) $sc_$cpu_SB_EnaRoute

Command Structure

CFE_SB_RouteCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_SB_CMDPC -** command execution counter will increment
- View routing information CFE_SB_SEND_ROUTING_INFO_CC to verify enable/disable state change
- The CFE_SB_ENBL_RTE2_EID debug event message will be generated. All debug events are filtered by default.
- Destination will begin receiving messages.

Error Conditions

An Error may occur if the MsgId or PipeId parmaters do not pass validation or the destination does not exist.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_SB_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases. See CFE_SB_ENBL_RTE1_EID or CF↩E_SB_ENBL_RTE3_EID

Criticality

This command is not inherently dangerous.

See also

CFE_SB_SEND_ROUTING_INFO_CC, CFE_SB_DISABLE_ROUTE_CC, CFE_SB_RouteCmd_t

Definition at line 234 of file cfe_sb_msg.h.

39.35.1.4   CFE_SB_ENABLE_SUB_REPORTING_CC

`#define CFE_SB_ENABLE_SUB_REPORTING_CC 9`

Name Enable Subscription Reporting Command

Description

This command will enable subscription reporting and is intended to be used only by the CFS SBN (Software Bus Networking) Application. It is not intended to be sent from the ground or used by operations. When subscription reporting is enabled, SB will generate and send a software bus packet for each subscription received. The software bus packet that is sent contains the information received in the subscription API. This subscription report is neeeded by SBN if offboard routing is required.

Command Mnemonic(s) $sc_$cpu_SB_EnaSubRptg

Command Structure

CFE_SB_CmdHdr_t

Command Verification

Successful execution of this command will result in the sending of a packet (with the CFE_SB_ONESUB_TLM_MID MsgId) for each subscription received by SB through the subscription APIs.

Error Conditions

None

Criticality

None

See also

CFE_SB_SingleSubscriptionTlm_t, CFE_SB_DISABLE_SUB_REPORTING_CC, CFE_SB_SEND_PREV_SU↩
BS_CC

Definition at line 399 of file cfe_sb_msg.h.

39.35.1.5 CFE_SB_NOOP_CC

```
#define CFE_SB_NOOP_CC 0
```

Name Software Bus No-Op

Description

This command performs no other function than to increment the command execution counter. The command may be used to verify general aliveness of the Software Bus task.

Command Mnemonic(s) $sc_$cpu_SB_NOOP

Command Structure

CFE_SB_CmdHdr_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_SB_CMDPC -** command execution counter will increment
- The CFE_SB_CMD0_RCVD_EID informational event message will be generated

Error Conditions

There are no error conditions for this command. If the Software Bus receives the command, the event is sent (although it may be filtered by EVS) and the counter is incremented unconditionally.

Criticality

None

See also

Definition at line 78 of file cfe_sb_msg.h.

39.35.1.6   CFE_SB_RESET_COUNTERS_CC

```
#define CFE_SB_RESET_COUNTERS_CC 1
```

Name Software Bus Reset Counters

Description

>   This command resets the following counters within the Software Bus housekeeping telemetry:
>
>   • Command Execution Counter ($sc_$cpu_SB_CMDPC)
>
>   • Command Error Counter ($sc_$cpu_SB_CMDEC)

Command Mnemonic(s) $sc_$cpu_SB_ResetCtrs

Command Structure

>   CFE_SB_CmdHdr_t

Command Verification

>   Successful execution of this command may be verified with the following telemetry:
>
>   • **$sc_$cpu_SB_CMDPC -** command execution counter will increment
>
>   • The CFE_SB_CMD1_RCVD_EID informational event message will be generated

Error Conditions

>   There are no error conditions for this command. If the Software Bus receives the command, the event is sent
>   (although it may be filtered by EVS) and the counter is incremented unconditionally.

Criticality

>   This command is not inherently dangerous. However, it is possible for ground systems and on-board safing proce-
>   dures to be designed such that they react to changes in the counter values that are reset by this command.

See also

Definition at line 115 of file cfe_sb_msg.h.

39.35.1.7 CFE_SB_SEND_MAP_INFO_CC

```
#define CFE_SB_SEND_MAP_INFO_CC 8
```

Name Write Map Info to a File

This command will create a file containing the software bus message

> map information. The message map is a lookup table (an array of uint16s)that allows fast access to the correct routing table element during a softeware bus send operation. This is diasgnostic information that may be needed due to the dynamic nature of the cFE software bus. An abosulte path and filename may be specified in the command. If this command field contains an empty string (NULL terminator as the first character) the default file path and name is used. The default file path and name is defined in the platform configuration file as CFE_PLATFOR↩ M_SB_DEFAULT_MAP_FILENAME.

Command Mnemonic(s) $sc_$cpu_SB_WriteMap2File

Command Structure

> CFE_SB_WriteFileInfoCmd_t

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_SB_CMDPC -** command execution counter will increment.
> - Specified filename created at specified location. See description.
> - The CFE_SB_SND_RTG_EID debug event message will be generated. All debug events are filtered by default.

Error Conditions

> - Errors may occur during write operations to the file. Possible causes might be insufficient space in the file system or the filename or file path is improperly specified.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_SB_CMDEC -** command error counter will increment

- A command specific error event message is issued for all error cases. See CFE_SB_SND_RTG_ERR1_EID and CFE_SB_FILEWRITE_ERR_EID

Criticality

> This command is not inherently dangerous. It will create a new file in the file system and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

> CFE_SB_SEND_ROUTING_INFO_CC, CFE_SB_SEND_PIPE_INFO_CC

Definition at line 366 of file cfe_sb_msg.h.

39.35.1.8   CFE_SB_SEND_PIPE_INFO_CC

#define CFE_SB_SEND_PIPE_INFO_CC 7

[Name](#) Write Pipe Info to a File

Description

> This command will create a file containing the software bus pipe information. The pipe information contains information about every pipe that has been created through the [CFE_SB_CreatePipe](#) API. An abosulte path and filename may be specified in the command. If this command field contains an empty string (NULL terminator as the first character) the default file path and name is used. The default file path and name is defined in the platform configuration file as [CFE_PLATFORM_SB_DEFAULT_PIPE_FILENAME](#).

[Command Mnemonic(s)](#) $sc_$cpu_SB_WritePipe2File

Command Structure

> [CFE_SB_WriteFileInfoCmd_t](#)

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_SB_CMDPC -** command execution counter will increment.
> - Specified filename created at specified location. See description.
> - The [CFE_SB_SND_RTG_EID](#) debug event message will be generated. All debug events are filtered by default.

Error Conditions

> - Errors may occur during write operations to the file. Possible causes might be insufficient space in the file system or the filename or file path is improperly specified.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_SB_CMDEC -** command error counter will increment

- A command specific error event message is issued for all error cases. See [CFE_SB_SND_RTG_ERR1_EID](#) and [CFE_SB_FILEWRITE_ERR_EID](#)

Criticality

> This command is not inherently dangerous. It will create a new file in the file system and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

> [CFE_SB_SEND_ROUTING_INFO_CC](#), [CFE_SB_SEND_MAP_INFO_CC](#)

Definition at line 321 of file cfe_sb_msg.h.

39.35.1.9 CFE_SB_SEND_PREV_SUBS_CC

```
#define CFE_SB_SEND_PREV_SUBS_CC 11
```

Name Send Previous Subscriptions Command

This command generates a series of packets that contain information

regarding all subscriptions previously received by SB. This command is intended to be used only by the CFS S↩
BN(Software Bus Networking) Application. It is not intended to be sent from the ground or used by operations.
When this command is received the software bus will generate and send a series of packets containing information
about all subscription previously received.

Command Mnemonic(s) $sc_$cpu_SB_SendPrevSubs

Command Structure

CFE_SB_CmdHdr_t

Command Verification

Successful execution of this command will result in a series of packets (with the CFE_SB_ALLSUBS_TLM_MID
MsgId) being sent on the software bus.

Error Conditions

None

Criticality

None

See also

CFE_SB_AllSubscriptionsTlm_t, CFE_SB_ENABLE_SUB_REPORTING_CC, CFE_SB_DISABLE_SUB_REP↩
ORTING_CC

Definition at line 464 of file cfe_sb_msg.h.

39.35.1.10   CFE_SB_SEND_ROUTING_INFO_CC

`#define CFE_SB_SEND_ROUTING_INFO_CC 3`

Name Write Software Bus Routing Info to a File

Description

This command will create a file containing the software bus routing information. The routing information contains information about every subscription that has been received through the SB subscription APIs. An abosulte path and filename may be specified in the command. If this command field contains an empty string (NULL terminator as the first character) the default file path and name is used. The default file path and name is defined in the platform configuration file as CFE_PLATFORM_SB_DEFAULT_ROUTING_FILENAME.

Command Mnemonic(s) $sc_$cpu_SB_WriteRouting2File

Command Structure

CFE_SB_WriteFileInfoCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_SB_CMDPC -** command execution counter will increment.
- Specified filename created at specified location. See description.
- The CFE_SB_SND_RTG_EID debug event message will be generated. All debug events are filtered by default.

Error Conditions

- Errors may occur during write operations to the file. Possible causes might be insufficient space in the file system or the filename or file path is improperly specified.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_SB_CMDEC -** command error counter will increment

- A command specific error event message is issued for all error cases. See CFE_SB_SND_RTG_ERR1_EID and CFE_SB_FILEWRITE_ERR_EID

Criticality

This command is not inherently dangerous. It will create a new file in the file system and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

CFE_SB_SEND_PIPE_INFO_CC, CFE_SB_SEND_MAP_INFO_CC, CFE_SB_WriteFileInfoCmd_t

Definition at line 194 of file cfe_sb_msg.h.

39.35.1.11 CFE_SB_SEND_SB_STATS_CC

```
#define CFE_SB_SEND_SB_STATS_CC 2
```

Name Send Software Bus Statistics

Description

This command will cause the SB task to send a statistics packet containing current utilization figures and high water marks which may be useful for checking the margin of the SB platform configuration settings.

Command Mnemonic(s) $sc_$cpu_SB_DumpStats

Command Structure

CFE_SB_CmdHdr_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_SB_CMDPC -** command execution counter will increment
- Receipt of statistics packet with MsgId CFE_SB_STATS_TLM_MID
- The CFE_SB_SND_STATS_EID debug event message will be generated. All debug events are filtered by default.

Error Conditions

There are no error conditions for this command. If the Software Bus receives the command, the debug event is sent and the counter is incremented unconditionally.

Criticality

This command is not inherently dangerous. It will create and send a message on the software bus. If performed repeatedly, it is possible that receiver pipes may overflow.

See also

Definition at line 150 of file cfe_sb_msg.h.

39.35.2 Typedef Documentation

39.35.2.1 CFE_SB_DisableRoute_t

typedef CFE_SB_RouteCmd_t CFE_SB_DisableRoute_t

Definition at line 534 of file cfe_sb_msg.h.

39.35.2.2 CFE_SB_DisableSubReporting_t

typedef CFE_SB_CmdHdr_t CFE_SB_DisableSubReporting_t

Definition at line 481 of file cfe_sb_msg.h.

39.35.2.3 CFE_SB_EnableRoute_t

typedef CFE_SB_RouteCmd_t CFE_SB_EnableRoute_t

Definition at line 533 of file cfe_sb_msg.h.

39.35.2.4 CFE_SB_EnableSubReporting_t

typedef CFE_SB_CmdHdr_t CFE_SB_EnableSubReporting_t

Definition at line 480 of file cfe_sb_msg.h.

39.35.2.5 CFE_SB_HKMsg_t

typedef CFE_SB_HousekeepingTlm_t CFE_SB_HKMsg_t

Definition at line 764 of file cfe_sb_msg.h.

39.35.2.6 CFE_SB_Noop_t

typedef CFE_SB_CmdHdr_t CFE_SB_Noop_t

Definition at line 478 of file cfe_sb_msg.h.

39.35.2.7 CFE_SB_PrevSubMsg_t

typedef CFE_SB_AllSubscriptionsTlm_t CFE_SB_PrevSubMsg_t

Definition at line 766 of file cfe_sb_msg.h.

39.35.2.8 CFE_SB_ResetCounters_t

typedef CFE_SB_CmdHdr_t CFE_SB_ResetCounters_t

Definition at line 479 of file cfe_sb_msg.h.

39.35.2.9 CFE_SB_SendMapInfo_t

typedef CFE_SB_WriteFileInfoCmd_t CFE_SB_SendMapInfo_t

Definition at line 508 of file cfe_sb_msg.h.

39.35.2.10 CFE_SB_SendPipeInfo_t

typedef CFE_SB_WriteFileInfoCmd_t CFE_SB_SendPipeInfo_t

Definition at line 507 of file cfe_sb_msg.h.

39.35.2.11 CFE_SB_SendPrevSubs_t

typedef CFE_SB_CmdHdr_t CFE_SB_SendPrevSubs_t

Definition at line 483 of file cfe_sb_msg.h.

39.35.2.12 CFE_SB_SendRoutingInfo_t

typedef CFE_SB_WriteFileInfoCmd_t CFE_SB_SendRoutingInfo_t

Definition at line 506 of file cfe_sb_msg.h.

39.35.2.13   CFE_SB_SendSbStats_t

typedef CFE_SB_CmdHdr_t CFE_SB_SendSbStats_t

Definition at line 482 of file cfe_sb_msg.h.

39.35.2.14   CFE_SB_StatMsg_t

typedef CFE_SB_StatsTlm_t CFE_SB_StatMsg_t

Definition at line 765 of file cfe_sb_msg.h.

39.35.2.15   CFE_SB_SubRprtMsg_t

typedef CFE_SB_SingleSubscriptionTlm_t CFE_SB_SubRprtMsg_t

Definition at line 767 of file cfe_sb_msg.h.

39.36   cfe/fsw/cfe-core/src/inc/cfe_tbl.h File Reference

```
#include "cfe_tbl_extern_typedefs.h"
#include "cfe_sb_extern_typedefs.h"
#include "common_types.h"
#include "cfe_time.h"
#include "osconfig.h"
```

Data Structures

- struct CFE_TBL_Info_t

  Table Info.

Macros

- #define CFE_TBL_OPT_BUFFER_MSK (0x0001)

    Table buffer mask.
- #define CFE_TBL_OPT_SNGL_BUFFER (0x0000)

    Single buffer table.
- #define CFE_TBL_OPT_DBL_BUFFER (0x0001)

    Double buffer table.
- #define CFE_TBL_OPT_LD_DMP_MSK (0x0002)

    Table load/dump mask.
- #define CFE_TBL_OPT_LOAD_DUMP (0x0000)

    Load/Dump table.
- #define CFE_TBL_OPT_DUMP_ONLY (0x0002)

    Dump only table.
- #define CFE_TBL_OPT_USR_DEF_MSK (0x0004)

    Table user defined mask.
- #define CFE_TBL_OPT_NOT_USR_DEF (0x0000)

    Not user defined table.
- #define CFE_TBL_OPT_USR_DEF_ADDR (0x0006)

    User Defined table,.
- #define CFE_TBL_OPT_CRITICAL_MSK (0x0008)

    Table critical mask.
- #define CFE_TBL_OPT_NOT_CRITICAL (0x0000)

    Not critical table.
- #define CFE_TBL_OPT_CRITICAL (0x0008)

    Critical table.
- #define CFE_TBL_OPT_DEFAULT (CFE_TBL_OPT_SNGL_BUFFER | CFE_TBL_OPT_LOAD_DUMP)

    Default table options.
- #define CFE_TBL_MAX_FULL_NAME_LEN (CFE_MISSION_TBL_MAX_FULL_NAME_LEN)

    Table maximum full name length.
- #define CFE_TBL_BAD_TABLE_HANDLE (CFE_TBL_Handle_t) 0xFFFF

    Bad table handle.
- #define CFE_TBL_INACTIVE_BUFFER CFE_TBL_BufferSelect_INACTIVE
- #define CFE_TBL_ACTIVE_BUFFER CFE_TBL_BufferSelect_ACTIVE

Typedefs

- typedef int32(∗ CFE_TBL_CallbackFuncPtr_t) (void ∗TblPtr)

    Table Callback Function.
- typedef int16 CFE_TBL_Handle_t

    Table Handle primitive.

Enumerations

- enum CFE_TBL_SrcEnum_t { CFE_TBL_SRC_FILE = 0, CFE_TBL_SRC_ADDRESS }

    Table Source.

Functions

- int32 CFE_TBL_Register (CFE_TBL_Handle_t ∗TblHandlePtr, const char ∗Name, uint32 Size, uint16 TblOption↩
  Flags, CFE_TBL_CallbackFuncPtr_t TblValidationFuncPtr)

    Register a table with cFE to obtain Table Management Services.
- int32 CFE_TBL_Share (CFE_TBL_Handle_t ∗TblHandlePtr, const char ∗TblName)

    Obtain handle of table registered by another application.
- int32 CFE_TBL_Unregister (CFE_TBL_Handle_t TblHandle)

    Unregister a previously registered table and free associated resources.
- int32 CFE_TBL_Load (CFE_TBL_Handle_t TblHandle, CFE_TBL_SrcEnum_t SrcType, const void ∗SrcDataPtr)

    Load a specified table with data from specified source.
- int32 CFE_TBL_Update (CFE_TBL_Handle_t TblHandle)

    Update contents of a specified table, if an update is pending.
- int32 CFE_TBL_Validate (CFE_TBL_Handle_t TblHandle)

    Perform steps to validate the contents of a table image.
- int32 CFE_TBL_Manage (CFE_TBL_Handle_t TblHandle)

    Perform standard operations to maintain a table.
- int32 CFE_TBL_DumpToBuffer (CFE_TBL_Handle_t TblHandle)

    Copies the contents of a Dump Only Table to a shared buffer.
- int32 CFE_TBL_Modified (CFE_TBL_Handle_t TblHandle)

    Notify cFE Table Services that table contents have been modified by the Application.
- int32 CFE_TBL_GetAddress (void ∗∗TblPtr, CFE_TBL_Handle_t TblHandle)

    Obtain the current address of the contents of the specified table.
- int32 CFE_TBL_ReleaseAddress (CFE_TBL_Handle_t TblHandle)

    Release previously obtained pointer to the contents of the specified table.
- int32 CFE_TBL_GetAddresses (void ∗∗TblPtrs[ ], uint16 NumTables, const CFE_TBL_Handle_t TblHandles[ ])

    Obtain the current addresses of an array of specified tables.
- int32 CFE_TBL_ReleaseAddresses (uint16 NumTables, const CFE_TBL_Handle_t TblHandles[ ])

    Release the addresses of an array of specified tables.
- int32 CFE_TBL_GetStatus (CFE_TBL_Handle_t TblHandle)

    Obtain current status of pending actions for a table.
- int32 CFE_TBL_GetInfo (CFE_TBL_Info_t ∗TblInfoPtr, const char ∗TblName)

    Obtain characteristics/information of/about a specified table.
- int32   CFE_TBL_NotifyByMessage   (CFE_TBL_Handle_t   TblHandle,   CFE_SB_MsgId_t   MsgId,   uint16
  CommandCode, uint32 Parameter)

    Instruct cFE Table Services to notify Application via message when table requires management.

39.36.1   Macro Definition Documentation

39.36.1.1   CFE_TBL_ACTIVE_BUFFER

```
#define CFE_TBL_ACTIVE_BUFFER CFE_TBL_BufferSelect_ACTIVE
```

Definition at line 97 of file cfe_tbl.h.

39.36.1.2 CFE_TBL_BAD_TABLE_HANDLE

`#define CFE_TBL_BAD_TABLE_HANDLE (`CFE_TBL_Handle_t`) 0xFFFF`

Bad table handle.

Definition at line 83 of file cfe_tbl.h.

39.36.1.3 CFE_TBL_INACTIVE_BUFFER

`#define CFE_TBL_INACTIVE_BUFFER` CFE_TBL_BufferSelect_INACTIVE

Definition at line 96 of file cfe_tbl.h.

39.36.1.4 CFE_TBL_MAX_FULL_NAME_LEN

`#define CFE_TBL_MAX_FULL_NAME_LEN (`CFE_MISSION_TBL_MAX_FULL_NAME_LEN`)`

Table maximum full name length.

The full length of table names is defined at the mission scope. This is defined here to support applications that depend on cfe_tbl.h providing this value.

Definition at line 80 of file cfe_tbl.h.

39.36.2 Typedef Documentation

39.36.2.1 CFE_TBL_CallbackFuncPtr_t

`typedef` int32`(* CFE_TBL_CallbackFuncPtr_t) (void *TblPtr)`

Table Callback Function.

Definition at line 107 of file cfe_tbl.h.

39.36.2.2 CFE_TBL_Handle_t

`typedef` int16 CFE_TBL_Handle_t

Table Handle primitive.

Definition at line 110 of file cfe_tbl.h.

39.36.3 Enumeration Type Documentation

39.36.3.1 CFE_TBL_SrcEnum_t

`enum` CFE_TBL_SrcEnum_t

Table Source.

Enumerator

CFE_TBL_SRC_FILE	File source When this option is selected, the `SrcDataPtr` will be interpreted as a pointer to a null terminated character string. The string should specify the full path and filename of the file containing the initial data contents of the table.
CFE_TBL_SRC_ADDRESS	Address source When this option is selected, the `SrcDataPtr` will be interpreted as a pointer to a memory location that is the beginning of the initialization data for loading the table OR, in the case of a "user defined" dump only table, the address of the active table itself. The block of memory is assumed to be of the same size specified in the CFE_TBL_Register function Size parameter.

Definition at line 113 of file cfe_tbl.h.

39.37   cfe/fsw/cfe-core/src/inc/cfe_tbl_events.h File Reference

Macros

- #define CFE_TBL_MAX_EID 103

Informational Event Message IDs

- #define CFE_TBL_INIT_INF_EID 1

  'Task Initialized'

Command Response Informational Event Message IDs

- #define CFE_TBL_NOOP_INF_EID 10

  'No-op command'
- #define CFE_TBL_RESET_INF_EID 11

  'Reset Counters command'
- #define CFE_TBL_FILE_LOADED_INF_EID 12

  'Successful load of '%s' into '%s' working buffer'
- #define CFE_TBL_OVERWRITE_DUMP_INF_EID 13

  'Successfully overwrote '%s' with Table '%s''
- #define CFE_TBL_WRITE_DUMP_INF_EID 14

  'Successfully dumped Table '%s' to '%s''
- #define CFE_TBL_OVERWRITE_REG_DUMP_INF_EID 15

  'Successfully overwrote '%s' with Table Registry'
- #define CFE_TBL_VAL_REQ_MADE_INF_EID 16

  'Tbl Services issued validation request for '%s''
- #define CFE_TBL_LOAD_PEND_REQ_INF_EID 17

  'Tbl Services notifying App that '%s' has a load pending'
- #define CFE_TBL_TLM_REG_CMD_INF_EID 18

  'Table Registry entry for '%s' will be telemetered'
- #define CFE_TBL_LOAD_ABORT_INF_EID 21

  'Table Load Aborted for '%s''
- #define CFE_TBL_WRITE_REG_DUMP_INF_EID 22

  'Successfully dumped Table Registry to '%s':Size=%d,Entries=%d'
- #define CFE_TBL_ASSUMED_VALID_INF_EID 23

  'Tbl Services assumes '%s' is valid. No Validation Function has been registered'

Command Error Event Message IDs

- #define CFE_TBL_MID_ERR_EID 50

    'Invalid message ID – ID = 0x%X'
- #define CFE_TBL_CC1_ERR_EID 51

    'Invalid command code – ID = 0x%X, CC = %d'
- #define CFE_TBL_LEN_ERR_EID 52

    'Invalid cmd pkt – ID = 0x%X, CC = %d, Len = %d'
- #define CFE_TBL_FILE_ACCESS_ERR_EID 53

    'Unable to open file '%s' for table load, Status = 0x%08X'
- #define CFE_TBL_FILE_STD_HDR_ERR_EID 54

    'Unable to read std header for '%s', Status = 0x%08X'
- #define CFE_TBL_FILE_TBL_HDR_ERR_EID 55

    'Unable to read tbl header for '%s', Status = 0x%08X'
- #define CFE_TBL_FAIL_HK_SEND_ERR_EID 56

    'Unable to send Hk Packet (Status=0x%08X)'
- #define CFE_TBL_NO_SUCH_TABLE_ERR_EID 57

    'Unable to locate '%s' in Table Registry'
- #define CFE_TBL_FILE_TYPE_ERR_EID 58

    'File '%s' is not a cFE file type, ContentType = 0x%08X'
- #define CFE_TBL_FILE_SUBTYPE_ERR_EID 59

    'File subtype for '%s' is wrong. Subtype = 0x%08X'
- #define CFE_TBL_NO_WORK_BUFFERS_ERR_EID 60

    'No working buffers available for table '%s''
- #define CFE_TBL_INTERNAL_ERROR_ERR_EID 61

    'Internal Error (Status=0x%08X)'
- #define CFE_TBL_CREATING_DUMP_FILE_ERR_EID 62

    'Error creating dump file '%s', Status=0x%08X'
- #define CFE_TBL_WRITE_CFE_HDR_ERR_EID 63

    'Error writing cFE File Header to '%s', Status=0x%08X'
- #define CFE_TBL_WRITE_TBL_HDR_ERR_EID 64

    'Error writing Tbl image File Header to '%s', Status=0x%08X'
- #define CFE_TBL_WRITE_TBL_IMG_ERR_EID 65

    'Error writing Tbl image to '%s', Status=0x%08X'
- #define CFE_TBL_NO_INACTIVE_BUFFER_ERR_EID 66

    'No Inactive Buffer for Table '%s' present'
- #define CFE_TBL_TOO_MANY_VALIDATIONS_ERR_EID 67

    'Too many Table Validations have been requested'
- #define CFE_TBL_WRITE_TBL_REG_ERR_EID 68

    'Error writing Registry to '%s', Status=0x%08X'
- #define CFE_TBL_LOAD_ABORT_ERR_EID 69

    'Cannot abort load of '%s'. No load started.'
- #define CFE_TBL_ACTIVATE_ERR_EID 70

    'Cannot activate table '%s'. No Inactive image available'
- #define CFE_TBL_FILE_INCOMPLETE_ERR_EID 71

    'Incomplete load of '%s' into '%s' working buffer'
- #define CFE_TBL_LOAD_EXCEEDS_SIZE_ERR_EID 72

    'Cannot load '%s' (%d) at offset %d in '%s' (%d)'
- #define CFE_TBL_ZERO_LENGTH_LOAD_ERR_EID 73

    'Table Hdr in '%s' indicates no data in file'
- #define CFE_TBL_PARTIAL_LOAD_ERR_EID 74

    ''%s' has partial load for uninitialized table '%s''
- #define CFE_TBL_FILE_TOO_BIG_ERR_EID 75

    'File '%s' has more data than Tbl Hdr indicates (%d)'
- #define CFE_TBL_TOO_MANY_DUMPS_ERR_EID 76

'Too many Dump Only Table Dumps have been requested'
- #define CFE_TBL_DUMP_PENDING_ERR_EID 77

'A dump for '%s' is already pending'
- #define CFE_TBL_ACTIVATE_DUMP_ONLY_ERR_EID 78

'Illegal attempt to activate dump-only table '%s''
- #define CFE_TBL_LOADING_A_DUMP_ONLY_ERR_EID 79

'Attempted to load DUMP-ONLY table '%s' from '%s''
- #define CFE_TBL_ILLEGAL_BUFF_PARAM_ERR_EID 80

'Cmd for Table '%s' had illegal buffer parameter (0x%08X)'
- #define CFE_TBL_UNVALIDATED_ERR_EID 81

'Cannot activate table '%s'. Inactive image not Validated'
- #define CFE_TBL_IN_REGISTRY_ERR_EID 82

''%s' found in Table Registry. CDS cannot be deleted until table is unregistered'
- #define CFE_TBL_NOT_CRITICAL_TBL_ERR_EID 83

'Table '%s' is in Critical Table Registry but CDS is not tagged as a table'
- #define CFE_TBL_NOT_IN_CRIT_REG_ERR_EID 84

'Table '%s' is not found in Critical Table Registry'
- #define CFE_TBL_CDS_NOT_FOUND_ERR_EID 85

'Unable to locate '%s' in CDS Registry'
- #define CFE_TBL_CDS_DELETE_ERR_EID 86

'Error while deleting '%s' from CDS, See SysLog.(Err=0x%08X)'
- #define CFE_TBL_CDS_OWNER_ACTIVE_ERR_EID 87

'CDS '%s' owning app is still active'
- #define CFE_TBL_LOADING_PENDING_ERR_EID 88

'Attempted to load table '%s' while previous load is still pending'
- #define CFE_TBL_FAIL_NOTIFY_SEND_ERR_EID 89

'Manage Notification Pkt Error(MsgId=0x%08X, CC=0x%04X, Param=0x%08X, Status=0x%08X)'

API Informational Event Message IDs

- #define CFE_TBL_LOAD_SUCCESS_INF_EID 35

'Successfully loaded '%s' from '%s''
- #define CFE_TBL_VALIDATION_INF_EID 36

'%s validation successful for Inactive '%s''
- #define CFE_TBL_UPDATE_SUCCESS_INF_EID 37

'%s Successfully Updated '%s''
- #define CFE_TBL_CDS_DELETED_INFO_EID 38

'Successfully removed '%s' from CDS'

API Error Event Message IDs

- #define CFE_TBL_REGISTER_ERR_EID 90

'%s Failed to Register '%s', Status=0x%08X'
- #define CFE_TBL_SHARE_ERR_EID 91

'%s Failed to Share '%s', Status=0x%08X'
- #define CFE_TBL_UNREGISTER_ERR_EID 92

'%s Failed to Unregister '%s', Status=0x%08X'
- #define CFE_TBL_LOAD_VAL_ERR_EID 93
- #define CFE_TBL_LOAD_TYPE_ERR_EID 94

'%s Failed to Load '%s' (Invalid Source Type)"
- #define CFE_TBL_UPDATE_ERR_EID 95

'%s Failed to Update '%s', Status=0x%08X"
- #define CFE_TBL_VALIDATION_ERR_EID 96

'%s validation failed for Inactive '%s', Status=0x%08X'

- #define CFE_TBL_SPACECRAFT_ID_ERR_EID 97

    'Unable to verify Spacecraft ID for '%s', ID = 0x%08X'
- #define CFE_TBL_PROCESSOR_ID_ERR_EID 98

    'Unable to verify Processor ID for '%s', ID = 0x%08X'
- #define CFE_TBL_LOAD_DUMPONLY_ERR_EID 99

    Attempted to load Dump Only Tbl 's'
- #define CFE_TBL_LOAD_IN_PROGRESS_ERR_EID 100

    Load already in progress for 's'
- #define CFE_TBL_LOAD_FILENAME_LONG_ERR_EID 101

    Filename is too long ('s' (lu) > lu)
- #define CFE_TBL_LOAD_TBLNAME_MISMATCH_ERR_EID 102

    table name mismatch (exp=s, tblfilhdr=s)
- #define CFE_TBL_HANDLE_ACCESS_ERR_EID 103

    No access to Tbl handle=d

39.37.1 Macro Definition Documentation

39.37.1.1 CFE_TBL_ACTIVATE_DUMP_ONLY_ERR_EID

```
#define CFE_TBL_ACTIVATE_DUMP_ONLY_ERR_EID 78
```

```
'Illegal attempt to activate dump-only table '%s''
```

Event Message `'Illegal attempt to activate dump-only table '%s''`

Type: ERROR

Cause:

This event message is generated when a Table Activate command for a Dump-Only Table was received. By definition, Dump-Only tables are not allowed to be loaded with any new data.

Definition at line 694 of file cfe_tbl_events.h.

39.37.1.2   CFE_TBL_ACTIVATE_ERR_EID

#define CFE_TBL_ACTIVATE_ERR_EID 70

'Cannot activate table '%s'. No Inactive image available'

[Event Message](#) 'Cannot activate table '%s'. No Inactive image available'

Type: ERROR

Cause:

This event message is generated when an Activate Table command is received and the command specified table does not currently have an inactive buffer associated with it.

Definition at line 587 of file cfe_tbl_events.h.

39.37.1.3   CFE_TBL_ASSUMED_VALID_INF_EID

#define CFE_TBL_ASSUMED_VALID_INF_EID 23

'Tbl Services assumes '%s' is valid. No Validation Function has been registered'

[Event Message](#) 'Tbl Services assumes '%s' is valid. No Validation Function has
            been registered'

Type: INFORMATION

Cause:

This event message is generated when Table Services has received a Validation Command for a table that never specified a Validation Function when it was registered via the [CFE_TBL_Register](#) API.

Definition at line 241 of file cfe_tbl_events.h.

39.37.1.4 CFE_TBL_CC1_ERR_EID

`#define CFE_TBL_CC1_ERR_EID 51`

`'Invalid command code - ID = 0x%X, CC = %d'`

Event Message `'Invalid command code - ID = 0x%X, CC = %d'`

Type: ERROR

Cause:

This event message is generated when a message with the CFE_TBL_CMD_MID message ID has arrived but whose Command Code is not one of the command codes specified in cfe_tbl_msg.h . This problem is most likely to occur when:

1. A Message ID meant for another Application became corrupted and was set equal to CFE_TBL_CMD_MID.

2. The Command Code field in the Message became corrupted.

3. The command database at the ground station has been corrupted.

The `ID` field in the event message specifies the Message ID (in hex) and the `CC` field specifies the Command Code (in decimal) found in the message.

Definition at line 285 of file cfe_tbl_events.h.

39.37.1.5 CFE_TBL_CDS_DELETE_ERR_EID

`#define CFE_TBL_CDS_DELETE_ERR_EID 86`

`'Error while deleting '%s' from CDS, See SysLog.(Err=0x%08X)'`

Event Message `'Error while deleting '%s' from CDS, See SysLog.(Err=0x%08X)'`

Type: ERROR

Cause:

This event message is generated when an unexpected error was encountered during the deletion of the CDS. The System Log should have more precise information on the nature of the error.

Definition at line 800 of file cfe_tbl_events.h.

39.37.1.6   CFE_TBL_CDS_DELETED_INFO_EID

#define CFE_TBL_CDS_DELETED_INFO_EID 38

'Successfully removed '%s' from CDS'

Event Message 'Successfully removed '%s' from CDS'

Type: INFORMATION

Cause:

This event message is generated when a Critical Table's CDS has been successfully deleted.

Definition at line 897 of file cfe_tbl_events.h.

39.37.1.7   CFE_TBL_CDS_NOT_FOUND_ERR_EID

#define CFE_TBL_CDS_NOT_FOUND_ERR_EID 85

'Unable to locate '%s' in CDS Registry'

Event Message 'Unable to locate '%s' in CDS Registry'

Type: ERROR

Cause:

This event message is generated when a Table Delete Critical Data Store command is received specifying a table name that WAS found in the Critical Table Registry but its associated entry in the Critical Data Store Registry was not found. Somehow the two entities have become out of synch.

Definition at line 788 of file cfe_tbl_events.h.

39.37.1.8 CFE_TBL_CDS_OWNER_ACTIVE_ERR_EID

`#define CFE_TBL_CDS_OWNER_ACTIVE_ERR_EID 87`

`'CDS '%s' owning app is still active'`

Event Message `'CDS '%s' owning app is still active'`

Type: ERROR

Cause:

This event message is generated when an attempt is made to delete a CDS while an application with the same name as the CDS Prefix is still registered in the system. Owning applications must not be active before an associated CDS can be deleted.

Definition at line 813 of file cfe_tbl_events.h.

39.37.1.9 CFE_TBL_CREATING_DUMP_FILE_ERR_EID

`#define CFE_TBL_CREATING_DUMP_FILE_ERR_EID 62`

`'Error creating dump file '%s', Status=0x%08X'`

Event Message `'Error creating dump file '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated when a Table Dump or Table Registry Dump command was received and the cFE Table Services is unable to create the specified file.

The `Status` field provides the return status from the OS_creat function call.

Definition at line 473 of file cfe_tbl_events.h.

`#define CFE_TBL_CDS_OWNER_ACTIVE_ERR_EID 87`

39.37.1.10 CFE_TBL_DUMP_PENDING_ERR_EID

```
#define CFE_TBL_DUMP_PENDING_ERR_EID 77
```

```
'A dump for '%s' is already pending'
```

Event Message `'A dump for '%s' is already pending'`

Type: ERROR

Cause:

This event message is generated when a Table Dump command for a Dump-Only Table was received and Table Services hasn't finished processing the previous Table Dump command for the same Table.

Definition at line 682 of file cfe_tbl_events.h.

39.37.1.11 CFE_TBL_FAIL_HK_SEND_ERR_EID

```
#define CFE_TBL_FAIL_HK_SEND_ERR_EID 56
```

```
'Unable to send Hk Packet (Status=0x%08X)'
```

Event Message `'Unable to send Hk Packet (Status=0x%08X)'`

Type: ERROR

Cause:

This event message is generated when failure occurs while attempting to send the Housekeeping Message over the Software Bus.

The `Status` field of the event message contains the error code returned by CFE_SB_SendMsg.

Definition at line 370 of file cfe_tbl_events.h.

39.37.1.12 CFE_TBL_FAIL_NOTIFY_SEND_ERR_EID

`#define CFE_TBL_FAIL_NOTIFY_SEND_ERR_EID 89`

`'Manage Notification Pkt Error(MsgId=0x%08X, CC=0x%04X, Param=0x%08X, Status=0x%08X)'`

Event Message `'Manage Notification Pkt Error(MsgId=0x%08X, CC=0x%04X, Param=0x%08X, Status=0x%08X)'`

Type: ERROR

Cause:

This event message is generated when a table management notification message fails to be sent via the software bus.

The `MsgId` is the message ID of the table management notification message that was attempted to be sent, the `CC` is the command code, the `Param` is the application specified command parameter and the `Status` is the error code returned by the CFE_SB_SendMsg API call.

Definition at line 843 of file cfe_tbl_events.h.

39.37.1.13 CFE_TBL_FILE_ACCESS_ERR_EID

`#define CFE_TBL_FILE_ACCESS_ERR_EID 53`

`'Unable to open file '%s' for table load, Status = 0x%08X'`

Event Message `'Unable to open file '%s' for table load, Status = 0x%08X'`

Type: ERROR

Cause:

This event message is generated upon receipt of a Load Table command when the specified file containing the table image to be loaded cannot be opened. Possible causes for this are:

1. The filename was misspelled

2. The path to the file was incorrect

3. The length (including terminator) of the filename and/or path exceeds the allowable length (see OS_MAX_PAT←
   H_LEN and OS_MAX_FILE_NAME, respectively)

The `Status` field in the event message indicates the error code returned by the OS_open API.

Definition at line 324 of file cfe_tbl_events.h.

39.37.1.14   CFE_TBL_FILE_INCOMPLETE_ERR_EID

#define CFE_TBL_FILE_INCOMPLETE_ERR_EID 71

'Incomplete load of '%s' into '%s' working buffer'

Event Message 'Incomplete load of '%s' into '%s' working buffer'

Type: ERROR

Cause:

This event message is generated when a Load Table command is received and the Table Services is unable to load the number of bytes specified in the Table Image Header of the command specified file from the file into the Inactive Buffer.

Definition at line 600 of file cfe_tbl_events.h.

39.37.1.15   CFE_TBL_FILE_LOADED_INF_EID

#define CFE_TBL_FILE_LOADED_INF_EID 12

'Successful load of '%s' into '%s' working buffer'

Event Message 'Successful load of '%s' into '%s' working buffer'

Type: INFORMATION

Cause:

This event message is always generated after a successful execution of a cFE Table Services Load Table command

Definition at line 109 of file cfe_tbl_events.h.

39.37.1.16 CFE_TBL_FILE_STD_HDR_ERR_EID

#define CFE_TBL_FILE_STD_HDR_ERR_EID 54

'Unable to read std header for '%s', Status = 0x%08X'

Event Message 'Unable to read std header for '%s', Status = 0x%08X'

Type: ERROR

Cause:

This event message is generated when a read failure occurs during the reading of the cFE Standard File Header of a table image file specified either by an Application calling the CFE_TBL_Load API or in response to a command to Table Services requesting a table image file be loaded into an inactive buffer.

The Status field of the event message contains the error code returned by CFE_FS_ReadHeader.

Definition at line 340 of file cfe_tbl_events.h.

39.37.1.17 CFE_TBL_FILE_SUBTYPE_ERR_EID

#define CFE_TBL_FILE_SUBTYPE_ERR_EID 59

'File subtype for '%s' is wrong. Subtype = 0x%08X'

Event Message 'File subtype for '%s' is wrong. Subtype = 0x%08X'

Type: ERROR

Cause:

This event message is generated when either an Application calls the CFE_TBL_Load API or a Table Load command has been received and the specified file has a cFE Standard File Header whose Sub Type is not equal to the expected CFE_FS_SubType_TBL_IMG. Most likely causes for this are:

1. The specified file is not a cFE table image file.
2. The specified file has been created with bad "endianess" (headers should always conform to a big endian format).
3. The specified file has become corrupted.

The SubType field specified in the event message contains the sub type that was found in the specified file.

Definition at line 429 of file cfe_tbl_events.h.

39.37.1.18 CFE_TBL_FILE_TBL_HDR_ERR_EID

#define CFE_TBL_FILE_TBL_HDR_ERR_EID 55

'Unable to read tbl header for '%s', Status = 0x%08X'

Event Message 'Unable to read tbl header for '%s', Status = 0x%08X'

Type: ERROR

Cause:

This event message is generated when a read failure occurs during the reading of the cFE Table File Secondary Header of a table image file specified either by an Application calling the CFE_TBL_Load API or in response to a command to Table Services requesting a table image file be loaded into an inactive buffer.

The Status field of the event message contains the error code returned by OS_read.

Definition at line 356 of file cfe_tbl_events.h.

39.37.1.19 CFE_TBL_FILE_TOO_BIG_ERR_EID

#define CFE_TBL_FILE_TOO_BIG_ERR_EID 75

'File '%s' has more data than Tbl Hdr indicates (%d)'

Event Message 'File '%s' has more data than Tbl Hdr indicates (%d)'

Type: ERROR

Cause:

This event message is generated when a Load Table command is received and Table Services is able to locate more data in the specified Table Image file than the Table Header claims is present.

Definition at line 656 of file cfe_tbl_events.h.

39.37.1.20 CFE_TBL_FILE_TYPE_ERR_EID

`#define CFE_TBL_FILE_TYPE_ERR_EID 58`

`'File '%s' is not a cFE file type, ContentType = 0x%08X'`

Event Message `'File '%s' is not a cFE file type, ContentType = 0x%08X'`

Type: ERROR

Cause:

This event message is generated when either an Application calls the CFE_TBL_Load API or a Table Load command has been received and the specified file has a cFE Standard File Header whose Content Type is not equal to the expected CFE_FS_FILE_CONTENT_ID. Most likely causes for this are:

1. The specified file is not a cFE compatible file.
2. The specified file has been created with bad "endianess" (headers should always conform to a big endian format).
3. The specified file has become corrupted.

The `ContentType` field specified in the event message contains the content type that was found in the specified file.

Definition at line 408 of file cfe_tbl_events.h.

39.37.1.21 CFE_TBL_HANDLE_ACCESS_ERR_EID

`#define CFE_TBL_HANDLE_ACCESS_ERR_EID 103`

`No access to Tbl handle=d`

Event Message `No access to Tbl handle=d`

Type: ERROR

Cause:

The application ID does not have access to the table handle.

Definition at line 1100 of file cfe_tbl_events.h.

39.37.1.22 CFE_TBL_ILLEGAL_BUFF_PARAM_ERR_EID

#define CFE_TBL_ILLEGAL_BUFF_PARAM_ERR_EID 80

'Cmd for Table '%s' had illegal buffer parameter (0x%08X)'

Event Message 'Cmd for Table '%s' had illegal buffer parameter (0x%08X)'

Type: ERROR

Cause:

This event message is generated when either a Table Validate command or a Table Dump Command contains a buffer identifier that does not equal either of the valid values (see CFE_TBL_DumpCmd_Payload_t::ActiveTableFlag or CF↩︎
E_TBL_ValidateCmd_Payload_t::ActiveTableFlag)

The parameter in the Event Message indicates (in hex) the value found for the ActiveTableFlag in the command.

Definition at line 721 of file cfe_tbl_events.h.

39.37.1.23 CFE_TBL_IN_REGISTRY_ERR_EID

#define CFE_TBL_IN_REGISTRY_ERR_EID 82

''%s' found in Table Registry. CDS cannot be deleted until table is unregistered'

Event Message ''%s' found in Table Registry. CDS cannot be deleted until table
            is unregistered'

Type: ERROR

Cause:

This event message is generated when a Table Delete Critical Data Store command is received specifying a Table Image that is still registered. Critical Table Images cannot be removed from the CDS until the table is first removed from the Registry. Unload the owning application and try again.

Definition at line 748 of file cfe_tbl_events.h.

39.37.1.24   CFE_TBL_INIT_INF_EID

```
#define CFE_TBL_INIT_INF_EID 1
```

```
'Task Initialized'
```

Event Message `'Task Initialized'`

Type: INFORMATION

Cause:

This event message is always automatically issued when the Table Services Task completes its Initialization.

Definition at line 68 of file cfe_tbl_events.h.

39.37.1.25   CFE_TBL_INTERNAL_ERROR_ERR_EID

```
#define CFE_TBL_INTERNAL_ERROR_ERR_EID 61
```

```
'Internal Error (Status=0x%08X)'
```

Event Message `'Internal Error (Status=0x%08X)'`

Type: ERROR

Cause:

This event message is generated when a Table Load command was issued and the cFE Table Services is unable to allocate a working table buffer for an unexpected reason.

The `Status` field provides the return status from the function that was to provide a working buffer.

Definition at line 459 of file cfe_tbl_events.h.

39.37.1.26   CFE_TBL_LEN_ERR_EID

#define CFE_TBL_LEN_ERR_EID 52

'Invalid cmd pkt - ID = 0x%X, CC = %d, Len = %d'

Event Message 'Invalid cmd pkt - ID = 0x%X, CC = %d, Len = %d'

Type: ERROR

Cause:

This event message is generated when a message with the CFE_TBL_CMD_MID message ID has arrived but whose packet length does not match the expected length for the specified command code.

The ID field in the event message specifies the Message ID (in hex), the CC field specifies the Command Code (in decimal) and Len specifies the message Length (in decimal) found in the message.

Definition at line 302 of file cfe_tbl_events.h.

39.37.1.27   CFE_TBL_LOAD_ABORT_ERR_EID

#define CFE_TBL_LOAD_ABORT_ERR_EID 69

'Cannot abort load of '%s'. No load started.'

Event Message 'Cannot abort load of '%s'. No load started.'

Type: ERROR

Cause:

This event message is generated when an Abort Load command is received and the command specified table is not currently in the process of being loaded.

Definition at line 575 of file cfe_tbl_events.h.

#define CFE_TBL_LEN_ERR_EID 52

39.37.1.28 CFE_TBL_LOAD_ABORT_INF_EID

```
#define CFE_TBL_LOAD_ABORT_INF_EID 21
```

```
'Table Load Aborted for '%s''
```

Event Message `'Table Load Aborted for '%s''`

Type: INFORMATION

Cause:

This event message is generated upon successful execution of a cFE Table Services Abort Table Load command .

Definition at line 213 of file cfe_tbl_events.h.

39.37.1.29 CFE_TBL_LOAD_DUMPONLY_ERR_EID

```
#define CFE_TBL_LOAD_DUMPONLY_ERR_EID 99
```

```
Attempted to load Dump Only Tbl 's'
```

Event Message `Attempted to load Dump Only Tbl 's'`

Type: ERROR

Cause:

This event message is generated when an application attempts to load a dump-only table.

Definition at line 1055 of file cfe_tbl_events.h.

39.37.1.30   CFE_TBL_LOAD_EXCEEDS_SIZE_ERR_EID

#define CFE_TBL_LOAD_EXCEEDS_SIZE_ERR_EID 72

'Cannot load '%s' (%d) at offset %d in '%s' (%d)'

Event Message 'Cannot load '%s' (%d) at offset %d in '%s' (%d)'

Type: ERROR

Cause:

This event message is generated when a Load Table command is received and the Table Header in the specified Table Image file identifies a number of bytes with a specified starting offset that would exceed the size of the specified table. For example, if a table had 10 bytes and the Table Header indicated that the Table Image in the file contains 7 bytes that starts at offset 5, then the data content would have exceeded the 10 byte limit of the table.

The numbers in parenthesis in the event message text indicate the data size (in bytes) for the specified load file and the registered size for the specified table.

Definition at line 618 of file cfe_tbl_events.h.

39.37.1.31   CFE_TBL_LOAD_FILENAME_LONG_ERR_EID

#define CFE_TBL_LOAD_FILENAME_LONG_ERR_EID 101

Filename is too long ('s' (lu) > lu)

Event Message Filename is too long ('s' (lu) > lu)

Type: ERROR

Cause:

The filename provided for the table file is too long (exceeding OS_MAX_PATH_LEN - 1).

Definition at line 1078 of file cfe_tbl_events.h.

39.37.1.32 CFE_TBL_LOAD_IN_PROGRESS_ERR_EID

`#define CFE_TBL_LOAD_IN_PROGRESS_ERR_EID 100`

`Load already in progress for 's'`

Event Message `Load already in progress for 's'`

Type: ERROR

Cause:

This event message is generated when an application attempts to load a table already in progress. Likely due to a race condition.

Definition at line 1067 of file cfe_tbl_events.h.

39.37.1.33 CFE_TBL_LOAD_PEND_REQ_INF_EID

`#define CFE_TBL_LOAD_PEND_REQ_INF_EID 17`

`'Tbl Services notifying App that '%s' has a load pending'`

Event Message `'Tbl Services notifying App that '%s' has a load pending'`

Type: DEBUG

Cause:

This event message is generated upon successful execution of a cFE Table Services Activate Table command . It should be noted, however, that this Event Message does *NOT* indicate completion of the Table Activation. It is *ONLY* indicating that the appropriate flag has been set to *NOTIFY* the table's owning Application that an Update has been requested. Completion of the Update is indicated by either the CFE_TBL_UPDATE_SUCCESS_INF_EID or CFE_TBL_UPDAT↩ E_ERR_EID event messages.

Definition at line 188 of file cfe_tbl_events.h.

39.37.1.34   CFE_TBL_LOAD_SUCCESS_INF_EID

#define CFE_TBL_LOAD_SUCCESS_INF_EID 35

'Successfully loaded '%s' from '%s''

Event Message 'Successfully loaded '%s' from '%s''

Type: DEBUG (the first time) and INFORMATION (normally)

Cause:

This event message is generated when a Table is successfully updated by its owning Application with the contents of the Application specified file or memory area. This Event Message only appears when an Application successfully calls the CFE_TBL_Load API.

Definition at line 861 of file cfe_tbl_events.h.

39.37.1.35   CFE_TBL_LOAD_TBLNAME_MISMATCH_ERR_EID

#define CFE_TBL_LOAD_TBLNAME_MISMATCH_ERR_EID 102

table name mismatch (exp=s, tblfilhdr=s)

Event Message table name mismatch (exp=s, tblfilhdr=s)

Type: ERROR

Cause:

The table name in the table file header does not match the specified table name.

Definition at line 1089 of file cfe_tbl_events.h.

39.37.1.36 CFE_TBL_LOAD_TYPE_ERR_EID

`#define CFE_TBL_LOAD_TYPE_ERR_EID 94`

`'%s Failed to Load '%s' (Invalid Source Type)"`

Event Message `'%s Failed to Load '%s' (Invalid Source Type)"`

Type: ERROR

Cause:

This event message is generated when an Application calls CFE_TBL_Load with a bad value for the `SrcType` parameter. The `SrcType` must be one of the values specified by CFE_TBL_SrcEnum_t.

Definition at line 958 of file cfe_tbl_events.h.

39.37.1.37 CFE_TBL_LOAD_VAL_ERR_EID

`#define CFE_TBL_LOAD_VAL_ERR_EID 93`

Definition at line 946 of file cfe_tbl_events.h.

39.37.1.38 CFE_TBL_LOADING_A_DUMP_ONLY_ERR_EID

`#define CFE_TBL_LOADING_A_DUMP_ONLY_ERR_EID 79`

`'Attempted to load DUMP-ONLY table '%s' from '%s''`

Event Message `'Attempted to load DUMP-ONLY table '%s' from '%s''`

Type: ERROR

Cause:

This event message is generated when a Table Load command for a Dump-Only Table was received. By definition, Dump-Only tables are not allowed to be loaded with any new data.

Definition at line 706 of file cfe_tbl_events.h.

39.37.1.39   CFE_TBL_LOADING_PENDING_ERR_EID

#define CFE_TBL_LOADING_PENDING_ERR_EID 88

'Attempted to load table '%s' while previous load is still pending'

Event Message 'Attempted to load table '%s' while previous load is still pending'

Type: ERROR

Cause:

This event message is generated when an attempt is made to load a table while a previous load is still pending. The most likely cause of this is the owning application is waiting for an appropriate time to load the table with the specified contents. In order to override this load, the user would be required to issue the Abort Load Command .

Definition at line 827 of file cfe_tbl_events.h.

39.37.1.40   CFE_TBL_MAX_EID

#define CFE_TBL_MAX_EID 103

Definition at line 49 of file cfe_tbl_events.h.

39.37.1.41   CFE_TBL_MID_ERR_EID

#define CFE_TBL_MID_ERR_EID 50

'Invalid message ID - ID = 0x%X'

Event Message 'Invalid message ID - ID = 0x%X'

Type: ERROR

Cause:

This event message is generated when a message has arrived on the cFE Table Services Application's Message Pipe that has a Message ID that is neither CFE_TBL_SEND_HK_MID or CFE_TBL_CMD_MID. Most likely, the cFE Software Bus routing table has become corrupt and is sending messages targeted for other Applications to the cFE Table Services Application.

The ID field in the event message identifies the message ID (in hex) that was found in the message.

Definition at line 264 of file cfe_tbl_events.h.

39.37.1.42 CFE_TBL_NO_INACTIVE_BUFFER_ERR_EID

#define CFE_TBL_NO_INACTIVE_BUFFER_ERR_EID 66

'No Inactive Buffer for Table '%s' present'

Event Message 'No Inactive Buffer for Table '%s' present'

Type: ERROR

Cause:

This event message is generated when a Table Dump or a Table Validate command for an Inactive Table Buffer was received and there isn't an Inactive Table Buffer associated with the specified Table.

Definition at line 530 of file cfe_tbl_events.h.

39.37.1.43 CFE_TBL_NO_SUCH_TABLE_ERR_EID

#define CFE_TBL_NO_SUCH_TABLE_ERR_EID 57

'Unable to locate '%s' in Table Registry'

Event Message 'Unable to locate '%s' in Table Registry'

Type: ERROR

Cause:

This event message is generated when a command that specifies a table name has a table name that is not found in the Table Registry. Most likely causes for this are:

1. Table name was misspelled in the command.

2. The Application that Registered the Table has either failed to run or has been terminated thus removing the Table from the Registry.

3. The Table Registry has become corrupted.

Definition at line 387 of file cfe_tbl_events.h.

39.37.1.44   CFE_TBL_NO_WORK_BUFFERS_ERR_EID

#define CFE_TBL_NO_WORK_BUFFERS_ERR_EID 60

'No working buffers available for table '%s''

Event Message 'No working buffers available for table '%s''

Type: ERROR

Cause:

This event message is generated when either a Table Load Command for a Single Buffered Table or a Table Dump Command for a Dump Only Table has been sent AND there are no Shared Buffers available to hold either the load image or the dump image. To free a Shared Buffer, either a previously loaded table image must be activated or aborted OR the operator has to wait for previously dumped Dump Only tables have had a chance to be written to a file (which occurs whenever the cFE Table Services receives a Housekeeping Request).

Definition at line 445 of file cfe_tbl_events.h.

39.37.1.45   CFE_TBL_NOOP_INF_EID

#define CFE_TBL_NOOP_INF_EID 10

'No-op command'

Event Message 'No-op command'

Type: INFORMATION

Cause:

This event message is always automatically issued in response to a cFE Table Services NO-OP command

Definition at line 85 of file cfe_tbl_events.h.

39.37.1.46 CFE_TBL_NOT_CRITICAL_TBL_ERR_EID

#define CFE_TBL_NOT_CRITICAL_TBL_ERR_EID 83

'Table '%s' is in Critical Table Registry but CDS is not tagged as a table'

Event Message 'Table '%s' is in Critical Table Registry but CDS is not tagged as a table'

Type: ERROR

Cause:

This event message is generated when a Table Delete Critical Data Store command is received specifying a CDS name for a Critical Data Store that is NOT a critical table image. To delete CDSs that are not Critical Table Images, the Executive Services command CFE_ES_DELETE_CDS_CC must be used.

Definition at line 761 of file cfe_tbl_events.h.

39.37.1.47 CFE_TBL_NOT_IN_CRIT_REG_ERR_EID

#define CFE_TBL_NOT_IN_CRIT_REG_ERR_EID 84

'Table '%s' is not found in Critical Table Registry'

Event Message 'Table '%s' is not found in Critical Table Registry'

Type: ERROR

Cause:

This event message is generated when a Table Delete Critical Data Store command is received specifying a table name that cannot be found in the Critical Table Registry. If a Critical Data Store exists with the specified name, then the Critical Table Registry has somehow gotten out of sync with the CDS. Otherwise, the likely cause of this error is a misspelled table name in the command.

Definition at line 775 of file cfe_tbl_events.h.

39.37.1.48   CFE_TBL_OVERWRITE_DUMP_INF_EID

#define CFE_TBL_OVERWRITE_DUMP_INF_EID 13

'Successfully overwrote '%s' with Table '%s''

Event Message 'Successfully overwrote '%s' with Table '%s''

Type: INFORMATION

Cause:

This event message is always generated after a successful execution of a cFE Table Services Dump Table command where the command specified target filename was the same as a file already present in the onboard filesystem. If the specified file did not exist, the event message would have been CFE_TBL_WRITE_DUMP_INF_EID.

Definition at line 124 of file cfe_tbl_events.h.

39.37.1.49   CFE_TBL_OVERWRITE_REG_DUMP_INF_EID

#define CFE_TBL_OVERWRITE_REG_DUMP_INF_EID 15

'Successfully overwrote '%s' with Table Registry'

Event Message 'Successfully overwrote '%s' with Table Registry'

Type: DEBUG

Cause:

This event message is always generated after a successful execution of a cFE Table Services Dump Table Registry command where the command specified target filename was the same as a file already present in the onboard filesystem. If the specified file did not exist, the event message would have been CFE_TBL_WRITE_REG_DUMP_INF_EID.

Definition at line 154 of file cfe_tbl_events.h.

39.37.1.50 CFE_TBL_PARTIAL_LOAD_ERR_EID

#define CFE_TBL_PARTIAL_LOAD_ERR_EID 74

''%s' has partial load for uninitialized table '%s''

Event Message ''%s' has partial load for uninitialized table '%s''

Type: ERROR

Cause:

This event message is generated when a Load Table command is received and the Table Header in the specified Table Image file indicates the starting offset for the table is non-zero and the table has never been previously, completely loaded. Partial Table loads are only allowed after the table has had a successful load.

Definition at line 644 of file cfe_tbl_events.h.

39.37.1.51 CFE_TBL_PROCESSOR_ID_ERR_EID

#define CFE_TBL_PROCESSOR_ID_ERR_EID 98

'Unable to verify Processor ID for '%s', ID = 0x%08X'

Event Message 'Unable to verify Processor ID for '%s', ID = 0x%08X'

Type: ERROR

Cause:

This event message is generated when either an Application calls the CFE_TBL_Load API or a Table Load command has been received and the specified table file has failed Processor ID validation. Verification of Processor ID in table files is enabled/disabled via CFE_PLATFORM_TBL_VALID_PRID_COUNT, defined in the platform configuration header file. This event message can only be generated if CFE_PLATFORM_TBL_VALID_PRID_COUNT has a non-zero value and the table file has a cFE Standard File Header whose Processor ID does not match one of the values defined for Processor ID verification in the platform config file. The most likely causes for this error are:

1. The specified table file is not intended for this processor.

2. The specified table file has been created with bad "endianess" (headers should always conform to a big endian format).

3. The specified table file has become corrupted.

4. The definition for CFE_PLATFORM_TBL_VALID_PRID_COUNT is not large enough to include all of the valid Processor ID entries in the platform config file.

5. There is no entry for this Processor ID in the platform config file list of valid Processor ID's.

The ID field specified in the event message contains the Processor ID that was found in the specified table file.

Definition at line 1044 of file cfe_tbl_events.h.

39.37.1.52   CFE_TBL_REGISTER_ERR_EID

```
#define CFE_TBL_REGISTER_ERR_EID 90
```

```
'%s Failed to Register '%s', Status=0x%08X'
```

Event Message '%s Failed to Register '%s', Status=0x%08X'

Type: ERROR

Cause:

This event message is generated when an Application calls CFE_TBL_Register unsuccessfully.

The Status field of the Event Message can be used to identify the reason for the failure by looking it up in the cfe_↩ error.h file

Definition at line 915 of file cfe_tbl_events.h.

39.37.1.53   CFE_TBL_RESET_INF_EID

```
#define CFE_TBL_RESET_INF_EID 11
```

```
'Reset Counters command'
```

Event Message 'Reset Counters command'

Type: INFORMATION

Cause:

This event message is always automatically issued in response to a cFE Table Services Reset Counters command

Definition at line 97 of file cfe_tbl_events.h.

39.37.1.54 CFE_TBL_SHARE_ERR_EID

`#define CFE_TBL_SHARE_ERR_EID 91`

`'%s Failed to Share '%s', Status=0x%08X'`

Event Message `'%s Failed to Share '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated when an Application calls CFE_TBL_Share unsuccessfully.

The `Status` field of the Event Message can be used to identify the reason for the failure by looking it up in the cfe_↩
error.h file

Definition at line 929 of file cfe_tbl_events.h.

39.37.1.55 CFE_TBL_SPACECRAFT_ID_ERR_EID

`#define CFE_TBL_SPACECRAFT_ID_ERR_EID 97`

`'Unable to verify Spacecraft ID for '%s', ID = 0x%08X'`

Event Message `'Unable to verify Spacecraft ID for '%s', ID = 0x%08X'`

Type: ERROR

Cause:

This event message is generated when either an Application calls the CFE_TBL_Load API or a Table Load command has been received and the specified table file has failed Spacecraft ID validation. Verification of Spacecraft ID in table files is enabled/disabled via CFE_PLATFORM_TBL_VALID_SCID_COUNT, defined in the platform configuration header file. This event message can only be generated if CFE_PLATFORM_TBL_VALID_SCID_COUNT has a non-zero value and the table file has a cFE Standard File Header whose Spacecraft ID does not match one of the values defined for Spacecraft ID verification in the platform config file. The most likely causes for this error are:

1. The specified table file is not intended for this spacecraft.

2. The specified table file has been created with bad "endianess" (headers should always conform to a big endian format).

3. The specified table file has become corrupted.

4. The definition for CFE_PLATFORM_TBL_VALID_SCID_COUNT is not large enough to include all of the valid Spacecraft ID entries in the platform config file.

5. There is no entry for this Spacecraft ID in the platform config file list of valid Spacecraft ID's.

The `ID` field specified in the event message contains the Spacecraft ID that was found in the specified table file.

Definition at line 1016 of file cfe_tbl_events.h.

39.37.1.56   CFE_TBL_TLM_REG_CMD_INF_EID

```
#define CFE_TBL_TLM_REG_CMD_INF_EID 18
```

```
'Table Registry entry for '%s' will be telemetered'
```

Event Message 'Table Registry entry for '%s' will be telemetered'

Type: DEBUG

Cause:

This event message is generated upon successful execution of a cFE Table Services Telemeter Table Registry Entry command . Subsequent Table Services Housekeeping Telemetry should contain the desired Table Registry Entry data.

Definition at line 201 of file cfe_tbl_events.h.

39.37.1.57   CFE_TBL_TOO_MANY_DUMPS_ERR_EID

```
#define CFE_TBL_TOO_MANY_DUMPS_ERR_EID 76
```

```
'Too many Dump Only Table Dumps have been requested'
```

Event Message 'Too many Dump Only Table Dumps have been requested'

Type: ERROR

Cause:

This event message is generated when a Table Dump command for a Dump-Only Table was received and there are no more free Dump Only Control Blocks available. The number of simultaneous Dump Only Tables that can be pending is specified by the configuration parameter CFE_PLATFORM_TBL_MAX_SIMULTANEOUS_LOADS which is found in the cfe_platform_cfg.h file.

Definition at line 670 of file cfe_tbl_events.h.

39.37.1.58 CFE_TBL_TOO_MANY_VALIDATIONS_ERR_EID

```
#define CFE_TBL_TOO_MANY_VALIDATIONS_ERR_EID 67
```

```
'Too many Table Validations have been requested'
```

Event Message `'Too many Table Validations have been requested'`

Type: ERROR

Cause:

This event message is generated when a Table Validate command was received and there are no more free Validation Result Blocks available. The number of simultaneous validations that can be pending is specified by the configuration parameter CFE_PLATFORM_TBL_MAX_NUM_VALIDATIONS which is found in the cfe_platform_cfg.h file.

Validation Commands lock one of the Validation Result Blocks upon receipt of the validation command until the result of the Validation, performed by the table's owning Application, has been reported in a Table Services Housekeeping Request Message.

Definition at line 548 of file cfe_tbl_events.h.

39.37.1.59 CFE_TBL_UNREGISTER_ERR_EID

```
#define CFE_TBL_UNREGISTER_ERR_EID 92
```

```
'%s Failed to Unregister '%s', Status=0x%08X'
```

Event Message `'%s Failed to Unregister '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated when an Application calls CFE_TBL_Unregister unsuccessfully.

The `Status` field of the Event Message can be used to identify the reason for the failure by looking it up in the cfe_↩ error.h file

Definition at line 943 of file cfe_tbl_events.h.

39.37.1.60   CFE_TBL_UNVALIDATED_ERR_EID

#define CFE_TBL_UNVALIDATED_ERR_EID 81

'Cannot activate table '%s'. Inactive image not Validated'

Event Message 'Cannot activate table '%s'. Inactive image not Validated'

Type: ERROR

Cause:

This event message is generated when a Table Activate command is received specifying a Table Image that has not been Validated. If a table has a validation function associated with it (as defined by the owning Application when the Table is first Registered), then the Inactive Image MUST be successfully Validated prior to Activation.

Definition at line 735 of file cfe_tbl_events.h.

39.37.1.61   CFE_TBL_UPDATE_ERR_EID

#define CFE_TBL_UPDATE_ERR_EID 95

'%s Failed to Update '%s', Status=0x%08X"

Event Message '%s Failed to Update '%s', Status=0x%08X"

Type: ERROR

Cause:

This event message is generated when an Application calls CFE_TBL_Update (or, via an internal call, the CFE_TBL↩ _Manage) API and the Table fails to properly update.

The Status parameter in the Event Message can be used to identify the reason for the failure by looking it up in the cfe_error.h file.

Definition at line 973 of file cfe_tbl_events.h.

CFE_TBL_UNVALIDATED_ERR_EID

39.37.1.62 CFE_TBL_UPDATE_SUCCESS_INF_EID

#define CFE_TBL_UPDATE_SUCCESS_INF_EID 37

'%s Successfully Updated '%s''

Event Message '%s Successfully Updated '%s''

Type: INFORMATION

Cause:

This event message is generated when a Table's Active Buffer is successfully updated with the contents of its Inactive Buffer.

Definition at line 886 of file cfe_tbl_events.h.

39.37.1.63 CFE_TBL_VAL_REQ_MADE_INF_EID

#define CFE_TBL_VAL_REQ_MADE_INF_EID 16

'Tbl Services issued validation request for '%s''

Event Message 'Tbl Services issued validation request for '%s''

Type: DEBUG

Cause:

This event message is generated upon successful execution of a cFE Table Services Validate Table command . It should be noted, however, that this Event Message does *NOT* indicate completion of the Table Validation. It is *ONLY* indicating that the appropriate flag has been set to *NOTIFY* the table's owning Application that a Validation has been requested. Completion of the Validation is indicated by either the CFE_TBL_VALIDATION_INF_EID or CFE_TBL_VALIDATION←_ERR_EID event messages.

Definition at line 171 of file cfe_tbl_events.h.

39.37.1.64   CFE_TBL_VALIDATION_ERR_EID

#define CFE_TBL_VALIDATION_ERR_EID 96

'%s validation failed for Inactive '%s', Status=0x%08X'

Event Message '%s validation failed for Inactive '%s', Status=0x%08X'

Type: ERROR

Cause:

This event message is generated when an Application calls CFE_TBL_Validate (or, via an internal call, the CFE_TBL↩
_Manage) API and the Table fails its Validation.

The Status parameter in the Event Message contains the status code returned by the Table's Validation function as
defined by the owning Application when the Table was Registered.

Definition at line 988 of file cfe_tbl_events.h.

39.37.1.65   CFE_TBL_VALIDATION_INF_EID

#define CFE_TBL_VALIDATION_INF_EID 36

'%s validation successful for Inactive '%s''

Event Message '%s validation successful for Inactive '%s''

Type: INFORMATION

Cause:

This event message is generated when a Table Image is successfully validated by its owning Application via the Valida-
tion function specified by the owning Application when the table was first registered.

Definition at line 874 of file cfe_tbl_events.h.

39.37.1.66 CFE_TBL_WRITE_CFE_HDR_ERR_EID

#define CFE_TBL_WRITE_CFE_HDR_ERR_EID 63

'Error writing cFE File Header to '%s', Status=0x%08X'

Event Message 'Error writing cFE File Header to '%s', Status=0x%08X'

Type: ERROR

Cause:

This event message is generated when a Table Dump or Table Registry Dump command was received and the cFE Table Services is unable to write the standard cFE File Header to the specified file.

The Status field provides the return status from the CFE_FS_WriteHeader function call.

Definition at line 488 of file cfe_tbl_events.h.

39.37.1.67 CFE_TBL_WRITE_DUMP_INF_EID

#define CFE_TBL_WRITE_DUMP_INF_EID 14

'Successfully dumped Table '%s' to '%s''

Event Message 'Successfully dumped Table '%s' to '%s''

Type: INFORMATION

Cause:

This event message is always generated after a successful execution of a cFE Table Services Dump Table command where the command specified target filename was a currently non-existent file. If the file did already exist, the event message would have been CFE_TBL_OVERWRITE_DUMP_INF_EID.

Definition at line 139 of file cfe_tbl_events.h.

39.37.1.68   CFE_TBL_WRITE_REG_DUMP_INF_EID

```
#define CFE_TBL_WRITE_REG_DUMP_INF_EID 22
```

```
'Successfully dumped Table Registry to '%s':Size=%d,Entries=%d'
```

Event Message `'Successfully dumped Table Registry to '%s':Size=%d,Entries=%d'`

Type: DEBUG

Cause:

This event message is always generated after a successful execution of a cFE Table Services Dump Table Registry command where the command specified target filename was a currently non-existent file. If the file did already exist, the event message would have been CFE_TBL_OVERWRITE_REG_DUMP_INF_EID.

Definition at line 228 of file cfe_tbl_events.h.

39.37.1.69   CFE_TBL_WRITE_TBL_HDR_ERR_EID

```
#define CFE_TBL_WRITE_TBL_HDR_ERR_EID 64
```

```
'Error writing Tbl image File Header to '%s', Status=0x%08X'
```

Event Message `'Error writing Tbl image File Header to '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated when a Table Dump command was received and the cFE Table Services is unable to write the standard cFE Table Image Header to the specified file.

The `Status` field provides the return status from the OS_write function call.

Definition at line 502 of file cfe_tbl_events.h.

39.37.1.70 CFE_TBL_WRITE_TBL_IMG_ERR_EID

`#define CFE_TBL_WRITE_TBL_IMG_ERR_EID 65`

`'Error writing Tbl image to '%s', Status=0x%08X'`

Event Message `'Error writing Tbl image to '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated when a Table Dump command was received and the cFE Table Services is unable to write the contents of the specified Table image to the specified file.

The `Status` field provides the return status from the OS_write function call.

Definition at line 517 of file cfe_tbl_events.h.

39.37.1.71 CFE_TBL_WRITE_TBL_REG_ERR_EID

`#define CFE_TBL_WRITE_TBL_REG_ERR_EID 68`

`'Error writing Registry to '%s', Status=0x%08X'`

Event Message `'Error writing Registry to '%s', Status=0x%08X'`

Type: ERROR

Cause:

This event message is generated when a Table Registry Dump command was received and the cFE Table Services is unable to write the entire contents of the Table Registry to the specified file.

The `Status` field provides the return status from the OS_write function call.

Definition at line 563 of file cfe_tbl_events.h.

39.37.1.72 CFE_TBL_ZERO_LENGTH_LOAD_ERR_EID

#define CFE_TBL_ZERO_LENGTH_LOAD_ERR_EID 73

'Table Hdr in '%s' indicates no data in file'

Event Message 'Table Hdr in '%s' indicates no data in file'

Type: ERROR

Cause:

This event message is generated when a Load Table command is received and the Table Header in the specified Table Image file claims the file contains no data.

Definition at line 630 of file cfe_tbl_events.h.

39.38 cfe/fsw/cfe-core/src/inc/cfe_tbl_extern_typedefs.h File Reference

#include "common_types.h"
#include <cfe_mission_cfg.h>

Data Structures

- struct CFE_TBL_File_Hdr_t
  The definition of the header fields that are included in CFE Table Data files.

Typedefs

- typedef uint16 CFE_TBL_BufferSelect_Enum_t
  Selects the buffer to operate on for validate or dump commands.

Enumerations

- enum CFE_TBL_BufferSelect { CFE_TBL_BufferSelect_INACTIVE = 0, CFE_TBL_BufferSelect_ACTIVE = 1 }
  Label definitions associated with CFE_TBL_BufferSelect_Enum_t.

39.38.1 Typedef Documentation

39.38.1.1 CFE_TBL_BufferSelect_Enum_t

typedef uint16 CFE_TBL_BufferSelect_Enum_t

Selects the buffer to operate on for validate or dump commands.

See also

enum CFE_TBL_BufferSelect

Definition at line 60 of file cfe_tbl_extern_typedefs.h.

39.38.2 Enumeration Type Documentation

39.38.2.1 CFE_TBL_BufferSelect

enum CFE_TBL_BufferSelect

Label definitions associated with CFE_TBL_BufferSelect_Enum_t.

Enumerator

CFE_TBL_BufferSelect_INACTIVE	Select the Inactive buffer for validate or dump.
CFE_TBL_BufferSelect_ACTIVE	Select the Active buffer for validate or dump.

Definition at line 40 of file cfe_tbl_extern_typedefs.h.

39.39 cfe/fsw/cfe-core/src/inc/cfe_tbl_filedef.h File Reference

```
#include <cfe_mission_cfg.h>
#include <common_types.h>
#include "cfe_tbl_extern_typedefs.h"
#include "cfe_fs_extern_typedefs.h"
```

Data Structures

- struct CFE_TBL_FileDef_t

Macros

- #define CFE_TBL_FILEDEF(ObjName, TblName, Desc, Filename) static OS_USED CFE_TBL_FileDef_t CFE↩
  _TBL_FileDef={#ObjName "\0", #TblName "\0", #Desc "\0", #Filename "\0", sizeof(ObjName)};

39.39.1 Macro Definition Documentation

39.39.1.1 CFE_TBL_FILEDEF

```
#define CFE_TBL_FILEDEF(
            ObjName,
            TblName,
            Desc,
            Filename ) static OS_USED CFE_TBL_FileDef_t CFE_TBL_FileDef={#ObjName "\0", #TblName
"\0", #Desc "\0", #Filename "\0", sizeof(ObjName)};
```

The CFE_TBL_FILEDEF macro can be used to simplify the declaration of a table image when using the elf2cfetbl utility.

Note that the macro adds a NULL at the end to ensure that it is null-terminated. (C allows a struct to be statically initialized with a string exactly the length of the array, which loses the null terminator.) This means the actual length limit of the fields are the above LEN - 1.

An example of the source code and how this macro would be used is as follows:

```
 #include "cfe_tbl_filedef.h"

typedef struct
{
    int     Int1;
    int     Int2;
    int     Int3;
    char    Char1;
} MyTblStruct_t;

MyTblStruct_t MyTblStruct = { 0x01020304, 0x05060708, 0x090A0B0C, 0x0D };

CFE_TBL_FILEDEF(MyTblStruct, MyApp.TableName, Table Utility Test Table, MyTblDefault.bin )
```

Definition at line 96 of file cfe_tbl_filedef.h.

39.40 cfe/fsw/cfe-core/src/inc/cfe_tbl_msg.h File Reference

```
#include "cfe.h"
```

Data Structures

- struct CFE_TBL_NoArgsCmd_t

    Generic "no arguments" command.
- struct CFE_TBL_LoadCmd_Payload_t

    Load Table Command.
- struct CFE_TBL_Load_t
- struct CFE_TBL_DumpCmd_Payload_t

    Dump Table Command.
- struct CFE_TBL_Dump_t

- struct CFE_TBL_ValidateCmd_Payload_t

    Validate Table Command.
- struct CFE_TBL_Validate_t
- struct CFE_TBL_ActivateCmd_Payload_t

    Activate Table Command.
- struct CFE_TBL_Activate_t
- struct CFE_TBL_DumpRegistryCmd_Payload_t

    Dump Registry Command.
- struct CFE_TBL_DumpRegistry_t
- struct CFE_TBL_SendRegistryCmd_Payload_t

    Telemeter Table Registry Entry Command.
- struct CFE_TBL_SendRegistry_t
- struct CFE_TBL_DelCDSCmd_Payload_t

    Delete Critical Table CDS Command.
- struct CFE_TBL_DeleteCDS_t
- struct CFE_TBL_AbortLoadCmd_Payload_t

    Abort Load Command.
- struct CFE_TBL_AbortLoad_t
- struct CFE_TBL_NotifyCmd_Payload_t

    Table Management Notification Message.
- struct CFE_TBL_NotifyCmd_t
- struct CFE_TBL_HousekeepingTlm_Payload_t
- struct CFE_TBL_HousekeepingTlm_t
- struct CFE_TBL_TblRegPacket_Payload_t
- struct CFE_TBL_TableRegistryTlm_t

Macros

Table Services Command Codes

- #define CFE_TBL_NOOP_CC 0
- #define CFE_TBL_RESET_COUNTERS_CC 1
- #define CFE_TBL_LOAD_CC 2
- #define CFE_TBL_DUMP_CC 3
- #define CFE_TBL_VALIDATE_CC 4
- #define CFE_TBL_ACTIVATE_CC 5
- #define CFE_TBL_DUMP_REGISTRY_CC 6
- #define CFE_TBL_SEND_REGISTRY_CC 7
- #define CFE_TBL_DELETE_CDS_CC 8
- #define CFE_TBL_ABORT_LOAD_CC 9

Typedefs

- typedef CFE_TBL_NoArgsCmd_t CFE_TBL_Noop_t
- typedef CFE_TBL_NoArgsCmd_t CFE_TBL_ResetCounters_t
- typedef CFE_TBL_HousekeepingTlm_t CFE_TBL_HkPacket_t
- typedef CFE_TBL_TableRegistryTlm_t CFE_TBL_TblRegPacket_t

39.40.1   Macro Definition Documentation

39.40.1.1   CFE_TBL_ABORT_LOAD_CC

#define CFE_TBL_ABORT_LOAD_CC 9

Name Abort Table Load

Description

> This command will cause Table Services to discard the contents of a table buffer that was previously loaded with the data in a file as specified by a Table Load command. For single buffered tables, the allocated shared working buffer is freed and becomes available for other Table Load commands.

Command Mnemonic(s) $sc_$cpu_TBL_LOADABORT

Command Structure

> CFE_TBL_AbortLoad_t

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
> - The CFE_TBL_LOAD_ABORT_INF_EID informational event message is generated
> - If the load was aborted for a single buffered table, the **$sc_$cpu_TBL_NumFreeShrBuf telemetry** point should increment

Error Conditions

> This command may fail for the following reason(s):
>
> - The specified table name was not found in the table registry.
> - The specified table did not have a load in progress to be aborted.

> Evidence of failure may be found in the following telemetry:
>
> - **$sc_$cpu_TBL_CMDEC -** command error counter will increment
> - Error specific event message

Criticality

> This command will cause the loss of data put into an inactive table buffer.

See also

> CFE_TBL_LOAD_CC, CFE_TBL_DUMP_CC, CFE_TBL_VALIDATE_CC, CFE_TBL_ACTIVATE_CC

Definition at line 476 of file cfe_tbl_msg.h.

39.40.1.2 CFE_TBL_ACTIVATE_CC

`#define CFE_TBL_ACTIVATE_CC 5`

Name Activate Table

Description

> This command will cause Table Services to notify a table's owner that an update is pending. The owning application will then update the contents of the active table buffer with the contents of the associated inactive table buffer at a time of their convenience.

Command Mnemonic(s) $sc_$cpu_TBL_ACTIVATE

Command Structure

> CFE_TBL_Activate_t

Command Verification

> Successful execution of this command may be verified with the following telemetry:
> - **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
> - The CFE_TBL_UPDATE_SUCCESS_INF_EID informational event message will be generated

Error Conditions

> This command may fail for the following reason(s):
> - A single buffered table's inactive buffer was requested to be dumped and no such buffer is currently allocated.
> - The specified table name was not found in the table registry.

> Evidence of failure may be found in the following telemetry:

> - **$sc_$cpu_TBL_CMDEC -** command error counter will increment

> - Command specific error event message are issued for all error cases

Criticality

> This command will cause the contents of the specified table to be updated with the contents in the inactive table buffer.

See also

> CFE_TBL_LOAD_CC, CFE_TBL_DUMP_CC, CFE_TBL_VALIDATE_CC, CFE_TBL_ABORT_LOAD_CC

Definition at line 316 of file cfe_tbl_msg.h.

39.40.1.3   CFE_TBL_DELETE_CDS_CC

#define CFE_TBL_DELETE_CDS_CC 8

Name Delete Critical Table from Critical Data Store

Description

This command will delete the Critical Data Store (CDS) associated with the specified Critical Table. Note that any table still present in the Table Registry is unable to be deleted from the Critical Data Store. All Applications that are accessing the critical table must release and unregister their access before the CDS can be deleted.

Command Mnemonic(s) $sc_$cpu_TBL_DeleteCDS

Command Structure

CFE_TBL_DeleteCDS_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
- The CFE_TBL_CDS_DELETED_INFO_EID informational event message will be generated

Error Conditions

This command may fail for the following reason(s):

- The specified table name was not found in the critical data store registry
- The specified table name WAS found in the table registry (all registrations/sharing of the table must be unregistered before the table's CDS can be deleted)
- The table's owning application is still active

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_TBL_CMDEC -** command error counter will increment
- Error specific event message

Criticality

This command will cause the loss of the specified table's contents before the owning Application was terminated.

See also

CFE_ES_DUMP_CDS_REGISTRY_CC, CFE_ES_DELETE_CDS_CC

Definition at line 437 of file cfe_tbl_msg.h.

39.40.1.4 CFE_TBL_DUMP_CC

#define CFE_TBL_DUMP_CC 3

Name Dump Table

Description

This command will cause the Table Services to put the contents of the specified table buffer into the command specified file.

Command Mnemonic(s) $sc_$cpu_TBL_DUMP

Command Structure

CFE_TBL_Dump_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
- Either the CFE_TBL_OVERWRITE_DUMP_INF_EID OR the CFE_TBL_WRITE_DUMP_INF_EID informational event message will be generated

Error Conditions

This command may fail for the following reason(s):

- A single buffered table's inactive buffer was requested to be dumped and no such buffer is currently allocated.
- Error occurred during write operation to file. Possible causes might be insufficient space in the file system or the filename or file path is improperly specified.
- The specified table name was not found in the table registry.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_TBL_CMDEC -** command error counter will increment
- A command specific error event message is issued for all error cases

Criticality

This command is not inherently dangerous. It will create a new file in the file system and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

CFE_TBL_LOAD_CC, CFE_TBL_VALIDATE_CC, CFE_TBL_ACTIVATE_CC, CFE_TBL_ABORT_LOAD_CC

Definition at line 219 of file cfe_tbl_msg.h.

39.40.1.5   CFE_TBL_DUMP_REGISTRY_CC

#define CFE_TBL_DUMP_REGISTRY_CC 6

Name Dump Table Registry

Description

This command will cause Table Services to write some of the contents of the Table Registry to the command specified file. This allows the operator to see the current state and configuration of all tables that have been registered with the cFE.

Command Mnemonic(s) $sc_$cpu_TBL_WriteReg2File

Command Structure

CFE_TBL_DumpRegistry_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
- The generation of either CFE_TBL_OVERWRITE_REG_DUMP_INF_EID or CFE_TBL_WRITE_REG_DU↩ MP_INF_EID debug event messages
- The specified file should appear (or be updated) at the specified location in the file system

Error Conditions

This command may fail for the following reason(s):

- Error occurred during write operation to file. Possible causes might be insufficient space in the file system or the filename or file path is improperly specified.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_TBL_CMDEC -** command error counter will increment
- An Error specific event message

Criticality

This command is not inherently dangerous. It will create a new file in the file system and could, if performed repeatedly without sufficient file management by the operator, fill the file system.

See also

CFE_TBL_SEND_REGISTRY_CC

Definition at line 358 of file cfe_tbl_msg.h.

39.40.1.6   CFE_TBL_LOAD_CC

```
#define CFE_TBL_LOAD_CC 2
```

Name Load Table

Description

This command loads the contents of the specified file into an inactive buffer for the table specified within the file.

Command Mnemonic(s) $sc_$cpu_TBL_Load

Command Structure

CFE_TBL_Load_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
- The CFE_TBL_FILE_LOADED_INF_EID informational event message will be generated

Error Conditions

This command can fail for the following reasons:

- Table name found in table image file's table header is not found in table registry (ie - The table associated with the table image in the file has not been registered by an application).
- The table image file's header indicates the file contains 'x' number of bytes of data but the file contains less.
- No working buffers are available for the load. This would indicate that too many single-buffered table loads are in progress at the same time.
- The table image file's header indicates the data to be loaded is beyond the size of the table. Either the number of bytes in the file are too many or the starting offset into the table is too high.
- The table image file's header indicates there is no data in the file (ie - Number of bytes to load is zero).
- An attempt is being made to load an uninitialized table with a file containing only a partial table image.
- The table image file was unable to be opened. Either the file does not exist at the specified location, the filename is in error, or the file system has been corrupted.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_TBL_CMDEC -** command error counter will increment
- Command specific error event messages are issued for all error cases

Criticality

This command is not inherently dangerous. It is performing the first step of loading a table and can be aborted (using the Abort Table Load command described below) without affecting the contents of the active table image.

See also

CFE_TBL_DUMP_CC, CFE_TBL_VALIDATE_CC, CFE_TBL_ACTIVATE_CC, CFE_TBL_ABORT_LOAD_CC

Definition at line 176 of file cfe_tbl_msg.h.

39.40.1.7   CFE_TBL_NOOP_CC

```
#define CFE_TBL_NOOP_CC 0
```

Name Table No-Op

Description

> This command performs no other function than to increment the command execution counter. The command may be used to verify general aliveness of the Table Services task.

Command Mnemonic(s) $sc_$cpu_TBL_NOOP

Command Structure

> CFE_TBL_NoArgsCmd_t

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
> - The CFE_TBL_NOOP_INF_EID informational event message will be generated

Error Conditions

> There are no error conditions for this command. If the Table Services receives the command, the event is sent (although it may be filtered by EVS) and the counter is incremented unconditionally.

Criticality

> None

See also

Definition at line 82 of file cfe_tbl_msg.h.

39.40.1.8 CFE_TBL_RESET_COUNTERS_CC

`#define CFE_TBL_RESET_COUNTERS_CC 1`

Name Table Reset Counters

Description

This command resets the following counters within the Table Services housekeeping telemetry:

- Command Execution Counter ($sc_$cpu_TBL_CMDPC)
- Command Error Counter ($sc_$cpu_TBL_CMDEC)
- Successful Table Validations Counter ($sc_$cpu_TBL_ValSuccessCtr)
- Failed Table Validations Counter ($sc_$cpu_TBL_ValFailedCtr)
- Number of Table Validations Requested ($sc_$cpu_TBL_ValReqCtr)

Command Mnemonic(s) $sc_$cpu_TBL_ResetCtrs

Command Structure

CFE_TBL_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
- The CFE_TBL_RESET_INF_EID debug event message will be generated

Error Conditions

There are no error conditions for this command. If the Table Services receives the command, the event is sent (although it may be filtered by EVS) and the counter is incremented unconditionally.

Criticality

This command is not inherently dangerous. However, it is possible for ground systems and on-board safing procedures to be designed such that they react to changes in the counter values that are reset by this command.

See also

Definition at line 122 of file cfe_tbl_msg.h.

39.40.1.9 CFE_TBL_SEND_REGISTRY_CC

`#define CFE_TBL_SEND_REGISTRY_CC 7`

Name Telemeter One Table Registry Entry

Description

This command will cause Table Services to telemeter the contents of the Table Registry for the command specified table.

Command Mnemonic(s) $sc_$cpu_TBL_TLMReg

Command Structure

CFE_TBL_DumpRegistry_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
- Receipt of a Table Registry Info Packet (see CFE_TBL_TableRegistryTlm_t)
- The CFE_TBL_TLM_REG_CMD_INF_EID debug event message will be generated

Error Conditions

This command may fail for the following reason(s):

- The specified table name was not found in the table registry.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_TBL_CMDEC -** command error counter will increment
- Error specific event message

Criticality

This command is not inherently dangerous. It will generate additional telemetry.

See also

CFE_TBL_DUMP_REGISTRY_CC

Definition at line 393 of file cfe_tbl_msg.h.

39.40.1.10 CFE_TBL_VALIDATE_CC

#define CFE_TBL_VALIDATE_CC 4

Name Validate Table

Description

This command will cause Table Services to calculate the Data Integrity Value for the specified table and to notify the owning application that the table's validation function should be executed. The results of both the Data Integrity Value computation and the validation function are reported in Table Services Housekeeping Telemetry.

Command Mnemonic(s) $sc_$cpu_TBL_VALIDATE

Command Structure

CFE_TBL_Validate_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TBL_CMDPC -** command execution counter will increment
- **$sc_$cpu_TBL_ValReqCtr -** table validation request counter will increment
- **$sc_$cpu_TBL_LastValCRC -** calculated data integrity value will be updated
- The CFE_TBL_VAL_REQ_MADE_INF_EID debug event message (indicating the application is being notified of a validation request)

If the specified table has an associated validation function, then the following telemetry will also change:

- Either **$sc_$cpu_TBL_ValSuccessCtr OR $sc_$cpu_TBL_ValFailedCtr will** increment
- **$sc_$cpu_TBL_ValCompltdCtr -** table validations performed counter will increment
- **$sc_$cpu_TBl_LastValS -** table validation function return status will update
- The CFE_TBL_VALIDATION_INF_EID informational event message (indicating the validation function return status) will be generated

Error Conditions

This command may fail for the following reason(s):

- A single buffered table's inactive buffer was requested to be dumped and no such buffer is currently allocated.
- Too many validations have been requested simultaneously. The operator must wait for one or more applications to perform their table validation functions before trying again.
- The specified table name was not found in the table registry.

Evidence of failure may be found in the following telemetry:

- **$sc_$cpu_TBL_CMDEC -** command error counter will increment
- Command specific error event message are issued for all error cases

Criticality

The success or failure of a table validation does not have any immediate impact on table contents. The results are sent to the operator in telemetry and the operator must determine whether the results are acceptable and send a command to activate the validated table image.

See also

CFE_TBL_LOAD_CC, CFE_TBL_DUMP_CC, CFE_TBL_ACTIVATE_CC, CFE_TBL_ABORT_LOAD_CC

Definition at line 276 of file cfe_tbl_msg.h.

39.40.2 Typedef Documentation

39.40.2.1 CFE_TBL_HkPacket_t

typedef CFE_TBL_HousekeepingTlm_t CFE_TBL_HkPacket_t

Definition at line 828 of file cfe_tbl_msg.h.

39.40.2.2 CFE_TBL_Noop_t

typedef CFE_TBL_NoArgsCmd_t CFE_TBL_Noop_t

Definition at line 504 of file cfe_tbl_msg.h.

39.40.2.3 CFE_TBL_ResetCounters_t

typedef CFE_TBL_NoArgsCmd_t CFE_TBL_ResetCounters_t

Definition at line 505 of file cfe_tbl_msg.h.

39.40.2.4 CFE_TBL_TblRegPacket_t

typedef CFE_TBL_TableRegistryTlm_t CFE_TBL_TblRegPacket_t

Definition at line 829 of file cfe_tbl_msg.h.

39.41 cfe/fsw/cfe-core/src/inc/cfe_time.h File Reference

```
#include "cfe_time_extern_typedefs.h"
#include "common_types.h"
```

Data Structures

- struct CFE_TIME_SysTime_t

    Data structure used to hold system time values.

- struct CFE_TIME_ResetVars_t

    Time related variables that are maintained through a Processor Reset.

Macros

- #define CFE_TIME_PRINTED_STRING_SIZE 24

    Required size of buffer to be passed into CFE_TIME_Print (includes null terminator)

- #define CFE_TIME_USE_INTERN CFE_TIME_SourceSelect_INTERNAL
- #define CFE_TIME_USE_EXTERN CFE_TIME_SourceSelect_EXTERNAL
- #define CFE_TIME_TONE_PRI CFE_TIME_ToneSignalSelect_PRIMARY
- #define CFE_TIME_TONE_RED CFE_TIME_ToneSignalSelect_REDUNDANT
- #define CFE_TIME_ADD_ADJUST CFE_TIME_AdjustDirection_ADD
- #define CFE_TIME_SUB_ADJUST CFE_TIME_AdjustDirection_SUBTRACT
- #define CFE_TIME_NO_FLY CFE_TIME_FlywheelState_NO_FLY
- #define CFE_TIME_IS_FLY CFE_TIME_FlywheelState_IS_FLY
- #define CFE_TIME_NOT_SET CFE_TIME_SetState_NOT_SET
- #define CFE_TIME_WAS_SET CFE_TIME_SetState_WAS_SET
- #define CFE_TIME_INVALID CFE_TIME_ClockState_INVALID
- #define CFE_TIME_VALID CFE_TIME_ClockState_VALID
- #define CFE_TIME_FLYWHEEL CFE_TIME_ClockState_FLYWHEEL
- #define CFE_TIME_Copy(m, t) { (m)->Seconds = (t)->Seconds; (m)->Subseconds = (t)->Subseconds; }

    Time Copy.

Typedefs

- typedef int32(∗ CFE_TIME_SynchCallbackPtr_t) (void)

    Time Synchronization Callback Function Ptr Type.

Enumerations

- enum CFE_TIME_Compare_t { CFE_TIME_A_LT_B = -1, CFE_TIME_EQUAL = 0, CFE_TIME_A_GT_B = 1 }

    Enumerated types identifying the relative relationships of two times.

Functions

- [CFE_TIME_SysTime_t CFE_TIME_GetTime](#) (void)

    Get the current spacecraft time.
- [CFE_TIME_SysTime_t CFE_TIME_GetTAI](#) (void)

    Get the current TAI (MET + SCTF) time.
- [CFE_TIME_SysTime_t CFE_TIME_GetUTC](#) (void)

    Get the current UTC (MET + SCTF - Leap Seconds) time.
- [CFE_TIME_SysTime_t CFE_TIME_GetMET](#) (void)

    Get the current value of the Mission Elapsed Time (MET).
- [uint32 CFE_TIME_GetMETseconds](#) (void)

    Get the current seconds count of the mission-elapsed time.
- [uint32 CFE_TIME_GetMETsubsecs](#) (void)

    Get the current sub-seconds count of the mission-elapsed time.
- [CFE_TIME_SysTime_t CFE_TIME_GetSTCF](#) (void)

    Get the current value of the spacecraft time correction factor (STCF).
- [int16 CFE_TIME_GetLeapSeconds](#) (void)

    Get the current value of the leap seconds counter.
- [CFE_TIME_ClockState_Enum_t CFE_TIME_GetClockState](#) (void)

    Get the current state of the spacecraft clock.
- [uint16 CFE_TIME_GetClockInfo](#) (void)

    Provides information about the spacecraft clock.
- [CFE_TIME_SysTime_t CFE_TIME_Add](#) ([CFE_TIME_SysTime_t](#) Time1, [CFE_TIME_SysTime_t](#) Time2)

    Adds two time values.
- [CFE_TIME_SysTime_t CFE_TIME_Subtract](#) ([CFE_TIME_SysTime_t](#) Time1, [CFE_TIME_SysTime_t](#) Time2)

    Subtracts two time values.
- [CFE_TIME_Compare_t CFE_TIME_Compare](#) ([CFE_TIME_SysTime_t](#) TimeA, [CFE_TIME_SysTime_t](#) TimeB)

    Compares two time values.
- [CFE_TIME_SysTime_t CFE_TIME_MET2SCTime](#) ([CFE_TIME_SysTime_t](#) METTime)

    Convert specified MET into Spacecraft Time.
- [uint32 CFE_TIME_Sub2MicroSecs](#) ([uint32](#) SubSeconds)

    Converts a sub-seconds count to an equivalent number of microseconds.
- [uint32 CFE_TIME_Micro2SubSecs](#) ([uint32](#) MicroSeconds)

    Converts a number of microseconds to an equivalent sub-seconds count.
- [uint32 CFE_TIME_CFE2FSSeconds](#) ([uint32](#) SecondsCFE)

    DEPRECATED: Converts cFE seconds into the File System's seconds.
- [uint32 CFE_TIME_FS2CFESeconds](#) ([uint32](#) SecondsFS)

    DEPRECATED: Converts a file system's seconds into cFE seconds.
- void [CFE_TIME_ExternalTone](#) (void)

    Provides the 1 Hz signal from an external source.
- void [CFE_TIME_ExternalMET](#) ([CFE_TIME_SysTime_t](#) NewMET)

    Provides the Mission Elapsed Time from an external source.
- void [CFE_TIME_ExternalGPS](#) ([CFE_TIME_SysTime_t](#) NewTime, [int16](#) NewLeaps)

    Provide the time from an external source that has data common to GPS receivers.
- void [CFE_TIME_ExternalTime](#) ([CFE_TIME_SysTime_t](#) NewTime)

    Provide the time from an external source that measures time relative to a known epoch.
- [int32 CFE_TIME_RegisterSynchCallback](#) ([CFE_TIME_SynchCallbackPtr_t](#) CallbackFuncPtr)

Registers a callback function that is called whenever time synchronization occurs.

- int32 CFE_TIME_UnregisterSynchCallback (CFE_TIME_SynchCallbackPtr_t CallbackFuncPtr)

Unregisters a callback function that is called whenever time synchronization occurs.

- void CFE_TIME_Print (char ∗PrintBuffer, CFE_TIME_SysTime_t TimeToPrint)

Print a time value as a string.

- void CFE_TIME_Local1HzISR (void)

This function should be called from the system PSP layer once per second.

39.41.1 Macro Definition Documentation

39.41.1.1 CFE_TIME_ADD_ADJUST

```
#define CFE_TIME_ADD_ADJUST CFE_TIME_AdjustDirection_ADD
```

Definition at line 74 of file cfe_time.h.

39.41.1.2 CFE_TIME_Copy

```
#define CFE_TIME_Copy(
            m,
            t ) { (m)->Seconds = (t)->Seconds; (m)->Subseconds = (t)->Subseconds; }
```

Time Copy.

Macro to copy systime into another systime. Preferred to use this macro as it does not require the two arguments to be exactly the same type, it will work with any two structures that define "Seconds" and "Subseconds" members.

Definition at line 128 of file cfe_time.h.

39.41.1.3 CFE_TIME_FLYWHEEL

```
#define CFE_TIME_FLYWHEEL CFE_TIME_ClockState_FLYWHEEL
```

Definition at line 94 of file cfe_time.h.

39.41.1.4 CFE_TIME_INVALID

```
#define CFE_TIME_INVALID CFE_TIME_ClockState_INVALID
```

Definition at line 92 of file cfe_time.h.

39.41.1.5   CFE_TIME_IS_FLY

#define CFE_TIME_IS_FLY CFE_TIME_FlywheelState_IS_FLY

Definition at line 81 of file cfe_time.h.

39.41.1.6   CFE_TIME_NO_FLY

#define CFE_TIME_NO_FLY CFE_TIME_FlywheelState_NO_FLY

Definition at line 80 of file cfe_time.h.

39.41.1.7   CFE_TIME_NOT_SET

#define CFE_TIME_NOT_SET CFE_TIME_SetState_NOT_SET

Definition at line 86 of file cfe_time.h.

39.41.1.8   CFE_TIME_PRINTED_STRING_SIZE

#define CFE_TIME_PRINTED_STRING_SIZE 24

Required size of buffer to be passed into CFE_TIME_Print (includes null terminator)

Definition at line 50 of file cfe_time.h.

39.41.1.9   CFE_TIME_SUB_ADJUST

#define CFE_TIME_SUB_ADJUST CFE_TIME_AdjustDirection_SUBTRACT

Definition at line 75 of file cfe_time.h.

39.41.1.10   CFE_TIME_TONE_PRI

#define CFE_TIME_TONE_PRI CFE_TIME_ToneSignalSelect_PRIMARY

Definition at line 68 of file cfe_time.h.

39.41.1.11 CFE_TIME_TONE_RED

#define CFE_TIME_TONE_RED CFE_TIME_ToneSignalSelect_REDUNDANT

Definition at line 69 of file cfe_time.h.

39.41.1.12 CFE_TIME_USE_EXTERN

#define CFE_TIME_USE_EXTERN CFE_TIME_SourceSelect_EXTERNAL

Definition at line 63 of file cfe_time.h.

39.41.1.13 CFE_TIME_USE_INTERN

#define CFE_TIME_USE_INTERN CFE_TIME_SourceSelect_INTERNAL

Definition at line 62 of file cfe_time.h.

39.41.1.14 CFE_TIME_VALID

#define CFE_TIME_VALID CFE_TIME_ClockState_VALID

Definition at line 93 of file cfe_time.h.

39.41.1.15 CFE_TIME_WAS_SET

#define CFE_TIME_WAS_SET CFE_TIME_SetState_WAS_SET

Definition at line 87 of file cfe_time.h.

39.41.2 Typedef Documentation

39.41.2.1   CFE_TIME_SynchCallbackPtr_t

```
typedef int32(* CFE_TIME_SynchCallbackPtr_t) (void)
```

Time Synchronization Callback Function Ptr Type.

Description

Applications that wish to get direct notification of the receipt of the cFE Time Synchronization signal (typically a 1 Hz signal), must register a callback function with the following prototype via the CFE_TIME_RegisterSynchCallback API.

Definition at line 172 of file cfe_time.h.

39.41.3   Enumeration Type Documentation

39.41.3.1   CFE_TIME_Compare_t

```
enum CFE_TIME_Compare_t
```

Enumerated types identifying the relative relationships of two times.

Description

Since time fields contain numbers that are relative to an epoch time, then it is possible for a time value to be "negative". This can lead to some confusion about what relationship exists between two time values. To resolve this confusion, the cFE provides the API CFE_TIME_Compare which returns these enumerated values.

Enumerator

CFE_TIME_A_LT_B	The first specified time is considered to be before the second specified time.
CFE_TIME_EQUAL	The two specified times are considered to be equal.
CFE_TIME_A_GT↩_B	The first specified time is considered to be after the second specified time.

Definition at line 138 of file cfe_time.h.

39.42   cfe/fsw/cfe-core/src/inc/cfe_time_events.h File Reference

Macros

• #define CFE_TIME_MAX_EID 49

- #define CFE_TIME_INIT_EID 1 /∗ start up message "informational" ∗/

  'cFE TIME Initialized'
- #define CFE_TIME_NOOP_EID 4 /∗ processed command "informational" ∗/

  'No-op command'
- #define CFE_TIME_RESET_EID 5

  'Reset Counters command'
- #define CFE_TIME_DIAG_EID 6

  'Request diagnostics command'
- #define CFE_TIME_STATE_EID 7

  'Set Clock State = %s'
- #define CFE_TIME_SOURCE_EID 8

  'Set Time Source = %s'
- #define CFE_TIME_SIGNAL_EID 9

  'Set Tone Source = %s'
- #define CFE_TIME_DELAY_EID 11

  'Set Tone Delay - secs = %d, usecs = %d, ssecs = 0x%X, dir = %d'
- #define CFE_TIME_TIME_EID 12

  'Set Time - secs = %d, usecs = %d, ssecs = 0x%X'
- #define CFE_TIME_MET_EID 13

  'Set MET - secs = %d, usecs = %d, ssecs = 0x%X'
- #define CFE_TIME_STCF_EID 14

  'Set STCF - secs = %d, usecs = %d, ssecs = 0x%X'
- #define CFE_TIME_DELTA_EID 15

  'STCF Adjust - secs = %d, usecs = %d, ssecs = 0x%X, dir[1=Positive, 2=Negative] = %d'
- #define CFE_TIME_1HZ_EID 16

  'STCF 1Hz Adjust - secs = %d, ssecs = 0x%X, dir = %d'
- #define CFE_TIME_LEAPS_EID 17

  'Set Leap Seconds = %d'
- #define CFE_TIME_FLY_ON_EID 20 /∗ flywheel state "informational" ∗/

  'Start FLYWHEEL'
- #define CFE_TIME_FLY_OFF_EID 21

  'Stop FLYWHEEL'
- #define CFE_TIME_EXIT_ERR_EID 25 /∗ task termination "error" ∗/
- #define CFE_TIME_ID_ERR_EID 26 /∗ invalid command packet "error" ∗/

  'Invalid message ID - ID = 0x%X'
- #define CFE_TIME_CC_ERR_EID 27

  'Invalid command code - ID = 0x%X, CC = %d'
- #define CFE_TIME_STATE_ERR_EID 30 /∗ processed command "error" ∗/

  'Invalid Clock State = 0x%X'
- #define CFE_TIME_SOURCE_ERR_EID 31

  'Invalid Time Source = 0x%X'
- #define CFE_TIME_SIGNAL_ERR_EID 32

  'Invalid Tone Source = 0x%X'
- #define CFE_TIME_DELAY_ERR_EID 33

  'Invalid Tone Delay - secs = %d, usecs = %d'
- #define CFE_TIME_TIME_ERR_EID 34

'Invalid Time – secs = %d, usecs = %d'
- #define CFE_TIME_MET_ERR_EID 35

    'Invalid MET – secs = %d, usecs = %d'
- #define CFE_TIME_STCF_ERR_EID 36

    'Invalid STCF – secs = %d, usecs = %d'
- #define CFE_TIME_DELTA_ERR_EID 37

    'Invalid STCF Adjust - secs = %d, usecs = %d, dir[1=Positive, 2=Negative] = %d'
- #define CFE_TIME_1HZ_ERR_EID 38
- #define CFE_TIME_SOURCE_CFG_EID 40 /∗ cmd disabled per cfg "error" ∗/

    'Set Source commands invalid without CFE_PLATFORM_TIME_CFG_SOURCE set to true'
- #define CFE_TIME_SIGNAL_CFG_EID 41

    'Set Signal commands invalid without CFE_PLATFORM_TIME_CFG_SIGNAL set to true'
- #define CFE_TIME_DELAY_CFG_EID 42

    'Set Delay commands invalid without CFE_PLATFORM_TIME_CFG_CLIENT set to true'
- #define CFE_TIME_TIME_CFG_EID 43

    'Set Time commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'
- #define CFE_TIME_MET_CFG_EID 44

    'Set MET commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'
- #define CFE_TIME_STCF_CFG_EID 45

    'Set STCF commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'
- #define CFE_TIME_LEAPS_CFG_EID 46

    'Set Leaps commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'
- #define CFE_TIME_DELTA_CFG_EID 47

    'STCF Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'
- #define CFE_TIME_1HZ_CFG_EID 48

    '1Hz Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'
- #define CFE_TIME_LEN_ERR_EID 49

    'Invalid cmd length: ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'

39.42.1   Macro Definition Documentation

39.42.1.1   CFE_TIME_1HZ_CFG_EID

```
#define CFE_TIME_1HZ_CFG_EID 48
```

`'1Hz Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'`

Event Message `'1Hz Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives either a Add STCF Adjustment each second Command OR a Subtract STCF Adjustment each second command and the Time Services configuration parameter CF↩ E_PLATFORM_TIME_CFG_SERVER has not been set to true in the cfe_platform_cfg.h file.

Definition at line 603 of file cfe_time_events.h.

39.42.1.2   CFE_TIME_1HZ_EID

```
#define CFE_TIME_1HZ_EID 16
```

```
'STCF 1Hz Adjust - secs = %d, ssecs = 0x%X, dir = %d'
```

Event Message `'STCF 1Hz Adjust - secs = %d, ssecs = 0x%X, dir = %d'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of any of the following cFE Time Services STCF Adjustment Commands:

- Add STCF Adjustment each second command
- Subtract STCF Adjustment each second command

The `secs` field specifies the number of seconds the STCF is to be adjusted by, the `ssecs` field specifies the number of sub-seconds ($1/2^{32}$ seconds) the STCF is to be adjusted by and the `dir` field identifies whether the adjustment was added or subtracted. The direction value can be either CFE_TIME_AdjustDirection_ADD or CFE_TIME_Adjust↩ Direction_SUBTRACT.

Definition at line 251 of file cfe_time_events.h.

39.42.1.3   CFE_TIME_1HZ_ERR_EID

```
#define CFE_TIME_1HZ_ERR_EID 38
```

(obsolete - unused)

Definition at line 474 of file cfe_time_events.h.

39.42.1.4 CFE_TIME_CC_ERR_EID

#define CFE_TIME_CC_ERR_EID 27

'Invalid command code – ID = 0x%X, CC = %d'

Event Message 'Invalid command code – ID = 0x%X, CC = %d'

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a message from the software bus that contains a unrecognized command code in its header..

The ID field specifies, in hex, the message ID of the message containing the unrecognized command code, identified, in decimal, by the CC field.

Definition at line 322 of file cfe_time_events.h.

39.42.1.5 CFE_TIME_DELAY_CFG_EID

#define CFE_TIME_DELAY_CFG_EID 42

'Set Delay commands invalid without CFE_PLATFORM_TIME_CFG_CLIENT set to true'

Event Message 'Set Delay commands invalid without CFE_PLATFORM_TIME_CFG_CLIENT set to true'

Type: ERROR

Cause:

This event message is generated whenever Time Services receives either a Add Tone Delay Command OR a Subtract Tone Delay Command and the Time Services configuration parameter CFE_PLATFORM_TIME_CFG_CLIENT has not been set to true in the cfe_platform_cfg.h file.

Definition at line 517 of file cfe_time_events.h.

39.42.1.6 CFE_TIME_DELAY_EID

`#define CFE_TIME_DELAY_EID 11`

`'Set Tone Delay - secs = %d, usecs = %d, ssecs = 0x%X, dir = %d'`

Event Message `'Set Tone Delay - secs = %d, usecs = %d, ssecs = 0x%X, dir = %d'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of either a cFE Time Services Add Time Delay OR a Subtract Time Delay command

The `secs` field specifies the new delay (in seconds), the `usecs` field specifies the delay in micro-seconds, the `ssecs` field is the micro-seconds field converted to Spacecraft Time sub-seconds and the `dir` field identifies the direction of the delay. The direction can be either CFE_TIME_AdjustDirection_ADD or CFE_TIME_AdjustDirection_SUBTRACT.

Definition at line 162 of file cfe_time_events.h.

39.42.1.7 CFE_TIME_DELAY_ERR_EID

`#define CFE_TIME_DELAY_ERR_EID 33`

`'Invalid Tone Delay - secs = %d, usecs = %d'`

Event Message `'Invalid Tone Delay - secs = %d, usecs = %d'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives either a Add Tone Delay Command OR a Subtract Tone Delay Command that contains a microsecond field that is greater than or equal to 1000000.

The `secs` field specifies, in decimal, the tone signal delay in seconds and the `usecs` field specifies, in decimal, the micro-second delay that was in error.

Definition at line 396 of file cfe_time_events.h.

39.42.1.8 CFE_TIME_DELTA_CFG_EID

```
#define CFE_TIME_DELTA_CFG_EID 47
```

`'STCF Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'`

Event Message `'STCF Adjust commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives either a Add Single STCF Adjustment Command OR a Subtract Single STCF Adjustment command and the Time Services configuration parameter CFE_PLATFOR↩ M_TIME_CFG_SERVER has not been set to true in the cfe_platform_cfg.h file.

Definition at line 588 of file cfe_time_events.h.

39.42.1.9 CFE_TIME_DELTA_EID

```
#define CFE_TIME_DELTA_EID 15
```

`'STCF Adjust - secs = %d, usecs = %d, ssecs = 0x%X, dir[1=Positive, 2=Negative] = %d'`

Event Message `'STCF Adjust - secs = %d, usecs = %d, ssecs = 0x%X, dir[1=Positive, 2=Negative] = %d'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of any of the following cFE Time Services STCF Adjustment Commands:

- Add Single STCF Adjustment command
- Subtract Single STCF Adjustment command

The `secs` field specifies the number of seconds the STCF is to be adjusted by, the `usecs` field specifies the number of micro-seconds, the `ssecs` field is the micro-seconds field converted to Spacecraft Time sub-seconds and the `dir` field identifies whether the adjustment was added or subtracted. The direction can be either CFE_TIME_AdjustDirection_↩ ADD or CFE_TIME_AdjustDirection_SUBTRACT.

Definition at line 231 of file cfe_time_events.h.

39.42.1.10 CFE_TIME_DELTA_ERR_EID

```
#define CFE_TIME_DELTA_ERR_EID 37
```

```
'Invalid STCF Adjust - secs = %d, usecs = %d, dir[1=Positive, 2=Negative] =
%d'
```

Event Message 'Invalid STCF Adjust - secs = %d, usecs = %d, dir[1=Positive, 2=Negative]
= %d'

Type: ERROR

Cause:

This event message is generated whenever Time Services receives either a Add Single STCF Adjustment Command OR a Subtract Single STCF Adjustment command that contains a microsecond field that is greater than or equal to 1,000,000.

The `secs` field specifies the number of seconds the STCF is to be adjusted by, the `usecs` field specifies the number of micro-seconds that was in error, the `dir` field identifies whether the adjustment was to be added or subtracted. The direction can be either CFE_TIME_AdjustDirection_ADD or CFE_TIME_AdjustDirection_SUBTRACT.

Definition at line 470 of file cfe_time_events.h.

39.42.1.11 CFE_TIME_DIAG_EID

```
#define CFE_TIME_DIAG_EID 6
```

```
'Request diagnostics command'
```

Event Message 'Request diagnostics command'

Type: DEBUG

Cause:

This event message is always automatically issued in response to a cFE Time Services Request Diagnostics command

Definition at line 96 of file cfe_time_events.h.

39.42.1.12   CFE_TIME_EXIT_ERR_EID

`#define CFE_TIME_EXIT_ERR_EID 25 /* task termination "error" */`

Definition at line 290 of file cfe_time_events.h.

39.42.1.13   CFE_TIME_FLY_OFF_EID

`#define CFE_TIME_FLY_OFF_EID 21`

`'Stop FLYWHEEL'`

Event Message `'Stop FLYWHEEL'`

Type: INFORMATION

Cause:

This event message is generated whenever the Time Services exits FLYWHEEL mode.

Definition at line 288 of file cfe_time_events.h.

39.42.1.14   CFE_TIME_FLY_ON_EID

`#define CFE_TIME_FLY_ON_EID 20 /* flywheel state "informational" */`

`'Start FLYWHEEL'`

Event Message `'Start FLYWHEEL'`

Type: INFORMATION

Cause:

This event message is generated whenever the Time Services enters FLYWHEEL mode.

Definition at line 277 of file cfe_time_events.h.

39.42.1.15   CFE_TIME_ID_ERR_EID

```
#define CFE_TIME_ID_ERR_EID 26 /* invalid command packet "error" */
```

```
'Invalid message ID - ID = 0x%X'
```

Event Message `'Invalid message ID - ID = 0x%X'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a message from the software bus that is not one of Time Services recognized messages.

The `ID` field specifies, in hex, the message ID of the inappropriately received message.

Definition at line 306 of file cfe_time_events.h.

39.42.1.16   CFE_TIME_INIT_EID

```
#define CFE_TIME_INIT_EID 1 /* start up message "informational" */
```

```
'cFE TIME Initialized'
```

Event Message `'cFE TIME Initialized'`

Type: INFORMATION

Cause:

This event message is always automatically issued when the Time Services Task completes its Initialization.

Definition at line 60 of file cfe_time_events.h.

39.42.1.17 CFE_TIME_LEAPS_CFG_EID

#define CFE_TIME_LEAPS_CFG_EID 46

'Set Leaps commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'

Event Message 'Set Leaps commands invalid without CFE_PLATFORM_TIME_CFG_SERVER
            set to true'

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Leap Seconds Command and the Time Ser-
vices configuration parameter CFE_PLATFORM_TIME_CFG_SERVER has not been set to true in the cfe_platform_↩
cfg.h file.

Definition at line 573 of file cfe_time_events.h.

39.42.1.18 CFE_TIME_LEAPS_EID

#define CFE_TIME_LEAPS_EID 17

'Set Leap Seconds = %d'

Event Message 'Set Leap Seconds = %d'

Type: INFORMATION

Cause:

This event message is generated upon successful completion of the Set Leap Seconds command

The %d field contains the number of seconds the Spacecraft's Leap Seconds has been set to.

Definition at line 266 of file cfe_time_events.h.

39.42.1.19 CFE_TIME_LEN_ERR_EID

`#define CFE_TIME_LEN_ERR_EID 49`

`'Invalid cmd length:  ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'`

Event Message `'Invalid cmd length:  ID = 0x%X, CC = %d, Exp Len = %d, Len = %d'`

Type: ERROR

Cause:

This event message is generated when a message with the CFE_TIME_CMD_MID message ID has arrived but whose packet length does not match the expected length for the specified command code.

The `ID` field in the event message specifies the Message ID (in hex), the `CC` field specifies the Command Code (in decimal), the `Exp` Len field specified the Expected Length (in decimal), and `Len` specifies the message Length (in decimal) found in the message.

Definition at line 621 of file cfe_time_events.h.

39.42.1.20 CFE_TIME_MAX_EID

`#define CFE_TIME_MAX_EID 49`

Definition at line 45 of file cfe_time_events.h.

39.42.1.21 CFE_TIME_MET_CFG_EID

`#define CFE_TIME_MET_CFG_EID 44`

`'Set MET commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'`

Event Message `'Set MET commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Mission Elapsed Time Command and the Time Services configuration parameter CFE_PLATFORM_TIME_CFG_SERVER has not been set to true in the cfe_↩ platform_cfg.h file.

Definition at line 545 of file cfe_time_events.h.

39.42.1.22 CFE_TIME_MET_EID

```
#define CFE_TIME_MET_EID 13
```

```
'Set MET - secs = %d, usecs = %d, ssecs = 0x%X'
```

Event Message `'Set MET - secs = %d, usecs = %d, ssecs = 0x%X'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of a cFE Time Services Set Mission Elapsed Time command

The `secs` field specifies the new MET (in seconds), the `usecs` field specifies the MET micro-seconds, the `ssecs` field is the micro-seconds field converted to Spacecraft Time sub-seconds

Definition at line 194 of file cfe_time_events.h.

39.42.1.23 CFE_TIME_MET_ERR_EID

```
#define CFE_TIME_MET_ERR_EID 35
```

```
'Invalid MET - secs = %d, usecs = %d'
```

Event Message `'Invalid MET - secs = %d, usecs = %d'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Mission Elapsed Time Command that contains a microsecond field that is greater than or equal to 1,000,000.

The `secs` field specifies, in decimal, the MET in seconds and the `usecs` field specifies, in decimal, the micro-second field of the MET that was in error.

Definition at line 432 of file cfe_time_events.h.

39.42.1.24   CFE_TIME_NOOP_EID

```
#define CFE_TIME_NOOP_EID 4 /* processed command "informational" */
```

```
'No-op command'
```

Event Message `'No-op command'`

Type: INFORMATION

Cause:

This event message is always automatically issued in response to a cFE Time Services NO-OP command

Definition at line 72 of file cfe_time_events.h.

39.42.1.25   CFE_TIME_RESET_EID

```
#define CFE_TIME_RESET_EID 5
```

```
'Reset Counters command'
```

Event Message `'Reset Counters command'`

Type: DEBUG

Cause:

This event message is always automatically issued in response to a cFE Time Services Reset Counters command

Definition at line 84 of file cfe_time_events.h.

39.42.1.26   CFE_TIME_SIGNAL_CFG_EID

#define CFE_TIME_SIGNAL_CFG_EID 41

'Set Signal commands invalid without CFE_PLATFORM_TIME_CFG_SIGNAL set to true'

Event Message 'Set Signal commands invalid without CFE_PLATFORM_TIME_CFG_SIGNAL
set to true'

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Clock Signal Command and the Time Services configuration parameter CFE_PLATFORM_TIME_CFG_SIGNAL has not been set to true in the cfe_platform_↩cfg.h file.

Definition at line 502 of file cfe_time_events.h.

39.42.1.27   CFE_TIME_SIGNAL_EID

#define CFE_TIME_SIGNAL_EID 9

'Set Tone Source = %s'

Event Message 'Set Tone Source = %s'

Type: INFORMATION

Cause:

This event message is generated upon successful completion of a cFE Time Services Set Clock Signal command

The '%s' field will identify whether the command specified PRIMARY, or REDUNDANT.

Definition at line 141 of file cfe_time_events.h.

39.42.1.28 CFE_TIME_SIGNAL_ERR_EID

`#define CFE_TIME_SIGNAL_ERR_EID 32`

`'Invalid Tone Source = 0x%X'`

Event Message `'Invalid Tone Source = 0x%X'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Clock Signal Command that contains a desired clock source that is none of the following:

- CFE_TIME_ToneSignalSelect_PRIMARY

- CFE_TIME_ToneSignalSelect_REDUNDANT

The `Source` field specifies, in hex, the signal source value received in the command message.

Definition at line 377 of file cfe_time_events.h.

39.42.1.29 CFE_TIME_SOURCE_CFG_EID

`#define CFE_TIME_SOURCE_CFG_EID 40 /* cmd disabled per cfg "error" */`

`'Set Source commands invalid without CFE_PLATFORM_TIME_CFG_SOURCE set to true'`

Event Message `'Set Source commands invalid without CFE_PLATFORM_TIME_CFG_SOURCE`
            `set to true'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Clock Source Command and the Time Services configuration parameter CFE_PLATFORM_TIME_CFG_SOURCE has not been set to true in the cfe_platform_↩
cfg.h file.

Definition at line 488 of file cfe_time_events.h.

39.42.1.30   CFE_TIME_SOURCE_EID

```
#define CFE_TIME_SOURCE_EID 8
```

```
'Set Time Source = %s'
```

Event Message `'Set Time Source = %s'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of a cFE Time Services Set Time Source command

The `'%s'` field will identify whether the command specified `INTERNAL`, or `EXTERNAL`.

Definition at line 126 of file cfe_time_events.h.

39.42.1.31   CFE_TIME_SOURCE_ERR_EID

```
#define CFE_TIME_SOURCE_ERR_EID 31
```

```
'Invalid Time Source = 0x%X'
```

Event Message `'Invalid Time Source = 0x%X'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Clock Source Command that contains a desired clock source that is none of the following:

- CFE_TIME_SourceSelect_INTERNAL
- CFE_TIME_SourceSelect_EXTERNAL

The `Source` field specifies, in hex, the source value received in the command message.

Definition at line 359 of file cfe_time_events.h.

39.42.1.32   CFE_TIME_STATE_EID

```
#define CFE_TIME_STATE_EID 7
```

```
'Set Clock State = %s'
```

Event Message `'Set Clock State = %s'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of a cFE Time Services Set Time State command

The `'%s'` field will identify whether the command specified `VALID`, `INVALID`, or `FLYWHEEL`.

Definition at line 111 of file cfe_time_events.h.

39.42.1.33   CFE_TIME_STATE_ERR_EID

```
#define CFE_TIME_STATE_ERR_EID 30 /* processed command "error" */
```

```
'Invalid Clock State = 0x%X'
```

Event Message `'Invalid Clock State = 0x%X'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Clock State Command that contains a desired clock state that is none of the following:

- CFE_TIME_ClockState_INVALID

- CFE_TIME_ClockState_VALID

- CFE_TIME_ClockState_FLYWHEEL

The `State` field specifies, in hex, the state value received in the command message.

Definition at line 341 of file cfe_time_events.h.

39.42.1.34   CFE_TIME_STCF_CFG_EID

#define CFE_TIME_STCF_CFG_EID 45

'Set STCF commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'

Event Message 'Set STCF commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set
               to true'

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Spacecraft Time Correlation Factor Command
and the Time Services configuration parameter CFE_PLATFORM_TIME_CFG_SERVER has not been set to true in
the cfe_platform_cfg.h file.

Definition at line 559 of file cfe_time_events.h.

39.42.1.35   CFE_TIME_STCF_EID

#define CFE_TIME_STCF_EID 14

'Set STCF - secs = %d, usecs = %d, ssecs = 0x%X'

Event Message 'Set STCF - secs = %d, usecs = %d, ssecs = 0x%X'

Type: INFORMATION

Cause:

This event message is generated upon successful completion of a cFE Time Services Set Spacecraft Time Correlation
Factor command

The secs field specifies the new STCF (in seconds), the usecs field specifies the STCF micro-seconds, the ssecs
field is the micro-seconds field converted to Spacecraft Time sub-seconds.

Definition at line 211 of file cfe_time_events.h.

39.42.1.36 CFE_TIME_STCF_ERR_EID

```
#define CFE_TIME_STCF_ERR_EID 36
```

```
'Invalid STCF - secs = %d, usecs = %d'
```

Event Message `'Invalid STCF - secs = %d, usecs = %d'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Spacecraft Time Correlation Factor Command that contains a microsecond field that is greater than or equal to 1,000,000.

The `secs` field specifies, in decimal, the STCF in seconds and the `usecs` field specifies, in decimal, the micro-second field of the STCF that was in error.

Definition at line 450 of file cfe_time_events.h.

39.42.1.37 CFE_TIME_TIME_CFG_EID

```
#define CFE_TIME_TIME_CFG_EID 43
```

```
'Set Time commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'
```

Event Message `'Set Time commands invalid without CFE_PLATFORM_TIME_CFG_SERVER set to true'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Spacecraft Time Command and the Time Services configuration parameter CFE_PLATFORM_TIME_CFG_SERVER has not been set to true in the cfe_platform_↩ cfg.h file.

Definition at line 531 of file cfe_time_events.h.

39.42.1.38   CFE_TIME_TIME_EID

```
#define CFE_TIME_TIME_EID 12
```

```
'Set Time – secs = %d, usecs = %d, ssecs = 0x%X'
```

Event Message `'Set Time – secs = %d, usecs = %d, ssecs = 0x%X'`

Type: INFORMATION

Cause:

This event message is generated upon successful completion of a cFE Time Services Set Time command

The `secs` field specifies the new spacecraft time (in seconds), the `usecs` field specifies the spacecraft time micro-seconds, the `ssecs` field is the micro-seconds field converted to Spacecraft Time sub-seconds

Definition at line 178 of file cfe_time_events.h.

39.42.1.39   CFE_TIME_TIME_ERR_EID

```
#define CFE_TIME_TIME_ERR_EID 34
```

```
'Invalid Time – secs = %d, usecs = %d'
```

Event Message `'Invalid Time – secs = %d, usecs = %d'`

Type: ERROR

Cause:

This event message is generated whenever Time Services receives a Set Spacecraft Time Command that contains a microsecond field that is greater than or equal to 1,000,000.

The `secs` field specifies, in decimal, the spacecraft time in seconds and the `usecs` field specifies, in decimal, the micro-second field of the spacecraft time that was in error.

Definition at line 414 of file cfe_time_events.h.

39.43 cfe/fsw/cfe-core/src/inc/cfe_time_extern_typedefs.h File Reference

```
#include "common_types.h"
```

Typedefs

- typedef uint8 CFE_TIME_FlagBit_Enum_t

    Bit positions of the various clock state flags.
- typedef int16 CFE_TIME_ClockState_Enum_t

    Enumerated types identifying the quality of the current time.
- typedef uint8 CFE_TIME_SourceSelect_Enum_t

    Clock Source Selection Parameters.
- typedef uint8 CFE_TIME_ToneSignalSelect_Enum_t

    Tone Signal Selection Parameters.
- typedef uint8 CFE_TIME_AdjustDirection_Enum_t

    STCF adjustment direction (for both one-time and 1Hz adjustments)
- typedef uint8 CFE_TIME_FlywheelState_Enum_t

    Fly-wheel status values.
- typedef uint8 CFE_TIME_SetState_Enum_t

    Clock status values (has the clock been set to correct time)

Enumerations

- enum CFE_TIME_FlagBit {
  CFE_TIME_FlagBit_CLKSET = 0, CFE_TIME_FlagBit_FLYING = 1, CFE_TIME_FlagBit_SRCINT = 2, CFE_T↩
  IME_FlagBit_SIGPRI = 3,
  CFE_TIME_FlagBit_SRVFLY = 4, CFE_TIME_FlagBit_CMDFLY = 5, CFE_TIME_FlagBit_ADDADJ = 6, CFE_↩
  TIME_FlagBit_ADD1HZ = 7,
  CFE_TIME_FlagBit_ADDTCL = 8, CFE_TIME_FlagBit_SERVER = 9, CFE_TIME_FlagBit_GDTONE = 10 }

    Label definitions associated with CFE_TIME_FlagBit_Enum_t.
- enum CFE_TIME_ClockState { CFE_TIME_ClockState_INVALID = -1, CFE_TIME_ClockState_VALID = 0, CF↩
  E_TIME_ClockState_FLYWHEEL = 1 }

    Label definitions associated with CFE_TIME_ClockState_Enum_t.
- enum CFE_TIME_SourceSelect { CFE_TIME_SourceSelect_INTERNAL = 1, CFE_TIME_SourceSelect_EXT↩
  ERNAL = 2 }

    Label definitions associated with CFE_TIME_SourceSelect_Enum_t.
- enum CFE_TIME_ToneSignalSelect { CFE_TIME_ToneSignalSelect_PRIMARY = 1, CFE_TIME_ToneSignal↩
  Select_REDUNDANT = 2 }

    Label definitions associated with CFE_TIME_ToneSignalSelect_Enum_t.
- enum CFE_TIME_AdjustDirection { CFE_TIME_AdjustDirection_ADD = 1, CFE_TIME_AdjustDirection_SUBT↩
  RACT = 2 }

    Label definitions associated with CFE_TIME_AdjustDirection_Enum_t.
- enum CFE_TIME_FlywheelState { CFE_TIME_FlywheelState_NO_FLY = 0, CFE_TIME_FlywheelState_IS_FLY
  = 1 }

    Label definitions associated with CFE_TIME_FlywheelState_Enum_t.
- enum CFE_TIME_SetState { CFE_TIME_SetState_NOT_SET = 0, CFE_TIME_SetState_WAS_SET = 1 }

    Label definitions associated with CFE_TIME_SetState_Enum_t.

39.43.1   Typedef Documentation

39.43.1.1   CFE_TIME_AdjustDirection_Enum_t

typedef uint8 CFE_TIME_AdjustDirection_Enum_t

STCF adjustment direction (for both one-time and 1Hz adjustments)

See also

> enum CFE_TIME_AdjustDirection

Definition at line 237 of file cfe_time_extern_typedefs.h.

39.43.1.2   CFE_TIME_ClockState_Enum_t

typedef int16 CFE_TIME_ClockState_Enum_t

Enumerated types identifying the quality of the current time.

Description

> The CFE_TIME_ClockState_Enum_t enumerations identify the three recognized states of the current time. If the
> clock has never been successfully synchronized with the primary onboard clock source, the time is conisdered
> to be CFE_TIME_ClockState_INVALID. If the time is currently synchronized (i.e. - the primary synchronization
> mechanism has not been dropped for any significant amount of time), then the current time is considered to be C↩
> FE_TIME_ClockState_VALID. If the time had, at some point in the past, been synchronized, but the synchronization
> with the primary onboard clock has since been lost, then the time is considered to be CFE_TIME_ClockState↩
> _FLYWHEEL. Since different clocks drift at different rates from one another, the accuracy of the time while in
> CFE_TIME_ClockState_FLYWHEEL is dependent upon the time spent in that state.

See also

> enum CFE_TIME_ClockState

Definition at line 159 of file cfe_time_extern_typedefs.h.

39.43.1.3 CFE_TIME_FlagBit_Enum_t

typedef uint8 CFE_TIME_FlagBit_Enum_t

Bit positions of the various clock state flags.

See also

> enum CFE_TIME_FlagBit

Definition at line 104 of file cfe_time_extern_typedefs.h.

39.43.1.4 CFE_TIME_FlywheelState_Enum_t

typedef uint8 CFE_TIME_FlywheelState_Enum_t

Fly-wheel status values.

See also

> enum CFE_TIME_FlywheelState

Definition at line 263 of file cfe_time_extern_typedefs.h.

39.43.1.5 CFE_TIME_SetState_Enum_t

typedef uint8 CFE_TIME_SetState_Enum_t

Clock status values (has the clock been set to correct time)

See also

> enum CFE_TIME_SetState

Definition at line 289 of file cfe_time_extern_typedefs.h.

39.43.1.6 CFE_TIME_SourceSelect_Enum_t

typedef uint8 CFE_TIME_SourceSelect_Enum_t

Clock Source Selection Parameters.

See also

> enum CFE_TIME_SourceSelect

Definition at line 185 of file cfe_time_extern_typedefs.h.

39.43.1.7   CFE_TIME_ToneSignalSelect_Enum_t

typedef uint8 CFE_TIME_ToneSignalSelect_Enum_t

Tone Signal Selection Parameters.

See also

> enum CFE_TIME_ToneSignalSelect

Definition at line 211 of file cfe_time_extern_typedefs.h.

39.43.2   Enumeration Type Documentation

39.43.2.1   CFE_TIME_AdjustDirection

enum CFE_TIME_AdjustDirection

Label definitions associated with CFE_TIME_AdjustDirection_Enum_t.

Enumerator

CFE_TIME_AdjustDirection_ADD	Add time adjustment.
CFE_TIME_AdjustDirection_SUBTRACT	Subtract time adjustment.

Definition at line 217 of file cfe_time_extern_typedefs.h.

39.43.2.2   CFE_TIME_ClockState

enum CFE_TIME_ClockState

Label definitions associated with CFE_TIME_ClockState_Enum_t.

Enumerator

CFE_TIME_ClockState_INVALID	The spacecraft time has not been set since the last clock reset. Times returned by clock routines have no relationship to any ground-based time reference.
CFE_TIME_ClockState_VALID	The spacecraft time has been set at least once since the last clock reset, and it is synchronized with the primary on-board time base. Times returned by clock routines can be trusted.
CFE_TIME_ClockState_FLYWHEEL	The spacecraft time has been set at least once since the last clock reset, but it is not currently synchronized with the primary on-board time base. Times returned by clock routines are a "best guess" based on a non-optimal oscillator.

Definition at line 110 of file cfe_time_extern_typedefs.h.

39.43.2.3 CFE_TIME_FlagBit

enum CFE_TIME_FlagBit

Label definitions associated with CFE_TIME_FlagBit_Enum_t.

Enumerator

CFE_TIME_FlagBit_CLKSET	The spacecraft time has been set.
CFE_TIME_FlagBit_FLYING	This instance of Time Services is flywheeling.
CFE_TIME_FlagBit_SRCINT	The clock source is set to internal.
CFE_TIME_FlagBit_SIGPRI	The clock signal is set to primary.
CFE_TIME_FlagBit_SRVFLY	The Time Server is in flywheel mode.
CFE_TIME_FlagBit_CMDFLY	This instance of Time Services was commanded into flywheel mode.
CFE_TIME_FlagBit_ADDADJ	One time STCF Adjustment is to be done in positive direction.
CFE_TIME_FlagBit_ADD1HZ	1 Hz STCF Adjustment is to be done in a positive direction
CFE_TIME_FlagBit_ADDTCL	Time Client Latency is applied in a positive direction.
CFE_TIME_FlagBit_SERVER	This instance of Time Services is a Time Server.
CFE_TIME_FlagBit_GDTONE	The tone received is good compared to the last tone received.

Definition at line 39 of file cfe_time_extern_typedefs.h.

39.43.2.4 CFE_TIME_FlywheelState

enum CFE_TIME_FlywheelState

Label definitions associated with CFE_TIME_FlywheelState_Enum_t.

Enumerator

CFE_TIME_FlywheelState_NO_FLY	Not in flywheel state.
CFE_TIME_FlywheelState_IS_FLY	In flywheel state.

Definition at line 243 of file cfe_time_extern_typedefs.h.

39.43.2.5 CFE_TIME_SetState

enum CFE_TIME_SetState

Label definitions associated with CFE_TIME_SetState_Enum_t.

Enumerator

CFE_TIME_SetState_NOT_SET	Spacecraft time has not been set.
CFE_TIME_SetState_WAS_SET	Spacecraft time has been set.

Definition at line 269 of file cfe_time_extern_typedefs.h.

39.43.2.6 CFE_TIME_SourceSelect

enum CFE_TIME_SourceSelect

Label definitions associated with CFE_TIME_SourceSelect_Enum_t.

Enumerator

CFE_TIME_SourceSelect_INTERNAL	Use Internal Source.
CFE_TIME_SourceSelect_EXTERNAL	Use External Source.

Definition at line 165 of file cfe_time_extern_typedefs.h.

39.43.2.7 CFE_TIME_ToneSignalSelect

enum CFE_TIME_ToneSignalSelect

Label definitions associated with CFE_TIME_ToneSignalSelect_Enum_t.

Enumerator

CFE_TIME_ToneSignalSelect_PRIMARY	Primary Source.
CFE_TIME_ToneSignalSelect_REDUNDANT	Redundant Source.

Definition at line 191 of file cfe_time_extern_typedefs.h.

39.44 cfe/fsw/cfe-core/src/inc/cfe_time_msg.h File Reference

```
#include "cfe.h"
```

Data Structures

- struct CFE_TIME_NoArgsCmd_t

- struct CFE_TIME_LeapsCmd_Payload_t
- struct CFE_TIME_SetLeapSeconds_t
- struct CFE_TIME_StateCmd_Payload_t
- struct CFE_TIME_SetState_t
- struct CFE_TIME_SourceCmd_Payload_t
- struct CFE_TIME_SetSource_t
- struct CFE_TIME_SignalCmd_Payload_t
- struct CFE_TIME_SetSignal_t
- struct CFE_TIME_TimeCmd_Payload_t
- struct CFE_TIME_TimeCmd_t
- struct CFE_TIME_OneHzAdjustmentCmd_Payload_t
- struct CFE_TIME_OneHzAdjustmentCmd_t
- struct CFE_TIME_1HzCmd_t
- struct CFE_TIME_ToneSignalCmd_t
- struct CFE_TIME_FakeToneCmd_t
- struct CFE_TIME_ToneDataCmd_Payload_t
- struct CFE_TIME_ToneDataCmd_t
- struct CFE_TIME_HousekeepingTlm_Payload_t
- struct CFE_TIME_HousekeepingTlm_t
- struct CFE_TIME_DiagnosticTlm_Payload_t
- struct CFE_TIME_DiagnosticTlm_t

Macros

- #define CFE_TIME_FLAG_CLKSET 0x8000

  The spacecraft time has been set.
- #define CFE_TIME_FLAG_FLYING 0x4000

  This instance of Time Services is flywheeling.
- #define CFE_TIME_FLAG_SRCINT 0x2000

  The clock source is set to "internal".
- #define CFE_TIME_FLAG_SIGPRI 0x1000

  The clock signal is set to "primary".
- #define CFE_TIME_FLAG_SRVFLY 0x0800

  The Time Server is in flywheel mode.
- #define CFE_TIME_FLAG_CMDFLY 0x0400

  This instance of Time Services was commanded into flywheel mode.
- #define CFE_TIME_FLAG_ADDADJ 0x0200

  One time STCF Adjustment is to be done in positive direction.
- #define CFE_TIME_FLAG_ADD1HZ 0x0100

  1 Hz STCF Adjustment is to be done in a positive direction
- #define CFE_TIME_FLAG_ADDTCL 0x0080

  Time Client Latency is applied in a positive direction.
- #define CFE_TIME_FLAG_SERVER 0x0040

  This instance of Time Services is a Time Server.
- #define CFE_TIME_FLAG_GDTONE 0x0020

  The tone received is good compared to the last tone received.
- #define CFE_TIME_FLAG_UNUSED 0x001F

  Reserved flags - should be zero.

Time Services Command Codes

- #define CFE_TIME_NOOP_CC 0 /∗ no-op command ∗/
- #define CFE_TIME_RESET_COUNTERS_CC 1 /∗ reset counters ∗/
- #define CFE_TIME_SEND_DIAGNOSTIC_TLM_CC 2 /∗ request diagnostic hk telemetry ∗/
- #define CFE_TIME_SET_SOURCE_CC 3 /∗ set clock source (int vs ext) ∗/
- #define CFE_TIME_SET_STATE_CC 4 /∗ set clock state ∗/
- #define CFE_TIME_ADD_DELAY_CC 5 /∗ add tone delay value ∗/
- #define CFE_TIME_SUB_DELAY_CC 6 /∗ sub tone delay value ∗/
- #define CFE_TIME_SET_TIME_CC 7 /∗ set time ∗/
- #define CFE_TIME_SET_MET_CC 8 /∗ set MET ∗/
- #define CFE_TIME_SET_STCF_CC 9 /∗ set STCF ∗/
- #define CFE_TIME_SET_LEAP_SECONDS_CC 10 /∗ set Leap Seconds ∗/
- #define CFE_TIME_ADD_ADJUST_CC 11 /∗ add one time STCF adjustment ∗/
- #define CFE_TIME_SUB_ADJUST_CC 12 /∗ subtract one time STCF adjustment ∗/
- #define CFE_TIME_ADD_1HZ_ADJUSTMENT_CC 13 /∗ add 1Hz STCF adjustment ∗/
- #define CFE_TIME_SUB_1HZ_ADJUSTMENT_CC 14 /∗ subtract 1Hz STCF adjustment ∗/
- #define CFE_TIME_SET_SIGNAL_CC 15 /∗ set clock signal (pri vs red) ∗/

Typedefs

- typedef CFE_TIME_NoArgsCmd_t CFE_TIME_Noop_t
- typedef CFE_TIME_NoArgsCmd_t CFE_TIME_ResetCounters_t
- typedef CFE_TIME_NoArgsCmd_t CFE_TIME_SendDiagnosticTlm_t
- typedef CFE_TIME_TimeCmd_t CFE_TIME_AddDelay_t
- typedef CFE_TIME_TimeCmd_t CFE_TIME_SubDelay_t
- typedef CFE_TIME_TimeCmd_t CFE_TIME_SetMET_t
- typedef CFE_TIME_TimeCmd_t CFE_TIME_SetSTCF_t
- typedef CFE_TIME_TimeCmd_t CFE_TIME_AddAdjust_t
- typedef CFE_TIME_TimeCmd_t CFE_TIME_SubAdjust_t
- typedef CFE_TIME_TimeCmd_t CFE_TIME_SetTime_t
- typedef CFE_TIME_OneHzAdjustmentCmd_t CFE_TIME_Add1HZAdjustment_t
- typedef CFE_TIME_OneHzAdjustmentCmd_t CFE_TIME_Sub1HZAdjustment_t
- typedef CFE_TIME_HousekeepingTlm_t CFE_TIME_HkPacket_t
- typedef CFE_TIME_DiagnosticTlm_t CFE_TIME_DiagPacket_t

39.44.1   Macro Definition Documentation

39.44.1.1   CFE_TIME_ADD_1HZ_ADJUSTMENT_CC

```
#define CFE_TIME_ADD_1HZ_ADJUSTMENT_CC 13 /* add 1Hz STCF adjustment */
```

Name Add Delta to Spacecraft Time Correlation Factor each 1Hz

Description

This command has been updated to take actual sub-seconds (1/2^{32} seconds) rather than micro-seconds as an input argument. This change occurred after the determination was made that one micro-second is too large an increment for a constant 1Hz adjustment.

This command continuously adjusts the Spacecraft Time Correlation Factor (STCF) every second, by adding the specified value. The adjustment to the STCF is applied in the Time Service local 1Hz interrupt handler. As the local 1Hz interrupt is not synchronized to the tone signal, one cannot say when the adjustment will occur, other than once a second, at about the same time relative to the tone.

There was some debate about whether the maximum 1Hz clock drift correction factor would ever need to exceed some small fraction of a second. But, the decision was made to provide the capability to make 1Hz adjustments greater than one second and leave it to the ground system to provide mission specific limits.

Command Mnemonic(s) $sc_$cpu_TIME_Add1HzSTCF

Command Structure

CFE_TIME_Add1HZAdjustment_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- **$sc_$cpu_TIME_STCFSecs -** Housekeeping Telemetry point indicating new STCF seconds value
- **$sc_$cpu_TIME_STCFSubsecs -** Housekeeping Telemetry point indicating new STCF subseconds value
- The CFE_TIME_1HZ_EID informational event message will be generated

Error Conditions

- Platorm receiving the command is not a Time Server

  Evidence of Failure may be found in the following telemetry:
- **$sc_$cpu_TIME_CMDEC -** command error counter will increment
- Error specific event message will be issued (CFE_TIME_1HZ_CFG_EID)

Criticality

Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_ADD_ADJUST_CC, CFE_TIME_SUB_ADJUST_CC, CFE_TIME_SUB_1HZ_ADJUSTMENT_CC

Definition at line 612 of file cfe_time_msg.h.

39.44.1.2   CFE_TIME_ADD_ADJUST_CC

```
#define CFE_TIME_ADD_ADJUST_CC 11 /* add one time STCF adjustment */
```

Name Add Delta to Spacecraft Time Correlation Factor

Description

This command adjusts the Spacecraft Time Correlation Factor (STCF) by adding the specified value. The new STCF takes effect immediately upon execution of this command.

Command Mnemonic(s) $sc_$cpu_TIME_AddSTCFAdj

Command Structure

CFE_TIME_TimeCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- **$sc_$cpu_TIME_STCFSecs -** Housekeeping Telemetry point indicating new STCF seconds value
- **$sc_$cpu_TIME_STCFSubsecs -** Housekeeping Telemetry point indicating new STCF subseconds value
- The CFE_TIME_DELTA_EID informational event message will be generated

Error Conditions

- An invalid number of microseconds was specified (must be less than 1 million)
- Platorm receiving the command is not a Time Server

    Evidence of Failure may be found in the following telemetry:

- **$sc_$cpu_TIME_CMDEC -** command error counter will increment
- Error specific event messages will be issued (CFE_TIME_DELTA_ERR_EID or CFE_TIME_DELTA_CFG_↩ EID)

Criticality

Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_ADD_ADJUST_CC, CFE_TIME_SUB_ADJUST_CC, CFE_TIME_ADD_1HZ_ADJUSTMENT_CC, CFE_TIME_SUB_1HZ_ADJUSTMENT_CC

Definition at line 532 of file cfe_time_msg.h.

39.44.1.3 CFE_TIME_ADD_DELAY_CC

```
#define CFE_TIME_ADD_DELAY_CC 5 /* add tone delay value */
```

Name Add Time to Tone Time Delay

Description

This command is used to factor out a known, predictable latency between the Time Server and a particular Time Client. The correction is applied (added) to the current time calculation for Time Clients, so this command has no meaning for Time Servers. Each Time Client can have a unique latency setting. The latency value is a positive number of seconds and microseconds that represent the deviation from the time maintained by the Time Server.

Command Mnemonic(s) $sc_$cpu_TIME_AddClockLat

Command Structure

CFE_TIME_TimeCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC** - command execution counter will increment
- **$sc_$cpu_TIME_DLatentS,** $sc_$cpu_TIME_DLatentSs - Housekeeping Telemetry point indicating command specified values
- **$sc_$cpu_TIME_DLatentDir** - Diagnostic Telemetry point indicating commanded latency direction
- The CFE_TIME_DELAY_EID informational event message will be generated

Error Conditions

- An invalid number of microseconds was specified (must be less than 1 million)
- Platorm receiving the command is not a Time Client

    Evidence of Failure may be found in the following telemetry:

- **$sc_$cpu_TIME_CMDEC** - command error counter will increment
- Error specific event messages will be issued (CFE_TIME_DELAY_CFG_EID or CFE_TIME_DELAY_ERR↩ _EID)

Criticality

Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_SUB_DELAY_CC

Definition at line 302 of file cfe_time_msg.h.

39.44.1.4 CFE_TIME_NOOP_CC

```
#define CFE_TIME_NOOP_CC 0 /* no-op command */
```

Name Time No-Op

Description

This command performs no other function than to increment the command execution counter. The command may be used to verify general aliveness of the Time Services task.

Command Mnemonic(s) $sc_$cpu_TIME_NOOP

Command Structure

CFE_TIME_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- The CFE_TIME_NOOP_EID informational event message will be generated

Error Conditions

There are no error conditions for this command. If the Time Services receives the command, the event is sent (although it may be filtered by EVS) and the counter is incremented unconditionally.

Criticality

None

See also

Definition at line 80 of file cfe_time_msg.h.

39.44.1.5 CFE_TIME_RESET_COUNTERS_CC

```
#define CFE_TIME_RESET_COUNTERS_CC 1 /* reset counters */
```

Name Time Reset Counters

Description

This command resets the following counters within the Time Services Housekeeping Telemetry :

- Command Execution Counter ($sc_$cpu_TIME_CMDPC)
- Command Error Counter ($sc_$cpu_TIME_CMDEC) This command also resets the following counters within the Time Services Diagnostic Telemetry :
- Tone Signal Detected Software Bus Message Counter ($sc_$cpu_TIME_DTSDetCNT)
- Time at the Tone Data Software Bus Message Counter ($sc_$cpu_TIME_DTatTCNT)
- Tone Signal/Data Verify Counter ($sc_$cpu_TIME_DVerifyCNT)
- Tone Signal/Data Error Counter ($sc_$cpu_TIME_DVerifyER)
- Tone Signal Interrupt Counter ($sc_$cpu_TIME_DTsISRCNT)
- Tone Signal Interrupt Error Counter ($sc_$cpu_TIME_DTsISRERR)
- Tone Signal Task Counter ($sc_$cpu_TIME_DTsTaskCNT)
- Local 1 Hz Interrupt Counter ($sc_$cpu_TIME_D1HzISRCNT)
- Local 1 Hz Task Counter ($sc_$cpu_TIME_D1HzTaskCNT)
- Reference Time Version Counter ($sc_$cpu_TIME_DVersionCNT)

Command Mnemonic(s) $sc_$cpu_TIME_ResetCtrs

Command Structure

CFE_TIME_NoArgsCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- The CFE_TIME_RESET_EID informational event message will be generated

Error Conditions

There are no error conditions for this command. If the Time Services receives the command, the event is sent (although it may be filtered by EVS) and the counter is incremented unconditionally.

Criticality

None

See also

Definition at line 124 of file cfe_time_msg.h.

39.44.1.6   CFE_TIME_SEND_DIAGNOSTIC_TLM_CC

```
#define CFE_TIME_SEND_DIAGNOSTIC_TLM_CC 2 /* request diagnostic hk telemetry */
```

Name Request TIME Diagnostic Telemetry

Description

> This command requests that the Time Service generate a message containing various data values not included in the normal Time Service housekeeping message. The command requests only a single copy of the diagnostic message. Refer to CFE_TIME_DiagnosticTlm_t for a description of the Time Service diagnostic message contents.

Command Mnemonic(s) $sc_$cpu_TIME_RequestDiag

Command Structure

> CFE_TIME_NoArgsCmd_t

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
> - Sequence Counter for CFE_TIME_DiagnosticTlm_t will increment
> - The CFE_TIME_DIAG_EID debug event message will be generated

Error Conditions

> There are no error conditions for this command. If the Time Services receives the command, the event and telemetry is sent (although one or both may be filtered by EVS and TO) and the counter is incremented unconditionally.

Criticality

> None

See also

Definition at line 158 of file cfe_time_msg.h.

39.44.1.7   CFE_TIME_SET_LEAP_SECONDS_CC

```
#define CFE_TIME_SET_LEAP_SECONDS_CC 10 /* set Leap Seconds */
```

Name Set Leap Seconds

Description

This command sets the spacecraft Leap Seconds to the specified value. Leap Seconds may be positive or negative, and there is no limit to the value except, of course, the limit imposed by the 16 bit signed integer data type. The new Leap Seconds value takes effect immediately upon execution of this command.

Command Mnemonic(s) $sc_$cpu_TIME_SetClockLeap

Command Structure

CFE_TIME_TimeCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- **$sc_$cpu_TIME_LeapSecs -** Housekeeping Telemetry point indicating new Leap seconds value
- The CFE_TIME_LEAPS_EID informational event message will be generated

Error Conditions

- Platorm receiving the command is not a Time Server

  Evidence of Failure may be found in the following telemetry:

- **$sc_$cpu_TIME_CMDEC -** command error counter will increment
- Error specific event messages will be issued (CFE_TIME_LEAPS_CFG_EID)

Criticality

Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_SET_TIME_CC, CFE_TIME_SET_MET_CC, CFE_TIME_SET_STCF_CC

Definition at line 497 of file cfe_time_msg.h.

39.44.1.8   CFE_TIME_SET_MET_CC

`#define CFE_TIME_SET_MET_CC 8 /* set MET */`

Name Set Mission Elapsed Time

Description

>   This command sets the Mission Elapsed Timer (MET) to the specified value.

>   Note that the MET (as implemented for cFE Time Service) is a logical representation and not a physical timer. Thus, setting the MET is not dependent on whether the hardware supports a MET register that can be written to.

>   Note also that Time Service "assumes" that during normal operation, the MET is synchronized to the tone signal. Therefore, unless operating in FLYWHEEL mode, the sub-seconds portion of the MET will be set to zero at the next tone signal interrupt.

>   The new MET takes effect immediately upon execution of this command.

Command Mnemonic(s) $sc_$cpu_TIME_SetClockMET

Command Structure

>   CFE_TIME_TimeCmd_t

Command Verification

>   Successful execution of this command may be verified with the following telemetry:
>   - **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
>   - **$sc_$cpu_TIME_METSecs -** Housekeeping Telemetry point indicating new MET seconds value
>   - **$sc_$cpu_TIME_METSubsecs -** Housekeeping Telemetry point indicating new MET subseconds value
>   - The CFE_TIME_MET_EID informational event message will be generated

Error Conditions

>   - An invalid number of microseconds was specified (must be less than 1 million)
>   - Platorm receiving the command is not a Time Server
>
>   Evidence of Failure may be found in the following telemetry:
>   - **$sc_$cpu_TIME_CMDEC -** command error counter will increment
>   - Error specific event messages will be issued (CFE_TIME_MET_CFG_EID or CFE_TIME_MET_ERR_EID)

Criticality

>   Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

>   CFE_TIME_SET_TIME_CC, CFE_TIME_SET_STCF_CC, CFE_TIME_SET_LEAP_SECONDS_CC

Definition at line 425 of file cfe_time_msg.h.

39.44.1.9 CFE_TIME_SET_SIGNAL_CC

```
#define CFE_TIME_SET_SIGNAL_CC 15 /* set clock signal (pri vs red) */
```

Name Set Tone Signal Source

Description

This command selects the Time Service tone signal source. Although the list of potential tone signal sources is mission specific, a common choice is the selection of primary or redundant tone signal. The selection may be available to both the Time Server and Time Clients, depending on hardware configuration.

Notes:

- This command is only valid when the CFE_PLATFORM_TIME_CFG_SIGNAL configuration parameter in the cfe_platform_cfg.h file has been set to true.

Command Mnemonic(s) $sc_$cpu_TIME_SetSignal

Command Structure

CFE_TIME_SetSignal_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- **$sc_$cpu_TIME_DSignal -** Diagnostic Telemetry point will indicate the command specified value
- The CFE_TIME_SIGNAL_EID informational event message will be generated

Error Conditions

- Invalid Signal selection (a value other than CFE_TIME_ToneSignalSelect_PRIMARY or CFE_TIME_Tone↩ SignalSelect_REDUNDANT was specified)
- Multiple Tone Signal Sources not available on this platform

  Evidence of failure may be found in the following telemetry:
- **$sc_$cpu_TIME_CMDEC -** Command Error counter will increment
- Error specific event message (either CFE_TIME_SIGNAL_CFG_EID or CFE_TIME_SIGNAL_ERR_EID)

Criticality

Although tone signal source selection is important, this command is not critical

See also

CFE_TIME_SET_STATE_CC, CFE_TIME_SET_SOURCE_CC

Definition at line 703 of file cfe_time_msg.h.

39.44.1.10   CFE_TIME_SET_SOURCE_CC

`#define CFE_TIME_SET_SOURCE_CC 3 /* set clock source (int vs ext) */`

[Name](#) Set Time Source

Description

> This command selects the Time Service clock source. Although the list of potential clock sources is mission specific and defined via configuration parameters, this command provides a common method for switching between the local processor clock and an external source for time data.
>
> When commanded to accept external time data (GPS, MET, spacecraft time, etc.), the Time Server will enable input via an API function specific to the configuration definitions for the particular source. When commanded to use internal time data, the Time Server will ignore the external data. However, the Time Server will continue to use the API function as the trigger to generate a "time at the tone" command packet regardless of the internal/external command selection.
>
> Notes:
> - Operating in FLYWHEEL mode is not considered a choice related to clock source, but rather an element of the clock state. See below for a description of the [CFE_TIME_SET_STATE_CC](#) command.
> - This command is only valid when the [CFE_PLATFORM_TIME_CFG_SOURCE](#) configuration parameter in the [cfe_platform_cfg.h](#) file has been set to true.

[Command Mnemonic(s)](#) $sc_$cpu_TIME_SetSource

Command Structure

> [CFE_TIME_SetSource_t](#)

Command Verification

> Successful execution of this command may be verified with the following telemetry:
> - **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
> - **$sc_$cpu_TIME_DSource -** Diagnostic Telemetry point will indicate the command specified value
> - The [CFE_TIME_SOURCE_EID](#) informational event message will be generated

Error Conditions

> - Invalid Source selection (a value other than [CFE_TIME_SourceSelect_INTERNAL](#) or [CFE_TIME_Source↩](#) [Select_EXTERNAL](#) was specified)
> - Time source selection not allowed on this platform
>
> Evidence of failure may be found in the following telemetry:
> - **$sc_$cpu_TIME_CMDEC -** Command Error counter will increment
> - Error specific event message (either [CFE_TIME_SOURCE_CFG_EID](#) or [CFE_TIME_SOURCE_ERR_EID](#))

Criticality

> Although clock source selection is important, this command is not critical.

See also

> [CFE_TIME_SET_STATE_CC](#), [CFE_TIME_SET_SIGNAL_CC](#)

Definition at line 208 of file cfe_time_msg.h.

39.44.1.11 CFE_TIME_SET_STATE_CC

```
#define CFE_TIME_SET_STATE_CC 4 /* set clock state */
```

[Name](#) Set Time State

Description

> This command indirectly affects the Time Service on-board determination of clock state. Clock state is a combination of factors, most significantly whether the spacecraft time has been accurately set, and whether Time Service is operating in FLYWHEEL mode.

> This command may be used to notify the Time Server that spacecraft time is now correct, or that time is no longer correct. This information will be distributed to Time Clients, and in turn, to any interested sub-systems.

> Also, this command may be used to force a Time Server or Time Client into FLYWHEEL mode. Use of FL↩ YWHEEL mode is mainly for debug purposes although in extreme circumstances, it may be of value to force Time Service not to rely on normal time updates. Note that when commanded into FLYWHEEL mode, the Time Service will remain so until receipt of another "set state" command setting the state into a mode other than FLYWHEEL.

> Note also that setting the clock state to VALID or INVALID on a Time Client that is currently getting time updates from the Time Server will have very limited effect. As soon as the Time Client receives the next time update, the VALID/INVALID selection will be set to that of the Time Server. However, setting a Time Client to FLYWHEEL cannot be overridden by the Time Server since the Time Client will ignore time updates from the Time Server while in FLYWHEEL mode.

[Command Mnemonic(s)](#) $sc_$cpu_TIME_SetState

Command Structure

> [CFE_TIME_SetState_t](#)

Command Verification

> Successful execution of this command may be verified with the following telemetry:
> - **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
> - **$sc_$cpu_TIME_StateFlg,** $sc_$cpu_TIME_FlagSet, $sc_$cpu_TIME_FlagFly, $sc_$cpu_TIME_↩ FlagSrc, $sc_$cpu_TIME_FlagPri, $sc_$cpu_TIME_FlagSfly, $sc_$cpu_TIME_FlagCfly, $sc_$cpu_TIME↩ _FlagAdjd, $sc_$cpu_TIME_Flag1Hzd, $sc_$cpu_TIME_FlagClat, $sc_$cpu_TIME_FlagSorC, $sc_$cpu_↩ TIME_FlagNIU - Housekeeping Telemetry point "may"l indicate the command specified value (see above)
> - The [CFE_TIME_STATE_EID](#) informational event message will be generated

Error Conditions

> - Invalid State selection (a value other than [CFE_TIME_ClockState_INVALID](#), [CFE_TIME_ClockState_VALID](#) or [CFE_TIME_ClockState_FLYWHEEL](#) was specified)
> - Time source selection not allowed on this platform
>
> Evidence of failure may be found in the following telemetry:
> - **$sc_$cpu_TIME_CMDEC -** Command Error counter will increment

• Error specific event message (CFE_TIME_STATE_ERR_EID)

Criticality

Setting Time Service into FLYWHEEL mode is not particularly hazardous, as the result may be that the calculation of spacecraft time is done using a less than optimal timer. However, inappropriately setting the clock state to V↩ ALID (indicating that spacecraft time is accurate) may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_SET_SOURCE_CC, CFE_TIME_SET_SIGNAL_CC

Definition at line 264 of file cfe_time_msg.h.

39.44.1.12   CFE_TIME_SET_STCF_CC

```
#define CFE_TIME_SET_STCF_CC 9 /* set STCF */
```

Name Set Spacecraft Time Correlation Factor

Description

This command sets the Spacecraft Time Correlation Factor (STCF) to the specified value. This command differs from the previously described SET CLOCK in the nature of the command argument. This command sets the STCF value directly, rather than extracting the STCF from a value representing the total of MET, STCF and optionally, Leap Seconds. The new STCF takes effect immediately upon execution of this command.

Command Mnemonic(s) $sc_$cpu_TIME_SetClockSTCF

Command Structure

CFE_TIME_TimeCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

• **$sc_$cpu_TIME_CMDPC -** command execution counter will increment

• **$sc_$cpu_TIME_STCFSecs -** Housekeeping Telemetry point indicating new STCF seconds value

• **$sc_$cpu_TIME_STCFSubsecs -** Housekeeping Telemetry point indicating new STCF subseconds value

• The CFE_TIME_STCF_EID informational event message will be generated

Error Conditions

• An invalid number of microseconds was specified (must be less than 1 million)

• Platorm receiving the command is not a Time Server

Evidence of Failure may be found in the following telemetry:

• **$sc_$cpu_TIME_CMDEC -** command error counter will increment

• Error specific event messages will be issued (CFE_TIME_STCF_CFG_EID or CFE_TIME_STCF_ERR_EID)

Criticality

Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_SET_TIME_CC, CFE_TIME_SET_MET_CC, CFE_TIME_SET_LEAP_SECONDS_CC

Definition at line 462 of file cfe_time_msg.h.

39.44.1.13 CFE_TIME_SET_TIME_CC

```
#define CFE_TIME_SET_TIME_CC 7 /* set time */
```

Name Set Spacecraft Time

Description

This command sets the spacecraft clock to a new value, regardless of the current setting (time jam). The new time value represents the desired offset from the mission-defined time epoch and takes effect immediately upon execution of this command. Time Service will calculate a new STCF value based on the current MET and the desired new time using one of the following:

If Time Service is configured to compute current time as TAI

• **STCF = (new time) - (current MET)**

• **(current time) = (current MET) + STCF**

If Time Service is configured to compute current time as UTC

• **STCF = ((new time) - (current MET)) + (Leap Seconds)**

• **(current time) = ((curent MET) + STCF) - (Leap Seconds)**

Command Mnemonic(s) $sc_$cpu_TIME_SetClock

Command Structure

CFE_TIME_TimeCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- **$sc_$cpu_TIME_STCFSecs -** Housekeeping Telemetry point indicating newly calculated STCF seconds value
- **$sc_$cpu_TIME_STCFSubsecs -** Housekeeping Telemetry point indicating newly calculated STCF subseconds value
- The CFE_TIME_TIME_EID informational event message will be generated

Error Conditions

- An invalid number of microseconds was specified (must be less than 1 million)
- Platorm receiving the command is not a Time Server

   Evidence of Failure may be found in the following telemetry:
- **$sc_$cpu_TIME_CMDEC -** command error counter will increment
- Error specific event messages will be issued (CFE_TIME_TIME_CFG_EID or CFE_TIME_TIME_ERR_EID)

Criticality

Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_SET_MET_CC, CFE_TIME_SET_STCF_CC, CFE_TIME_SET_LEAP_SECONDS_CC

Definition at line 385 of file cfe_time_msg.h.

39.44.1.14   CFE_TIME_SUB_1HZ_ADJUSTMENT_CC

```
#define CFE_TIME_SUB_1HZ_ADJUSTMENT_CC 14 /* subtract 1Hz STCF adjustment */
```

Name Subtract Delta from Spacecraft Time Correlation Factor each 1Hz

Description

This command has been updated to take actual sub-seconds ($1/2^{32}$ seconds) rather than micro-seconds as an input argument. This change occurred after the determination was made that one micro-second is too large an increment for a constant 1Hz adjustment.

This command continuously adjusts the Spacecraft Time Correlation Factor (STCF) every second, by subtracting the specified value. The adjustment to the STCF is applied in the Time Service local 1Hz interrupt handler. As the local 1Hz interrupt is not synchronized to the tone signal, one cannot say when the adjustment will occur, other than once a second, at about the same time relative to the tone.

There was some debate about whether the maximum 1Hz clock drift correction factor would ever need to exceed some small fraction of a second. But, the decision was made to provide the capability to make 1Hz adjustments greater than one second and leave it to the ground system to provide mission specific limits.

Command Mnemonic(s) $sc_$cpu_TIME_Sub1HzSTCF

Command Structure

> CFE_TIME_Sub1HZAdjustment_t

Command Verification

> Successful execution of this command may be verified with the following telemetry: Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
> - **$sc_$cpu_TIME_STCFSecs -** Housekeeping Telemetry point indicating new STCF seconds value
> - **$sc_$cpu_TIME_STCFSubsecs -** Housekeeping Telemetry point indicating new STCF subseconds value
> - The CFE_TIME_1HZ_EID informational event message will be generated

Error Conditions

> - Platorm receiving the command is not a Time Server
>
>   Evidence of Failure may be found in the following telemetry:
> - **$sc_$cpu_TIME_CMDEC -** command error counter will increment
> - Error specific event message will be issued (CFE_TIME_1HZ_CFG_EID)

Criticality

> Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

> CFE_TIME_ADD_ADJUST_CC, CFE_TIME_SUB_ADJUST_CC, CFE_TIME_ADD_1HZ_ADJUSTMENT_CC

Definition at line 660 of file cfe_time_msg.h.

39.44.1.15 CFE_TIME_SUB_ADJUST_CC

```
#define CFE_TIME_SUB_ADJUST_CC 12 /* subtract one time STCF adjustment */
```

Name Subtract Delta from Spacecraft Time Correlation Factor

Description

> This command adjusts the Spacecraft Time Correlation Factor (STCF) by subtracting the specified value. The new STCF takes effect immediately upon execution of this command.

Command Mnemonic(s) $sc_$cpu_TIME_SubSTCFAdj

Command Structure

> CFE_TIME_TimeCmd_t

Command Verification

> Successful execution of this command may be verified with the following telemetry:
>
> - **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
> - **$sc_$cpu_TIME_STCFSecs -** Housekeeping Telemetry point indicating new STCF seconds value
> - **$sc_$cpu_TIME_STCFSubsecs -** Housekeeping Telemetry point indicating new STCF subseconds value
> - The CFE_TIME_DELTA_EID informational event message will be generated

Error Conditions

> - An invalid number of microseconds was specified (must be less than 1 million)
> - Platorm receiving the command is not a Time Server
>
>   Evidence of Failure may be found in the following telemetry:
> - **$sc_$cpu_TIME_CMDEC -** command error counter will increment
> - Error specific event messages will be issued (CFE_TIME_DELTA_ERR_EID or CFE_TIME_DELTA_CFG_↩EID)

Criticality

> Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

> CFE_TIME_ADD_ADJUST_CC, CFE_TIME_ADD_1HZ_ADJUSTMENT_CC, CFE_TIME_SUB_1HZ_ADJUST↩MENT_CC

Definition at line 566 of file cfe_time_msg.h.

39.44.1.16   CFE_TIME_SUB_DELAY_CC

```
#define CFE_TIME_SUB_DELAY_CC 6 /* sub tone delay value */
```

Name Subtract Time from Tone Time Delay

Description

This command is used to factor out a known, predictable latency between the Time Server and a particular Time Client. The correction is applied (subtracted) to the current time calculation for Time Clients, so this command has no meaning for Time Servers. Each Time Client can have a unique latency setting. The latency value is a positive number of seconds and microseconds that represent the deviation from the time maintained by the Time Server.

Note that it is unimaginable that the seconds value will ever be anything but zero.

Command Mnemonic(s) $sc_$cpu_TIME_SubClockLat

Command Structure

CFE_TIME_TimeCmd_t

Command Verification

Successful execution of this command may be verified with the following telemetry:

- **$sc_$cpu_TIME_CMDPC -** command execution counter will increment
- **$sc_$cpu_TIME_DLatentS,** $sc_$cpu_TIME_DLatentSs - Housekeeping Telemetry point indicating command specified values
- **$sc_$cpu_TIME_DLatentDir -** Diagnostic Telemetry point indicating commanded latency direction
- The CFE_TIME_DELAY_EID informational event message will be generated

Error Conditions

- An invalid number of microseconds was specified (must be less than 1 million)
- Platorm receiving the command is not a Time Client

  Evidence of Failure may be found in the following telemetry:

- **$sc_$cpu_TIME_CMDEC -** command error counter will increment
- Error specific event messages will be issued (CFE_TIME_DELAY_CFG_EID or CFE_TIME_DELAY_ERR↩ _EID)

Criticality

Inappropriately setting the clock may result in other sub-systems performing incorrect time based calculations. The specific risk is dependent upon the behavior of those sub-systems.

See also

CFE_TIME_ADD_DELAY_CC

Definition at line 340 of file cfe_time_msg.h.

39.44.2 Typedef Documentation

39.44.2.1 CFE_TIME_Add1HZAdjustment_t

typedef CFE_TIME_OneHzAdjustmentCmd_t CFE_TIME_Add1HZAdjustment_t

Definition at line 863 of file cfe_time_msg.h.

39.44.2.2 CFE_TIME_AddAdjust_t

typedef CFE_TIME_TimeCmd_t CFE_TIME_AddAdjust_t

Definition at line 836 of file cfe_time_msg.h.

39.44.2.3 CFE_TIME_AddDelay_t

typedef CFE_TIME_TimeCmd_t CFE_TIME_AddDelay_t

Definition at line 832 of file cfe_time_msg.h.

39.44.2.4 CFE_TIME_DiagPacket_t

typedef CFE_TIME_DiagnosticTlm_t CFE_TIME_DiagPacket_t

Definition at line 1155 of file cfe_time_msg.h.

39.44.2.5 CFE_TIME_HkPacket_t

typedef CFE_TIME_HousekeepingTlm_t CFE_TIME_HkPacket_t

Definition at line 1154 of file cfe_time_msg.h.

39.44.2.6 CFE_TIME_Noop_t

typedef CFE_TIME_NoArgsCmd_t CFE_TIME_Noop_t

Definition at line 740 of file cfe_time_msg.h.

39.44.2.7 CFE_TIME_ResetCounters_t

typedef CFE_TIME_NoArgsCmd_t CFE_TIME_ResetCounters_t

Definition at line 741 of file cfe_time_msg.h.

39.44.2.8 CFE_TIME_SendDiagnosticTlm_t

typedef CFE_TIME_NoArgsCmd_t CFE_TIME_SendDiagnosticTlm_t

Definition at line 742 of file cfe_time_msg.h.

39.44.2.9 CFE_TIME_SetMET_t

typedef CFE_TIME_TimeCmd_t CFE_TIME_SetMET_t

Definition at line 834 of file cfe_time_msg.h.

39.44.2.10 CFE_TIME_SetSTCF_t

typedef CFE_TIME_TimeCmd_t CFE_TIME_SetSTCF_t

Definition at line 835 of file cfe_time_msg.h.

39.44.2.11 CFE_TIME_SetTime_t

typedef CFE_TIME_TimeCmd_t CFE_TIME_SetTime_t

Definition at line 838 of file cfe_time_msg.h.

39.44.2.12 CFE_TIME_Sub1HZAdjustment_t

typedef CFE_TIME_OneHzAdjustmentCmd_t CFE_TIME_Sub1HZAdjustment_t

Definition at line 864 of file cfe_time_msg.h.

39.44.2.13   CFE_TIME_SubAdjust_t

typedef CFE_TIME_TimeCmd_t CFE_TIME_SubAdjust_t

Definition at line 837 of file cfe_time_msg.h.

39.44.2.14   CFE_TIME_SubDelay_t

typedef CFE_TIME_TimeCmd_t CFE_TIME_SubDelay_t

Definition at line 833 of file cfe_time_msg.h.

39.45   cfe/fsw/cfe-core/src/inc/cfe_version.h File Reference

Purpose: Provide version identifiers for the cFE core.

#include <target_config.h>

Macros

- #define CFE_BUILD_NUMBER 289
- #define CFE_BUILD_BASELINE "v6.7.0"
- #define CFE_MAJOR_VERSION 6

    ONLY APPLY for OFFICIAL releases. Major version number.
- #define CFE_MINOR_VERSION 7

    ONLY APPLY for OFFICIAL releases. Minor version number.
- #define CFE_REVISION 0

    ONLY APPLY for OFFICIAL releases. Revision version number.
- #define CFE_MISSION_REV 0

    ONLY USED by MISSION Implementations. Mission revision.
- #define CFE_STR_HELPER(x) #x

    Helper function to concatenate strings from integer macros.
- #define CFE_STR(x) CFE_STR_HELPER(x)

    Helper function to concatenate strings from integer macros.
- #define CFE_SRC_VERSION CFE_BUILD_BASELINE "+dev" CFE_STR(CFE_BUILD_NUMBER)

    Development Build Version Number.
- #define CFE_VERSION_STRING

    Development Build Version String.
- #define OS_VERSION

    OSAL Version Definitions.
- #define CFS_VERSIONS

    Combined string with formatted combination of all cFS component versions.

39.45.1 Detailed Description

Purpose: Provide version identifiers for the cFE core.

target_config.h contains extended version information within it. This information is generated automatically by the build using git to determine the most recent tag and commit id.

39.45.2 Macro Definition Documentation

39.45.2.1 CFE_BUILD_BASELINE

```
#define CFE_BUILD_BASELINE "v6.7.0"
```

Development Build: git tag that is the base for the current development

Definition at line 39 of file cfe_version.h.

39.45.2.2 CFE_BUILD_NUMBER

```
#define CFE_BUILD_NUMBER 289
```

Development Build: Number of commits since baseline

Definition at line 38 of file cfe_version.h.

39.45.2.3 CFE_MAJOR_VERSION

```
#define CFE_MAJOR_VERSION 6
```

ONLY APPLY for OFFICIAL releases. Major version number.

Definition at line 43 of file cfe_version.h.

39.45.2.4 CFE_MINOR_VERSION

```
#define CFE_MINOR_VERSION 7
```

ONLY APPLY for OFFICIAL releases. Minor version number.

Definition at line 44 of file cfe_version.h.

39.45.2.5   CFE_MISSION_REV

`#define CFE_MISSION_REV 0`

ONLY USED by MISSION Implementations. Mission revision.

Definition at line 46 of file cfe_version.h.

39.45.2.6   CFE_REVISION

`#define CFE_REVISION 0`

ONLY APPLY for OFFICIAL releases. Revision version number.

Definition at line 45 of file cfe_version.h.

39.45.2.7   CFE_SRC_VERSION

`#define CFE_SRC_VERSION CFE_BUILD_BASELINE "+dev" CFE_STR(CFE_BUILD_NUMBER)`

Development Build Version Number.

Baseline git tag + Number of commits since baseline.
See Version Numbers for format differences between development and release versions.

Definition at line 55 of file cfe_version.h.

39.45.2.8   CFE_STR

```
#define CFE_STR(
            x ) CFE_STR_HELPER(x)
```

Helper function to concatenate strings from integer macros.

Definition at line 49 of file cfe_version.h.

39.45.2.9   CFE_STR_HELPER

```
#define CFE_STR_HELPER(
            x ) #x
```

Helper function to concatenate strings from integer macros.

Definition at line 48 of file cfe_version.h.

39.45.2.10 CFE_VERSION_STRING

```
#define CFE_VERSION_STRING
```

Value:

```
" cFE Development Build\n "                                               \
    CFE_SRC_VERSION " (Codename: Bootes)"      /* Codename for current development */  \
    "\n Last Offical Release: cfe v6.7.0"   /* For full support please use this version */
```

Development Build Version String.

Reports the current development build's baseline, number, and name. Also includes a note about the latest official version.
See Version Numbers for format differences between development and release versions.

Definition at line 61 of file cfe_version.h.

39.45.2.11 CFS_VERSIONS

```
#define CFS_VERSIONS
```

Value:

```
"cFS Versions \n"                 \
  " cfe:  "  CFE_SRC_VERSION "\n"                  \
  " osal: "  OS_VERSION "\n"                  \
  " psp:  "  /* CFE_PSP_VERSION is defined at runtime */
```

Combined string with formatted combination of all cFS component versions.

Definition at line 80 of file cfe_version.h.

39.45.2.12 OS_VERSION

```
#define OS_VERSION
```

Value:

```
CFE_STR(OS_MAJOR_VERSION) "."   \
    CFE_STR(OS_MINOR_VERSION) "."   \
    CFE_STR(OS_REVISION) "."        \
    CFE_STR(OS_MISSION_REV)
```

OSAL Version Definitions.

Allows for backwards compatibility.
This will be defined by osal in the future

Definition at line 72 of file cfe_version.h.

39.46 cfe/fsw/cfe-core/src/inc/network_includes.h File Reference

39.47 osal/src/os/inc/common_types.h File Reference

```
#include <stdint.h>
#include <stddef.h>
#include <stdbool.h>
```

Macros

- #define CompileTimeAssert(Condition, Message) typedef char Message[(Condition) ? 1 : -1]
- #define _EXTENSION_
- #define OS_PACK
- #define OS_ALIGN(n)
- #define OS_USED
- #define OS_PRINTF(n, m)
- #define TRUE true
- #define FALSE false
- #define NULL ((void ∗) 0)

Typedefs

- typedef int8_t int8
- typedef int16_t int16
- typedef int32_t int32
- typedef int64_t int64
- typedef uint8_t uint8
- typedef uint16_t uint16
- typedef uint32_t uint32
- typedef uint64_t uint64
- typedef intptr_t intptr
- typedef uintptr_t cpuaddr
- typedef size_t cpusize
- typedef ptrdiff_t cpudiff
- typedef bool osalbool
- typedef osalbool boolean

Functions

- CompileTimeAssert (sizeof(uint8)==1, TypeUint8WrongSize)
- CompileTimeAssert (sizeof(uint16)==2, TypeUint16WrongSize)
- CompileTimeAssert (sizeof(uint32)==4, TypeUint32WrongSize)
- CompileTimeAssert (sizeof(uint64)==8, TypeUint64WrongSize)
- CompileTimeAssert (sizeof(int8)==1, Typeint8WrongSize)
- CompileTimeAssert (sizeof(int16)==2, Typeint16WrongSize)
- CompileTimeAssert (sizeof(int32)==4, Typeint32WrongSize)
- CompileTimeAssert (sizeof(int64)==8, Typeint64WrongSize)
- CompileTimeAssert (sizeof(cpuaddr) >=sizeof(void ∗), TypePtrWrongSize)

39.47.1   Macro Definition Documentation

39.47.1.1   _EXTENSION_

```
#define _EXTENSION_
```

Definition at line 70 of file common_types.h.

39.47.1.2   CompileTimeAssert

```
#define CompileTimeAssert(
            Condition,
            Message ) typedef char Message[(Condition) ?  1 :  -1]
```

Definition at line 49 of file common_types.h.

39.47.1.3   FALSE

```
#define FALSE false
```

Deprecated Use false

Definition at line 132 of file common_types.h.

39.47.1.4   NULL

```
#define NULL ((void *) 0)
```

Definition at line 140 of file common_types.h.

Referenced by CFE_PSP_AttachSigHandler(), CFE_PSP_ExceptionSigHandler(), CFE_PSP_GetCDSSize(), CFE←
_PSP_GetCFETextSegmentInfo(), CFE_PSP_GetKernelTextSegmentInfo(), CFE_PSP_GetResetArea(), CFE_PSP←
_GetUserReservedArea(), CFE_PSP_GetVolatileDiskMem(), CFE_PSP_ReadFromCDS(), CFE_PSP_SetupLocal1←
Hz(), CFE_PSP_WriteToCDS(), OS_Application_Run(), and OS_Application_Startup().

39.47.1.5 OS_ALIGN

```
#define OS_ALIGN(
              n )
```

Definition at line 72 of file common_types.h.

39.47.1.6 OS_PACK

```
#define OS_PACK
```

Definition at line 71 of file common_types.h.

39.47.1.7 OS_PRINTF

```
#define OS_PRINTF(
              n,
              m )
```

Definition at line 74 of file common_types.h.

39.47.1.8 OS_USED

```
#define OS_USED
```

Definition at line 73 of file common_types.h.

39.47.1.9 TRUE

```
#define TRUE true
```

[Deprecated] Use true

Definition at line 128 of file common_types.h.

39.47.2 Typedef Documentation

39.47.2.1 boolean

typedef osalbool boolean

Deprecated Use bool

Definition at line 124 of file common_types.h.

39.47.2.2 cpuaddr

typedef uintptr_t cpuaddr

Definition at line 95 of file common_types.h.

39.47.2.3 cpudiff

typedef ptrdiff_t cpudiff

Definition at line 97 of file common_types.h.

39.47.2.4 cpusize

typedef size_t cpusize

Definition at line 96 of file common_types.h.

39.47.2.5 int16

typedef int16_t int16

Definition at line 87 of file common_types.h.

39.47.2.6 int32

typedef int32_t int32

Definition at line 88 of file common_types.h.

39.47.2.7   int64

```
typedef int64_t int64
```

Definition at line 89 of file common_types.h.

39.47.2.8   int8

```
typedef int8_t int8
```

Definition at line 86 of file common_types.h.

39.47.2.9   intptr

```
typedef intptr_t intptr
```

Definition at line 94 of file common_types.h.

39.47.2.10   osalbool

```
typedef bool osalbool
```

Deprecated Use bool

Definition at line 105 of file common_types.h.

39.47.2.11   uint16

```
typedef uint16_t uint16
```

Definition at line 91 of file common_types.h.

39.47.2.12   uint32

```
typedef uint32_t uint32
```

Definition at line 92 of file common_types.h.

39.47.2.13 uint64

typedef uint64_t uint64

Definition at line 93 of file common_types.h.

39.47.2.14 uint8

typedef uint8_t uint8

Definition at line 90 of file common_types.h.

39.47.3 Function Documentation

39.47.3.1 CompileTimeAssert() [1/9]

```
CompileTimeAssert (
            sizeof(uint8)   = =1,
            TypeUint8WrongSize  )
```

39.47.3.2 CompileTimeAssert() [2/9]

```
CompileTimeAssert (
            sizeof(uint16)   = =2,
            TypeUint16WrongSize  )
```

39.47.3.3 CompileTimeAssert() [3/9]

```
CompileTimeAssert (
            sizeof(uint32)   = =4,
            TypeUint32WrongSize  )
```

39.47.3.4 CompileTimeAssert() [4/9]

```
CompileTimeAssert (
            sizeof(uint64)   = =8,
            TypeUint64WrongSize  )
```

39.47.3.5 CompileTimeAssert() [5/9]

```
CompileTimeAssert (
            sizeof(int8)   = =1,
            Typeint8WrongSize  )
```

39.47.3.6 CompileTimeAssert() [6/9]

```
CompileTimeAssert (
            sizeof(int16)   = =2,
            Typeint16WrongSize  )
```

39.47.3.7 CompileTimeAssert() [7/9]

```
CompileTimeAssert (
            sizeof(int32)   = =4,
            Typeint32WrongSize  )
```

39.47.3.8 CompileTimeAssert() [8/9]

```
CompileTimeAssert (
            sizeof(int64)   = =8,
            Typeint64WrongSize  )
```

39.47.3.9 CompileTimeAssert() [9/9]

```
CompileTimeAssert (
            sizeof(cpuaddr) >=sizeof(void *) ,
            TypePtrWrongSize  )
```

39.48 osal/src/os/inc/osapi-os-core.h File Reference

```
#include <stdarg.h>
```

Data Structures

- struct OS_task_prop_t

    OSAL task properties.
- struct OS_queue_prop_t

    OSAL queue properties.
- struct OS_bin_sem_prop_t

    OSAL binary semaphore properties.
- struct OS_count_sem_prop_t

    OSAL counting semaphore properties.
- struct OS_mut_sem_prop_t

    OSAL mutexe properties.
- struct OS_time_t

    OSAL time.
- struct OS_heap_prop_t

    OSAL heap properties.
- struct OS_FdSet

    An abstract structure capable of holding several OSAL IDs.

Macros

- #define OS_OBJECT_INDEX_MASK 0xFFFF

    Object index mask.
- #define OS_OBJECT_TYPE_SHIFT 16

    Object type shift.
- #define OS_OBJECT_TYPE_UNDEFINED 0x00

    Object type undefined.
- #define OS_OBJECT_TYPE_OS_TASK 0x01

    Object task type.
- #define OS_OBJECT_TYPE_OS_QUEUE 0x02

    Object queue type.
- #define OS_OBJECT_TYPE_OS_COUNTSEM 0x03

    Object counting semaphore type.
- #define OS_OBJECT_TYPE_OS_BINSEM 0x04

    Object binary semaphore type.
- #define OS_OBJECT_TYPE_OS_MUTEX 0x05

    Object mutex type.
- #define OS_OBJECT_TYPE_OS_STREAM 0x06

    Object stream type.
- #define OS_OBJECT_TYPE_OS_DIR 0x07

    Object directory type.
- #define OS_OBJECT_TYPE_OS_TIMEBASE 0x08

    Object timebase type.
- #define OS_OBJECT_TYPE_OS_TIMECB 0x09

    Object timer callback type.
- #define OS_OBJECT_TYPE_OS_MODULE 0x0A

    Object module type.

- #define OS_OBJECT_TYPE_OS_FILESYS 0x0B

  Object file system type.
- #define OS_OBJECT_TYPE_OS_CONSOLE 0x0C

  Object console type.
- #define OS_OBJECT_TYPE_USER 0x10

  Object user type.
- #define OS_MAX_TASK_PRIORITY 255

  Upper limit for OSAL task priorities.
- #define OS_OBJECT_CREATOR_ANY 0

  Constant that may be passed to OS_ForEachObject()/OS_ForEachObjectOfType() to match any creator (i.e. get all objects)
- #define OS_SEM_FULL 1

  Semaphore full state.
- #define OS_SEM_EMPTY 0

  Semaphore empty state.
- #define OS_FP_ENABLED 1

  Floating point enabled state for a task.
- #define OS_ERROR_NAME_LENGTH 35

  Error string name length.

Typedefs

- typedef char os_err_name_t[OS_ERROR_NAME_LENGTH]

  For the OS_GetErrorName() function, to ensure everyone is making an array of the same length.
- typedef void osal_task

  For task entry point.
- typedef void(∗ OS_ArgCallback_t) (uint32 object_id, void ∗arg)

  General purpose OSAL callback function.

Enumerations

- enum OS_StreamState_t { OS_STREAM_STATE_BOUND = 0x01, OS_STREAM_STATE_CONNECTED = 0x02, OS_STREAM_STATE_READABLE = 0x04, OS_STREAM_STATE_WRITABLE = 0x08 }

  For the OS_SelectSingle() function's in/out StateFlags parameter, the state(s) of the stream and the result of the select is a combination of one or more of these states.

Functions

- typedef osal_task ((∗osal_task_entry)(void))

  For task entry point.
- void OS_Application_Startup (void)

  Application startup.
- void OS_Application_Run (void)

  Application run.
- int32 OS_API_Init (void)

  Initialization of API.

- int32 OS_QueueGet (uint32 queue_id, void ∗data, uint32 size, uint32 ∗size_copied, int32 timeout)

    Receive a message on a message queue.
- int32 OS_QueuePut (uint32 queue_id, const void ∗data, uint32 size, uint32 flags)

    Put a message on a message queue.
- int32 OS_QueueGetIdByName (uint32 ∗queue_id, const char ∗queue_name)

    Find an existing queue ID by name.
- int32 OS_QueueGetInfo (uint32 queue_id, OS_queue_prop_t ∗queue_prop)

    Fill a property object buffer with details regarding the resource.
- int32 OS_BinSemCreate (uint32 ∗sem_id, const char ∗sem_name, uint32 sem_initial_value, uint32 options)

    Creates a binary semaphore.
- int32 OS_BinSemFlush (uint32 sem_id)

    Unblock all tasks pending on the specified semaphore.
- int32 OS_BinSemGive (uint32 sem_id)

    Increment the semaphore value.
- int32 OS_BinSemTake (uint32 sem_id)

    Decrement the semaphore value.
- int32 OS_BinSemTimedWait (uint32 sem_id, uint32 msecs)

    Decrement the semaphore value with a timeout.
- int32 OS_BinSemDelete (uint32 sem_id)

    Deletes the specified Binary Semaphore.
- int32 OS_BinSemGetIdByName (uint32 ∗sem_id, const char ∗sem_name)

    Find an existing semaphore ID by name.
- int32 OS_BinSemGetInfo (uint32 sem_id, OS_bin_sem_prop_t ∗bin_prop)

    Fill a property object buffer with details regarding the resource.
- int32 OS_CountSemCreate (uint32 ∗sem_id, const char ∗sem_name, uint32 sem_initial_value, uint32 options)

    Creates a counting semaphore.
- int32 OS_CountSemGive (uint32 sem_id)

    Increment the semaphore value.
- int32 OS_CountSemTake (uint32 sem_id)

    Decrement the semaphore value.
- int32 OS_CountSemTimedWait (uint32 sem_id, uint32 msecs)

    Decrement the semaphore value with timeout.
- int32 OS_CountSemDelete (uint32 sem_id)

    Deletes the specified counting Semaphore.
- int32 OS_CountSemGetIdByName (uint32 ∗sem_id, const char ∗sem_name)

    Find an existing semaphore ID by name.
- int32 OS_CountSemGetInfo (uint32 sem_id, OS_count_sem_prop_t ∗count_prop)

    Fill a property object buffer with details regarding the resource.
- int32 OS_MutSemCreate (uint32 ∗sem_id, const char ∗sem_name, uint32 options)

    Creates a mutex semaphore.
- int32 OS_MutSemGive (uint32 sem_id)

    Releases the mutex object referenced by sem_id.
- int32 OS_MutSemTake (uint32 sem_id)

    Acquire the mutex object referenced by sem_id.
- int32 OS_MutSemDelete (uint32 sem_id)

    Deletes the specified Mutex Semaphore.
- int32 OS_MutSemGetIdByName (uint32 ∗sem_id, const char ∗sem_name)

> *DEPRECATED - platform dependent, never implemented in framework OSALs.*
- int32 OS_ShMemSemTake (uint32 Id)

> *DEPRECATED - platform dependent, never implemented in framework OSALs.*
- int32 OS_ShMemSemGive (uint32 Id)

> *DEPRECATED - platform dependent, never implemented in framework OSALs.*
- int32 OS_ShMemAttach (cpuaddr *Address, uint32 Id)

> *DEPRECATED - platform dependent, never implemented in framework OSALs.*
- int32 OS_ShMemGetIdByName (uint32 *ShMemId, const char *SegName)

> *DEPRECATED - platform dependent, never implemented in framework OSALs.*
- int32 OS_HeapGetInfo (OS_heap_prop_t *heap_prop)

> *Return current info on the heap.*
- int32 OS_GetErrorName (int32 error_num, os_err_name_t *err_name)

> *Convert an error number to a string.*
- int32 OS_SelectMultiple (OS_FdSet *ReadSet, OS_FdSet *WriteSet, int32 msecs)

> *Wait for events across multiple file handles.*
- int32 OS_SelectSingle (uint32 objid, uint32 *StateFlags, int32 msecs)

> *Wait for events on a single file handle.*
- int32 OS_SelectFdZero (OS_FdSet *Set)

> *Clear a FdSet structure.*
- int32 OS_SelectFdAdd (OS_FdSet *Set, uint32 objid)

> *Add an ID to an FdSet structure.*
- int32 OS_SelectFdClear (OS_FdSet *Set, uint32 objid)

> *Clear an ID from an FdSet structure.*
- bool OS_SelectFdIsSet (OS_FdSet *Set, uint32 objid)

> *Check if an FdSet structure contains a given ID.*
- void OS_printf (const char *string,...) OS_PRINTF(1

> *Abstraction for the system printf() call.*
- void void OS_printf_disable (void)

> *This function disables the output from OS_printf.*
- void OS_printf_enable (void)

> *This function enables the output from OS_printf.*
- uint32 OS_BSP_GetArgC (void)
- char *const * OS_BSP_GetArgV (void)
- void OS_BSP_SetExitCode (int32 code)

39.48.1   Macro Definition Documentation

39.48.1.1   OS_ERROR_NAME_LENGTH

```
#define OS_ERROR_NAME_LENGTH 35
```

Error string name length.

The sizes of strings in OSAL functions are built with this limit in mind. Always check the uses of os_err_name_t when changing this value.

Definition at line 83 of file osapi-os-core.h.

39.48.1.2 OS_FP_ENABLED

```
#define OS_FP_ENABLED 1
```

Floating point enabled state for a task.

Definition at line 76 of file osapi-os-core.h.

39.48.1.3 OS_MAX_TASK_PRIORITY

```
#define OS_MAX_TASK_PRIORITY 255
```

Upper limit for OSAL task priorities.

Definition at line 59 of file osapi-os-core.h.

39.48.1.4 OS_OBJECT_CREATOR_ANY

```
#define OS_OBJECT_CREATOR_ANY 0
```

Constant that may be passed to OS_ForEachObject()/OS_ForEachObjectOfType() to match any creator (i.e. get all objects)

Definition at line 65 of file osapi-os-core.h.

39.48.1.5 OS_OBJECT_INDEX_MASK

```
#define OS_OBJECT_INDEX_MASK 0xFFFF
```

Object index mask.

Definition at line 36 of file osapi-os-core.h.

39.48.1.6 OS_OBJECT_TYPE_SHIFT

```
#define OS_OBJECT_TYPE_SHIFT 16
```

Object type shift.

Definition at line 37 of file osapi-os-core.h.

39.48.2   Typedef Documentation

39.48.2.1   OS_ArgCallback_t

typedef void(* OS_ArgCallback_t) ([uint32]() object_id, void *arg)

General purpose OSAL callback function.

This may be used by multiple APIS

Definition at line 199 of file osapi-os-core.h.

39.48.2.2   os_err_name_t

typedef char os_err_name_t[[OS_ERROR_NAME_LENGTH]()]

For the [OS_GetErrorName()]() function, to ensure everyone is making an array of the same length.

Implementation note for developers:

The sizes of strings in OSAL functions are built with this [OS_ERROR_NAME_LENGTH]() limit in mind. Always check the uses of os_err_name_t when changing this value.

Definition at line 186 of file osapi-os-core.h.

39.48.2.3   osal_task

typedef void [osal_task]()

For task entry point.

Definition at line 191 of file osapi-os-core.h.

39.48.3   Enumeration Type Documentation

39.48.3.1   OS_StreamState_t

enum [OS_StreamState_t]()

For the [OS_SelectSingle()]() function's in/out StateFlags parameter, the state(s) of the stream and the result of the select is a combination of one or more of these states.

See also

> [OS_SelectSingle()]()

Enumerator

OS_STREAM_STATE_BOUND	whether the stream is bound
OS_STREAM_STATE_CONNECTED	whether the stream is connected
OS_STREAM_STATE_READABLE	whether the stream is readable
OS_STREAM_STATE_WRITABLE	whether the stream is writable

Definition at line 168 of file osapi-os-core.h.

39.48.4 Function Documentation

39.48.4.1 OS_BSP_GetArgC()

```
uint32 OS_BSP_GetArgC (
            void  )
```

Referenced by OS_Application_Startup().

39.48.4.2 OS_BSP_GetArgV()

```
char* const* OS_BSP_GetArgV (
            void  )
```

Referenced by OS_Application_Startup().

39.48.4.3 OS_BSP_SetExitCode()

```
void OS_BSP_SetExitCode (
            int32 code )
```

39.48.4.4 OS_ForEachObjectOfType()

```
void OS_ForEachObjectOfType (
            uint32 objtype,
            uint32 creator_id,
            OS_ArgCallback_t callback_ptr,
            void * callback_arg )
```

call the supplied callback function for valid object IDs of a specific type

Loops through all defined OSAL objects of a specific type and calls callback_ptr on each one If creator_id is nonzero then only objects with matching creator id are processed.

Parameters

in	*objtype*	The type of objects to iterate
in	*creator_id*	Filter objects to those created by a specific task This may be passed as OS_OBJECT_CREATOR_ANY to return all objects
in	*callback_ptr*	Function to invoke for each matching object ID
in	*callback_arg*	Opaque Argument to pass to callback function

39.48.4.5   osal_task()

```
typedef osal_task (
            (*)(void) osal_task_entry )
```

For task entry point.

39.49   osal/src/os/inc/osapi-os-filesys.h File Reference

Data Structures

- struct OS_VolumeInfo_t

    Internal structure of the OS volume table for mounted file systems and path translation.

- struct os_fsinfo_t

    OSAL file system info.

- struct OS_file_prop_t

    OSAL file properties.

- struct os_fstat_t

    File system status.

- struct os_dirent_t

    Directory entry.

Macros

- #define OS_READ_ONLY 0
- #define OS_WRITE_ONLY 1
- #define OS_READ_WRITE 2
- #define OS_SEEK_SET 0
- #define OS_SEEK_CUR 1
- #define OS_SEEK_END 2
- #define OS_CHK_ONLY 0
- #define OS_REPAIR 1
- #define FS_BASED 0
- #define RAM_DISK 1
- #define EEPROM_DISK 2
- #define ATA_DISK 3

- #define NUM_FILE_SYSTEMS OS_MAX_FILE_SYSTEMS

    Number of entries in the internal volume table.

- #define OS_FS_DEV_NAME_LEN 32
- #define OS_FS_PHYS_NAME_LEN 64
- #define OS_FS_VOL_NAME_LEN 32
- #define OS_MAX_LOCAL_PATH_LEN (OS_MAX_PATH_LEN + OS_FS_PHYS_NAME_LEN)

    Maximum length of a local/native path name string.

- #define OS_FS_ERR_PATH_TOO_LONG (-103)

    FS path too long.

- #define OS_FS_ERR_NAME_TOO_LONG (-104)

    FS name too long.

- #define OS_FS_ERR_DRIVE_NOT_CREATED (-106)

    FS drive not created.

- #define OS_FS_ERR_DEVICE_NOT_FREE (-107)

    FS device not free.

- #define OS_FS_ERR_PATH_INVALID (-108)

    FS path invalid.

- #define OS_FS_SUCCESS OS_SUCCESS
- #define OS_FS_ERROR OS_ERROR
- #define OS_FS_ERR_INVALID_POINTER OS_INVALID_POINTER
- #define OS_FS_ERR_NO_FREE_FDS OS_ERR_NO_FREE_IDS
- #define OS_FS_ERR_INVALID_FD OS_ERR_INVALID_ID
- #define OS_FS_UNIMPLEMENTED OS_ERR_NOT_IMPLEMENTED
- #define OS_FILESTAT_MODE(x) ((x).FileModeBits)

    Access file stat mode bits.

- #define OS_FILESTAT_ISDIR(x) ((x).FileModeBits & OS_FILESTAT_MODE_DIR)

    File stat is directory logical.

- #define OS_FILESTAT_EXEC(x) ((x).FileModeBits & OS_FILESTAT_MODE_EXEC)

    File stat is executable logical.

- #define OS_FILESTAT_WRITE(x) ((x).FileModeBits & OS_FILESTAT_MODE_WRITE)

    File stat is write enabled logical.

- #define OS_FILESTAT_READ(x) ((x).FileModeBits & OS_FILESTAT_MODE_READ)

    File stat is read enabled logical.

- #define OS_FILESTAT_SIZE(x) ((x).FileSize)

    Access file stat size field.

- #define OS_FILESTAT_TIME(x) ((x).FileTime)

    Access file stat time field.

- #define OS_DIRENTRY_NAME(x) ((x).FileName)

    Access filename part of the dirent structure.

Typedefs

- typedef os_err_name_t os_fs_err_name_t
- typedef void ∗ os_dirp_t
- typedef int32 os_fshealth_t
- typedef OS_file_prop_t OS_FDTableEntry

Enumerations

- enum { OS_FILESTAT_MODE_EXEC = 0x00001, OS_FILESTAT_MODE_WRITE = 0x00002, OS_FILESTAT↩
  _MODE_READ = 0x00004, OS_FILESTAT_MODE_DIR = 0x10000 }

    File stat mode bits.

Functions

- int32 OS_creat (const char ∗path, int32 access)

    Creates a file specified by path.
- int32 OS_open (const char ∗path, int32 access, uint32 mode)

    Opens a file.
- int32 OS_close (uint32 filedes)

    Closes an open file handle.
- int32 OS_read (uint32 filedes, void ∗buffer, uint32 nbytes)

    Read from a file handle.
- int32 OS_write (uint32 filedes, const void ∗buffer, uint32 nbytes)

    Write to a file handle.
- int32 OS_TimedRead (uint32 filedes, void ∗buffer, uint32 nbytes, int32 timeout)

    File/Stream input read with a timeout.
- int32 OS_TimedWrite (uint32 filedes, const void ∗buffer, uint32 nbytes, int32 timeout)

    File/Stream output write with a timeout.
- int32 OS_chmod (const char ∗path, uint32 access)

    Changes the permissions of a file.
- int32 OS_stat (const char ∗path, os_fstat_t ∗filestats)

    Obtain information about a file or directory.
- int32 OS_lseek (uint32 filedes, int32 offset, uint32 whence)

    Seeks to the specified position of an open file.
- int32 OS_remove (const char ∗path)

    Removes a file from the file system.
- int32 OS_rename (const char ∗old_filename, const char ∗new_filename)

    Renames a file.
- int32 OS_cp (const char ∗src, const char ∗dest)

    Copies a single file from src to dest.
- int32 OS_mv (const char ∗src, const char ∗dest)

    Move a single file from src to dest.
- int32 OS_FDGetInfo (uint32 filedes, OS_file_prop_t ∗fd_prop)

    Obtain information about an open file.
- int32 OS_FileOpenCheck (const char ∗Filename)

    Checks to see if a file is open.
- int32 OS_CloseAllFiles (void)

    Close all open files.
- int32 OS_CloseFileByName (const char ∗Filename)

    Close a file by filename.
- os_dirp_t OS_opendir (const char ∗path)

    Opens a directory for searching.
- int32 OS_closedir (os_dirp_t directory)

39.49.1 Macro Definition Documentation

39.49.1.1 NUM_FILE_SYSTEMS

```
#define NUM_FILE_SYSTEMS OS_MAX_FILE_SYSTEMS
```

Number of entries in the internal volume table.

[Deprecated](#)

Definition at line 67 of file osapi-os-filesys.h.

39.49.1.2 OS_CHK_ONLY

```
#define OS_CHK_ONLY 0
```

Unused, API takes bool

Definition at line 49 of file osapi-os-filesys.h.

39.49.1.3 OS_DIRENTRY_NAME

```
#define OS_DIRENTRY_NAME(
               x ) ((x).FileName)
```

Access filename part of the dirent structure.

Definition at line 234 of file osapi-os-filesys.h.

39.49.1.4 OS_FILESTAT_EXEC

```
#define OS_FILESTAT_EXEC(
               x ) ((x).FileModeBits & OS_FILESTAT_MODE_EXEC)
```

File stat is executable logical.

Definition at line 208 of file osapi-os-filesys.h.

39.49.1.5 OS_FILESTAT_ISDIR

```
#define OS_FILESTAT_ISDIR(
               x ) ((x).FileModeBits & OS_FILESTAT_MODE_DIR)
```

File stat is directory logical.

Definition at line 206 of file osapi-os-filesys.h.

39.49.1.6 OS_FILESTAT_MODE

```
#define OS_FILESTAT_MODE(
            x ) ((x).FileModeBits)
```

Access file stat mode bits.

Definition at line 204 of file osapi-os-filesys.h.

39.49.1.7 OS_FILESTAT_READ

```
#define OS_FILESTAT_READ(
            x ) ((x).FileModeBits & OS_FILESTAT_MODE_READ)
```

File stat is read enabled logical.

Definition at line 212 of file osapi-os-filesys.h.

39.49.1.8 OS_FILESTAT_SIZE

```
#define OS_FILESTAT_SIZE(
            x ) ((x).FileSize)
```

Access file stat size field.

Definition at line 214 of file osapi-os-filesys.h.

39.49.1.9 OS_FILESTAT_TIME

```
#define OS_FILESTAT_TIME(
            x ) ((x).FileTime)
```

Access file stat time field.

Definition at line 216 of file osapi-os-filesys.h.

39.49.1.10 OS_FILESTAT_WRITE

```
#define OS_FILESTAT_WRITE(
            x ) ((x).FileModeBits & OS_FILESTAT_MODE_WRITE)
```

File stat is write enabled logical.

Definition at line 210 of file osapi-os-filesys.h.

39.49.1.11   OS_FS_DEV_NAME_LEN

#define OS_FS_DEV_NAME_LEN 32

Device name length

Definition at line 73 of file osapi-os-filesys.h.

39.49.1.12   OS_FS_PHYS_NAME_LEN

#define OS_FS_PHYS_NAME_LEN 64

Physical drive name length

Definition at line 74 of file osapi-os-filesys.h.

39.49.1.13   OS_FS_VOL_NAME_LEN

#define OS_FS_VOL_NAME_LEN 32

Volume name length

Definition at line 75 of file osapi-os-filesys.h.

39.49.1.14   OS_MAX_LOCAL_PATH_LEN

#define OS_MAX_LOCAL_PATH_LEN (OS_MAX_PATH_LEN + OS_FS_PHYS_NAME_LEN)

Maximum length of a local/native path name string.

This is a concatenation of the OSAL virtual path with the system mount point or device name

Definition at line 83 of file osapi-os-filesys.h.

39.49.1.15   OS_REPAIR

#define OS_REPAIR 1

Unused, API takes bool

Definition at line 50 of file osapi-os-filesys.h.

39.49.2 Typedef Documentation

39.49.2.1 os_dirp_t

```
typedef void* os_dirp_t
```

Deprecated

Definition at line 230 of file osapi-os-filesys.h.

39.49.2.2 OS_FDTableEntry

```
typedef OS_file_prop_t OS_FDTableEntry
```

Deprecated Use OS_file_prop_t

Definition at line 241 of file osapi-os-filesys.h.

39.49.2.3 os_fs_err_name_t

```
typedef os_err_name_t os_fs_err_name_t
```

Definition at line 130 of file osapi-os-filesys.h.

39.49.2.4 os_fshealth_t

```
typedef int32 os_fshealth_t
```

Deprecated type no longer used

Definition at line 240 of file osapi-os-filesys.h.

39.49.3 Enumeration Type Documentation

39.49.3.1 anonymous enum

```
anonymous enum
```

File stat mode bits.

We must also define replacements for the stat structure's mode bits. This is currently just a small subset since the OSAL just presents a very simplified view of the filesystem to the upper layers. And since not all OS'es are POSIX, the more POSIX-specific bits are not relevant anyway.

Enumerator

OS_FILESTAT_MODE_EXEC	
OS_FILESTAT_MODE_WRITE	
OS_FILESTAT_MODE_READ	
OS_FILESTAT_MODE_DIR	

Definition at line 195 of file osapi-os-filesys.h.

39.50 osal/src/os/inc/osapi-os-loader.h File Reference

Data Structures

- struct OS_module_address_t

    OSAL module address properties.
- struct OS_module_prop_t

    OSAL module properties.
- struct OS_static_symbol_record_t

    Associates a single symbol name with a memory address.

Typedefs

- typedef OS_module_prop_t OS_module_record_t

Functions

- int32 OS_SymbolLookup (cpuaddr ∗symbol_address, const char ∗symbol_name)

    Find the Address of a Symbol.
- int32 OS_SymbolTableDump (const char ∗filename, uint32 size_limit)

    Dumps the system symbol table to a file.
- int32 OS_ModuleLoad (uint32 ∗module_id, const char ∗module_name, const char ∗filename)

    Loads an object file.
- int32 OS_ModuleUnload (uint32 module_id)

    Unloads the module file.
- int32 OS_ModuleInfo (uint32 module_id, OS_module_prop_t ∗module_info)

    Obtain information about a module.

39.50.1 Typedef Documentation

39.50.1.1 OS_module_record_t

typedef OS_module_prop_t OS_module_record_t

Deprecated Use OS_module_prop_t

Definition at line 97 of file osapi-os-loader.h.

39.51 osal/src/os/inc/osapi-os-net.h File Reference

#include <osconfig.h>

Data Structures

- union OS_SockAddrData_t

  Storage buffer for generic network address.
- struct OS_SockAddr_t

  Encapsulates a generic network address.
- struct OS_socket_prop_t

  Encapsulates socket properties.

Macros

- #define OS_SOCKADDR_MAX_LEN 28

Enumerations

- enum OS_SocketDomain_t { OS_SocketDomain_INVALID, OS_SocketDomain_INET, OS_SocketDomain_IN←
  ET6, OS_SocketDomain_MAX }

  Socket domain.
- enum OS_SocketType_t { OS_SocketType_INVALID, OS_SocketType_DATAGRAM, OS_SocketType_STREAM,
  OS_SocketType_MAX }

  Socket type.

Functions

- int32 OS_SocketAddrInit (OS_SockAddr_t ∗Addr, OS_SocketDomain_t Domain)

  Initialize a socket address structure to hold an address of the given family.
- int32 OS_SocketAddrToString (char ∗buffer, uint32 buflen, const OS_SockAddr_t ∗Addr)

  Get a string representation of a network host address.
- int32 OS_SocketAddrFromString (OS_SockAddr_t ∗Addr, const char ∗string)

  Set a network host address from a string representation.
- int32 OS_SocketAddrGetPort (uint16 ∗PortNum, const OS_SockAddr_t ∗Addr)

  Get the port number of a network address.
- int32 OS_SocketAddrSetPort (OS_SockAddr_t ∗Addr, uint16 PortNum)

  Set the port number of a network address.
- int32 OS_SocketOpen (uint32 ∗sock_id, OS_SocketDomain_t Domain, OS_SocketType_t Type)

  Opens a socket.
- int32 OS_SocketBind (uint32 sock_id, const OS_SockAddr_t ∗Addr)

  Binds a socket to a given local address.
- int32 OS_SocketConnect (uint32 sock_id, const OS_SockAddr_t ∗Addr, int32 timeout)

  Connects a socket to a given remote address.
- int32 OS_SocketAccept (uint32 sock_id, uint32 ∗connsock_id, OS_SockAddr_t ∗Addr, int32 timeout)

  Waits for and accept the next incoming connection on the given socket.
- int32 OS_SocketRecvFrom (uint32 sock_id, void ∗buffer, uint32 buflen, OS_SockAddr_t ∗RemoteAddr, int32 time-out)

  Reads data from a message-oriented (datagram) socket.
- int32 OS_SocketSendTo (uint32 sock_id, const void ∗buffer, uint32 buflen, const OS_SockAddr_t ∗RemoteAddr)

  Sends data to a message-oriented (datagram) socket.
- int32 OS_SocketGetIdByName (uint32 ∗sock_id, const char ∗sock_name)

  Gets an OSAL ID from a given name.
- int32 OS_SocketGetInfo (uint32 sock_id, OS_socket_prop_t ∗sock_prop)

  Gets information about an OSAL Socket ID.
- int32 OS_NetworkGetID (void)

  Gets the network ID of the local machine.
- int32 OS_NetworkGetHostName (char ∗host_name, uint32 name_len)

  Gets the local machine network host name.

39.51.1   Macro Definition Documentation

39.51.1.1   OS_SOCKADDR_MAX_LEN

```
#define OS_SOCKADDR_MAX_LEN 28
```

Definition at line 49 of file osapi-os-net.h.

39.51.2   Enumeration Type Documentation

39.51.2.1   OS_SocketDomain_t

```
enum OS_SocketDomain_t
```

Socket domain.

Enumerator

OS_SocketDomain_INVALID	Invalid.
OS_SocketDomain_INET	IPv4 address family, most commonly used)
OS_SocketDomain_INET6	IPv6 address family, depends on OS/network stack support.
OS_SocketDomain_MAX	Maximum.

Definition at line 65 of file osapi-os-net.h.

39.51.2.2 OS_SocketType_t

```
enum OS_SocketType_t
```

Socket type.

Enumerator

OS_SocketType_INVALID	Invalid.
OS_SocketType_DATAGRAM	A connectionless, message-oriented socket.
OS_SocketType_STREAM	A stream-oriented socket with the concept of a connection.
OS_SocketType_MAX	Maximum.

Definition at line 74 of file osapi-os-net.h.

39.52 osal/src/os/inc/osapi-os-timer.h File Reference

Data Structures

- struct OS_timer_prop_t

   Timer properties.
- struct OS_timebase_prop_t

   Time base properties.

Typedefs

- typedef void(∗ OS_TimerCallback_t) (uint32 timer_id)

   Timer callback.
- typedef uint32(∗ OS_TimerSync_t) (uint32 timer_id)

   Timer sync.

Functions

- int32 OS_TimeBaseCreate (uint32 ∗timebase_id, const char ∗timebase_name, OS_TimerSync_t external_sync)

    Create an abstract Time Base resource.
- int32 OS_TimeBaseSet (uint32 timebase_id, uint32 start_time, uint32 interval_time)

    Sets the tick period for simulated time base objects.
- int32 OS_TimeBaseDelete (uint32 timebase_id)

    Deletes a time base object.
- int32 OS_TimeBaseGetIdByName (uint32 ∗timebase_id, const char ∗timebase_name)

    Find the ID of an existing time base resource.
- int32 OS_TimeBaseGetInfo (uint32 timebase_id, OS_timebase_prop_t ∗timebase_prop)

    Obtain information about a timebase resource.
- int32 OS_TimeBaseGetFreeRun (uint32 timebase_id, uint32 ∗freerun_val)

    Read the value of the timebase free run counter.
- int32 OS_TimerCreate (uint32 ∗timer_id, const char ∗timer_name, uint32 ∗clock_accuracy, OS_TimerCallback←↩
  _t callback_ptr)

    Create a timer object.
- int32 OS_TimerAdd (uint32 ∗timer_id, const char ∗timer_name, uint32 timebase_id, OS_ArgCallback_←↩
  t callback_ptr, void ∗callback_arg)

    Add a timer object based on an existing TimeBase resource.
- int32 OS_TimerSet (uint32 timer_id, uint32 start_time, uint32 interval_time)

    Configures a periodic or one shot timer.
- int32 OS_TimerDelete (uint32 timer_id)

    Deletes a timer resource.
- int32 OS_TimerGetIdByName (uint32 ∗timer_id, const char ∗timer_name)

    Locate an existing timer resource by name.
- int32 OS_TimerGetInfo (uint32 timer_id, OS_timer_prop_t ∗timer_prop)

    Gets information about an existing timer.

39.52.1   Typedef Documentation

39.52.1.1   OS_TimerCallback_t

```
typedef void(∗ OS_TimerCallback_t) (uint32 timer_id)
```

Timer callback.

Definition at line 36 of file osapi-os-timer.h.

39.52.1.2   OS_TimerSync_t

```
typedef uint32(∗ OS_TimerSync_t) (uint32 timer_id)
```

Timer sync.

Definition at line 37 of file osapi-os-timer.h.

39.53 osal/src/os/inc/osapi-version.h File Reference

Purpose:

Macros

- #define OS_BUILD_NUMBER 247
- #define OS_BUILD_BASELINE "v5.0.0+dev"
- #define OS_MAJOR_VERSION 5

    ONLY APPLY for OFFICIAL releases. Major version number.
- #define OS_MINOR_VERSION 0

    ONLY APPLY for OFFICIAL releases. Minor version number.
- #define OS_REVISION 0

    ONLY APPLY for OFFICIAL releases. Revision number.
- #define OS_MISSION_REV 0

    ONLY USED by MISSION Implementations. Mission revision.
- #define OS_STR_HELPER(x) #x

    Helper function to concatenate strings from integer.
- #define OS_STR(x) OS_STR_HELPER(x)

    Helper function to concatenate strings from integer.
- #define OS_VERSION OS_BUILD_BASELINE OS_STR(OS_BUILD_NUMBER)

    Development Build Version Number.
- #define OS_VERSION_STRING

    Development Build Version String.
- #define OSAL_API_VERSION ((OS_MAJOR_VERSION * 10000) + (OS_MINOR_VERSION * 100) + OS_RE↩
VISION)

    Combines the revision components into a single value.

39.53.1 Detailed Description

Purpose:

Provide version identifiers for cFS' Operating System Abstraction Layer See Version Numbers for version and build number and description

39.53.2 Macro Definition Documentation

39.53.2.1 OS_BUILD_BASELINE

```
#define OS_BUILD_BASELINE "v5.0.0+dev"
```

Definition at line 34 of file osapi-version.h.

39.53.2.2   OS_BUILD_NUMBER

#define OS_BUILD_NUMBER 247

Definition at line 33 of file osapi-version.h.

39.53.2.3   OS_MAJOR_VERSION

#define OS_MAJOR_VERSION 5

ONLY APPLY for OFFICIAL releases. Major version number.

Definition at line 39 of file osapi-version.h.

39.53.2.4   OS_MINOR_VERSION

#define OS_MINOR_VERSION 0

ONLY APPLY for OFFICIAL releases. Minor version number.

Definition at line 40 of file osapi-version.h.

39.53.2.5   OS_MISSION_REV

#define OS_MISSION_REV 0

ONLY USED by MISSION Implementations. Mission revision.

Definition at line 42 of file osapi-version.h.

39.53.2.6   OS_REVISION

#define OS_REVISION 0

ONLY APPLY for OFFICIAL releases. Revision number.

Definition at line 41 of file osapi-version.h.

39.53.2.7 OS_STR

```
#define OS_STR(
                x ) OS_STR_HELPER(x)
```

Helper function to concatenate strings from integer.

Definition at line 48 of file osapi-version.h.

39.53.2.8 OS_STR_HELPER

```
#define OS_STR_HELPER(
                x ) #x
```

Helper function to concatenate strings from integer.

Definition at line 47 of file osapi-version.h.

39.53.2.9 OS_VERSION

```
#define OS_VERSION OS_BUILD_BASELINE OS_STR(OS_BUILD_NUMBER)
```

Development Build Version Number.

Baseline git tag + Number of commits since baseline.
See Version Numbers for format differences between development and release versions.

Definition at line 54 of file osapi-version.h.

39.53.2.10 OS_VERSION_STRING

```
#define OS_VERSION_STRING
```

Value:

```
" OSAL Development Build\n"                                              \
    " " OS_VERSION " (Codename: Bootes)\n"  /* Codename for current development */ \
    " Latest Official Version: osal v5.0.0" /* For full support please use official release version */
```

Development Build Version String.

Reports the current development build's baseline, number, and name. Also includes a note about the latest official version.
See Version Numbers for format differences between development and release versions.

Definition at line 60 of file osapi-version.h.

39.53.2.11   OSAL_API_VERSION

#define OSAL_API_VERSION ((OS_MAJOR_VERSION * 10000) + (OS_MINOR_VERSION * 100) + OS_REVISION)

Combines the revision components into a single value.

Applications can check against this number
e.g. "#if OSAL_API_VERSION >= 40100" would check if some feature added in OSAL 4.1 is present.

Definition at line 70 of file osapi-version.h.

39.54   osal/src/os/inc/osapi.h File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include "common_types.h"
#include "osapi-version.h"
#include "osconfig.h"
#include "osapi-os-core.h"
#include "osapi-os-filesys.h"
#include "osapi-os-net.h"
#include "osapi-os-loader.h"
#include "osapi-os-timer.h"
```

Macros

- #define OS_SUCCESS (0)

    Successful execution.
- #define OS_ERROR (-1)

    Failed execution.
- #define OS_INVALID_POINTER (-2)

    Invalid pointer.
- #define OS_ERROR_ADDRESS_MISALIGNED (-3)

    Address misalignment.
- #define OS_ERROR_TIMEOUT (-4)

    Error timeout.
- #define OS_INVALID_INT_NUM (-5)

    Invalid Interrupt number.
- #define OS_SEM_FAILURE (-6)

    Semaphore failure.
- #define OS_SEM_TIMEOUT (-7)

    Semaphore timeout.
- #define OS_QUEUE_EMPTY (-8)

    Queue empty.
- #define OS_QUEUE_FULL (-9)

    Queue full.
- #define OS_QUEUE_TIMEOUT (-10)

Queue timeout.

- #define OS_QUEUE_INVALID_SIZE (-11)

    Queue invalid size.

- #define OS_QUEUE_ID_ERROR (-12)

    Queue ID error.

- #define OS_ERR_NAME_TOO_LONG (-13)

    name length including null terminator greater than OS_MAX_API_NAME

- #define OS_ERR_NO_FREE_IDS (-14)

    No free IDs.

- #define OS_ERR_NAME_TAKEN (-15)

    Name taken.

- #define OS_ERR_INVALID_ID (-16)

    Invalid ID.

- #define OS_ERR_NAME_NOT_FOUND (-17)

    Name not found.

- #define OS_ERR_SEM_NOT_FULL (-18)

    Semaphore not full.

- #define OS_ERR_INVALID_PRIORITY (-19)

    Invalid priority.

- #define OS_INVALID_SEM_VALUE (-20)

    Invalid semaphore value.

- #define OS_ERR_FILE (-27)

    File error.

- #define OS_ERR_NOT_IMPLEMENTED (-28)

    Not implemented.

- #define OS_TIMER_ERR_INVALID_ARGS (-29)

    Timer invalid arguments.

- #define OS_TIMER_ERR_TIMER_ID (-30)

    Timer ID error.

- #define OS_TIMER_ERR_UNAVAILABLE (-31)

    Timer unavailable.

- #define OS_TIMER_ERR_INTERNAL (-32)

    Timer internal error.

- #define OS_ERR_OBJECT_IN_USE (-33)

    Object in use.

- #define OS_ERR_BAD_ADDRESS (-34)

    Bad address.

- #define OS_ERR_INCORRECT_OBJ_STATE (-35)

    Incorrect object state.

- #define OS_ERR_INCORRECT_OBJ_TYPE (-36)

    Incorrect object type.

- #define OS_ERR_STREAM_DISCONNECTED (-37)

    Stream disconnected.

- #define OS_ERR_OPERATION_NOT_SUPPORTED (-38)

    Requested operation is not support on the supplied object(s)

- #define OS_PEND (-1)
- #define OS_CHECK (0)

39.54.1   Macro Definition Documentation

39.54.1.1   OS_CHECK

```
#define OS_CHECK (0)
```

Definition at line 98 of file osapi.h.

39.54.1.2   OS_PEND

```
#define OS_PEND (-1)
```

Definition at line 97 of file osapi.h.

39.55   psp/fsw/inc/cfe_psp.h File Reference

```
#include "common_types.h"
#include "osapi.h"
```

Data Structures

- struct CFE_PSP_MemTable_t

Macros

- #define CFE_PSP_SUCCESS (0)
- #define CFE_PSP_ERROR (-1)
- #define CFE_PSP_INVALID_POINTER (-2)
- #define CFE_PSP_ERROR_ADDRESS_MISALIGNED (-3)
- #define CFE_PSP_ERROR_TIMEOUT (-4)
- #define CFE_PSP_INVALID_INT_NUM (-5)
- #define CFE_PSP_INVALID_MEM_ADDR (-21)
- #define CFE_PSP_INVALID_MEM_TYPE (-22)
- #define CFE_PSP_INVALID_MEM_RANGE (-23)
- #define CFE_PSP_INVALID_MEM_WORDSIZE (-24)
- #define CFE_PSP_INVALID_MEM_SIZE (-25)
- #define CFE_PSP_INVALID_MEM_ATTR (-26)
- #define CFE_PSP_ERROR_NOT_IMPLEMENTED (-27)
- #define CFE_PSP_INVALID_MODULE_NAME (-28)
- #define CFE_PSP_INVALID_MODULE_ID (-29)
- #define CFE_PSP_NO_EXCEPTION_DATA (-30)
- #define CFE_PSP_PANIC_STARTUP 1

- #define CFE_PSP_PANIC_VOLATILE_DISK 2
- #define CFE_PSP_PANIC_MEMORY_ALLOC 3
- #define CFE_PSP_PANIC_NONVOL_DISK 4
- #define CFE_PSP_PANIC_STARTUP_SEM 5
- #define CFE_PSP_PANIC_CORE_APP 6
- #define CFE_PSP_PANIC_GENERAL_FAILURE 7
- #define BUFF_SIZE 256
- #define SIZE_BYTE 1
- #define SIZE_HALF 2
- #define SIZE_WORD 3
- #define CFE_PSP_MEM_RAM 1
- #define CFE_PSP_MEM_EEPROM 2
- #define CFE_PSP_MEM_ANY 3
- #define CFE_PSP_MEM_INVALID 4
- #define CFE_PSP_MEM_ATTR_WRITE 0x01
- #define CFE_PSP_MEM_ATTR_READ 0x02
- #define CFE_PSP_MEM_ATTR_READWRITE 0x03
- #define CFE_PSP_MEM_SIZE_BYTE 0x01
- #define CFE_PSP_MEM_SIZE_WORD 0x02
- #define CFE_PSP_MEM_SIZE_DWORD 0x04
- #define CFE_PSP_MAJOR_VERSION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.MajorVersion)
- #define CFE_PSP_MINOR_VERSION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.MinorVersion)
- #define CFE_PSP_REVISION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.Revision)
- #define CFE_PSP_MISSION_REV (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.MissionRev)
- #define CFE_PSP_VERSION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.Version)

Reset Types

- #define CFE_PSP_RST_TYPE_PROCESSOR 1
- #define CFE_PSP_RST_TYPE_POWERON 2
- #define CFE_PSP_RST_TYPE_MAX 3

Reset Sub-Types

- #define CFE_PSP_RST_SUBTYPE_POWER_CYCLE 1

  Reset caused by power having been removed and restored.
- #define CFE_PSP_RST_SUBTYPE_PUSH_BUTTON 2

  Reset caused by reset button on the board having been pressed.
- #define CFE_PSP_RST_SUBTYPE_HW_SPECIAL_COMMAND 3

  Reset was caused by a reset line having been stimulated by a hardware special command.
- #define CFE_PSP_RST_SUBTYPE_HW_WATCHDOG 4

  Reset was caused by a watchdog timer expiring.
- #define CFE_PSP_RST_SUBTYPE_RESET_COMMAND 5

  Reset was caused by cFE ES processing a Reset Command .
- #define CFE_PSP_RST_SUBTYPE_EXCEPTION 6

  Reset was caused by a Processor Exception.
- #define CFE_PSP_RST_SUBTYPE_UNDEFINED_RESET 7

  Reset was caused in an unknown manner.
- #define CFE_PSP_RST_SUBTYPE_HWDEBUG_RESET 8

  Reset was caused by a JTAG or BDM connection.
- #define CFE_PSP_RST_SUBTYPE_BANKSWITCH_RESET 9

  Reset reverted to a cFE POWERON due to a boot bank switch.
- #define CFE_PSP_RST_SUBTYPE_MAX 10

  Placeholder to indicate 1+ the maximum value that the PSP will ever use.

Functions

- void CFE_PSP_Main (void)
- void CFE_PSP_GetTime (OS_time_t ∗LocalTime)
- void CFE_PSP_Restart (uint32 resetType)
- uint32 CFE_PSP_GetRestartType (uint32 ∗restartSubType)
- void CFE_PSP_FlushCaches (uint32 type, void ∗address, uint32 size)
- uint32 CFE_PSP_GetProcessorId (void)
- uint32 CFE_PSP_GetSpacecraftId (void)
- uint32 CFE_PSP_Get_Timer_Tick (void)
- uint32 CFE_PSP_GetTimerTicksPerSecond (void)
- uint32 CFE_PSP_GetTimerLow32Rollover (void)
- void CFE_PSP_Get_Timebase (uint32 ∗Tbu, uint32 ∗Tbl)
- uint32 CFE_PSP_Get_Dec (void)
- int32 CFE_PSP_GetCDSSize (uint32 ∗SizeOfCDS)
- int32 CFE_PSP_WriteToCDS (const void ∗PtrToDataToWrite, uint32 CDSOffset, uint32 NumBytes)
- int32 CFE_PSP_ReadFromCDS (void ∗PtrToDataToRead, uint32 CDSOffset, uint32 NumBytes)
- int32 CFE_PSP_GetResetArea (cpuaddr ∗PtrToResetArea, uint32 ∗SizeOfResetArea)
- int32 CFE_PSP_GetUserReservedArea (cpuaddr ∗PtrToUserArea, uint32 ∗SizeOfUserArea)
- int32 CFE_PSP_GetVolatileDiskMem (cpuaddr ∗PtrToVolDisk, uint32 ∗SizeOfVolDisk)
- int32 CFE_PSP_GetKernelTextSegmentInfo (cpuaddr ∗PtrToKernelSegment, uint32 ∗SizeOfKernelSegment)
- int32 CFE_PSP_GetCFETextSegmentInfo (cpuaddr ∗PtrToCFESegment, uint32 ∗SizeOfCFESegment)
- void CFE_PSP_WatchdogInit (void)
- void CFE_PSP_WatchdogEnable (void)
- void CFE_PSP_WatchdogDisable (void)
- void CFE_PSP_WatchdogService (void)
- uint32 CFE_PSP_WatchdogGet (void)
- void CFE_PSP_WatchdogSet (uint32 WatchdogValue)
- void CFE_PSP_Panic (int32 ErrorCode)
- int32 CFE_PSP_InitSSR (uint32 bus, uint32 device, char ∗DeviceName)
- int32 CFE_PSP_Decompress (char ∗srcFileName, char ∗dstFileName)
- void CFE_PSP_AttachExceptions (void)
- void CFE_PSP_SetDefaultExceptionEnvironment (void)
- uint32 CFE_PSP_Exception_GetCount (void)
- int32 CFE_PSP_Exception_GetSummary (uint32 ∗ContextLogId, uint32 ∗TaskId, char ∗ReasonBuf, uint32 ReasonSize)
- int32 CFE_PSP_Exception_CopyContext (uint32 ContextLogId, void ∗ContextBuf, uint32 ContextSize)
- int32 CFE_PSP_PortRead8 (cpuaddr PortAddress, uint8 ∗ByteValue)
- int32 CFE_PSP_PortWrite8 (cpuaddr PortAddress, uint8 ByteValue)
- int32 CFE_PSP_PortRead16 (cpuaddr PortAddress, uint16 ∗uint16Value)
- int32 CFE_PSP_PortWrite16 (cpuaddr PortAddress, uint16 uint16Value)
- int32 CFE_PSP_PortRead32 (cpuaddr PortAddress, uint32 ∗uint32Value)
- int32 CFE_PSP_PortWrite32 (cpuaddr PortAddress, uint32 uint32Value)
- int32 CFE_PSP_MemRead8 (cpuaddr MemoryAddress, uint8 ∗ByteValue)
- int32 CFE_PSP_MemWrite8 (cpuaddr MemoryAddress, uint8 ByteValue)
- int32 CFE_PSP_MemRead16 (cpuaddr MemoryAddress, uint16 ∗uint16Value)
- int32 CFE_PSP_MemWrite16 (cpuaddr MemoryAddress, uint16 uint16Value)
- int32 CFE_PSP_MemRead32 (cpuaddr MemoryAddress, uint32 ∗uint32Value)
- int32 CFE_PSP_MemWrite32 (cpuaddr MemoryAddress, uint32 uint32Value)
- int32 CFE_PSP_MemCpy (void ∗dest, const void ∗src, uint32 n)
- int32 CFE_PSP_MemSet (void ∗dest, uint8 value, uint32 n)

- int32 CFE_PSP_MemValidateRange (cpuaddr Address, uint32 Size, uint32 MemoryType)
- uint32 CFE_PSP_MemRanges (void)
- int32 CFE_PSP_MemRangeSet (uint32 RangeNum, uint32 MemoryType, cpuaddr StartAddr, uint32 Size, uint32 WordSize, uint32 Attributes)
- int32 CFE_PSP_MemRangeGet (uint32 RangeNum, uint32 *MemoryType, cpuaddr *StartAddr, uint32 *Size, uint32 *WordSize, uint32 *Attributes)
- int32 CFE_PSP_EepromWrite8 (cpuaddr MemoryAddress, uint8 ByteValue)
- int32 CFE_PSP_EepromWrite16 (cpuaddr MemoryAddress, uint16 uint16Value)
- int32 CFE_PSP_EepromWrite32 (cpuaddr MemoryAddress, uint32 uint32Value)
- int32 CFE_PSP_EepromWriteEnable (uint32 Bank)
- int32 CFE_PSP_EepromWriteDisable (uint32 Bank)
- int32 CFE_PSP_EepromPowerUp (uint32 Bank)
- int32 CFE_PSP_EepromPowerDown (uint32 Bank)

39.55.1 Macro Definition Documentation

39.55.1.1 BUFF_SIZE

```
#define BUFF_SIZE 256
```

Definition at line 86 of file cfe_psp.h.

39.55.1.2 CFE_PSP_ERROR

```
#define CFE_PSP_ERROR (-1)
```

Definition at line 54 of file cfe_psp.h.

Referenced by CFE_PSP_GetCDSSize(), CFE_PSP_GetCFETextSegmentInfo(), CFE_PSP_GetKernelTextSegment↩
Info(), CFE_PSP_GetResetArea(), CFE_PSP_GetUserReservedArea(), CFE_PSP_GetVolatileDiskMem(), CFE_PS↩
P_InitSSR(), CFE_PSP_ReadFromCDS(), and CFE_PSP_WriteToCDS().

39.55.1.3 CFE_PSP_ERROR_ADDRESS_MISALIGNED

```
#define CFE_PSP_ERROR_ADDRESS_MISALIGNED (-3)
```

Definition at line 56 of file cfe_psp.h.

39.55.1.4 CFE_PSP_ERROR_NOT_IMPLEMENTED

```
#define CFE_PSP_ERROR_NOT_IMPLEMENTED (-27)
```

Definition at line 65 of file cfe_psp.h.

Referenced by CFE_PSP_GetKernelTextSegmentInfo().

39.55.1.5 CFE_PSP_ERROR_TIMEOUT

```
#define CFE_PSP_ERROR_TIMEOUT (-4)
```

Definition at line 57 of file cfe_psp.h.

39.55.1.6 CFE_PSP_INVALID_INT_NUM

```
#define CFE_PSP_INVALID_INT_NUM (-5)
```

Definition at line 58 of file cfe_psp.h.

39.55.1.7 CFE_PSP_INVALID_MEM_ADDR

```
#define CFE_PSP_INVALID_MEM_ADDR (-21)
```

Definition at line 59 of file cfe_psp.h.

39.55.1.8 CFE_PSP_INVALID_MEM_ATTR

```
#define CFE_PSP_INVALID_MEM_ATTR (-26)
```

Definition at line 64 of file cfe_psp.h.

39.55.1.9 CFE_PSP_INVALID_MEM_RANGE

```
#define CFE_PSP_INVALID_MEM_RANGE (-23)
```

Definition at line 61 of file cfe_psp.h.

39.55.1.10   CFE_PSP_INVALID_MEM_SIZE

```
#define CFE_PSP_INVALID_MEM_SIZE (-25)
```

Definition at line 63 of file cfe_psp.h.

39.55.1.11   CFE_PSP_INVALID_MEM_TYPE

```
#define CFE_PSP_INVALID_MEM_TYPE (-22)
```

Definition at line 60 of file cfe_psp.h.

39.55.1.12   CFE_PSP_INVALID_MEM_WORDSIZE

```
#define CFE_PSP_INVALID_MEM_WORDSIZE (-24)
```

Definition at line 62 of file cfe_psp.h.

39.55.1.13   CFE_PSP_INVALID_MODULE_ID

```
#define CFE_PSP_INVALID_MODULE_ID (-29)
```

Definition at line 67 of file cfe_psp.h.

39.55.1.14   CFE_PSP_INVALID_MODULE_NAME

```
#define CFE_PSP_INVALID_MODULE_NAME (-28)
```

Definition at line 66 of file cfe_psp.h.

39.55.1.15   CFE_PSP_INVALID_POINTER

```
#define CFE_PSP_INVALID_POINTER (-2)
```

Definition at line 55 of file cfe_psp.h.

39.55.1.16   CFE_PSP_MAJOR_VERSION

```
#define CFE_PSP_MAJOR_VERSION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.MajorVersion)
```

Definition at line 142 of file cfe_psp.h.

39.55.1.17   CFE_PSP_MEM_ANY

```
#define CFE_PSP_MEM_ANY 3
```

Definition at line 96 of file cfe_psp.h.

39.55.1.18   CFE_PSP_MEM_ATTR_READ

```
#define CFE_PSP_MEM_ATTR_READ 0x02
```

Definition at line 103 of file cfe_psp.h.

39.55.1.19   CFE_PSP_MEM_ATTR_READWRITE

```
#define CFE_PSP_MEM_ATTR_READWRITE 0x03
```

Definition at line 104 of file cfe_psp.h.

39.55.1.20   CFE_PSP_MEM_ATTR_WRITE

```
#define CFE_PSP_MEM_ATTR_WRITE 0x01
```

Definition at line 102 of file cfe_psp.h.

39.55.1.21   CFE_PSP_MEM_EEPROM

```
#define CFE_PSP_MEM_EEPROM 2
```

Definition at line 95 of file cfe_psp.h.

39.55.1.22 CFE_PSP_MEM_INVALID

`#define CFE_PSP_MEM_INVALID 4`

Definition at line 97 of file cfe_psp.h.

39.55.1.23 CFE_PSP_MEM_RAM

`#define CFE_PSP_MEM_RAM 1`

Definition at line 94 of file cfe_psp.h.

39.55.1.24 CFE_PSP_MEM_SIZE_BYTE

`#define CFE_PSP_MEM_SIZE_BYTE 0x01`

Definition at line 109 of file cfe_psp.h.

39.55.1.25 CFE_PSP_MEM_SIZE_DWORD

`#define CFE_PSP_MEM_SIZE_DWORD 0x04`

Definition at line 111 of file cfe_psp.h.

39.55.1.26 CFE_PSP_MEM_SIZE_WORD

`#define CFE_PSP_MEM_SIZE_WORD 0x02`

Definition at line 110 of file cfe_psp.h.

39.55.1.27 CFE_PSP_MINOR_VERSION

`#define CFE_PSP_MINOR_VERSION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.MinorVersion)`

Definition at line 143 of file cfe_psp.h.

39.55.1.28   CFE_PSP_MISSION_REV

```
#define CFE_PSP_MISSION_REV (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.MissionRev)
```

Definition at line 145 of file cfe_psp.h.

39.55.1.29   CFE_PSP_NO_EXCEPTION_DATA

```
#define CFE_PSP_NO_EXCEPTION_DATA (-30)
```

Definition at line 68 of file cfe_psp.h.

39.55.1.30   CFE_PSP_PANIC_CORE_APP

```
#define CFE_PSP_PANIC_CORE_APP 6
```

Definition at line 80 of file cfe_psp.h.

39.55.1.31   CFE_PSP_PANIC_GENERAL_FAILURE

```
#define CFE_PSP_PANIC_GENERAL_FAILURE 7
```

Definition at line 81 of file cfe_psp.h.

39.55.1.32   CFE_PSP_PANIC_MEMORY_ALLOC

```
#define CFE_PSP_PANIC_MEMORY_ALLOC 3
```

Definition at line 77 of file cfe_psp.h.

39.55.1.33   CFE_PSP_PANIC_NONVOL_DISK

```
#define CFE_PSP_PANIC_NONVOL_DISK 4
```

Definition at line 78 of file cfe_psp.h.

39.55.1.34 CFE_PSP_PANIC_STARTUP

`#define CFE_PSP_PANIC_STARTUP 1`

Definition at line 75 of file cfe_psp.h.

39.55.1.35 CFE_PSP_PANIC_STARTUP_SEM

`#define CFE_PSP_PANIC_STARTUP_SEM 5`

Definition at line 79 of file cfe_psp.h.

39.55.1.36 CFE_PSP_PANIC_VOLATILE_DISK

`#define CFE_PSP_PANIC_VOLATILE_DISK 2`

Definition at line 76 of file cfe_psp.h.

39.55.1.37 CFE_PSP_REVISION

`#define CFE_PSP_REVISION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.Revision)`

Definition at line 144 of file cfe_psp.h.

39.55.1.38 CFE_PSP_RST_SUBTYPE_BANKSWITCH_RESET

`#define CFE_PSP_RST_SUBTYPE_BANKSWITCH_RESET 9`

Reset reverted to a cFE POWERON due to a boot bank switch.

Definition at line 136 of file cfe_psp.h.

39.55.1.39 CFE_PSP_RST_SUBTYPE_EXCEPTION

`#define CFE_PSP_RST_SUBTYPE_EXCEPTION 6`

Reset was caused by a Processor Exception.

Definition at line 133 of file cfe_psp.h.

39.55.1.40   CFE_PSP_RST_SUBTYPE_HW_SPECIAL_COMMAND

#define CFE_PSP_RST_SUBTYPE_HW_SPECIAL_COMMAND 3

Reset was caused by a reset line having been stimulated by a hardware special command.

Definition at line 130 of file cfe_psp.h.

39.55.1.41   CFE_PSP_RST_SUBTYPE_HW_WATCHDOG

#define CFE_PSP_RST_SUBTYPE_HW_WATCHDOG 4

Reset was caused by a watchdog timer expiring.

Definition at line 131 of file cfe_psp.h.

39.55.1.42   CFE_PSP_RST_SUBTYPE_HWDEBUG_RESET

#define CFE_PSP_RST_SUBTYPE_HWDEBUG_RESET 8

Reset was caused by a JTAG or BDM connection.

Definition at line 135 of file cfe_psp.h.

39.55.1.43   CFE_PSP_RST_SUBTYPE_MAX

#define CFE_PSP_RST_SUBTYPE_MAX 10

Placeholder to indicate 1+ the maximum value that the PSP will ever use.

Definition at line 137 of file cfe_psp.h.

39.55.1.44   CFE_PSP_RST_SUBTYPE_POWER_CYCLE

#define CFE_PSP_RST_SUBTYPE_POWER_CYCLE 1

Reset caused by power having been removed and restored.

Definition at line 128 of file cfe_psp.h.

39.55.1.45 CFE_PSP_RST_SUBTYPE_PUSH_BUTTON

`#define CFE_PSP_RST_SUBTYPE_PUSH_BUTTON 2`

Reset caused by reset button on the board having been pressed.

Definition at line 129 of file cfe_psp.h.

39.55.1.46 CFE_PSP_RST_SUBTYPE_RESET_COMMAND

`#define CFE_PSP_RST_SUBTYPE_RESET_COMMAND 5`

Reset was caused by cFE ES processing a Reset Command .

Definition at line 132 of file cfe_psp.h.

39.55.1.47 CFE_PSP_RST_SUBTYPE_UNDEFINED_RESET

`#define CFE_PSP_RST_SUBTYPE_UNDEFINED_RESET 7`

Reset was caused in an unknown manner.

Definition at line 134 of file cfe_psp.h.

39.55.1.48 CFE_PSP_RST_TYPE_MAX

`#define CFE_PSP_RST_TYPE_MAX 3`

Placeholder to indicate 1+ the maximum value that the PSP will ever use.

Definition at line 120 of file cfe_psp.h.

39.55.1.49 CFE_PSP_RST_TYPE_POWERON

`#define CFE_PSP_RST_TYPE_POWERON 2`

All memory has been cleared

Definition at line 119 of file cfe_psp.h.

Referenced by CFE_PSP_InitProcessorReservedMemory(), CFE_PSP_Restart(), and OS_Application_Startup().

39.55.1.50   CFE_PSP_RST_TYPE_PROCESSOR

```
#define CFE_PSP_RST_TYPE_PROCESSOR 1
```

Volatile disk, Critical Data Store and User Reserved memory could still be valid

Definition at line 118 of file cfe_psp.h.

Referenced by CFE_PSP_InitProcessorReservedMemory(), and OS_Application_Startup().

39.55.1.51   CFE_PSP_SUCCESS

```
#define CFE_PSP_SUCCESS (0)
```

Definition at line 53 of file cfe_psp.h.

Referenced by CFE_PSP_ExceptionGetSummary_Impl(), CFE_PSP_GetCDSSize(), CFE_PSP_GetCFEText↩
SegmentInfo(), CFE_PSP_GetResetArea(), CFE_PSP_GetUserReservedArea(), CFE_PSP_GetVolatileDiskMem(),
CFE_PSP_InitProcessorReservedMemory(), CFE_PSP_ReadFromCDS(), CFE_PSP_WriteToCDS(), and OS_↩
Application_Startup().

39.55.1.52   CFE_PSP_VERSION

```
#define CFE_PSP_VERSION (GLOBAL_PSP_CONFIGDATA.PSP_VersionInfo.Version)
```

Definition at line 146 of file cfe_psp.h.

39.55.1.53   SIZE_BYTE

```
#define SIZE_BYTE 1
```

Definition at line 87 of file cfe_psp.h.

39.55.1.54   SIZE_HALF

```
#define SIZE_HALF 2
```

Definition at line 88 of file cfe_psp.h.

39.55.1.55   SIZE_WORD

```
#define SIZE_WORD 3
```

Definition at line 89 of file cfe_psp.h.

39.55.2   Function Documentation

39.55.2.1   CFE_PSP_AttachExceptions()

```
void CFE_PSP_AttachExceptions (
            void  )
```

Definition at line 210 of file cfe_psp_exception.c.

References CFE_PSP_AsyncMask, CFE_PSP_AttachSigHandler(), and OS_printf().

Here is the call graph for this function:
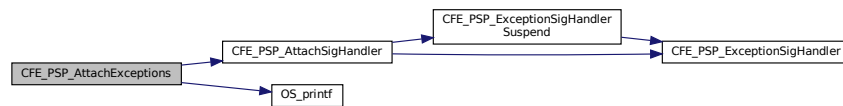
39.55.2.2   CFE_PSP_Decompress()

```
int32 CFE_PSP_Decompress (
            char * srcFileName,
            char * dstFileName )
```

39.55.2.3   CFE_PSP_EepromPowerDown()

```
int32 CFE_PSP_EepromPowerDown (
            uint32 Bank )
```

39.55.2.4 CFE_PSP_EepromPowerUp()

int32 CFE_PSP_EepromPowerUp (
          uint32 *Bank*)

39.55.2.5 CFE_PSP_EepromWrite16()

int32 CFE_PSP_EepromWrite16 (
          cpuaddr *MemoryAddress,*
          uint16 *uint16Value*)

39.55.2.6 CFE_PSP_EepromWrite32()

int32 CFE_PSP_EepromWrite32 (
          cpuaddr *MemoryAddress,*
          uint32 *uint32Value*)

39.55.2.7 CFE_PSP_EepromWrite8()

int32 CFE_PSP_EepromWrite8 (
          cpuaddr *MemoryAddress,*
          uint8 *ByteValue*)

39.55.2.8 CFE_PSP_EepromWriteDisable()

int32 CFE_PSP_EepromWriteDisable (
          uint32 *Bank*)

39.55.2.9 CFE_PSP_EepromWriteEnable()

int32 CFE_PSP_EepromWriteEnable (
          uint32 *Bank*)

39.55.2.10 CFE_PSP_Exception_CopyContext()

int32 CFE_PSP_Exception_CopyContext (
          uint32 *ContextLogId,*
          void * *ContextBuf,*
          uint32 *ContextSize*)

39.55.2.11 CFE_PSP_Exception_GetCount()

uint32 CFE_PSP_Exception_GetCount (
          void)

39.55.2.12 CFE_PSP_Exception_GetSummary()

int32 CFE_PSP_Exception_GetSummary (
          uint32 * *ContextLogId,*
          uint32 * *TaskId,*
          char * *ReasonBuf,*
          uint32 *ReasonSize*)

39.55.2.13 CFE_PSP_FlushCaches()

void CFE_PSP_FlushCaches (
          uint32 *type,*
          void * *address,*
          uint32 *size*)

Definition at line 156 of file cfe_psp_support.c.

39.55.2.14 CFE_PSP_Get_Dec()

uint32 CFE_PSP_Get_Dec (
          void)

Definition at line 185 of file cfe_psp_timer.c.

39.55.2.15 CFE_PSP_Get_Timebase()

void CFE_PSP_Get_Timebase (
          uint32 * *Tbu,*
          uint32 * *Tbl*)

Definition at line 162 of file cfe_psp_timer.c.

References OS_time_t::microsecs, OS_GetLocalTime(), and OS_time_t::seconds.

Here is the call graph for this function:

39.55.2.16   CFE_PSP_Get_Timer_Tick()

`uint32` CFE_PSP_Get_Timer_Tick (
            void)

Definition at line 102 of file cfe_psp_timer.c.

39.55.2.17   CFE_PSP_GetCDSSize()

`int32` CFE_PSP_GetCDSSize (
            `uint32` * *SizeOfCDS*)

Definition at line 221 of file cfe_psp_memory.c.

References CFE_PSP_CDS_SIZE, CFE_PSP_ERROR, CFE_PSP_SUCCESS, and NULL.

39.55.2.18   CFE_PSP_GetCFETextSegmentInfo()

`int32` CFE_PSP_GetCFETextSegmentInfo (
            `cpuaddr` * *PtrToCFESegment,*
            `uint32` * *SizeOfCFESegment*)

Definition at line 816 of file cfe_psp_memory.c.

References _fini, _init, CFE_PSP_ERROR, CFE_PSP_SUCCESS, and NULL.

39.55.2.19   CFE_PSP_GetKernelTextSegmentInfo()

`int32` CFE_PSP_GetKernelTextSegmentInfo (
            `cpuaddr` * *PtrToKernelSegment,*
            `uint32` * *SizeOfKernelSegment*)

Definition at line 788 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ERROR_NOT_IMPLEMENTED, and NULL.

39.55.2.20   CFE_PSP_GetProcessorId()

`uint32` CFE_PSP_GetProcessorId (
            void)

Definition at line 178 of file cfe_psp_support.c.

References CFE_PSP_CpuId.

39.55.2.21   CFE_PSP_GetResetArea()

```
int32 CFE_PSP_GetResetArea (
            cpuaddr * PtrToResetArea,
            uint32 * SizeOfResetArea )
```

Definition at line 454 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.55.2.22   CFE_PSP_GetRestartType()

```
uint32 CFE_PSP_GetRestartType (
            uint32 * restartSubType )
```

39.55.2.23   CFE_PSP_GetSpacecraftId()

```
uint32 CFE_PSP_GetSpacecraftId (
            void  )
```

Definition at line 199 of file cfe_psp_support.c.

References CFE_PSP_SpacecraftId.

39.55.2.24   CFE_PSP_GetTime()

```
void CFE_PSP_GetTime (
            OS_time_t * LocalTime )
```

Definition at line 77 of file cfe_psp_timer.c.

References OS_GetLocalTime().

Here is the call graph for this function:

```
int32 CFE_PSP_GetResetArea (
```

39.55.2.25   CFE_PSP_GetTimerLow32Rollover()

<code>uint32</code> CFE_PSP_GetTimerLow32Rollover (
            void)

Definition at line 144 of file cfe_psp_timer.c.

References CFE_PSP_TIMER_LOW32_ROLLOVER.

39.55.2.26   CFE_PSP_GetTimerTicksPerSecond()

<code>uint32</code> CFE_PSP_GetTimerTicksPerSecond (
            void)

Definition at line 123 of file cfe_psp_timer.c.

References CFE_PSP_TIMER_TICKS_PER_SECOND.

39.55.2.27   CFE_PSP_GetUserReservedArea()

<code>int32</code> CFE_PSP_GetUserReservedArea (
            <code>cpuaddr</code> * *PtrToUserArea,*
            <code>uint32</code> * *SizeOfUserArea*)

Definition at line 570 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.55.2.28   CFE_PSP_GetVolatileDiskMem()

<code>int32</code> CFE_PSP_GetVolatileDiskMem (
            <code>cpuaddr</code> * *PtrToVolDisk,*
            <code>uint32</code> * *SizeOfVolDisk*)

Definition at line 629 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.55.2.29 CFE_PSP_InitSSR()

```
int32 CFE_PSP_InitSSR (
            uint32 bus,
            uint32 device,
            char * DeviceName )
```

Definition at line 66 of file cfe_psp_ssr.c.

References CFE_PSP_ERROR.

39.55.2.30 CFE_PSP_Main()

```
void CFE_PSP_Main (
            void  )
```

39.55.2.31 CFE_PSP_MemCpy()

```
int32 CFE_PSP_MemCpy (
            void * dest,
            const void * src,
            uint32 n )
```

39.55.2.32 CFE_PSP_MemRangeGet()

```
int32 CFE_PSP_MemRangeGet (
            uint32 RangeNum,
            uint32 * MemoryType,
            cpuaddr * StartAddr,
            uint32 * Size,
            uint32 * WordSize,
            uint32 * Attributes )
```

39.55.2.33 CFE_PSP_MemRanges()

```
uint32 CFE_PSP_MemRanges (
            void  )
```

39.55.2.34 CFE_PSP_MemRangeSet()

```
int32 CFE_PSP_MemRangeSet (
        uint32 RangeNum,
        uint32 MemoryType,
        cpuaddr StartAddr,
        uint32 Size,
        uint32 WordSize,
        uint32 Attributes )
```

39.55.2.35 CFE_PSP_MemRead16()

```
int32 CFE_PSP_MemRead16 (
        cpuaddr MemoryAddress,
        uint16 * uint16Value )
```

39.55.2.36 CFE_PSP_MemRead32()

```
int32 CFE_PSP_MemRead32 (
        cpuaddr MemoryAddress,
        uint32 * uint32Value )
```

39.55.2.37 CFE_PSP_MemRead8()

```
int32 CFE_PSP_MemRead8 (
        cpuaddr MemoryAddress,
        uint8 * ByteValue )
```

39.55.2.38 CFE_PSP_MemSet()

```
int32 CFE_PSP_MemSet (
        void * dest,
        uint8 value,
        uint32 n )
```

39.55.2.39 CFE_PSP_MemValidateRange()

```
int32 CFE_PSP_MemValidateRange (
        cpuaddr Address,
        uint32 Size,
        uint32 MemoryType )
```

39.55.2.40   CFE_PSP_MemWrite16()

```
int32 CFE_PSP_MemWrite16 (
            cpuaddr MemoryAddress,
            uint16 uint16Value )
```

39.55.2.41   CFE_PSP_MemWrite32()

```
int32 CFE_PSP_MemWrite32 (
            cpuaddr MemoryAddress,
            uint32 uint32Value )
```

39.55.2.42   CFE_PSP_MemWrite8()

```
int32 CFE_PSP_MemWrite8 (
            cpuaddr MemoryAddress,
            uint8 ByteValue )
```

39.55.2.43   CFE_PSP_Panic()

```
void CFE_PSP_Panic (
            int32 ErrorCode )
```

Definition at line 135 of file cfe_psp_support.c.

References OS_printf().

Referenced by OS_Application_Startup().

Here is the call graph for this function:

39.55.2.44   CFE_PSP_PortRead16()

int32 CFE_PSP_PortRead16 (
            cpuaddr *PortAddress,*
            uint16 * *uint16Value*)

39.55.2.45   CFE_PSP_PortRead32()

int32 CFE_PSP_PortRead32 (
            cpuaddr *PortAddress,*
            uint32 * *uint32Value*)

39.55.2.46   CFE_PSP_PortRead8()

int32 CFE_PSP_PortRead8 (
            cpuaddr *PortAddress,*
            uint8 * *ByteValue*)

39.55.2.47   CFE_PSP_PortWrite16()

int32 CFE_PSP_PortWrite16 (
            cpuaddr *PortAddress,*
            uint16 *uint16Value*)

39.55.2.48   CFE_PSP_PortWrite32()

int32 CFE_PSP_PortWrite32 (
            cpuaddr *PortAddress,*
            uint32 *uint32Value*)

39.55.2.49   CFE_PSP_PortWrite8()

int32 CFE_PSP_PortWrite8 (
            cpuaddr *PortAddress,*
            uint8 *ByteValue*)

39.55.2.50 CFE_PSP_ReadFromCDS()

```
int32 CFE_PSP_ReadFromCDS (
            void * PtrToDataToRead,
            uint32 CDSOffset,
            uint32 NumBytes )
```

Definition at line 295 of file cfe_psp_memory.c.

References CFE_PSP_CDS_SIZE, CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.55.2.51 CFE_PSP_Restart()

```
void CFE_PSP_Restart (
            uint32 resetType )
```

Definition at line 70 of file cfe_psp_support.c.

References CFE_PSP_DeleteProcessorReservedMemory(), CFE_PSP_IdleTaskState, CFE_PSP_Reserved← MemoryMap, CFE_PSP_RST_TYPE_POWERON, OS_printf(), and OS_TaskDelay().

Here is the call graph for this function:
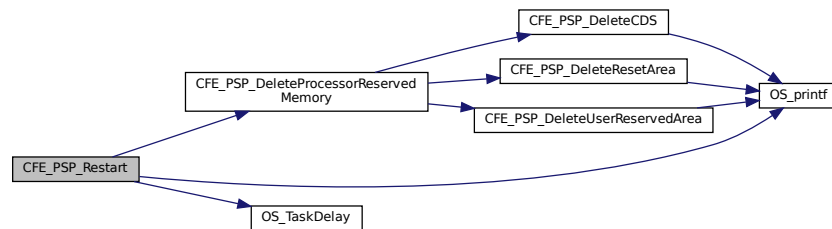
39.55.2.52 CFE_PSP_SetDefaultExceptionEnvironment()

```
void CFE_PSP_SetDefaultExceptionEnvironment (
            void  )
```

Definition at line 270 of file cfe_psp_exception.c.

References CFE_PSP_AttachSigHandler().

Here is the call graph for this function:

39.55.2.53 CFE_PSP_WatchdogDisable()

```
void CFE_PSP_WatchdogDisable (
            void  )
```

Definition at line 114 of file cfe_psp_watchdog.c.

39.55.2.54 CFE_PSP_WatchdogEnable()

```
void CFE_PSP_WatchdogEnable (
            void  )
```

Definition at line 98 of file cfe_psp_watchdog.c.

39.55.2.55 CFE_PSP_WatchdogGet()

```
uint32 CFE_PSP_WatchdogGet (
            void  )
```

Definition at line 156 of file cfe_psp_watchdog.c.

References CFE_PSP_WatchdogValue.

39.55.2.56 CFE_PSP_WatchdogInit()

```
void CFE_PSP_WatchdogInit (
            void  )
```

Definition at line 75 of file cfe_psp_watchdog.c.

References CFE_PSP_WatchdogValue.

39.55.2.57 CFE_PSP_WatchdogService()

```
void CFE_PSP_WatchdogService (
            void  )
```

Definition at line 135 of file cfe_psp_watchdog.c.

39.55.2.58   CFE_PSP_WatchdogSet()

```
void CFE_PSP_WatchdogSet (
            uint32 WatchdogValue )
```

Definition at line 177 of file cfe_psp_watchdog.c.

References CFE_PSP_WatchdogValue.

39.55.2.59   CFE_PSP_WriteToCDS()

```
int32 CFE_PSP_WriteToCDS (
            const void * PtrToDataToWrite,
            uint32 CDSOffset,
            uint32 NumBytes )
```

Definition at line 251 of file cfe_psp_memory.c.

References CFE_PSP_CDS_SIZE, CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.56   psp/fsw/inc/cfe_psp_configdata.h File Reference

```
#include <osapi.h>
#include <cfe_psp.h>
```

Data Structures

- struct CFE_PSP_VersionInfo_t
- struct Target_PspConfigData

Variables

- Target_PspConfigData GLOBAL_PSP_CONFIGDATA
- CFE_PSP_MemTable_t CFE_PSP_MemoryTable [ ]

39.56.1   Detailed Description

Created on: Dec 31, 2014 Author: joseph.p.hickey@nasa.gov

39.56.2   Variable Documentation

39.56.2.1   CFE_PSP_MemoryTable

CFE_PSP_MemTable_t CFE_PSP_MemoryTable[]

Extern reference to the psp memory table Allows the actual instantiation to be done outside this module

Definition at line 46 of file cfe_psp_memtab.c.

39.56.2.2   GLOBAL_PSP_CONFIGDATA

Target_PspConfigData GLOBAL_PSP_CONFIGDATA

Extern reference to psp config struct. Allows the actual instantiation to be done outside this module

39.57   psp/fsw/pc-linux/src/cfe_psp_exception.c File Reference

```
#include <stdio.h>
#include <string.h>
#include <pthread.h>
#include "common_types.h"
#include "osapi.h"
#include "cfe_psp.h"
#include "cfe_psp_config.h"
#include "cfe_psp_exceptionstorage_types.h"
#include "cfe_psp_exceptionstorage_api.h"
#include <execinfo.h>
#include <signal.h>
```

Functions

- void CFE_PSP_ExceptionSigHandler (int signo, siginfo_t ∗si, void ∗ctxt)
- void CFE_PSP_ExceptionSigHandlerSuspend (int signo, siginfo_t ∗si, void ∗ctxt)
- void CFE_PSP_AttachSigHandler (int signo)
- void CFE_PSP_AttachExceptions (void)
- void CFE_PSP_SetDefaultExceptionEnvironment (void)
- int32 CFE_PSP_ExceptionGetSummary_Impl (const CFE_PSP_Exception_LogData_t ∗Buffer, char ∗Reason↩
  Buf, uint32 ReasonSize)

Variables

- sigset_t CFE_PSP_AsyncMask

39.57.1   Function Documentation

39.57.1.1 CFE_PSP_AttachExceptions()

```
void CFE_PSP_AttachExceptions (
            void  )
```

Definition at line 210 of file cfe_psp_exception.c.

References CFE_PSP_AsyncMask, CFE_PSP_AttachSigHandler(), and OS_printf().

Here is the call graph for this function:
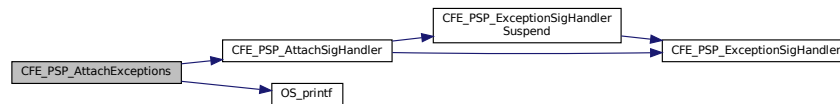
39.57.1.2 CFE_PSP_AttachSigHandler()

```
void CFE_PSP_AttachSigHandler (
            int signo )
```

Definition at line 154 of file cfe_psp_exception.c.

References CFE_PSP_AsyncMask, CFE_PSP_ExceptionSigHandler(), CFE_PSP_ExceptionSigHandlerSuspend(), and NULL.

Referenced by CFE_PSP_AttachExceptions(), and CFE_PSP_SetDefaultExceptionEnvironment().

Here is the call graph for this function:

39.57.1.3 CFE_PSP_ExceptionGetSummary_Impl()

```
int32 CFE_PSP_ExceptionGetSummary_Impl (
            const CFE_PSP_Exception_LogData_t * Buffer,
            char * ReasonBuf,
            uint32 ReasonSize )
```

Definition at line 286 of file cfe_psp_exception.c.

References CFE_PSP_SUCCESS.

39.57.1.4   CFE_PSP_ExceptionSigHandler()

```
void CFE_PSP_ExceptionSigHandler (
            int signo,
            siginfo_t * si,
            void * ctxt )
```

Definition at line 74 of file cfe_psp_exception.c.

References CFE_PSP_IdleTaskState, and NULL.

Referenced by CFE_PSP_AttachSigHandler(), and CFE_PSP_ExceptionSigHandlerSuspend().

39.57.1.5   CFE_PSP_ExceptionSigHandlerSuspend()

```
void CFE_PSP_ExceptionSigHandlerSuspend (
            int signo,
            siginfo_t * si,
            void * ctxt )
```

Definition at line 131 of file cfe_psp_exception.c.

References CFE_PSP_AsyncMask, and CFE_PSP_ExceptionSigHandler().

Referenced by CFE_PSP_AttachSigHandler().

Here is the call graph for this function:

39.57.1.6   CFE_PSP_SetDefaultExceptionEnvironment()

```
void CFE_PSP_SetDefaultExceptionEnvironment (
            void  )
```

Definition at line 270 of file cfe_psp_exception.c.

References CFE_PSP_AttachSigHandler().

Here is the call graph for this function:

39.57.2 Variable Documentation

39.57.2.1 CFE_PSP_AsyncMask

```
sigset_t CFE_PSP_AsyncMask
```

Definition at line 58 of file cfe_psp_exception.c.

Referenced by CFE_PSP_AttachExceptions(), CFE_PSP_AttachSigHandler(), and CFE_PSP_ExceptionSigHandler↩
Suspend().

39.58 psp/fsw/pc-linux/src/cfe_psp_memory.c File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <sys/types.h>
#include <unistd.h>
#include <string.h>
#include <sys/ipc.h>
#include <sys/shm.h>
#include <fcntl.h>
#include "common_types.h"
#include "osapi.h"
#include "cfe_psp.h"
#include "cfe_psp_config.h"
#include "cfe_psp_memory.h"
#include <target_config.h>
```

Data Structures

- struct CFE_PSP_LinuxReservedAreaFixedLayout_t

Macros

- #define CFE_PSP_CDS_KEY_FILE ".cdskeyfile"
- #define CFE_PSP_RESET_KEY_FILE ".resetkeyfile"
- #define CFE_PSP_RESERVED_KEY_FILE ".reservedkeyfile"
- #define CFE_PSP_CDS_SIZE (GLOBAL_CONFIGDATA.CfeConfig->CdsSize)
- #define CFE_PSP_RESET_AREA_SIZE (GLOBAL_CONFIGDATA.CfeConfig->ResetAreaSize)
- #define CFE_PSP_USER_RESERVED_SIZE (GLOBAL_CONFIGDATA.CfeConfig->UserReservedSize)

Functions

- void [CFE_PSP_InitCDS](void)
- void [CFE_PSP_InitResetArea](void)
- void [CFE_PSP_InitVolatileDiskMem](void)
- void [CFE_PSP_InitUserReservedArea](void)
- void [CFE_PSP_DeleteCDS](void)
- [int32](CFE_PSP_GetCDSSize) ([uint32](∗SizeOfCDS)
- [int32](CFE_PSP_WriteToCDS) (const void ∗PtrToDataToWrite, [uint32](CDSOffset, [uint32](NumBytes)
- [int32](CFE_PSP_ReadFromCDS) (void ∗PtrToDataToRead, [uint32](CDSOffset, [uint32](NumBytes)
- void [CFE_PSP_DeleteResetArea](void)
- [int32](CFE_PSP_GetResetArea) ([cpuaddr](∗PtrToResetArea, [uint32](∗SizeOfResetArea)
- void [CFE_PSP_DeleteUserReservedArea](void)
- [int32](CFE_PSP_GetUserReservedArea) ([cpuaddr](∗PtrToUserArea, [uint32](∗SizeOfUserArea)
- [int32](CFE_PSP_GetVolatileDiskMem) ([cpuaddr](∗PtrToVolDisk, [uint32](∗SizeOfVolDisk)
- void [CFE_PSP_SetupReservedMemoryMap](void)
- [int32](CFE_PSP_InitProcessorReservedMemory) ([uint32](RestartType)
- void [CFE_PSP_DeleteProcessorReservedMemory](void)
- [int32](CFE_PSP_GetKernelTextSegmentInfo) ([cpuaddr](∗PtrToKernelSegment, [uint32](∗SizeOfKernelSegment)
- [int32](CFE_PSP_GetCFETextSegmentInfo) ([cpuaddr](∗PtrToCFESegment, [uint32](∗SizeOfCFESegment)

Variables

- unsigned int _init
- unsigned int _fini
- int ResetAreaShmId
- int CDSShmId
- int UserShmId
- CFE_PSP_ReservedMemoryMap_t CFE_PSP_ReservedMemoryMap

39.58.1   Macro Definition Documentation

39.58.1.1   CFE_PSP_CDS_KEY_FILE

```
#define CFE_PSP_CDS_KEY_FILE ".cdskeyfile"
```

Definition at line 67 of file cfe_psp_memory.c.

Referenced by CFE_PSP_InitCDS(), and CFE_PSP_SetupReservedMemoryMap().

39.58.1.2 CFE_PSP_CDS_SIZE

```
#define CFE_PSP_CDS_SIZE (GLOBAL_CONFIGDATA.CfeConfig->CdsSize)
```

Definition at line 77 of file cfe_psp_memory.c.

Referenced by CFE_PSP_GetCDSSize(), CFE_PSP_InitCDS(), CFE_PSP_InitProcessorReservedMemory(), CFE_↩
PSP_ReadFromCDS(), and CFE_PSP_WriteToCDS().

39.58.1.3 CFE_PSP_RESERVED_KEY_FILE

```
#define CFE_PSP_RESERVED_KEY_FILE ".reservedkeyfile"
```

Definition at line 69 of file cfe_psp_memory.c.

Referenced by CFE_PSP_InitUserReservedArea(), and CFE_PSP_SetupReservedMemoryMap().

39.58.1.4 CFE_PSP_RESET_AREA_SIZE

```
#define CFE_PSP_RESET_AREA_SIZE (GLOBAL_CONFIGDATA.CfeConfig->ResetAreaSize)
```

Definition at line 78 of file cfe_psp_memory.c.

Referenced by CFE_PSP_InitProcessorReservedMemory(), and CFE_PSP_InitResetArea().

39.58.1.5 CFE_PSP_RESET_KEY_FILE

```
#define CFE_PSP_RESET_KEY_FILE ".resetkeyfile"
```

Definition at line 68 of file cfe_psp_memory.c.

Referenced by CFE_PSP_InitResetArea(), and CFE_PSP_SetupReservedMemoryMap().

39.58.1.6 CFE_PSP_USER_RESERVED_SIZE

```
#define CFE_PSP_USER_RESERVED_SIZE (GLOBAL_CONFIGDATA.CfeConfig->UserReservedSize)
```

Definition at line 79 of file cfe_psp_memory.c.

Referenced by CFE_PSP_InitProcessorReservedMemory(), and CFE_PSP_InitUserReservedArea().

39.58.2   Function Documentation

39.58.2.1   CFE_PSP_DeleteCDS()

```
void CFE_PSP_DeleteCDS (
            void  )
```

Definition at line 187 of file cfe_psp_memory.c.

References CDSShmId, and OS_printf().

Referenced by CFE_PSP_DeleteProcessorReservedMemory().

Here is the call graph for this function:

39.58.2.2   CFE_PSP_DeleteProcessorReservedMemory()

```
void CFE_PSP_DeleteProcessorReservedMemory (
            void  )
```

Definition at line 761 of file cfe_psp_memory.c.

References CFE_PSP_DeleteCDS(), CFE_PSP_DeleteResetArea(), and CFE_PSP_DeleteUserReservedArea().

Referenced by CFE_PSP_Restart().

Here is the call graph for this function:
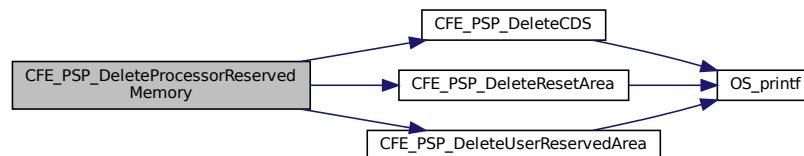
39.58.2.3 CFE_PSP_DeleteResetArea()

```
void CFE_PSP_DeleteResetArea (
            void  )
```

Definition at line 417 of file cfe_psp_memory.c.

References OS_printf(), and ResetAreaShmId.

Referenced by CFE_PSP_DeleteProcessorReservedMemory().

Here is the call graph for this function:

39.58.2.4 CFE_PSP_DeleteUserReservedArea()

```
void CFE_PSP_DeleteUserReservedArea (
            void  )
```

Definition at line 538 of file cfe_psp_memory.c.

References OS_printf(), and UserShmId.

Referenced by CFE_PSP_DeleteProcessorReservedMemory().

Here is the call graph for this function:

39.58.2.5   CFE_PSP_GetCDSSize()

```
int32 CFE_PSP_GetCDSSize (
            uint32 * SizeOfCDS )
```

Definition at line 221 of file cfe_psp_memory.c.

References CFE_PSP_CDS_SIZE, CFE_PSP_ERROR, CFE_PSP_SUCCESS, and NULL.

39.58.2.6   CFE_PSP_GetCFETextSegmentInfo()

```
int32 CFE_PSP_GetCFETextSegmentInfo (
            cpuaddr * PtrToCFESegment,
            uint32 * SizeOfCFESegment )
```

Definition at line 816 of file cfe_psp_memory.c.

References _fini, _init, CFE_PSP_ERROR, CFE_PSP_SUCCESS, and NULL.

39.58.2.7   CFE_PSP_GetKernelTextSegmentInfo()

```
int32 CFE_PSP_GetKernelTextSegmentInfo (
            cpuaddr * PtrToKernelSegment,
            uint32 * SizeOfKernelSegment )
```

Definition at line 788 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ERROR_NOT_IMPLEMENTED, and NULL.

39.58.2.8   CFE_PSP_GetResetArea()

```
int32 CFE_PSP_GetResetArea (
            cpuaddr * PtrToResetArea,
            uint32 * SizeOfResetArea )
```

Definition at line 454 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.58.2.9 CFE_PSP_GetUserReservedArea()

```
int32 CFE_PSP_GetUserReservedArea (
            cpuaddr * PtrToUserArea,
            uint32 * SizeOfUserArea )
```

Definition at line 570 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.58.2.10 CFE_PSP_GetVolatileDiskMem()

```
int32 CFE_PSP_GetVolatileDiskMem (
            cpuaddr * PtrToVolDisk,
            uint32 * SizeOfVolDisk )
```

Definition at line 629 of file cfe_psp_memory.c.

References CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.58.2.11 CFE_PSP_InitCDS()

```
void CFE_PSP_InitCDS (
            void  )
```

Definition at line 139 of file cfe_psp_memory.c.

References CDSShmId, CFE_PSP_CDS_KEY_FILE, CFE_PSP_CDS_SIZE, CFE_PSP_ReservedMemoryMap, and OS_printf().

Referenced by CFE_PSP_SetupReservedMemoryMap().

Here is the call graph for this function:

39.58.2.12   CFE_PSP_InitProcessorReservedMemory()

int32 CFE_PSP_InitProcessorReservedMemory (
            uint32 *RestartType*)

Definition at line 694 of file cfe_psp_memory.c.

References CFE_PSP_CDS_SIZE, CFE_PSP_ReservedMemoryMap, CFE_PSP_RESET_AREA_SIZE, CFE_PSP↩
_RST_TYPE_POWERON, CFE_PSP_RST_TYPE_PROCESSOR, CFE_PSP_SUCCESS, CFE_PSP_USER_RESE↩
RVED_SIZE, and OS_printf().

Referenced by OS_Application_Startup().

Here is the call graph for this function:

39.58.2.13   CFE_PSP_InitResetArea()

void CFE_PSP_InitResetArea (
            void)

Definition at line 344 of file cfe_psp_memory.c.

References CFE_PSP_LinuxReservedAreaFixedLayout_t::BootRecord, CFE_PSP_ReservedMemoryMap, CFE_P↩
SP_RESET_AREA_SIZE, CFE_PSP_RESET_KEY_FILE, CFE_PSP_LinuxReservedAreaFixedLayout_t::Exception↩
Storage, OS_printf(), and ResetAreaShmId.

Referenced by CFE_PSP_SetupReservedMemoryMap().

Here is the call graph for this function:

39.58.2.14 CFE_PSP_InitUserReservedArea()

```
void CFE_PSP_InitUserReservedArea (
            void  )
```

Definition at line 491 of file cfe_psp_memory.c.

References CFE_PSP_RESERVED_KEY_FILE, CFE_PSP_ReservedMemoryMap, CFE_PSP_USER_RESERVED↩
_SIZE, OS_printf(), and UserShmId.

Referenced by CFE_PSP_SetupReservedMemoryMap().

Here is the call graph for this function:

39.58.2.15 CFE_PSP_InitVolatileDiskMem()

```
void CFE_PSP_InitVolatileDiskMem (
            void  )
```

Definition at line 608 of file cfe_psp_memory.c.

Referenced by CFE_PSP_SetupReservedMemoryMap().

39.58.2.16 CFE_PSP_ReadFromCDS()

```
int32 CFE_PSP_ReadFromCDS (
            void * PtrToDataToRead,
            uint32 CDSOffset,
            uint32 NumBytes )
```

Definition at line 295 of file cfe_psp_memory.c.

References CFE_PSP_CDS_SIZE, CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS, and NULL.

39.58.2.17   CFE_PSP_SetupReservedMemoryMap()

```
void CFE_PSP_SetupReservedMemoryMap (
            void  )
```

Definition at line 666 of file cfe_psp_memory.c.

References CFE_PSP_CDS_KEY_FILE, CFE_PSP_InitCDS(), CFE_PSP_InitResetArea(), CFE_PSP_InitUser↩
ReservedArea(), CFE_PSP_InitVolatileDiskMem(), CFE_PSP_RESERVED_KEY_FILE, and CFE_PSP_RESET_KE↩
Y_FILE.

Referenced by OS_Application_Startup().

Here is the call graph for this function:
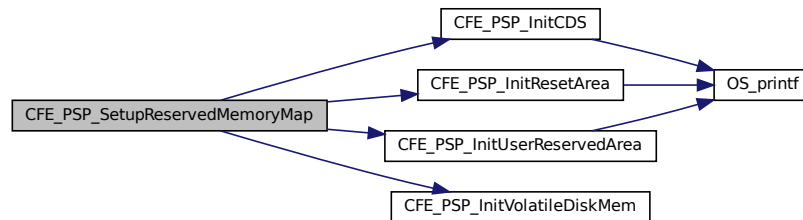
39.58.2.18   CFE_PSP_WriteToCDS()

```
int32 CFE_PSP_WriteToCDS (
            const void * PtrToDataToWrite,
            uint32 CDSOffset,
            uint32 NumBytes )
```

Definition at line 251 of file cfe_psp_memory.c.

References CFE_PSP_CDS_SIZE, CFE_PSP_ERROR, CFE_PSP_ReservedMemoryMap, CFE_PSP_SUCCESS,
and NULL.

39.58.3   Variable Documentation

39.58.3.1   _fini

```
unsigned int _fini
```

Referenced by CFE_PSP_GetCFETextSegmentInfo().

39.58.3.2 _init

```
unsigned int _init
```

Referenced by CFE_PSP_GetCFETextSegmentInfo().

39.58.3.3 CDSShmId

```
int CDSShmId
```

Definition at line 107 of file cfe_psp_memory.c.

Referenced by CFE_PSP_DeleteCDS(), and CFE_PSP_InitCDS().

39.58.3.4 CFE_PSP_ReservedMemoryMap

```
CFE_PSP_ReservedMemoryMap_t CFE_PSP_ReservedMemoryMap
```

Definition at line 114 of file cfe_psp_memory.c.

Referenced by CFE_PSP_GetResetArea(), CFE_PSP_GetUserReservedArea(), CFE_PSP_GetVolatileDiskMem(), CFE_PSP_InitCDS(), CFE_PSP_InitProcessorReservedMemory(), CFE_PSP_InitResetArea(), CFE_PSP_InitUser↩ ReservedArea(), CFE_PSP_ReadFromCDS(), CFE_PSP_Restart(), CFE_PSP_WriteToCDS(), and OS_Application↩ _Startup().

39.58.3.5 ResetAreaShmId

```
int ResetAreaShmId
```

Definition at line 106 of file cfe_psp_memory.c.

Referenced by CFE_PSP_DeleteResetArea(), and CFE_PSP_InitResetArea().

39.58.3.6 UserShmId

```
int UserShmId
```

Definition at line 108 of file cfe_psp_memory.c.

Referenced by CFE_PSP_DeleteUserReservedArea(), and CFE_PSP_InitUserReservedArea().

39.59   psp/fsw/pc-linux/src/cfe_psp_memtab.c File Reference

```
#include "common_types.h"
#include "osapi.h"
#include "cfe_psp.h"
#include "cfe_psp_config.h"
```

Variables

- CFE_PSP_MemTable_t CFE_PSP_MemoryTable [CFE_PSP_MEM_TABLE_SIZE]

39.59.1   Variable Documentation

39.59.1.1   CFE_PSP_MemoryTable

CFE_PSP_MemTable_t CFE_PSP_MemoryTable[CFE_PSP_MEM_TABLE_SIZE]

Initial value:

```
=
{
    { CFE_PSP_MEM_RAM, CFE_PSP_MEM_SIZE_DWORD, 0, 0xFFFFFFFF,
      CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
    { CFE_PSP_MEM_INVALID, 0, 0, 0, CFE_PSP_MEM_ATTR_READWRITE },
}
```

Extern reference to the psp memory table Allows the actual instantiation to be done outside this module

Definition at line 46 of file cfe_psp_memtab.c.

39.60   psp/fsw/pc-linux/src/cfe_psp_ssr.c File Reference

```
#include "common_types.h"
#include "osapi.h"
#include "cfe_psp.h"
#include "cfe_psp_config.h"
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
```

Functions

- int32 CFE_PSP_InitSSR (uint32 bus, uint32 device, char ∗DeviceName)

39.60.1 Function Documentation

39.60.1.1 CFE_PSP_InitSSR()

```
int32 CFE_PSP_InitSSR (
            uint32 bus,
            uint32 device,
            char * DeviceName )
```

Definition at line 66 of file cfe_psp_ssr.c.

References CFE_PSP_ERROR.

39.61 psp/fsw/pc-linux/src/cfe_psp_start.c File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/wait.h>
#include <sys/types.h>
#include <unistd.h>
#include <signal.h>
#include <sys/time.h>
#include <getopt.h>
#include <limits.h>
#include <pthread.h>
#include <sched.h>
#include <errno.h>
#include "common_types.h"
#include "osapi.h"
#include "cfe_psp.h"
#include "cfe_psp_memory.h"
#include <target_config.h>
#include "cfe_psp_module.h"
```

Data Structures

- struct CFE_PSP_CommandData_t

Macros

- #define CFE_PSP_MAIN_FUNCTION (∗GLOBAL_CONFIGDATA.CfeConfig->SystemMain)
- #define CFE_PSP_1HZ_FUNCTION (∗GLOBAL_CONFIGDATA.CfeConfig->System1HzISR)
- #define CFE_PSP_NONVOL_STARTUP_FILE (GLOBAL_CONFIGDATA.CfeConfig->NonvolStartupFile)
- #define CFE_PSP_CPU_ID (GLOBAL_CONFIGDATA.Default_CpuId)
- #define CFE_PSP_CPU_NAME (GLOBAL_CONFIGDATA.Default_CpuName)
- #define CFE_PSP_SPACECRAFT_ID (GLOBAL_CONFIGDATA.Default_SpacecraftId)
- #define CFE_PSP_CPU_NAME_LENGTH 32
- #define CFE_PSP_RESET_NAME_LENGTH 10

Functions

- void CFE_PSP_TimerHandler (int signum)
- void CFE_PSP_DisplayUsage (char ∗Name)
- void CFE_PSP_ProcessArgumentDefaults (CFE_PSP_CommandData_t ∗CommandDataDefault)
- void CFE_PSP_SetupLocal1Hz (void)
- void OS_Application_Startup (void)

    Application startup.

- void OS_Application_Run (void)

    Application run.

Variables

- uint32 TimerCounter
- CFE_PSP_CommandData_t CommandData
- uint32 CFE_PSP_SpacecraftId
- uint32 CFE_PSP_CpuId
- char CFE_PSP_CpuName [CFE_PSP_CPU_NAME_LENGTH]
- CFE_PSP_IdleTaskState_t CFE_PSP_IdleTaskState
- static const char ∗ optString = "R:S:C:I:N:h"
- static const struct option longOpts [ ]

39.61.1   Macro Definition Documentation

39.61.1.1   CFE_PSP_1HZ_FUNCTION

```
#define CFE_PSP_1HZ_FUNCTION (*GLOBAL_CONFIGDATA.CfeConfig->System1HzISR)
```

Definition at line 68 of file cfe_psp_start.c.

Referenced by CFE_PSP_TimerHandler().

39.61.1.2 CFE_PSP_CPU_ID

```
#define CFE_PSP_CPU_ID (GLOBAL_CONFIGDATA.Default_CpuId)
```

Definition at line 70 of file cfe_psp_start.c.

Referenced by CFE_PSP_DisplayUsage(), and CFE_PSP_ProcessArgumentDefaults().

39.61.1.3 CFE_PSP_CPU_NAME

```
#define CFE_PSP_CPU_NAME (GLOBAL_CONFIGDATA.Default_CpuName)
```

Definition at line 71 of file cfe_psp_start.c.

Referenced by CFE_PSP_DisplayUsage(), and CFE_PSP_ProcessArgumentDefaults().

39.61.1.4 CFE_PSP_CPU_NAME_LENGTH

```
#define CFE_PSP_CPU_NAME_LENGTH 32
```

Definition at line 78 of file cfe_psp_start.c.

Referenced by CFE_PSP_ProcessArgumentDefaults(), and OS_Application_Startup().

39.61.1.5 CFE_PSP_MAIN_FUNCTION

```
#define CFE_PSP_MAIN_FUNCTION (*GLOBAL_CONFIGDATA.CfeConfig->SystemMain)
```

Definition at line 67 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

39.61.1.6 CFE_PSP_NONVOL_STARTUP_FILE

```
#define CFE_PSP_NONVOL_STARTUP_FILE (GLOBAL_CONFIGDATA.CfeConfig->NonvolStartupFile)
```

Definition at line 69 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

39.61.1.7   CFE_PSP_RESET_NAME_LENGTH

`#define CFE_PSP_RESET_NAME_LENGTH 10`

Definition at line 79 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

39.61.1.8   CFE_PSP_SPACECRAFT_ID

`#define CFE_PSP_SPACECRAFT_ID (GLOBAL_CONFIGDATA.Default_SpacecraftId)`

Definition at line 72 of file cfe_psp_start.c.

Referenced by CFE_PSP_DisplayUsage(), and CFE_PSP_ProcessArgumentDefaults().

39.61.2   Function Documentation

39.61.2.1   CFE_PSP_DisplayUsage()

```
void CFE_PSP_DisplayUsage (
             char * Name )
```

Definition at line 510 of file cfe_psp_start.c.

References CFE_PSP_CPU_ID, CFE_PSP_CPU_NAME, and CFE_PSP_SPACECRAFT_ID.

Referenced by OS_Application_Startup().

39.61.2.2   CFE_PSP_ProcessArgumentDefaults()

```
void CFE_PSP_ProcessArgumentDefaults (
             CFE_PSP_CommandData_t * CommandDataDefault )
```

Definition at line 558 of file cfe_psp_start.c.

References CFE_PSP_CPU_ID, CFE_PSP_CPU_NAME, CFE_PSP_CPU_NAME_LENGTH, CFE_PSP_SPACECR↩
AFT_ID, CFE_PSP_CommandData_t::CpuId, CFE_PSP_CommandData_t::CpuName, CFE_PSP_CommandData_t↩
::GotCpuId, CFE_PSP_CommandData_t::GotCpuName, CFE_PSP_CommandData_t::GotSpacecraftId, CFE_PSP↩
_CommandData_t::GotSubType, CFE_PSP_CommandData_t::SpacecraftId, and CFE_PSP_CommandData_t::Sub↩
Type.

Referenced by OS_Application_Startup().

39.61.2.3   CFE_PSP_SetupLocal1Hz()

```
void CFE_PSP_SetupLocal1Hz (
            void  )
```

Definition at line 615 of file cfe_psp_start.c.

References CFE_PSP_TimerHandler(), NULL, OS_printf(), and TimerCounter.

Referenced by OS_Application_Startup().

Here is the call graph for this function:
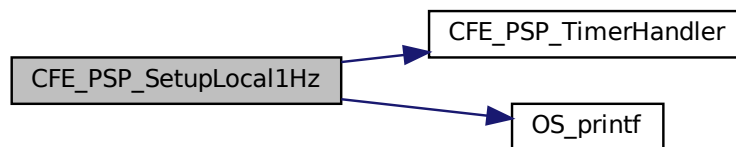
39.61.2.4   CFE_PSP_TimerHandler()

```
void CFE_PSP_TimerHandler (
            int signum )
```

Definition at line 487 of file cfe_psp_start.c.

References CFE_PSP_1HZ_FUNCTION, and TimerCounter.

Referenced by CFE_PSP_SetupLocal1Hz().

39.61.3   Variable Documentation

39.61.3.1   CFE_PSP_CpuId

uint32 CFE_PSP_CpuId

Definition at line 121 of file cfe_psp_start.c.

Referenced by CFE_PSP_GetProcessorId(), and OS_Application_Startup().

39.61.3.2   CFE_PSP_CpuName

char CFE_PSP_CpuName[CFE_PSP_CPU_NAME_LENGTH]

Definition at line 122 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

39.61.3.3   CFE_PSP_IdleTaskState

CFE_PSP_IdleTaskState_t CFE_PSP_IdleTaskState

Definition at line 124 of file cfe_psp_start.c.

Referenced by CFE_PSP_ExceptionSigHandler(), CFE_PSP_Restart(), OS_Application_Run(), and OS_Application←
_Startup().

39.61.3.4   CFE_PSP_SpacecraftId

uint32 CFE_PSP_SpacecraftId

Definition at line 120 of file cfe_psp_start.c.

Referenced by CFE_PSP_GetSpacecraftId(), and OS_Application_Startup().

39.61.3.5   CommandData

CFE_PSP_CommandData_t CommandData

Definition at line 119 of file cfe_psp_start.c.

39.61.3.6   longOpts

const struct option longOpts[] [static]

Initial value:

```
= {
    { "reset",     required_argument, NULL, 'R' },
    { "subtype",   required_argument, NULL, 'S' },
    { "cpuid",     required_argument, NULL, 'C' },
    { "scid",      required_argument, NULL, 'I'},
    { "cpuname",   required_argument, NULL, 'N'},
    { "help",      no_argument,       NULL, 'h' },
    { NULL,        no_argument,       NULL,  0 }
}
```

Definition at line 134 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

39.61.3.7 optString

```
const char* optString = "R:S:C:I:N:h"  [static]
```

Definition at line 129 of file cfe_psp_start.c.

Referenced by OS_Application_Startup().

39.61.3.8 TimerCounter

```
uint32 TimerCounter
```

Definition at line 118 of file cfe_psp_start.c.

Referenced by CFE_PSP_SetupLocal1Hz(), and CFE_PSP_TimerHandler().

39.62 psp/fsw/pc-linux/src/cfe_psp_support.c File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <sys/types.h>
#include <unistd.h>
#include "common_types.h"
#include "osapi.h"
#include "cfe_psp.h"
#include "cfe_psp_config.h"
#include "cfe_psp_memory.h"
```

Functions

- void CFE_PSP_Restart (uint32 reset_type)
- void CFE_PSP_Panic (int32 ErrorCode)
- void CFE_PSP_FlushCaches (uint32 type, void ∗address, uint32 size)
- uint32 CFE_PSP_GetProcessorId (void)
- uint32 CFE_PSP_GetSpacecraftId (void)

Variables

- uint32 CFE_PSP_SpacecraftId
- uint32 CFE_PSP_CpuId

39.62.1 Function Documentation

39.62.1.1 CFE_PSP_FlushCaches()

```
void CFE_PSP_FlushCaches (
            uint32 type,
            void * address,
            uint32 size )
```

Definition at line 156 of file cfe_psp_support.c.

39.62.1.2 CFE_PSP_GetProcessorId()

```
uint32 CFE_PSP_GetProcessorId (
            void  )
```

Definition at line 178 of file cfe_psp_support.c.

References CFE_PSP_CpuId.

39.62.1.3 CFE_PSP_GetSpacecraftId()

```
uint32 CFE_PSP_GetSpacecraftId (
            void  )
```

Definition at line 199 of file cfe_psp_support.c.

References CFE_PSP_SpacecraftId.

39.62.1.4 CFE_PSP_Panic()

```
void CFE_PSP_Panic (
            int32 ErrorCode )
```

Definition at line 135 of file cfe_psp_support.c.

References OS_printf().

Referenced by OS_Application_Startup().

Here is the call graph for this function:

39.62.1.5 CFE_PSP_Restart()

```
void CFE_PSP_Restart (
            uint32 reset_type )
```

Definition at line 70 of file cfe_psp_support.c.

References CFE_PSP_DeleteProcessorReservedMemory(), CFE_PSP_IdleTaskState, CFE_PSP_Reserved↩
MemoryMap, CFE_PSP_RST_TYPE_POWERON, OS_printf(), and OS_TaskDelay().

Here is the call graph for this function:
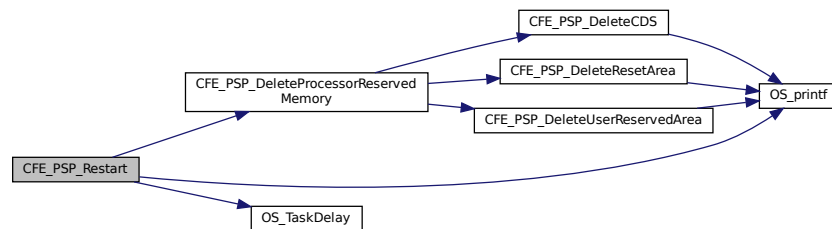
39.62.2 Variable Documentation

39.62.2.1 CFE_PSP_CpuId

uint32 CFE_PSP_CpuId

Definition at line 121 of file cfe_psp_start.c.

Referenced by CFE_PSP_GetProcessorId(), and OS_Application_Startup().

39.62.2.2 CFE_PSP_SpacecraftId

uint32 CFE_PSP_SpacecraftId

Definition at line 120 of file cfe_psp_start.c.

Referenced by CFE_PSP_GetSpacecraftId(), and OS_Application_Startup().

39.63   psp/fsw/pc-linux/src/cfe_psp_timer.c File Reference

```
#include "common_types.h"
#include "osapi.h"
#include <stdio.h>
#include <stdlib.h>
#include "cfe_psp.h"
```

Macros

- #define CFE_PSP_TIMER_TICKS_PER_SECOND
- #define CFE_PSP_TIMER_LOW32_ROLLOVER

Functions

- void CFE_PSP_GetTime (OS_time_t ∗LocalTime)
- uint32 CFE_PSP_Get_Timer_Tick (void)
- uint32 CFE_PSP_GetTimerTicksPerSecond (void)
- uint32 CFE_PSP_GetTimerLow32Rollover (void)
- void CFE_PSP_Get_Timebase (uint32 ∗Tbu, uint32 ∗Tbl)
- uint32 CFE_PSP_Get_Dec (void)

39.63.1   Macro Definition Documentation

39.63.1.1   CFE_PSP_TIMER_LOW32_ROLLOVER

```
#define CFE_PSP_TIMER_LOW32_ROLLOVER
```

Value:

```
1000000     /* The number that the least significant 32 bits of the 64 bit
                                                        time stamp returned by OS_BSPGet_Timebase rolls
        over.  If the lower 32
                                                        bits rolls at 1 second, then the
        OS_BSP_TIMER_LOW32_ROLLOVER will be 1000000.
                                                        if the lower 32 bits rolls at its maximum value
        (2^32) then
                                                        OS_BSP_TIMER_LOW32_ROLLOVER will be 0. */
```

Definition at line 63 of file cfe_psp_timer.c.

Referenced by CFE_PSP_GetTimerLow32Rollover().

39.63.1.2 CFE_PSP_TIMER_TICKS_PER_SECOND

```
#define CFE_PSP_TIMER_TICKS_PER_SECOND
```

Value:

```
1000000      /* Resolution of the least significant 32 bits of the 64 bit
                                                    time stamp returned by OS_BSPGet_Timebase in
        timer ticks per second.
                                                    The timer resolution for accuracy should not be
        any slower than 1000000
                                                    ticks per second or 1 us per tick */
```

Definition at line 59 of file cfe_psp_timer.c.

Referenced by CFE_PSP_GetTimerTicksPerSecond().

39.63.2 Function Documentation

39.63.2.1 CFE_PSP_Get_Dec()

```
uint32 CFE_PSP_Get_Dec (
            void  )
```

Definition at line 185 of file cfe_psp_timer.c.

39.63.2.2 CFE_PSP_Get_Timebase()

```
void CFE_PSP_Get_Timebase (
            uint32 * Tbu,
            uint32 * Tbl )
```

Definition at line 162 of file cfe_psp_timer.c.

References OS_time_t::microsecs, OS_GetLocalTime(), and OS_time_t::seconds.

Here is the call graph for this function:

39.63.2.3   CFE_PSP_Get_Timer_Tick()

uint32 CFE_PSP_Get_Timer_Tick (
           void)

Definition at line 102 of file cfe_psp_timer.c.

39.63.2.4   CFE_PSP_GetTime()

void CFE_PSP_GetTime (
           OS_time_t * *LocalTime*)

Definition at line 77 of file cfe_psp_timer.c.

References OS_GetLocalTime().

Here is the call graph for this function:

39.63.2.5   CFE_PSP_GetTimerLow32Rollover()

uint32 CFE_PSP_GetTimerLow32Rollover (
           void)

Definition at line 144 of file cfe_psp_timer.c.

References CFE_PSP_TIMER_LOW32_ROLLOVER.

39.63.2.6   CFE_PSP_GetTimerTicksPerSecond()

uint32 CFE_PSP_GetTimerTicksPerSecond (
           void)

Definition at line 123 of file cfe_psp_timer.c.

References CFE_PSP_TIMER_TICKS_PER_SECOND.

39.64 psp/fsw/pc-linux/src/cfe_psp_watchdog.c File Reference

```
#include "common_types.h"
#include "osapi.h"
#include <stdio.h>
#include <stdlib.h>
#include "cfe_psp.h"
#include "cfe_psp_config.h"
```

Functions

- void CFE_PSP_WatchdogInit (void)
- void CFE_PSP_WatchdogEnable (void)
- void CFE_PSP_WatchdogDisable (void)
- void CFE_PSP_WatchdogService (void)
- uint32 CFE_PSP_WatchdogGet (void)
- void CFE_PSP_WatchdogSet (uint32 WatchdogValue)

Variables

- uint32 CFE_PSP_WatchdogValue = CFE_PSP_WATCHDOG_MAX

39.64.1 Function Documentation

39.64.1.1 CFE_PSP_WatchdogDisable()

```
void CFE_PSP_WatchdogDisable (
            void )
```

Definition at line 114 of file cfe_psp_watchdog.c.

39.64.1.2 CFE_PSP_WatchdogEnable()

```
void CFE_PSP_WatchdogEnable (
            void )
```

Definition at line 98 of file cfe_psp_watchdog.c.

39.64.1.3   CFE_PSP_WatchdogGet()

uint32 CFE_PSP_WatchdogGet (
            void)

Definition at line 156 of file cfe_psp_watchdog.c.

References CFE_PSP_WatchdogValue.

39.64.1.4   CFE_PSP_WatchdogInit()

void CFE_PSP_WatchdogInit (
            void)

Definition at line 75 of file cfe_psp_watchdog.c.

References CFE_PSP_WatchdogValue.

39.64.1.5   CFE_PSP_WatchdogService()

void CFE_PSP_WatchdogService (
            void)

Definition at line 135 of file cfe_psp_watchdog.c.

39.64.1.6   CFE_PSP_WatchdogSet()

void CFE_PSP_WatchdogSet (
            uint32 *WatchdogValue*)

Definition at line 177 of file cfe_psp_watchdog.c.

References CFE_PSP_WatchdogValue.

39.64.2   Variable Documentation

39.64.2.1   CFE_PSP_WatchdogValue

uint32 CFE_PSP_WatchdogValue = CFE_PSP_WATCHDOG_MAX

Definition at line 64 of file cfe_psp_watchdog.c.

Referenced by CFE_PSP_WatchdogGet(), CFE_PSP_WatchdogInit(), and CFE_PSP_WatchdogSet().

Index