尖头塔式起重机

Topkit Tower Crane

Q900-50T

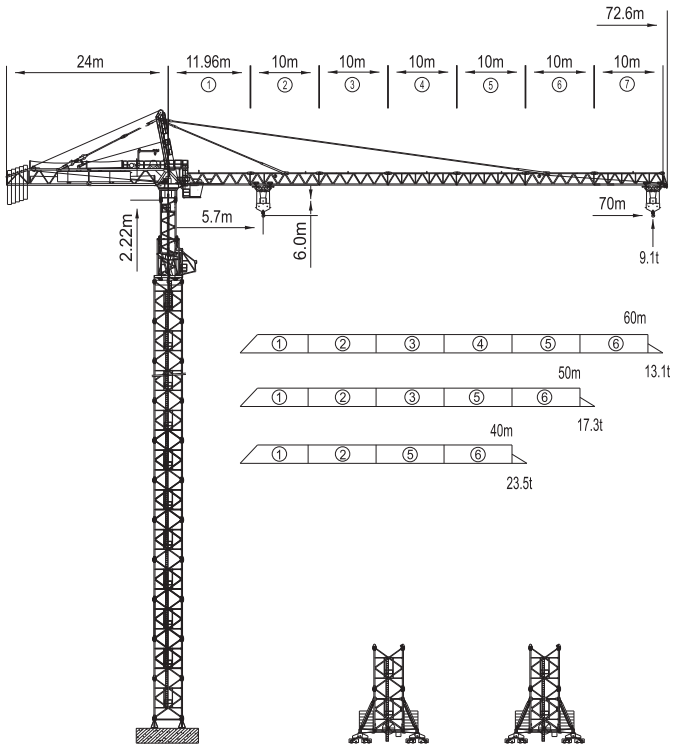

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts (4x4x5.78m)

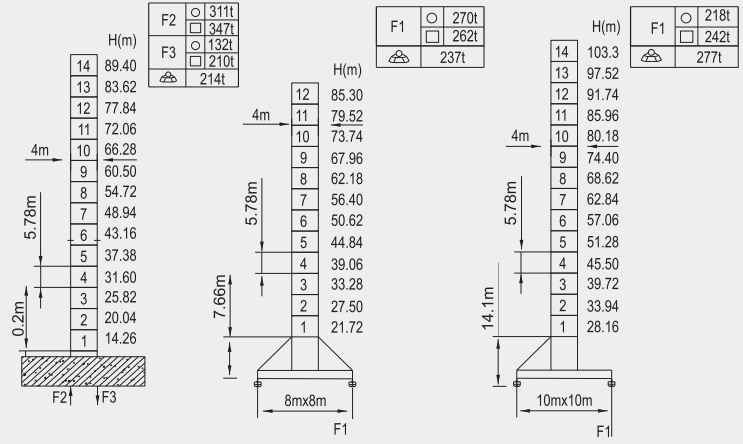

○ 工作状态	○ In service
□ 非工作状态	□ Out of service
空载、无配重	Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

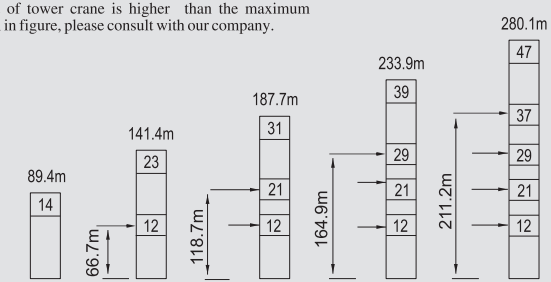

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~19.9	25	28.9	29.3	35	40	45	50	55	60	65	70
70m	VI	起重量 Load(t)	50	38	32	31.5	25.1	21.2	17.9	15.3	13.2	11.4	9.9	8.6
	IV		32				25.6	21.7	18.4	15.8	13.7	11.9	10.4	9.1

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~21.1	25	30.7	31.2	35	40	45	50	55	60
60m	VI	起重量 Load(t)	50	40.9	32	31.5	26.2	23	19.5	16.8	14.5	12.6
	IV		32				26.7	23.5	20	17.3	15	13.1

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~21.1	25	30.7	31.2	35	40	45	50
50m	VI	起重量 Load(t)	50	40.9	32	31.5	26.2	23	19.5	16.8
	IV		32				26.7	23.5	20	17.3

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.7~21.1	25	30.7	31.2	35	40
40m	VI	起重量 Load(t)	50	40.9	32	31.5	26.2	23
	IV		32				26.7	23.5

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 CounterJib Length(m)	平衡重/Counter-Weight			
		CA	CB	CC	合计/Tatal kg
		11400kg	10500kg	8000kg	
70	24	5			57000
60	24	4		1	53600
50	24	3		1	42200
40	24	1	2		32400



机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m/min	t	m	功率/Power
起升 Hoisting	180LVF85	0-12	50	0-18	32	0-36	16	700	132Kw
		0-18	33	0-27	21.2	0-54	10.6	>700 **	
		0-24	25	0-36	16	0-72	8	变频调速 Ferquency control	
变幅 Trolleying	33DVF26	0-45-65/min				变频调速 Ferquency control			24Kw
回转 Slewing	50RVF	0-0.55r/min				变频调速 Ferquency control			2X18.5Kw
行走 Traveling	56TVF	0-34m/min				变频调速 Ferquency control			8X3.4Kw
电网 Mains supply	CE138 ICE38	380V(±5%)/50Hz 440V(±5%)/60Hz							
电力功容量 Necessary electric power		270KVA							

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂根部节 Counter-jib1		14.54	4.42	7.12	11034	1
2	平衡臂端部节 Counter-jib2		12.1	3.2	3.54	7721	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
3	起升机构 Hoist Mechanism		3.53	2.36	1.76	7072	1
4	司机室平台 Cabin Platform		4.4	1.74	1.92	721	1
5	根部节 Jib-Section1		10.68	2.24	2.51	4665	1
6	起重臂第二节 Jib-Section2		10.4	1.9	1.91	4341	1
7	起重臂第三节 Jib-Section3		10.4	1.9	1.91	3815	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
8	起重臂第四节 Jib-Section4		10.4	1.9	1.91	3675	1
9	起重臂第五节 Jib-Section5		10.4	1.9	1.91	3669	1
10	起重臂第六节 Jib-Section6		10.34	1.9	1.87	2715	1
11	起重臂第七节 Jib-Section7		10.27	1.9	1.76	1729	1
12	起重臂端部节 Jib-Nose		0.8	2.24	2.36	295	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
13	塔头 Towerhead		2.12	1.53	8.84	3086	1
14	回转支承 Slewing Table		3.87	4.43	3.92	18945	1
15	内塔身 Inner Mast		12.1	2.59	2.59	11218	1
16	滑动底座 Slide Chassis		4.83	4.83	4.0	13275	1
17	附着框 Anchorage Frame		5.65	5.65	0.56	4128	n

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
18	底盘基础节 1 10mX10m Basic Mast1 10mX10m		4.65	4.65	6.0	10900	1
19	套架 Telescoping Cage		4.91	4.4	6.63	13693	1
20	标准节 R96 Mast R96		4.47	4.47	6.05	4035	1
21	标准节 R97 Mast R97		4.47	4.47	6.05	6036	1
22	标准节 R98 Mast R98		4.47	4.47	6.05	6884	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
23	底盘斜撑 8mX8m Strut 8mX8m		4.64	0.32	0.44	928	1
24	底盘半片底座 8mX8m Half-bearer 8mX8m		8.7	2.5	0.95	4186	1
25	底盘基础节2 10mX10m Basic Mast2 10mX10m		4.64	4.64	6.05	11270	1
26	固定支脚 Fixing Angles		1.0	1.0	1.57	981	1
27	底盘基础节 8mX8m Basic Mast 8mX8m		4.65	4.65	6.0	12239	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
28	底盘斜撑 10mX10m Strut 10mX10m		7.64	0.42	0.4	2130	1
29	底盘半片底座 10mX10m Half-bearer 10mX10m		10.7	3.64	1.2	6528	1
30	后小车（50t） Rear Trolley （50t）		3.09	2.52	1.3	2769	1
31	前小车（50t） Front Trolley （50t）		1.72	2.56	1.31	950	1
32	吊钩（50t） Hook（50t）		3.3	0.462	3.66	3367	1