

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING										FORM 8	
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										1. WELL NAME Brutus Buckeye 26-11-8-16-2H	
2. TYPE OF WELL Oil Well			3. TYPE OF WORK DRILL NEW ☒ REENTER P&A ☐ DEEPEN ☐ RECOMP ☐							4. API NUMBER 4301354614	
5. NAME OF OPERATOR Scout Energy Management, LLC					6. OPERATOR PHONE 972-325-1027			7. FIELD NAME MONUMENT BUTTE			
8. ADDRESS OF OPERATOR 13800 Montfort Drive, Suite 100, Dallas, TX, 75240					9. OPERATOR E-MAIL tbrown@scoutep.com			10. UNIT NAME Greater Monument Butte			
11. MINERAL LEASE NUMBER MULTIPLE LEASES			12. MINERAL OWNERSHIP FEDERAL,STATE			13. SURFACE OWNERSHIP FEDERAL			14. COUNTY DUCHESNE		
15. DATE SPUDED (SPUD RIG) 01/05/2024		16. DATE SPUDED (ROTARY RIG) 01/21/2024		17. DATE TOTAL DEPTH REACHED 02/02/2024		18. DATE COMPLETED/ABANDONED 07/26/2024			19. DATE OF FIRST PROD. / INJ. PROD:08/01/2024 INJ:		
20. DEPTH REFERENCE GROUND LEVEL ☒ KELLY BUSHING ☐ DERRICK FLOOR ☐					21. DEPTH REFERENCE ELEVATION 5514 (US Feet)			22. GRADED GROUND LEVEL ELEVATION 5514 (US Feet)			
23. WELLBORE DEVIATION PROFILE VERTICAL ☐ DIRECTIONAL ☐ HORIZONTAL ☒					24. TOTAL DEPTH MD 20033 TVD 6012			25. PLUGGED BACK TOTAL DEPTH MD TVD			
26. CURRENT WELL STATUS Producing											

27. LOCATION OF WELL									
WELL POSITION	FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN	UTM EASTING	UTM NORTHING
Surface	1882 FSL	1405 FEL	NWSE	26	8.0 S	16.0 E	S	578242	4437797
Producing Interval Top	201 FSL	407 FWL	SWSW	25	8.0 S	16.0 E	S		
Producing Interval Bottom	1243 FNL	2084 FEL	NWNE	11	8.0 S	16.0 E	S		
Total Depth	1354 FNL	2081 FEL	NWNE	11	8.0 S	16.0 E	S		

28. HOLE, CASING AND CEMENT INFORMATION																
STRING	HOLE SIZE	CASING O.D.	WEIGHT	GRADE	THREAD	TOP (MD)	BOTTOM (MD)	DV TOOL DEPTH	LEAD TAIL	CEMENT TYPE	SACKS	YIELD	WEIGHT	CEMENT TOP	BASIS FOR TOP	
COND	24.0	16.0	65.0			0	108				100	1.17	15.8	0	Circulate	
SURF	12.25	9.625	36.0	J-55	BTC	0	1531		L	Class G Cement	330	1.77	13.1	0	Circulate	
									T	Class G Cement	250	1.16	15.8			
PROD	8.75	5.5	20.0	P-110	BTC	0	6319		L	Class G Cement	650	2.92	11.5	0	Circulate	
P2	7.875	5.5	20.0	P-110	BTC	6319	20018		T	Class G Cement	2390	1.43	14.0			

29. TUBING RECORD			
TUBING SIZE	TOP (MD)	BOT (MD)	PACKER DEPTH
2.725	0	6478	6458

30. RETRIEVABLE / TEMPORARY PLUGS		
PLUG	DEPTH (MD)	TYPE

31. PERMANENT / ABANDONMENT PLUGS		
PLUG	TOP (MD)	BOTTOM (MD)

32. FORMATION DETAILS and STRATIGRAPHIC MARKERS				
FR	FORMATION NAME	TOP (MD)	TOP (TVD)	DESCRIPTION, CONTENTS, ETC.
1	UTELAND BUTTE	7290	7290	Shale
	OIL SHOW? ☐ GAS SHOW? ☐ WATER FLOW? ☐ DRILL STEM TESTED? ☐ CORED? ☐ COMPLETED OR TESTED? ☒ COMMINGLED? ☐			

33. COMPLETED and TESTED INTERVALS (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)						
FR	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	STIMULATION TREATMENT	INTERVAL STATUS
1	7290	19991			Fracture Stimulated	PRODUCING


34A. PRODUCTION INFORMATION (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)									
FR	TOP (MD)	BOTTOM (MD)	DATE FIRST PROD.	TEST DATE	HRS. TESTED	TBG. PRESSURE	CSG. PRESSURE	PROD. METHOD	
1	7290	19991	08/01/2024	08/13/2024	6	721		Flowing	
	TEST PRODUCTION VOLUMES			24-HOUR PRODUCTION RATES			GAS-OIL RATIO	OIL API	GAS BTU
	OIL (BBL)	GAS (MSCF)	WATER (BBL)	OIL (BBL)	GAS (MSCF)	WATER (BBL)	428	38.7	0.8360
	159	68	387	636	272	1548			

35. WELL TREATMENTS (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)						
FR	TREATMENT TYPE	TOP (MD)	BOTTOM (MD)	START DATE	END DATE	AMOUNT AND TYPE OF MATERIAL
1		7290	19991	06/11/2024	07/09/2024	731173 bbl slickwater 31886125 lbs local sand 53 stages

36. LOGS, SURVEYS, AND REPORTS (PDF file of each and LAS file of logs if available are to be submitted.)						
REPORTS AND OTHER INFORMATION.						
Dx Survey 	DST Report 	Core Analysis 	DOGM Form 7 	Geologic Report 	Wellbore Diagram 	Other 
SUBMITTED PDF LOGS			SUBMITTED LAS LOGS			
CEMENT BOND			CEMENT BOND			


OGM Official Use Only

37. I hereby certify that the foregoing and attached information is complete as determined from all available records.		
NAME Don Hamilton	TITLE Permitting Agent	DATE 09/30/2024
SIGNATURE N/A	PHONE 4356503866	EMAIL starpoint@etv.net

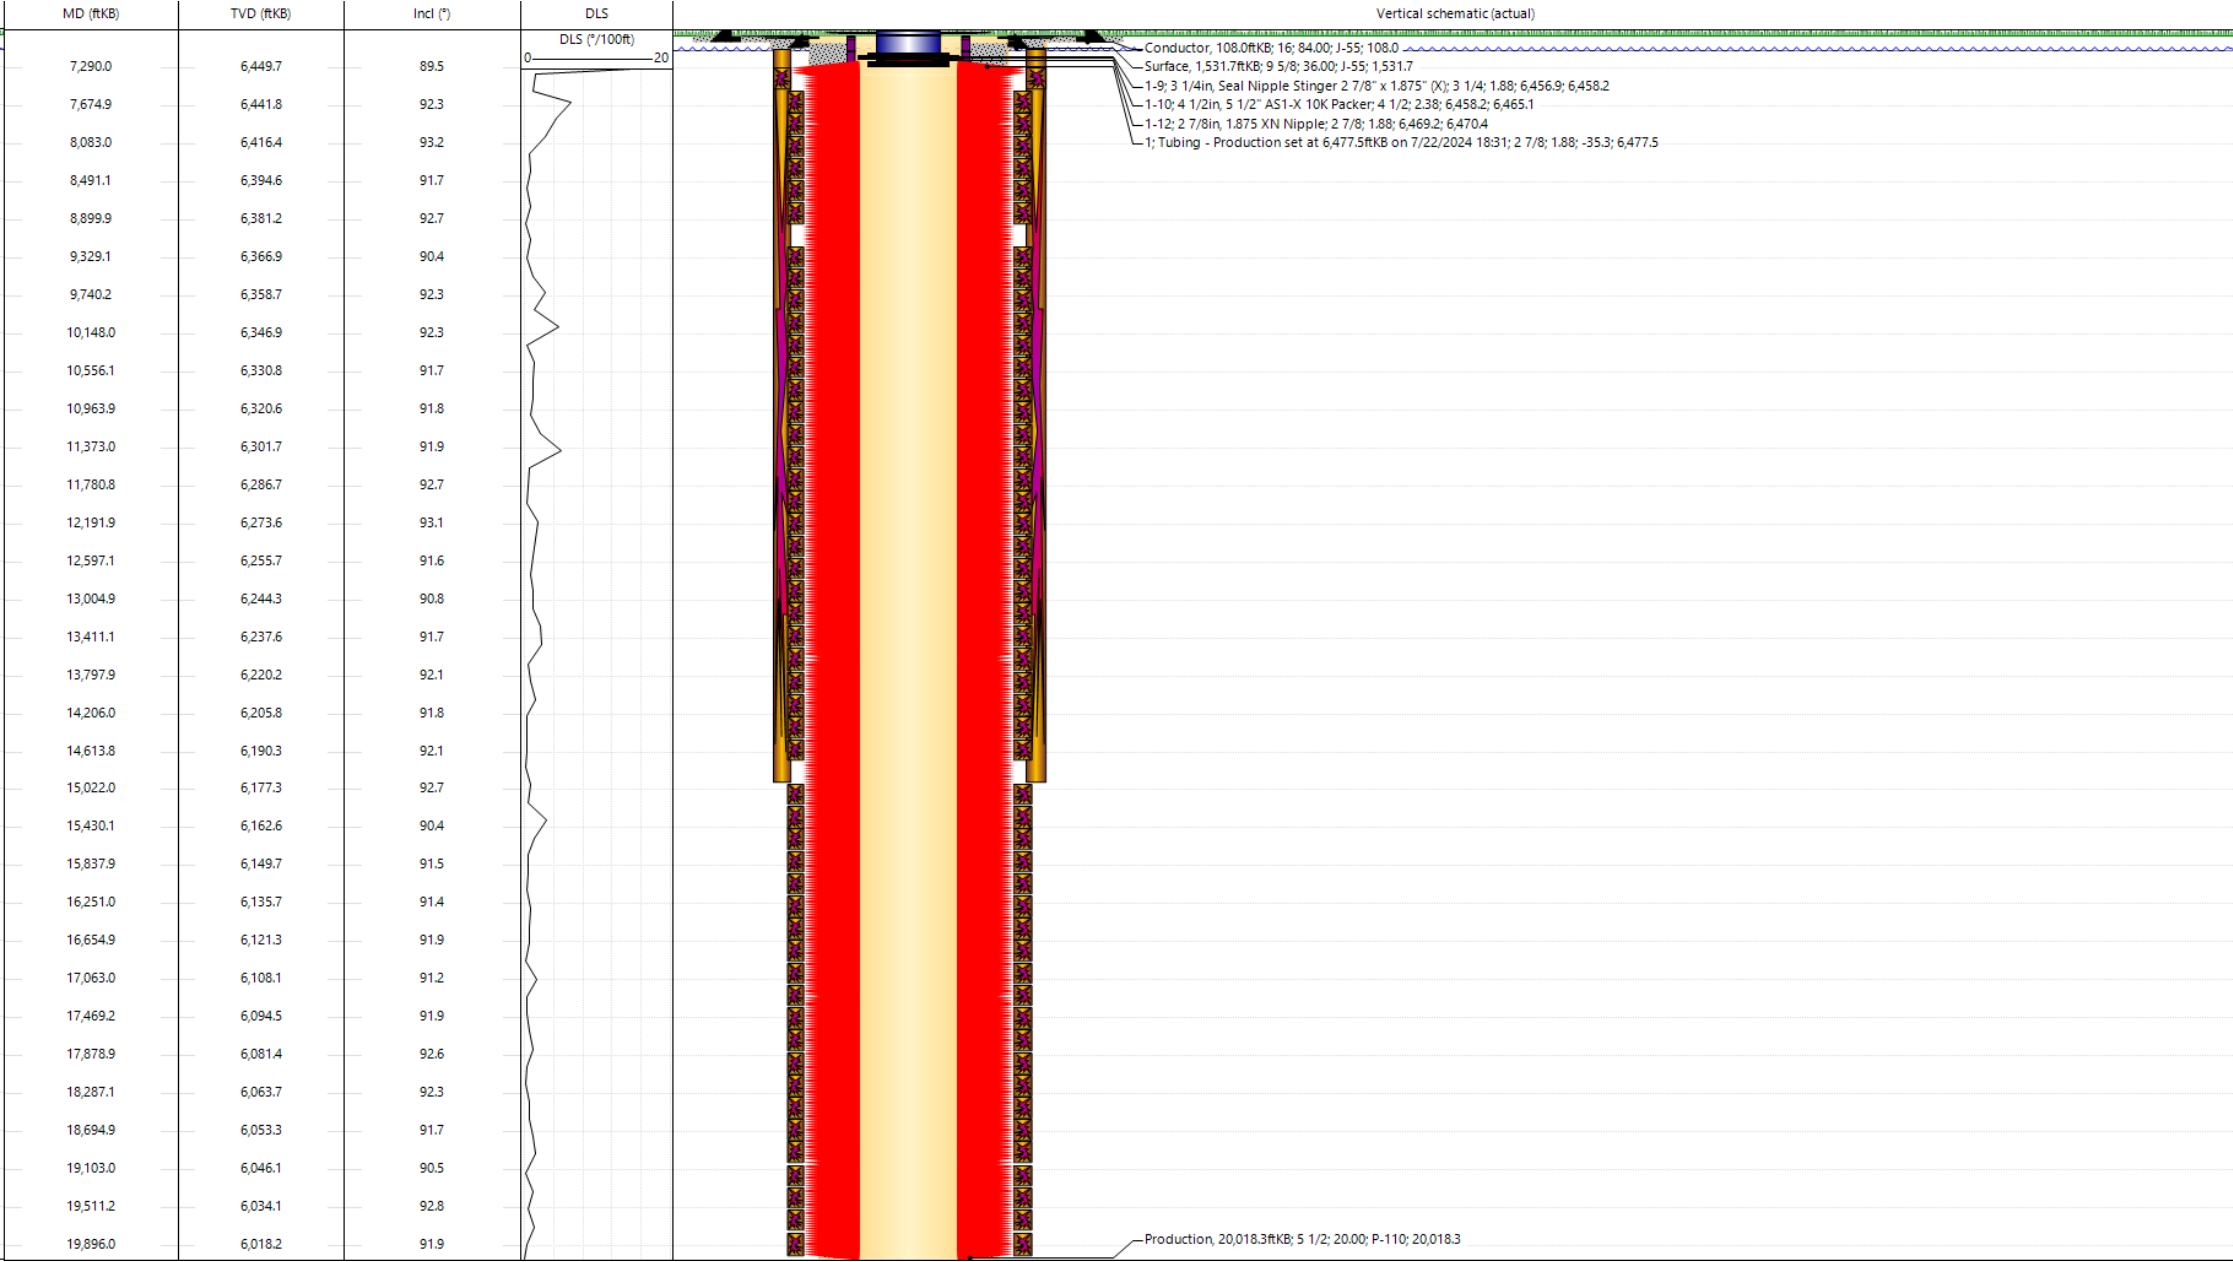

WELL LOCATION,
BRUTUS BUCKEYE 26-11-8-16-2H,
LOCATED AS SHOWN IN THE NW 1/4
SE 1/4 OF SECTION 26, T8S, R16E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

TARGET BOTTOM HOLE,
BRUTUS BUCKEYE 26-11-8-16-2H,
LOCATED AS SHOWN IN NE 1/4
NW 1/4 OF SECTION 11, T9S, R16E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

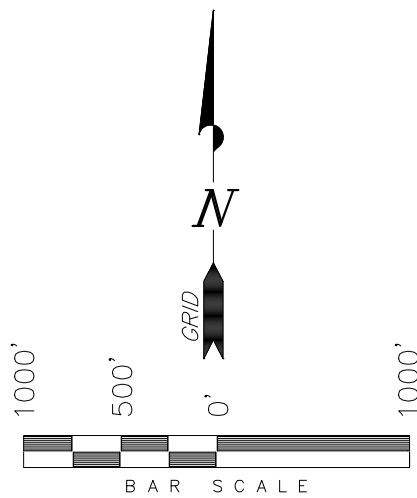

- NOTES:
- Well footages are measured at right angles to the Section Lines.
 - Bearings are based on Global Positioning Satellite Observations referencing Utah Central State Plane Grid North.

WELL LOCATION:
BRUTUS BUCKEYE 26-11-8-16-2H
ELEV. UNGRADED GROUND = 5514.8'

T8S, R16E, S.L.B.&M.

**T9S, R16E,
S.L.B.&M.**

SURFACE LOCATION	
NAD 83 (SURFACE LOCATION)	
LATITUDE =	40°05'12.56" (40.086823)
LONGITUDE =	110°04'56.03" (110.082231)
NAD 27 (SURFACE LOCATION)	
LATITUDE =	40°05'12.70" (40.086861)
LONGITUDE =	110°04'53.49" (110.081525)
UTM NAD 83 ZONE N12 METERS	
N: =	4437797.335
E: =	578241.756


KICK OFF POINT	
NAD 83 (KICK OFF POINT)	
LATITUDE =	40°05'04.78" (40.084660)
LONGITUDE =	110°04'36.35" (110.076763)
NAD 27 (KICK OFF POINT)	
LATITUDE =	40°05'04.91" (40.084698)
LONGITUDE =	110°04'33.80" (110.076057)
UTM NAD 83 ZONE N12 METERS	
N: =	4437562.063
E: =	578710.433

FIRST TAKE POINT	
NAD 83 (FIRST TAKE POINT)	
LATITUDE =	40°04'57.89" (40.082747)
LONGITUDE =	110°04'35.37" (110.076493)
NAD 27 (FIRST TAKE POINT)	
LATITUDE =	40°04'58.03" (40.082785)
LONGITUDE =	110°04'32.83" (110.075787)
UTM NAD 83 ZONE N12 METERS	
N: =	4437350.006
E: =	578735.636

LAST TAKE POINT	
NAD 83 (LAST TAKE POINT)	
LATITUDE =	40°02'57.18" (40.049215)
LONGITUDE =	110°05'18.83" (110.088563)
NAD 27 (LAST TAKE POINT)	
LATITUDE =	40°02'57.31" (40.049253)
LONGITUDE =	110°05'16.28" (110.087857)
UTM NAD 83 ZONE N12 METERS	
N: =	4433617.569
E: =	577744.693

BOTTOM OF HOLE	
NAD 83 (BOTTOM OF HOLE)	
LATITUDE =	40°02'57.06" (40.049184)
LONGITUDE =	110°05'18.87" (110.088574)
NAD 27 (BOTTOM OF HOLE)	
LATITUDE =	40°02'57.20" (40.049221)
LONGITUDE =	110°05'16.32" (110.087868)
UTM NAD 83 ZONE N12 METERS	
N: =	4433614.035
E: =	577743.768

THIS IS TO CERTIFY THAT THE ABOVE MAP WAS
PREPARED FROM FIELD SURVEYS AND SURVEYS
MADE BY ME OR UNDER MY SUPERVISION, THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST
OF MY KNOWLEDGE AND BELIEF.
10003 R 08-28-2024
STACY W.
REGISTERED LAND SURVEYOR
STATE OF UTAH

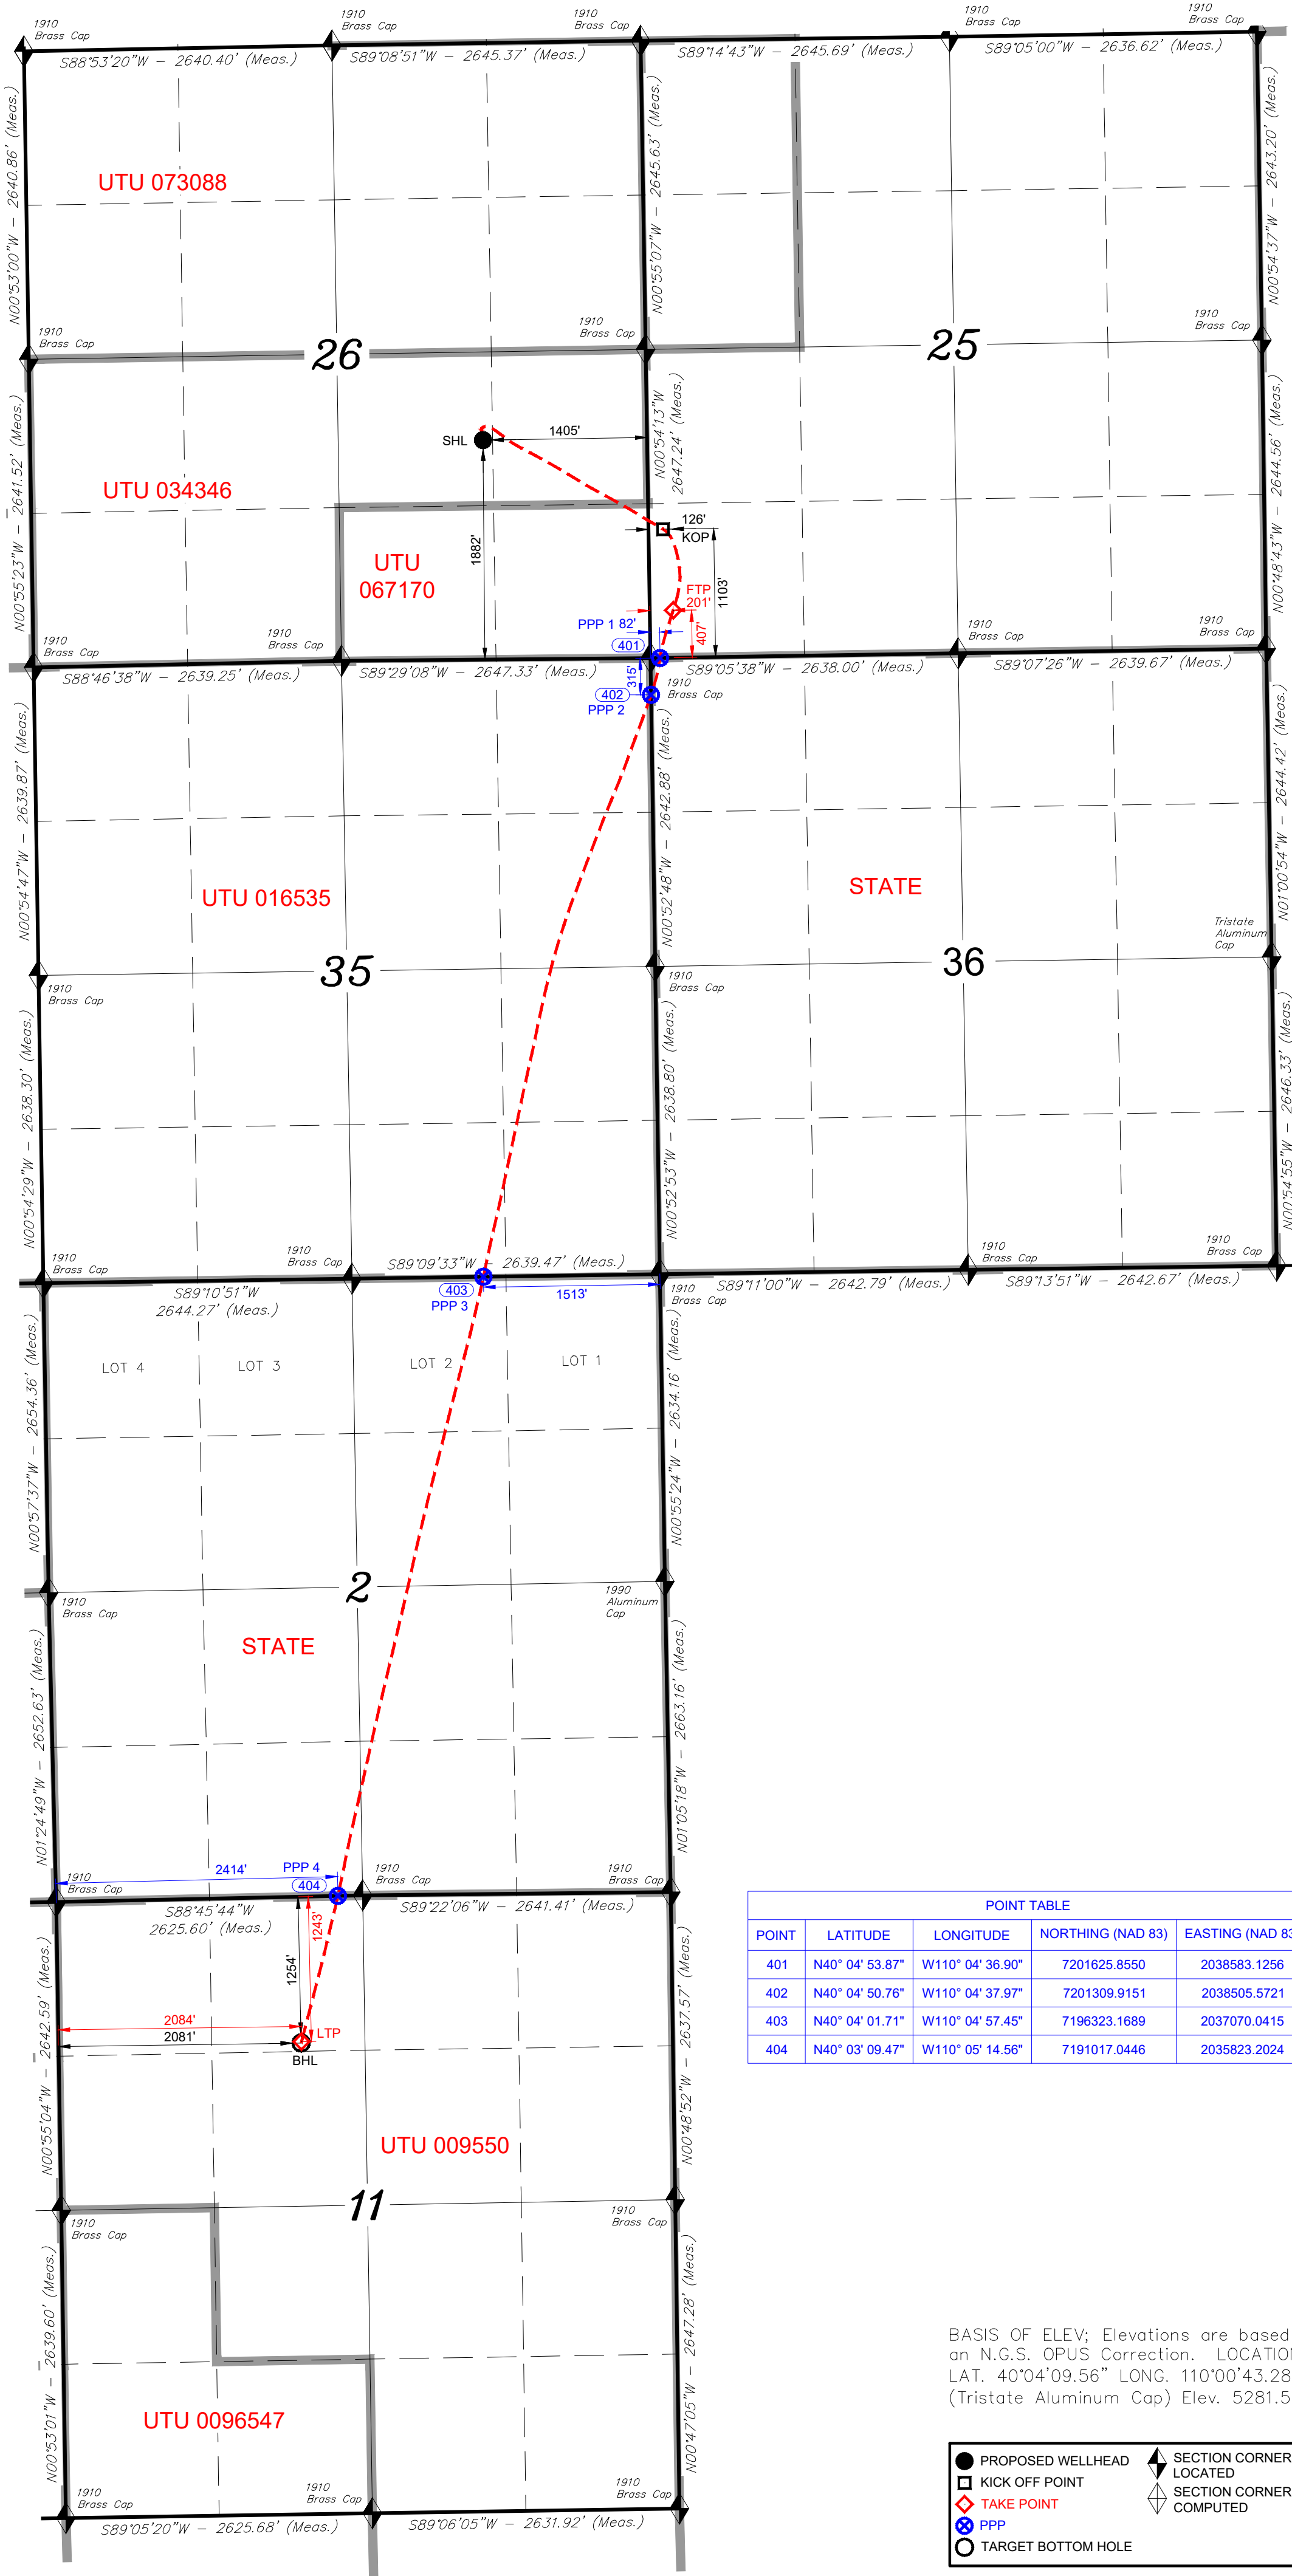

POINT TABLE				
POINT	LATITUDE	LONGITUDE	NORTHING (NAD 83)	EASTING (NAD 83)
401	N40° 04' 53.87"	W110° 04' 36.90"	7201625.8550	2038583.1256
402	N40° 04' 50.76"	W110° 04' 37.97"	7201309.9151	2038505.5721
403	N40° 04' 01.71"	W110° 04' 57.45"	7196323.1689	2037070.0415
404	N40° 03' 09.47"	W110° 05' 14.56"	7191017.0446	2035823.2024

BASIS OF ELEV; Elevations are based on
an N.G.S. OPUS Correction. LOCATION:
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'

- PROPOSED WELLHEAD
◻ KICK OFF POINT
◻ TAKE POINT
● PPP
○ TARGET BOTTOM HOLE
- ◆ SECTION CORNERS
LOCATED
◆ SECTION CORNERS
COMPUTED

SURVEYED BY: S.H.
DRAWN BY: F.T.M.
DATE: 08-23-23
SCALE: 1" = 1000'
REVISED:

