

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING								FORM 8	
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL NAME Brutus Buckeye 25-13-8-16-1H	
2. TYPE OF WELL Oil Well		3. TYPE OF WORK DRILL NEW ☒ REENTER P&A ☐ DEEPEN ☐ RECOMP ☐						4. API NUMBER 4301354611	
5. NAME OF OPERATOR Scout Energy Management, LLC				6. OPERATOR PHONE 972-325-1027				7. FIELD NAME MONUMENT BUTTE	
8. ADDRESS OF OPERATOR 13800 Montfort Drive, Suite 100, Dallas, TX, 75240				9. OPERATOR E-MAIL tbrown@scoutep.com				10. UNIT NAME Greater Monument Butte	
11. MINERAL LEASE NUMBER MULTIPLE LEASES		12. MINERAL OWNERSHIP FEDERAL,FEE		13. SURFACE OWNERSHIP FEDERAL		14. COUNTY DUCHESNE			
15. DATE SPUDDED (SPUD RIG) 01/05/2024		16. DATE SPUDDED (ROTARY RIG) 01/20/2024		17. DATE TOTAL DEPTH REACHED 02/13/2024		18. DATE COMPLETED/ABANDONED 07/26/2024		19. DATE OF FIRST PROD. / INJ. PROD:08/01/2024 INJ:	
20. DEPTH REFERENCE GROUND LEVEL ☒ KELLY BUSHING ☐ DERRICK FLOOR ☐				21. DEPTH REFERENCE ELEVATION 5512 (US Feet)		22. GRADED GROUND LEVEL ELEVATION 5212 (US Feet)			
23. WELLBORE DEVIATION PROFILE VERTICAL ☐ DIRECTIONAL ☐ HORIZONTAL ☒				24. TOTAL DEPTH MD 17470 TVD 6852		25. PLUGGED BACK TOTAL DEPTH MD TVD			
26. CURRENT WELL STATUS Producing									

27. LOCATION OF WELL									
WELL POSITION	FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN	UTM EASTING	UTM NORTHING
Surface	1881 FSL	1345 FEL	NWSE	26	8.0 S	16.0 E	S	578260	4437797
Producing Interval Top	1124 FSL	168 FEL	SWSW	26	8.0 S	16.0 E	S		
Producing Interval Bottom	521 FNL	1795 FEL	LOT2	13	8.0 S	16.0 E	S		
Total Depth	510 FNL	1791 FEL	LOT2	13	8.0 S	16.0 E	S		

28. HOLE, CASING AND CEMENT INFORMATION																
STRING	HOLE SIZE	CASING O.D.	WEIGHT	GRADE	THREAD	TOP (MD)	BOTTOM (MD)	DV TOOL DEPTH	LEAD TAIL	CEMENT TYPE	SACKS	YIELD	WEIGHT	CEMENT TOP	BASIS FOR TOP	
COND	24.0	16.0	65.0			0	108			Class D Cement	100			0	Circulate	
SURF	12.25	9.625	36.0	J-55	BTC	0	1532		L	Class G Cement	330	1.77	13.1	0		
									T	Class G Cement	250	1.16	15.8			
PROD	8.75	5.5	20.0	P-110	BTC	0	6139		L	Class G Cement	650	2.92	11.5	0		
P2	7.875	5.5	20.0	P-110	BTC	6139	1740		T	Class G Cement	1970	1.43	14.0			

29. TUBING RECORD				
TUBING SIZE		TOP (MD)		BOT (MD)
2.725		0		6140
				PACKER DEPTH
				6120

30. RETRIEVABLE / TEMPORARY PLUGS		
PLUG	DEPTH (MD)	TYPE

31. PERMANENT / ABANDONMENT PLUGS		
PLUG	TOP (MD)	BOTTOM (MD)

32. FORMATION DETAILS and STRATIGRAPHIC MARKERS					
FR	FORMATION NAME	TOP (MD)	TOP (TVD)	DESCRIPTION, CONTENTS, ETC.	
1	UTELAND BUTTE	7255	7250	Shale	
	OIL SHOW? ☐	GAS SHOW? ☐	WATER FLOW? ☐	DRILL STEM TESTED? ☐	CORED? ☐
	COMPLETED OR TESTED? ☒	COMMINGLED? ☐			


33. COMPLETED and TESTED INTERVALS (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)						
FR	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	STIMULATION TREATMENT	INTERVAL STATUS
1	7255	17444			Fracture Stimulated	PRODUCING

34A. PRODUCTION INFORMATION (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)								
FR	TOP (MD)	BOTTOM (MD)	DATE FIRST PROD.	TEST DATE	HRS. TESTED	TBG. PRESSURE	CSG. PRESSURE	PROD. METHOD
1	7255	17444	08/01/2024	08/13/2024	6	881		Flowing
	TEST PRODUCTION VOLUMES			24-HOUR PRODUCTION RATES			GAS-OIL RATIO	OIL API
	OIL (BBL)	GAS (MSCF)	WATER (BBL)	OIL (BBL)	GAS (MSCF)	WATER (BBL)		GAS BTU
	208	107	441	832	428	1764	514	38.7
								0.8360

35. WELL TREATMENTS (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)						
FR	TREATMENT TYPE	TOP (MD)	BOTTOM (MD)	START DATE	END DATE	AMOUNT AND TYPE OF MATERIAL
1		7255	17444	06/10/2024	07/08/2024	579420 bbl slickwater 25268250 lbs local sand 42 stages


36. LOGS, SURVEYS, AND REPORTS (PDF file of each and LAS file of logs if available are to be submitted.)
--

REPORTS AND OTHER INFORMATION.		
Dx Survey 	DST Report 	Core Analysis 
DOG M Form 7 	Geologic Report 	Wellbore Diagram 
Other 		
SUBMITTED PDF LOGS		SUBMITTED LAS LOGS
CEMENT BOND		CEMENT BOND
OGM Official Use Only		
37. I hereby certify that the foregoing and attached information is complete as determined from all available records.		
NAME	TITLE	DATE
Don Hamilton	Permitting Agent	09/30/2024
SIGNATURE	PHONE	EMAIL
N/A	4356503866	starpoint@etv.net

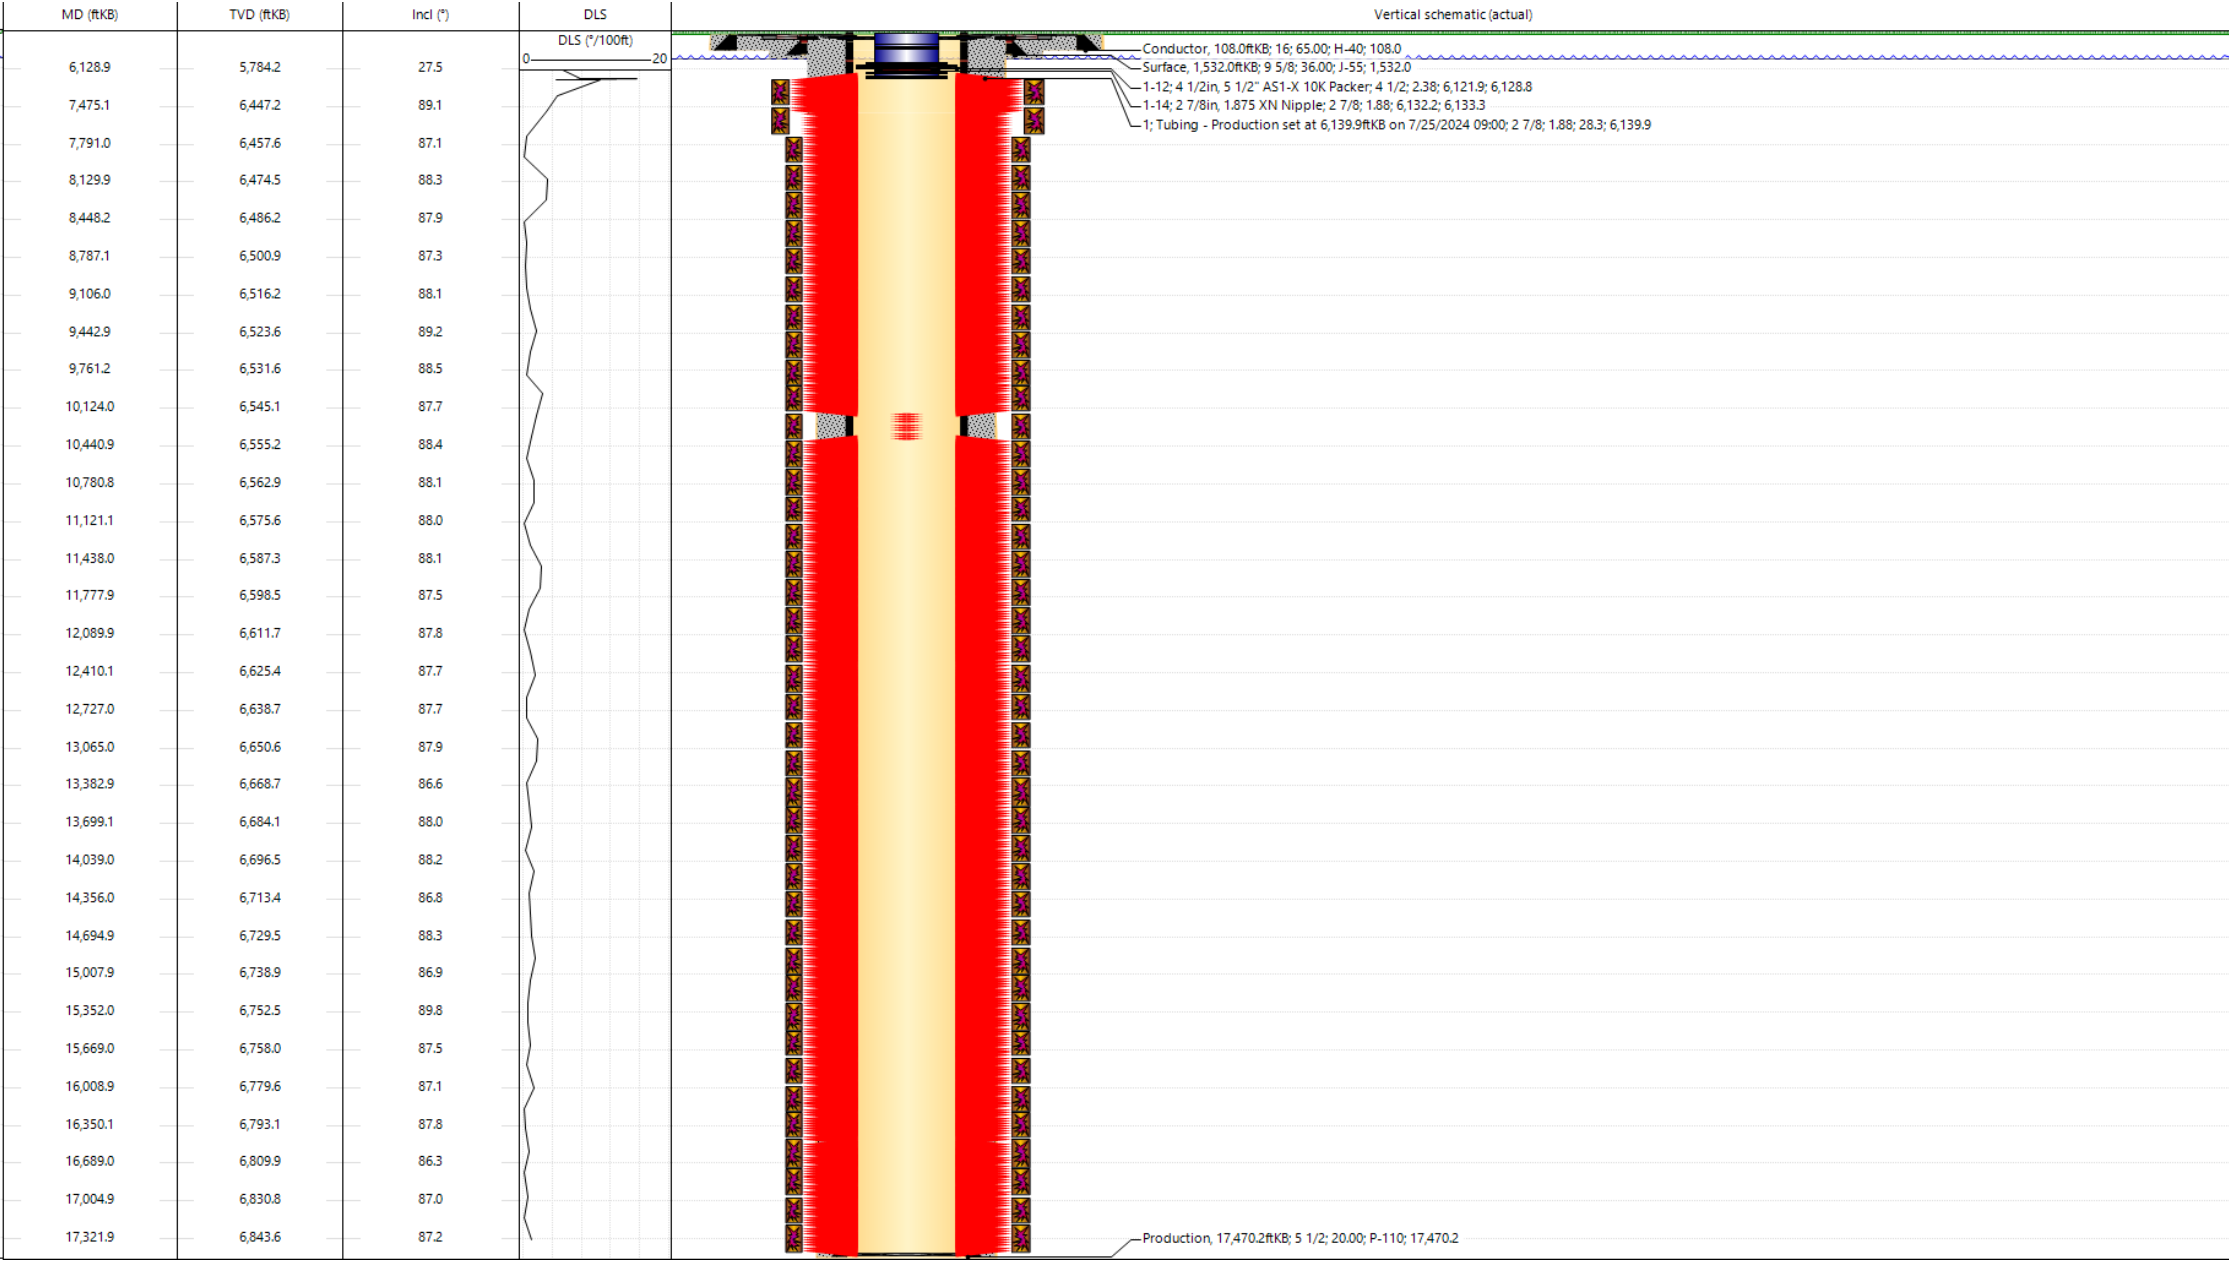


WELL LOCATION,
BRUTUS BUCKEYE 25-13-8-16-1H,
LOCATED AS SHOWN IN THE NW 1/4
SE 1/4 OF SECTION 26, T8S, R16E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

TARGET BOTTOM HOLE,
BRUTUS BUCKEYE 25-13-8-16-1H,
LOCATED AS SHOWN IN MINING CLAIM
DORIS NO. 1 OF SECTION 13, T8S, R16E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.

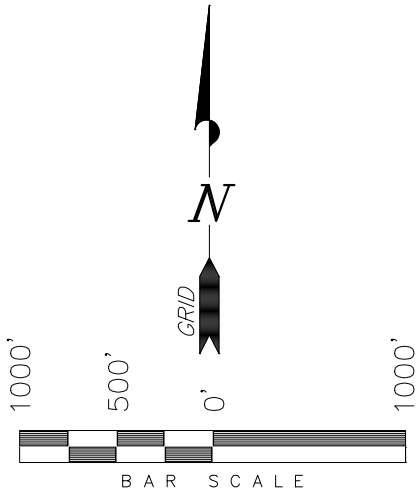

T8S, R16E, S.L.B.&M.

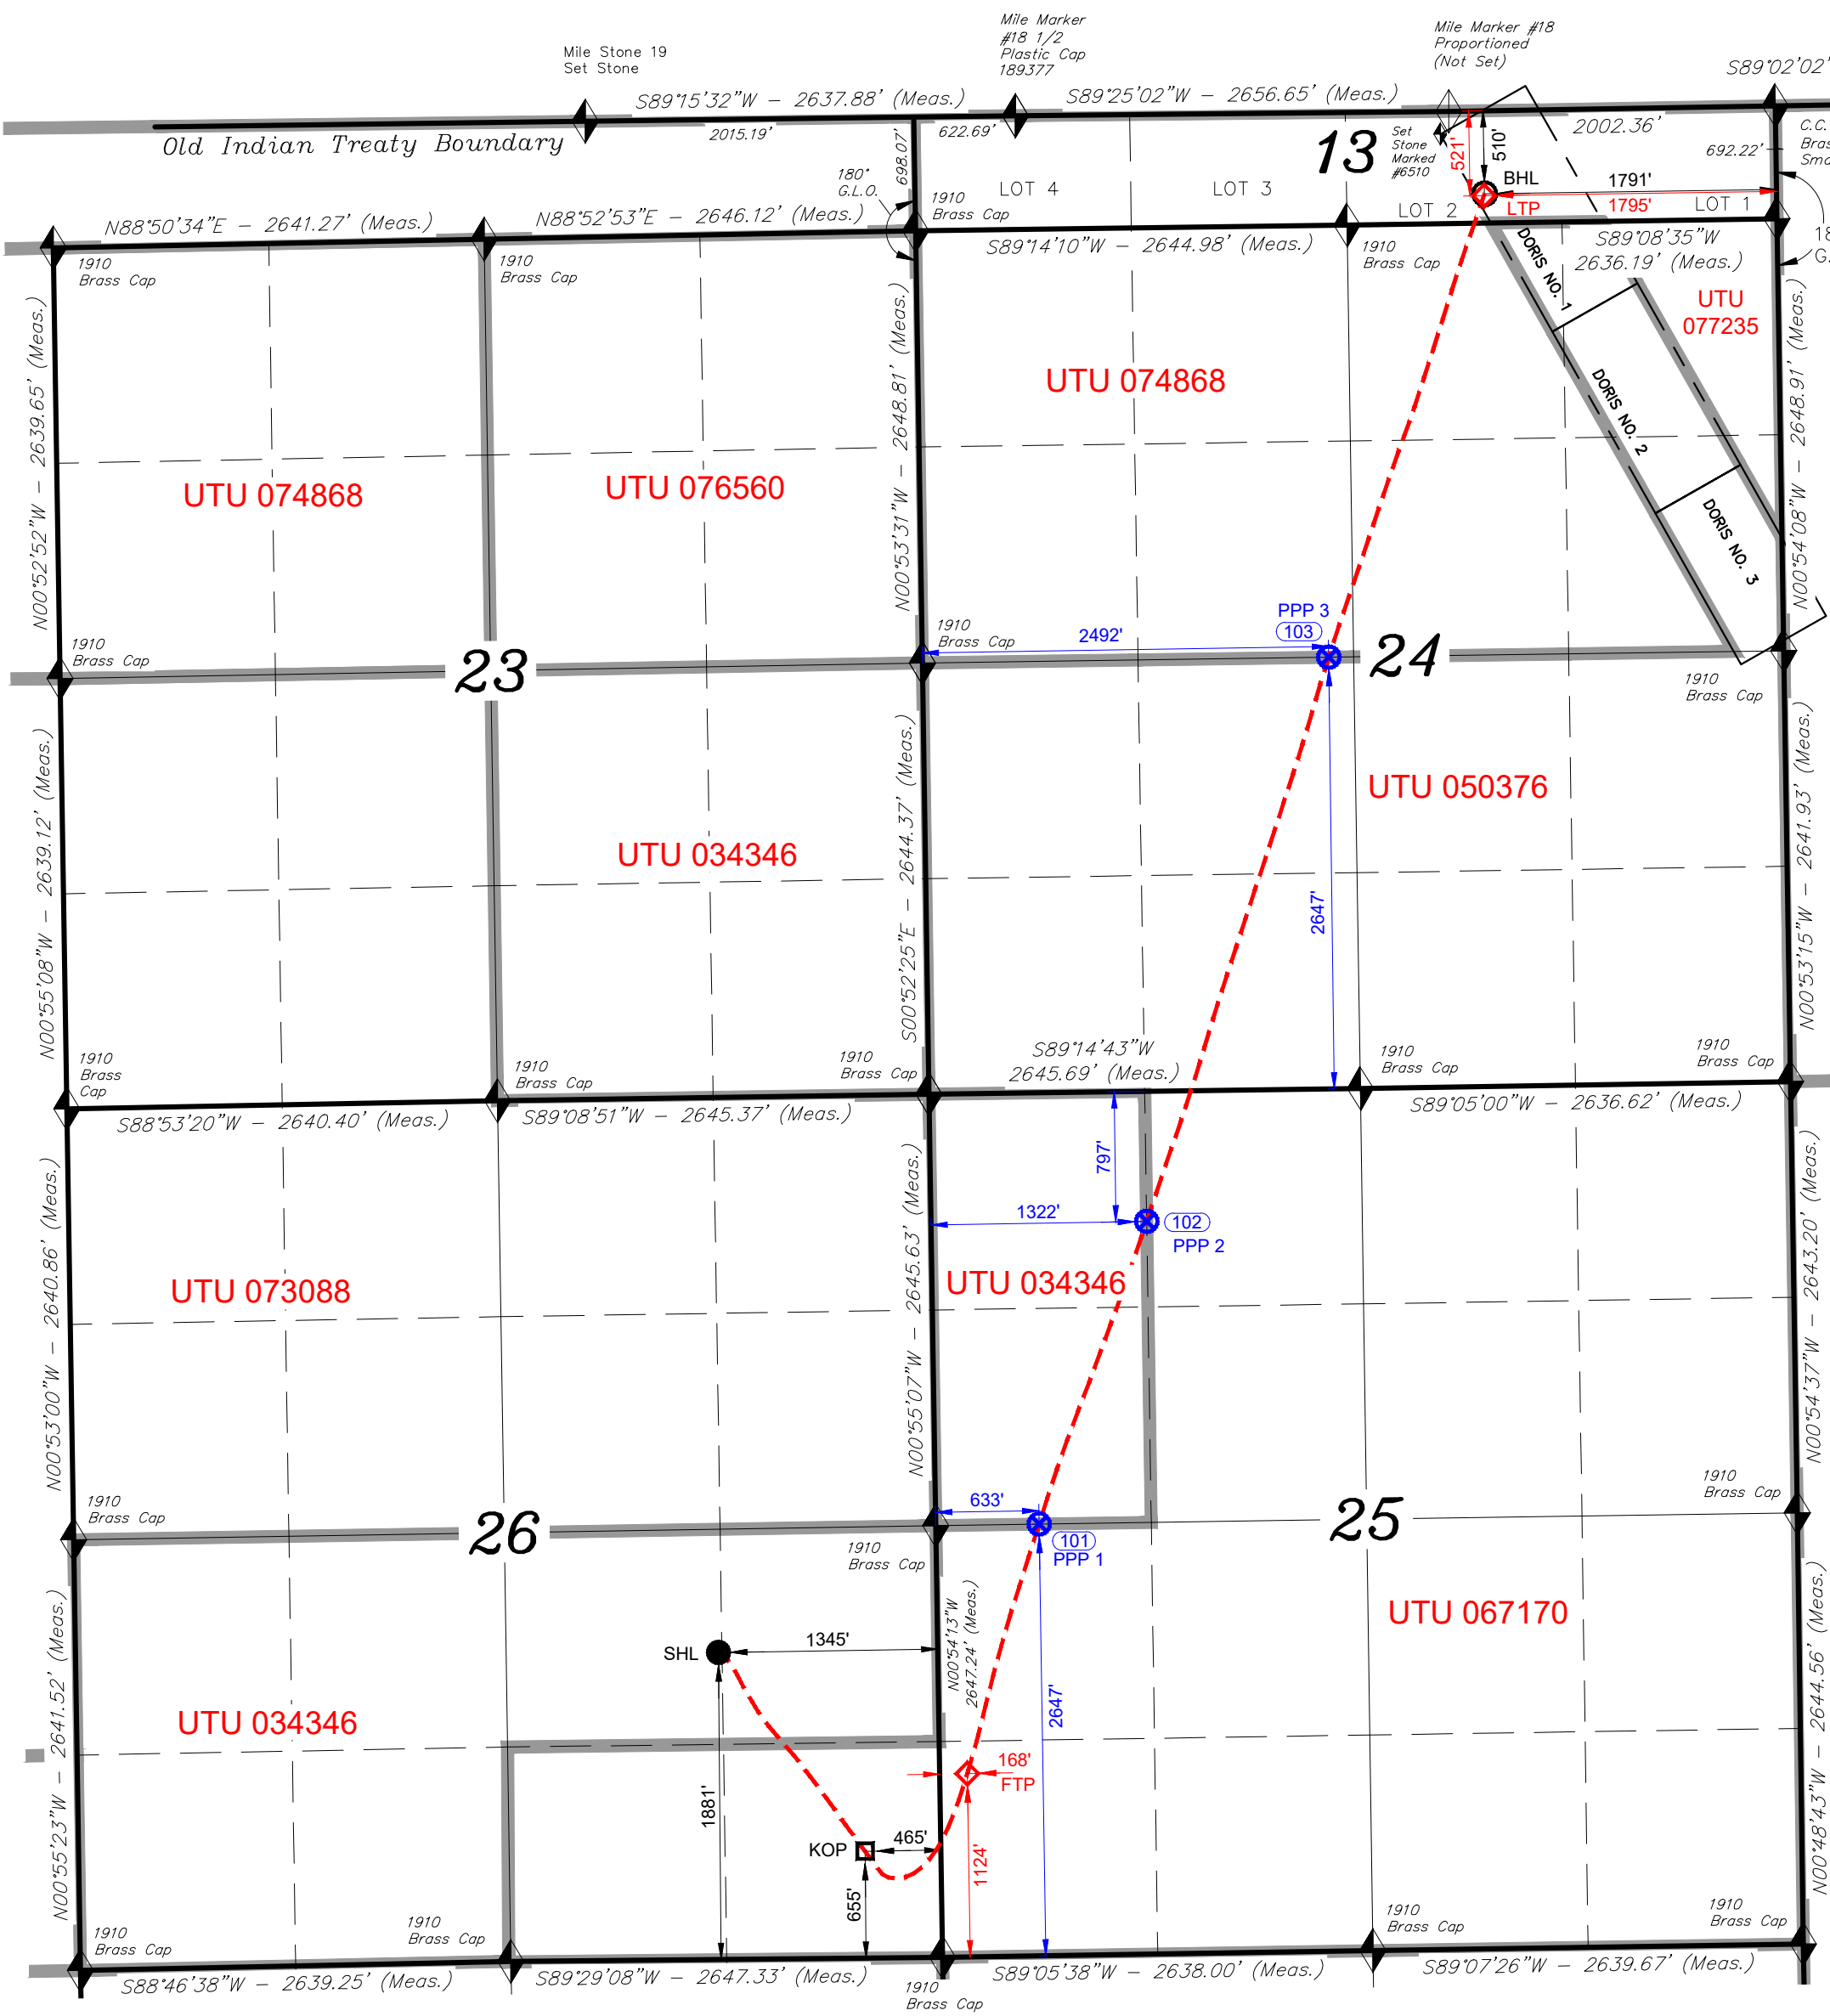

WELL LOCATION:
BRUTUS BUCKEYE 25-13-8-16-1H
ELEV. UNGRADED GROUND = 5512.2'

- NOTES:
- Well footages are measured at right angles to the Section Lines.
 - Bearings are based on Global Positioning Satellite Observations referencing Utah Central State Plane Grid North.

POINT TABLE				
POINT	LATITUDE	LONGITUDE	NORTHING (NAD 83)	EASTING (NAD 83)
101	N40° 05' 20.02"	W110° 04' 29.82"	7204280.0485	2039091.6649
102	N40° 05' 38.25"	W110° 04' 20.95"	7206135.2395	2039751.0138
103	N40° 06' 12.25"	W110° 04' 05.89"	7209593.1861	2040866.6926

SURFACE LOCATION	
NAD 83 (SURFACE LOCATION)	
LATITUDE =	40°05'12.55" (40.086820)
LONGITUDE =	110°04'55.26" (110.082017)
NAD 27 (SURFACE LOCATION)	
LATITUDE =	40°05'12.69" (40.086858)
LONGITUDE =	110°04'52.72" (110.081311)
UTM NAD 83 ZONE N12 METERS	
N =	4437797.191
E =	578260.002

BASIS OF ELEV: Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

KICK OFF POINT	
NAD 83 (KICK OFF POINT)	
LATITUDE =	40°05'00.38" (40.083438)
LONGITUDE =	110°04'43.95" (110.078874)
NAD 27 (KICK OFF POINT)	
LATITUDE =	40°05'00.51" (40.083476)
LONGITUDE =	110°04'41.41" (110.078168)
UTM NAD 83 ZONE N12 METERS	
N =	4437424.593
E =	578531.811

FIRST TAKE POINT	
NAD 83 (FIRST TAKE POINT)	
LATITUDE =	40°05'04.98" (40.084715)
LONGITUDE =	110°04'35.80" (110.076611)
NAD 27 (FIRST TAKE POINT)	
LATITUDE =	40°05'05.11" (40.084754)
LONGITUDE =	110°04'33.26" (110.075905)
UTM NAD 83 ZONE N12 METERS	
N =	4437568.358
E =	578723.340

LAST TAKE POINT	
NAD 83 (LAST TAKE POINT)	
LATITUDE =	40°06'40.04" (40.111123)
LONGITUDE =	110°03'53.07" (110.064740)
NAD 27 (LAST TAKE POINT)	
LATITUDE =	40°06'40.18" (40.111162)
LONGITUDE =	110°03'50.52" (110.064035)
UTM NAD 83 ZONE N12 METERS	
N =	4440510.044
E =	579704.533

BOTTOM OF HOLE	
NAD 83 (BOTTOM OF HOLE)	
LATITUDE =	40°06'40.15" (40.111154)
LONGITUDE =	110°03'53.01" (110.064726)
NAD 27 (BOTTOM OF HOLE)	
LATITUDE =	40°06'40.29" (40.111193)
LONGITUDE =	110°03'50.47" (110.064020)
UTM NAD 83 ZONE N12 METERS	
N =	4440513.493
E =	579705.719

SURVEYED BY: S.H.
DRAWN BY: F.T.M.
DATE: 08-23-23
SCALE: 1" = 1000'
REVISED:

● PROPOSED WELLHEAD	◆ SECTION CORNERS LOCATED
◻ KICK OFF POINT	◆ SECTION CORNERS COMPUTED
◆ TAKE POINT	
⊗ PPP	
○ TARGET BOTTOM HOLE	

THIS IS TO CERTIFY THAT THE ABOVE SURVEY WAS PREPARED FROM FIELD NOTES AND SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

10003
08-28-2024
STACY W.
REGISTERED LAND SURVEYOR
STATE OF UTAH

