
## Mechanical Quad Chart- 10/11/2023

## **Update**





#### Team Blockers

- Missing physical components- Endurosat and springs
- Solar panel surface area
  - To determine need for deployable solar panels
  - Surface area we can provide without deployables= approx. 70 cm<sup>2</sup> per side
- Need to know exact camera boards being used to rebuild interior board stack

#### Milestones

- Updated CAD model for chassis
- Interior stack integrated to model
- Currently building thermal model
- DXF file for "keep out zones" on wiki
- Met with machine shop at TechSpark


#### **Next week**


- Play with endurosat structure if we get it
- Start machining our chassis design?



#### Cross team issues and interfaces

- Boards continue to reference PC104 document on mechanical wiki
- Avionics-
  - number of access ports (charging, etc.) so we can work on structure adaptation for that
  - Updated final power budget
- Continue thinking about internal components and materials so we can start formulating testing protocols more fully (thermal, etc.)

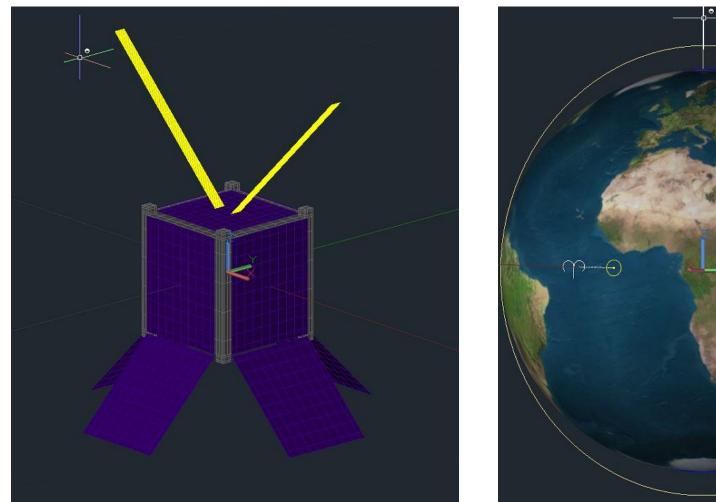


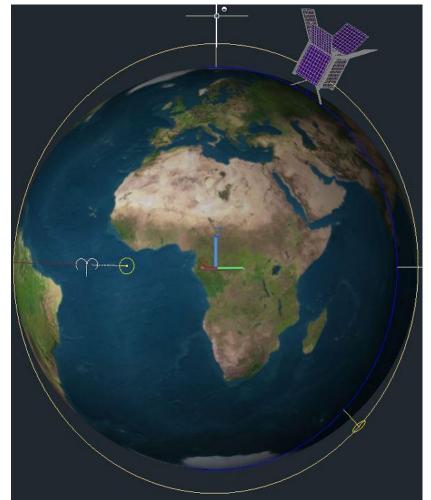

## Mechanical Quad Chart- 10/4/2023

### **Update**

Took apart 1u cubesat in lab to better understand board infrastructure and connectivity

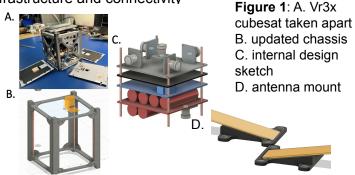

### **Team Blockers**

- Chassis hasn't arrived
- Springs haven't arrived
- Solar panel surface area
  - To determine need for deployable solar panels
- Not critical right now: thermal offloading capabilities of the chassis
  - Do we need an additional radiator?

#### **Milestones**


- Updated CAD model for chassis
- Z dimension/board heights determined
- Number of boards determined/more refined interior stack
- Antenna design

#### Next week

- Continued manufacturability considerations:
  - Integrating switches/holes on chassis
  - How to take apart/build: ie top comes off
- Play with endurosat structure if we get it
- Start machining our chassis design?

#### Cross team issues and interfaces

- Boards use PC104 board dimensions
  - Will give "keep out" zones for passive components on pcbs due to frame
- Avionics- number of access ports (charging, etc.) so we can work on structure adaptation for that
  - Where will they be?
- Starting thinking about internal components and materials so we can start formulating testing protocols (thermal, etc.)
- All sizes locked in by 10/6- try to avoid major component size changes after this date

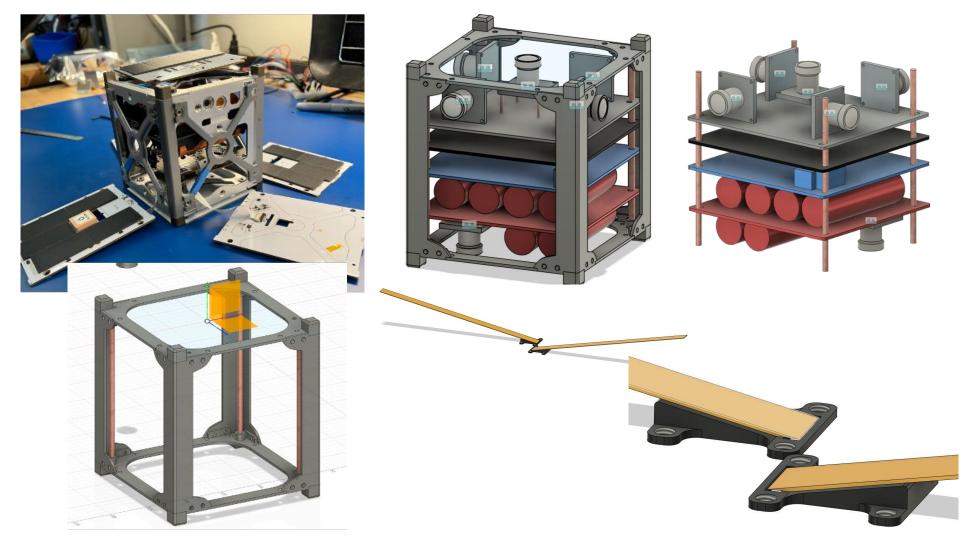

## Mechanical Quad Chart- 9/27/2023

## **Update**




Figure 1: A. chassis structure B. top view of PCB C. bottom view of PCB

#### Team Blockers

- Endurosat chassis purchase
  - Don't have arrival date
- Power budget
  - To determine solar panel surface area needed
  - Thermal offloading capabilities of the chassis Do we need an additional radiator?
- Component sizes for each team to determine stack height for each board
  - Number of boards you need

#### Milestones

- Cad model: chassis and PC104 start
- Placing orders for switches, springs, chassis
- We have a deployable solar panel idea if needed and would adjust structure accordingly

#### Next week

- Integrating antenna design to structure
- Manufacturability:
  - Integrating switches/holes on chassis
  - How to take apart/build: ie top comes off
- Play with endurosat structure if we get it

#### Cross team issues and interfaces


- Boards use PC104 board dimensions and hole positions
  - Will post the dimensions on the mechanical wiki by end of week
- Camera dimensions will need cutouts in some boards
- Avionics- number of access ports (charging, etc.) so we can work on structure adaptation for that
- By 10/6, have all internal component sizes sent to us for inner cad model
  - Like batteries, cameras, tall board components, etc.


# Mass budget estimate updated

### 1500g target (up to 2000g)


- Chassis- 120 g (Endurosat)
- Batteries- 282g if we use 6
- GPU/vision- 500g
- Torque coil- 46g (probably 2 coils so 92g)
- Antenna design- 100g
- PCBs- 70g per board? (so 420g for all 6 potential boards, then additional 70 for back panel?)
- Solar panels/outer panels- approx. 50g per side (around 300 total depending on size on each side)
- Ballast- ??g
- Deployable solar panels (4)- 176g

Total right now: 1878g

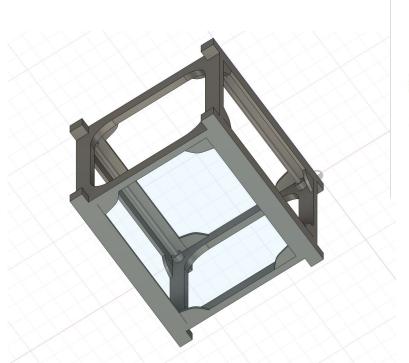

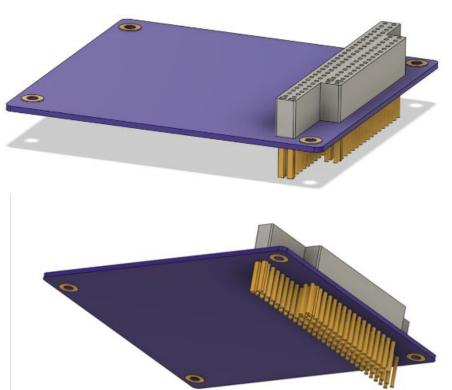

## Mechanical Quad Chart- 9/20/2023

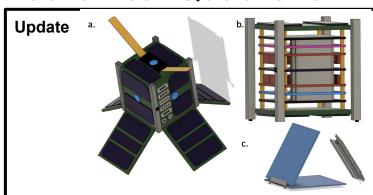

**Figure 1**: a. Overall design with outside panels. b. Internal board stack. c. initial design for solar panel deployment (hinges)

#### **Team Blockers**

#### **Endurosat**

- Potential chassis design
- Requires CMU legal representative to start looking at CAD drawings
- Was sent the data sheet

#### Other

Power budget to determine final solar panel surface area

#### **Milestones**

- Came up with initial deployable solar panel idea
- Refined initial CAD design
  - No magnetic torquer rod (embedded in outer panels)
  - Board connection and support with chassis
- No turn-style antenna
  - Thinking V shape

#### Next week

- Finalize inner board design and maybe 3D print a model so everyone has dimensions and constraints
- Continue buy/build considerations for chassis

#### Cross team issues and interfaces

Vision- camera and GPU selection

- Will potentially having antenna in camera view be something you can work around?

**GNC**- updated size with solar panels (each deployed panel will be an additional 10cm with an additional 176g at the bottom)

**Avionics**- power budget

Coms/ops- link budget


Main structure: 10 cells

+ Deployable structure: 16 cells

Total cells: 26 cells

2.4 W per cell x 26 cells= 62.4W X 29.5% efficiency

Total power generated= 18.408W

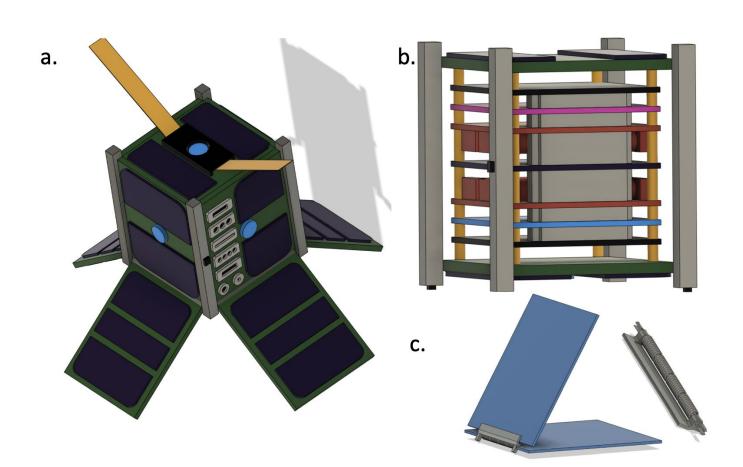

# Mass budget estimate updated

### 1500g target (up to 2000g)

- Chassis- ideally less than 100 g
- Batteries- 282g if we use 6
- GPU/vision- 200g worst case
- Torque coil- 46g (probably 2 coils so 92g)
- Antenna design- 100g
- PCBs- 70g per board? (so 420g for all 6 potential boards, then additional 70 for back panel?)
- Solar panels/outer panels- approx. 50g per side (around 300 total depending on size on each side)
- Ballast- ??g
- Deployable solar panels (4)- 176g

Total right now: 1740g

## Mechanical Quad Chart- 9/13/2023

## **Update**

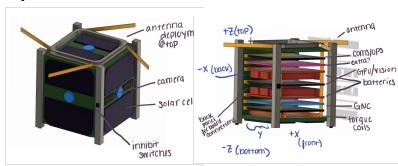


Fig.1- initial CubeSat Rev.1 sketch

#### **Team Blockers**

Need link budget to get power budget to get solar panel size and design

We need to know when each team decides what physical components they want to use so we can finalize mass budget (ie work towards more than just an estimate

Make sure to keep track of what materials you will be using (or if they can be coated with NASA-approved materials)-we are comprising a list

#### Milestones

- interfacing with the other teams
- Revised Level 2 requirements
- Started visualizing first iteration model with initial stack ideas
- First idea for antenna

#### This week

- Finalizing initial mass budget estimate as we collect more information from other teams
- Starting CAD models for chassis design
- Deciding how to organize the boards

#### Cross team issues and interfaces

Figure out power and link budget to begin determining battery number and subsequent solar arrays (ASAP)\

Vision- camera size to determine placement location- next week?

GNC- sensor and actuator selection- early next week

Coms/Ops- working on antenna design first iteration

# Mass budget estimate (rough)


### 1500g target (up to 2000g)


- Chassis- ideally less than 100 g
- Batteries- 282g if we use 6
- GPU/vision- 200g worst case
- Torque coil- 46g (probably 2 coils so 92g)
- Antenna design- 100g
- PCBs- 70g per board? (so 420g for all 6 potential boards, then additional 70 for back panel?)
- Solar panels/outer panels- approx. 50g per side (around 300 total depending on size on each side)
- Ballast- ??g

•

Total right now: 1564g

# Close-up images if needed

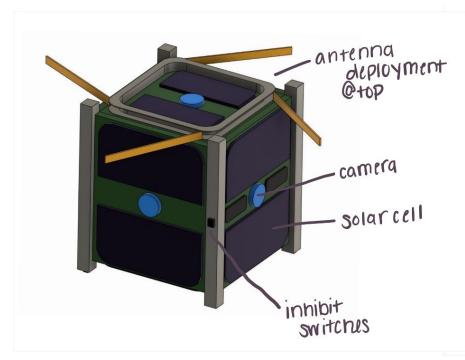

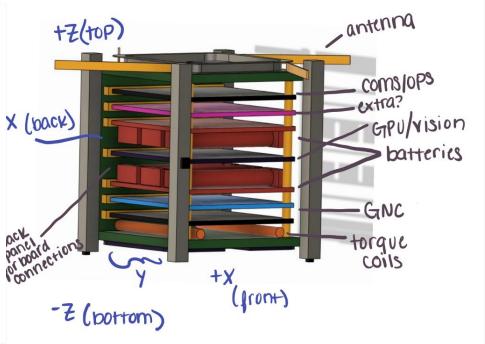

# Close-up images if needed

