
McMASTER-CARR®

Insertion Heater with Braided Wire Lead Covering

for 1/2" Hole, 120V AC, 2-1/2" Long Heating Element, 300W

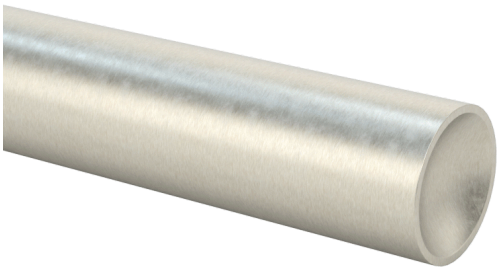

Delivers tomorrow

$62.47 each
4877K305

Wire Lead Covering	Braided
For Hole Size	1/2"
Heating Element	
Length	2 1/2"
Diameter	0.50"
Heating Element Length Tolerance	-1/8" to 1/8"
Heating Element Diameter Tolerance	-0.002" to 0.002"
Nominal Voltage	120V AC
Electrical Phase	Single
Wattage	300 W
Watt Density	130 W/in^2
Maximum Exposure Temperature	1,400° F
Wire Lead	
Length	12"
Maximum Exposure Temperature	840° F
Sheath Material	Incoloy Nickel
Temperature Control Type	Without Temperature Control
Base End Unheated Length	1/2"
Current @ Voltage	2.5 amp @ 120V AC
Electrical Connection Type	Hardwire
Heated Length	1 9/16"
Heater Type	Cartridge
Insulation Material	Magnesium Oxide
Measurement System	Inch
Operating Voltage	120V AC
Power Source	Electric
Tip End Unheated Length	7/16"
Wire Connection	Wire Leads
Wire Lead Covering Length	12"
Wire Lead Covering Material	Stainless Steel
Wire Lead Covering OD	0.25"
Wire Lead Gauge (AWG)	16
Wire Lead Insulation Material	Mica
Wire Lead OD	0.05"
Country of Origin	United States
DFARS Compliance	Specialty Metals COTS-Exempt
Export Control Classification Number	EAR99


(ECCN)	
REACH Compliance	REACH (EC 1907/2006) (02/04/2026, 253 SVHC) Compliant
RoHS Compliance	RoHS 3 (2015/863/EU) Compliant
Schedule B Number	851680.0000
U.S.–Mexico–Canada Agreement (USMCA) Qualifying	Yes

Also known as cartridge heating elements, insertion heating elements install into drilled and reamed holes in metal parts for quick heating through direct contact. They require a temperature switch or controller (sold separately) to regulate heat output.

To ensure a precise hole fit, use a reamer to enlarge the hole to an exact size and smooth the walls of the hole for the most metal-to-metal contact between the heating element and the part.

Braided Wire Lead Covering—Braided stainless steel wire lead covering is more abrasion and damage resistant than standard wire lead covering.

Incoloy Nickel Sheath—Heating elements with an Incoloy sheath have tightly wound, compressed heating elements for impact and vibration resistance. They also have excellent corrosion resistance.

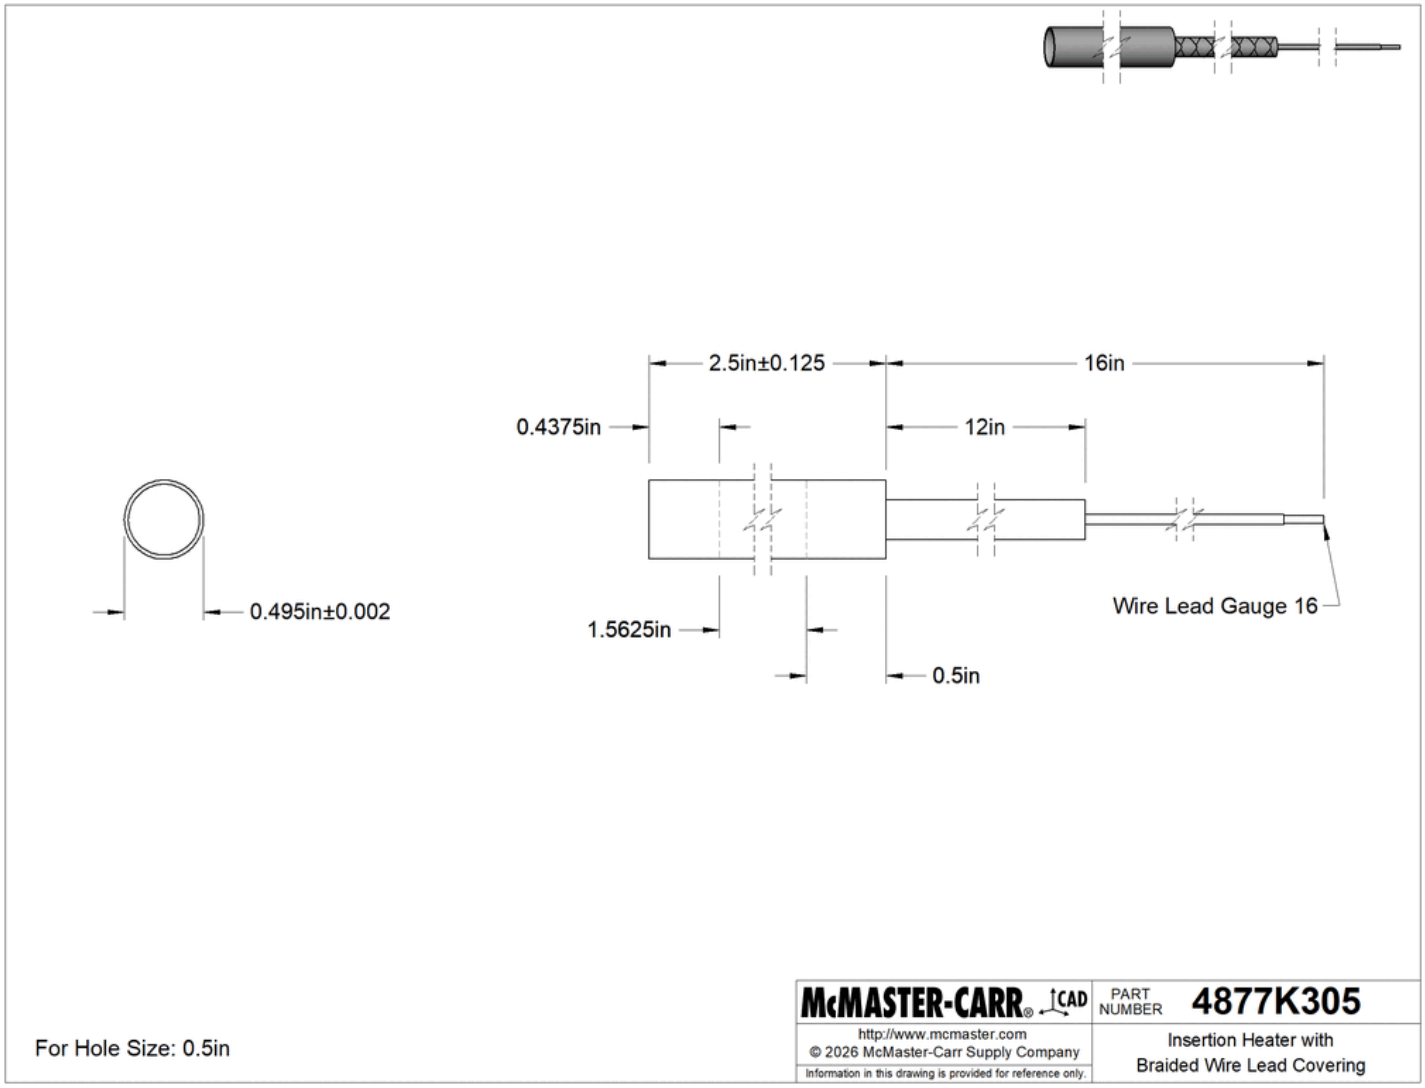

The information in this 3-D model is provided for reference only.