



IECEx Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification System for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.:	IECEx ExTC 26.0002X	Page 1 of 4	Certificate history:
Status:	Current	Issue No: 0	
Date of Issue:	2026-05-06		
Applicant:	Compac Industries Limited 52 Walls Road Penrose Auckland 1061 New Zealand		
Equipment:	KG100PSD		
Optional accessory:			
Type of Protection:	Flameproof "d"; intrinsic safety "i"		
Marking:	Ex db ib IIA T4 Gb -40°C ≤ Ta ≤ 70°C		

Approved for issue on behalf of the IECEx
Certification Body:

James Bes

Position:

Certification Authority

Signature:
(for printed version)

Date:
(for printed version)

2026-05-06

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting www.iecex.com or use of this QR Code.



Certificate issued by:

Ex Testing and Certification Pty Ltd
1/30 Kennington Drive
Tomago NSW 2322
Australia



**TESTING AND
CERTIFICATION**



IECEx Certificate of Conformity

Certificate No.: **IECEx ExTC 26.0002X**

Page 2 of 4

Date of issue: 2026-05-06

Issue No: 0

Manufacturer: **Compac Industries Limited**
52 Walls Road
Penrose
Auckland 1061
New Zealand

Manufacturing locations: **Compac Industries Limited**
52 Walls Road
Penrose
Auckland 1061
New Zealand

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended

STANDARDS :

The equipment and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards

[IEC 60079-0:2017](#) Explosive atmospheres - Part 0: Equipment - General requirements
Edition:7.0

[IEC 60079-1:2014](#) Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"
Edition:7.0

[IEC 60079-11:2023](#) Explosive atmospheres - Part 11: Equipment protection by intrinsic safety "i"
Edition:7.0

This Certificate **does not** indicate compliance with safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in:

Test Report:

[AU/ExTC/ExTR26.0002/00](#)

Quality Assessment Report:

[AU/TSA/QAR08.0008/11](#)



IECEx Certificate of Conformity

Certificate No.: **IECEx ExTC 26.0002X**

Page 3 of 4

Date of issue: 2026-05-06

Issue No: 0

EQUIPMENT:

Equipment and systems covered by this Certificate are as follows:

The KG100PSD is a consolidated power supply and display which is intended to be connected to a KG100 with CI545 Coriolis meter.

The equipment comprises a machined anodised aluminium housing with two compartments:

- The power supply compartment which houses the CI540 circuit boards and is protected by the flameproof Type of Protection. This compartment has a threaded cover manufactured from anodised aluminium, and a threaded entry for use with separately certified cable glands and thread adaptors. This compartment provides IP65 ingress protection in accordance with IEC 60529, and IP54 ingress protection following the tests of enclosures in accordance with IEC 60079-0.
- The display compartment which houses the CI543 circuit boards and is protected by the intrinsic safety Type of Protection. This compartment has a glass cover which is retained by a stainless steel plate. The display compartment additionally has a pushbutton mounted in the enclosure wall, and an opening for the intrinsically safe connector. This compartment provides IP65 ingress protection in accordance with IEC 60529 when the equipment is mounted to a KG100 with CI545 meter, and IP20 ingress protection in accordance with IEC 60529 when not mounted to a KG100 with CI545 meter.

The CI540 circuit boards form an associated apparatus that provides a barrier between the non-intrinsically safe connections and the intrinsically safe circuits on CI543. CI543 provides an LCD display visible through the glass cover, as well as an interface for external intrinsically safe equipment.

Continued in certificate annex.

SPECIFIC CONDITIONS OF USE: YES as shown below:

Refer to annex for details



IECEx Certificate of Conformity

Certificate No.: **IECEx ExTC 26.0002X**

Page 4 of 4

Date of issue: 2026-05-06

Issue No: 0

Additional information:

ExTC job 26013

Annex:

[IECEx ExTC 26.0002X-0 Annex Final.pdf](#)

 IECEx Certificate of Conformity Annex		 TESTING AND CERTIFICATION	
Annex to Certificate No.:	IECEx ExTC 26.0002X	Issue No.:	0

Description (continued from certificate body):


CI540 and CI543 are electrically connected by a ribbon cable which carries intrinsically safe circuits and is cemented into the wall between the power supply and display compartments.

The KG100PSD is provided with screw terminals inside the power supply compartment for external connections to non-intrinsically safe circuits. The intrinsic safety parameters for these connections are:

Mains Supply (CI540 J100)	
Um	250V

12V Supply (CI540 J101)	
Um	250V
Restricted to overvoltage category (OVC) I or II.	

RS485 (CI540 J300)	
Um	250V

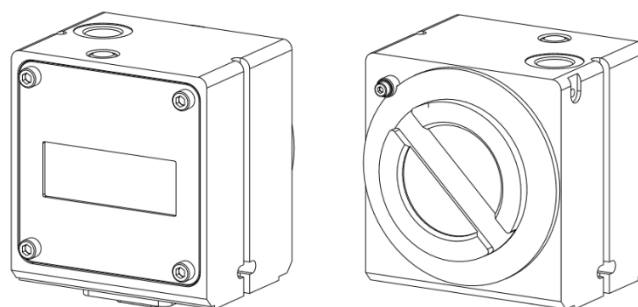

The equipment is provided with a connector in the wall of the enclosure for the intrinsically safe connection to external circuits. The intrinsic safety parameters for this connection are:

I.S. Output (CI543 J203)	
Uo	6V
Io	225mA
Po	1W
Co	220µF
Lo	50µH

The Co and Lo above have been assessed in combination. Both lumped inductance and capacitance may be connected without further reduction.

Specific Conditions of Use:

1. The flame paths are not intended to be repaired.
2. Only cable glands and thread adapters which have been separately certified to IEC 60079-0 and IEC 60079-1 shall be used.
3. The 12V DC input shall be overvoltage category (OVC) II or lower.
4. The intrinsically safe output circuits are bonded to the metallic enclosure, and this must be taken into account when interconnecting in the system.



IECEx Certificate of Conformity

Annex



TESTING AND
CERTIFICATION

Annex to Certificate No.:

IECEx ExTC 26.0002X

Issue No.:

0

Manufacturer's Documents pertaining to this Issue of the Certificate:

Title:	Drawing No.:	Pages	Rev. Level:	Date:
C5000 Control Unit Labels (KG100 P/Supply Display) KG100PSD	AP392	Sheet 11	D	2026-04-29
Installation & Safety Data for KG100PSD	AP420	4	A	2026-04-30
KG100PSD Ribbon Cable & PB Switch	AP421	1	A	2026-04-29
KG100 Power Supply (Schematic)	CI540	1-4	D	2026-03-24
KG100 Power Supply (PCB layout)	CI540	5-12	D	2026-03-24
CP-KG100SA-PS (BOM)	CI540P	2	D	2026-03-25
Work Instructions for CI540P-D	-	1	-	2026-03-25
Display for KG100 meter (Schematic)	CI543	1-2	A	2026-01-28
KG100PSD - Display (PCB layout)	CI543	3-8	A	2026-01-28
CP-KG100SA-DPS (BOM)	CI543P	1	A	2026-01-29
Work Instructions for CI543P-A	-	1	-	2026-04-29
KG100 Meter KG100 FP Housing Internal Cable Bridge assembly	MAD0113A	1	A	2026-01-22
KG100 Meter KG100 Standalone module	MAD0114B	4	A	2026-02-17
D2258 – KG100 Standalone KG- Flame proof box Cover – Machined Version	PDM2512A	1	A	2026-01-28
D2258 - KG100 Standalone KG100 Standalone - Display cover	PDM2513A	1	A	2026-01-28
D2258 - KG100 Standalone KG Flame proof box - Threaded - Machined Version (Various Titles)	PDM2514A	6	A	2026-04-29



IECEX Certificate of Conformity

Annex



TESTING AND
CERTIFICATION

Annex to Certificate No.:	IECEX ExTC 26.0002X	Issue No.:	0
---------------------------	---------------------	------------	---

Title:	Drawing No.:	Pages	Rev. Level:	Date:
KG100 Standalone SA Cover retaining latch	PDM2515A	1	A	2026-01-22
KG100 Meter KG100SA Connector Gasket	PDM2575C	1	C	2026-03-10