

# PHYS4B Electromagnetism for Scientists and Engineers: Circuits

Connor Petri

Winter 2025

## Contents

<b>1</b>	<b>Capacitors</b>	<b>2</b>
<b>2</b>	<b>Current and Resistance</b>	<b>6</b>

# 1 Capacitors

---

## Capacitance

Capacitors are devices that can store charge. They are made of one or more pairs of conductors separated by an insulator. In circuit diagrams, they are denoted using the following symbol:



### Definition

Capacitance is the ability of a capacitor to store charge. It is measured in farads.

$$C = \frac{Q}{\Delta V} = \epsilon_0 \frac{A}{d}$$

Where  $C$  is capacitance in farads,  $Q$  is charge in Coulombs,  $\Delta V$  is voltage in volts,  $\epsilon_0$  is the permittivity of free space,  $A$  is the area of the plates in  $m^2$ , and  $d$  is the distance between the plates in meters.

### Electric Field Within a Capacitor

The electric field within a capacitor is given by the equation:

$$E = \frac{\sigma}{\epsilon_0} = \frac{Q}{\epsilon_0 A}$$

Where  $E$  is the electric field in  $N/C$ ,  $\sigma$  is the charge density in  $C/m^2$ ,  $Q$  is the charge in Coulombs,  $\epsilon_0$  is the permittivity of free space, and  $A$  is the area of the plates in  $m^2$ .

## Voltage Across a Capacitor

The voltage across a capacitor is given by the equation:

$$\Delta V = Ed = \frac{Qd}{\epsilon_0 A}$$

Where  $\Delta V$  is the voltage in volts,  $E$  is the electric field in  $N/C$ ,  $d$  is the distance between the plates in meters,  $Q$  is the charge in Coulombs,  $\epsilon_0$  is the permittivity of free space, and  $A$  is the area of the plates in  $m^2$ .

## Energy Stored in a Capacitor

The electric potential energy stored in a capacitor is given by the equation:

$$U_e = \frac{1}{2}Q\Delta V = \frac{1}{2}C\Delta V^2 = \frac{Q^2}{2C}$$

Where  $U_e$  is the electric potential energy in Joules,  $Q$  is the charge in Coulombs,  $\Delta V$  is the voltage in volts,  $C$  is the capacitance in farads, and  $V$  is the voltage in volts.

---

## Dielectrics

Up until this point, we have made the assumption that the conductors in the capacitor have been separated by air, however this is not always the case. Dielectrics are insulating materials that are placed between the plates of a capacitor. They increase the capacitance of a capacitor by a factor of  $\kappa$ , or the dielectric constant of that material.  $\kappa$  is a direct property of a material that has been determined through experimentation, and thus this value will have to be given in the problem or retrieved from a table.

## Capacitance and Electric Field with a Dielectric

When a dielectric is placed between the plates of a capacitor, the capacitance and electric field change based off of the dielectric constant.

$$C_{\kappa} \propto \kappa$$
$$E_{\kappa} \propto \frac{1}{\kappa}$$

This changes the equations for capacitance, electric field, and voltage across a capacitor to the following:

$$C_{\kappa} = \kappa C_0 = \frac{\kappa Q}{\Delta V}$$
$$E_{\kappa} = \frac{\sigma}{\kappa \epsilon_0} = \frac{Q}{\kappa \epsilon_0 A}$$
$$\Delta V_{\kappa} = E_{\kappa} d = \frac{Qd}{\kappa \epsilon_0 A}$$

## Capacitors in Series and Parallel




Figure 1: Wired in series.

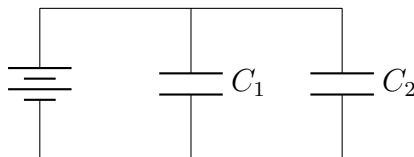


Figure 2: Wired in parallel.

### **Equivilant Capacitance**

When capacitors are wired in parallel, the equivilant capacitance is given by the equation:

$$C_{eq} = \sum_{i=1}^n C_i$$

When capacitors are wired in series, the equivilant capacitance is given by the equation:

$$\frac{1}{C_{eq}} = \sum_{i=1}^n \frac{1}{C_i}$$

## 2 Current and Resistance

---

### Current

#### Definition

Current is defined as the time rate of change of charge through an object. It is measured in amps.

$$I = \frac{dQ}{dt} \Rightarrow I = nqv_d A$$

Where  $I$  is the current in amps,  $n$  is the free electron density in electrons/ $m^3$ ,  $v_d$  is the drift velocity in  $m/s$ , and  $A$  is the cross-sectional area of the conductor in  $m^2$ .

$$[Amps] = \left[ \frac{Coulombs}{second} \right]$$

#### Drift Velocity

Electrons are bouncing around randomly. When an electric field is applied, the bouncing is directed in a direction, but it is still chaotic. This bouncing results in heat being generated. Heat is defined as the kinetic energy of a particle. The speed of the drift of the electrons is called the drift velocity ( $v_d$ ).

$$v_d = \frac{I_{avg}}{nqA} = \frac{I}{nqA}$$

Where  $v_d$  is the drift current,  $n$  is the free electron density,  $q$  is the charge of the current carrier (usually an electron) and  $A$  is the cross-sectional area of the conductor.

## Current Density

Current density is the current per unit area. It is defined as:

$$J = \frac{I}{A} = \sigma A = nqv_d$$

Where  $J$  is the current density in  $Amps/m^2$ ,  $I$  is the current in amps,  $A$  is the cross-sectional area of the conductor in  $m^2$ ,  $\sigma$  is the conductivity of the material, and  $n$  is the free electron density in  $electrons/m^3$ .

Voltage can be calculated as a function of current density and conductivity as follows:

$$\Delta V = E\ell = \frac{\ell J}{\sigma}$$

---

## Resistance

### Definition

Resistance is defined as the ratio of voltage to current, also known as Ohm's law. It is measured in ohms.

$$R = \frac{\Delta V}{I}$$

Where  $R$  is the resistance in ohms,  $\Delta V$  is the voltage in volts, and  $I$  is the current in amps.

### Resistivity

Resistivity is the fundamental property of a material that determines how much it resists the flow of current. It is measured in ohm-meters.

$$\rho = \frac{1}{\sigma} \Rightarrow R = \rho \frac{\ell}{A}$$

Where  $\rho$  is resistivity,  $\sigma$  is conductivity,  $R$  is resistance in  $\Omega$ ,  $I$  is current in amps, and  $\Delta V$  is voltage in volts.

$$[\Omega] = [\frac{V}{A}]$$

### Ohmic vs. Non-Ohmic devices

Ohmic devices are devices that have a Voltage vs Current slope of  $\frac{1}{R}$ . Non-ohmic devices have a slope that changes with voltage or current.

### Resistance and Temperature

$$\rho = \rho_0[1 + \alpha(T - T_0)]$$

$$\alpha = \frac{\Delta\rho/\rho}{\Delta T}$$

Where  $\rho$  is resistivity and  $T$  is temperature.

## Electrical Power

### Definition

Power is defined as the rate at which energy is transferred or converted. It is measured in watts.

$$P = \frac{dU_e}{dt} = \frac{d}{dt}(Q\Delta V) = \frac{dQ}{dt}\Delta V = I\Delta V$$

$$\implies P = I^2 R = \frac{(\Delta V)^2}{R}$$

Where  $P$  is power in watts,  $Q$  is total charge in Coulombs,  $\Delta V$  is voltage in volts, and  $I$  is current in amps.