


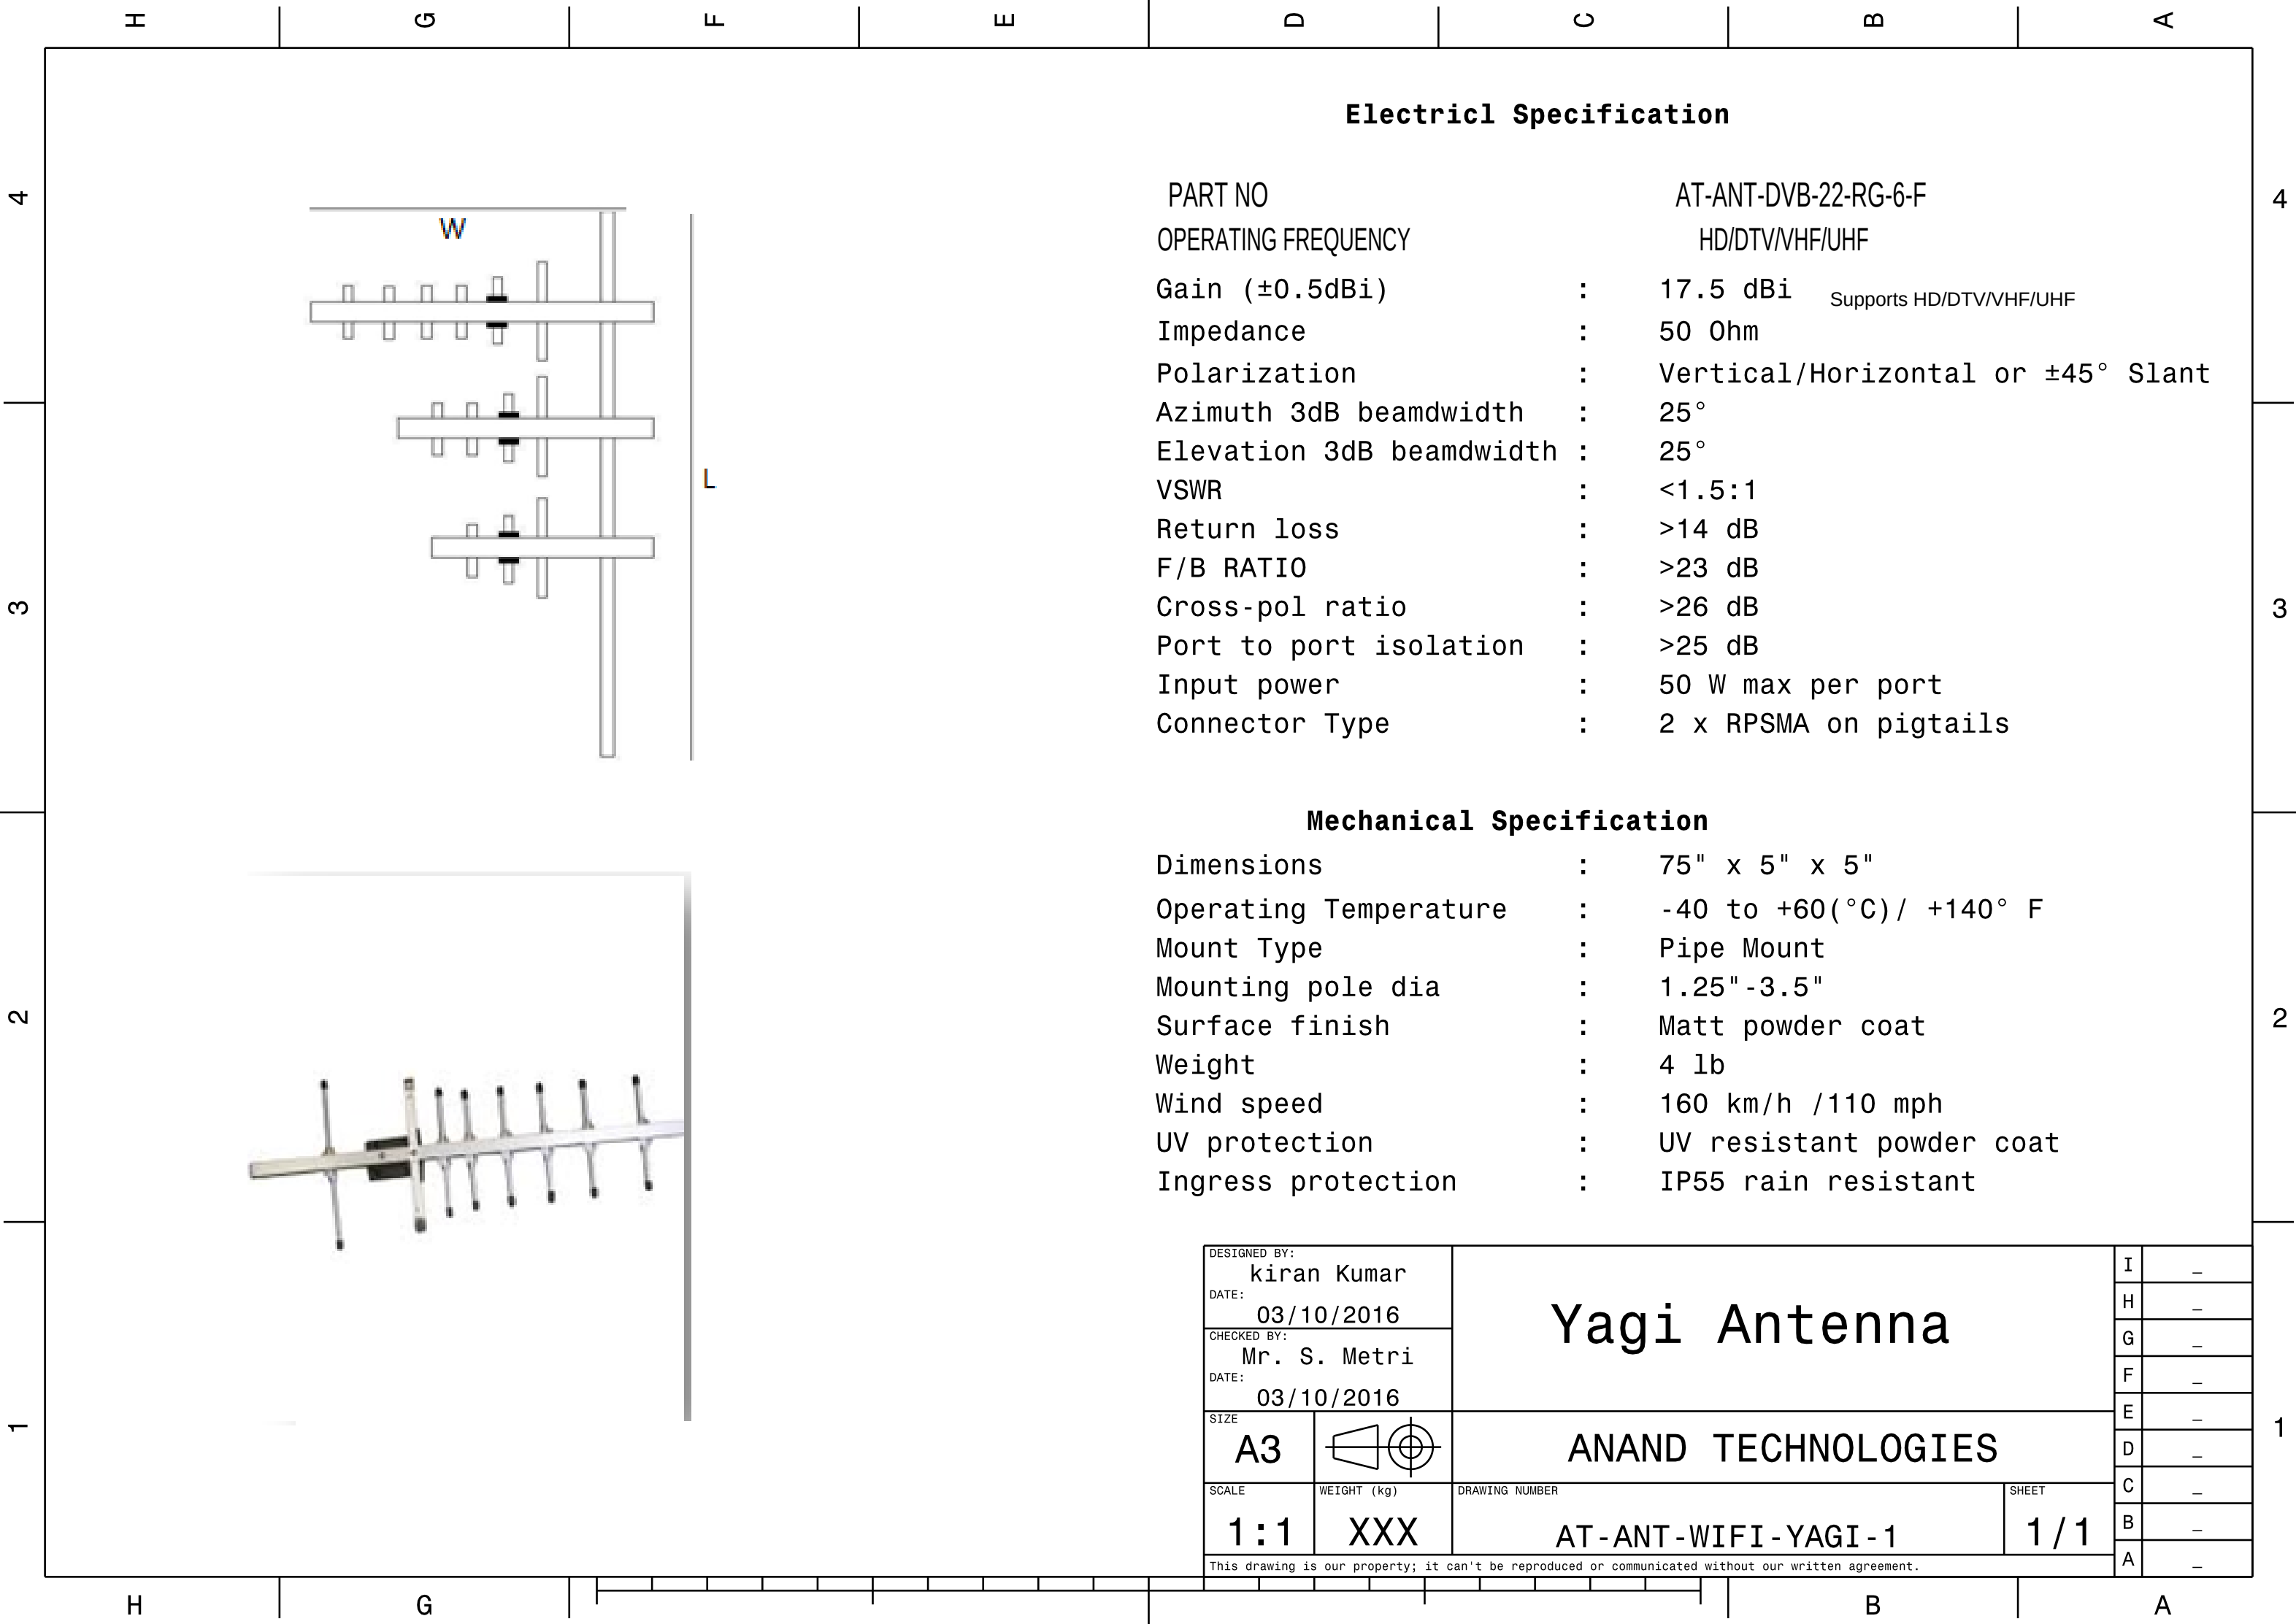


Electricl Specification

PART NO	AT-ANT-DVB-22-RG-6-F		
OPERATING FREQUENCY	HD/DTV/VHF/UHF		
Gain (±0.5dBi)	:	17.5 dBi	Supports HD/DTV/VHF/UHF
Impedance	:	50 Ohm	
Polarization	:	Vertical/Horizontal or ±45° Slant	
Azimuth 3dB beamdwidth	:	25°	
Elevation 3dB beamdwidth	:	25°	
VSWR	:	<1.5:1	
Return loss	:	>14 dB	
F/B RATIO	:	>23 dB	
Cross-pol ratio	:	>26 dB	
Port to port isolation	:	>25 dB	
Input power	:	50 W max per port	
Connector Type	:	2 x RPSMA on pigtails	

Mechanical Specification

Dimensions	:	75" x 5" x 5"
Operating Temperature	:	-40 to +60(°C)/ +140° F
Mount Type	:	Pipe Mount
Mounting pole dia	:	1.25"-3.5"
Surface finish	:	Matt powder coat
Weight	:	4 lb
Wind speed	:	160 km/h /110 mph
UV protection	:	UV resistant powder coat
Ingress protection	:	IP55 rain resistant

DESIGNED BY: kiran Kumar		Yagi Antenna		I	—
DATE: 03/10/2016				H	—
CHECKED BY: Mr. S. Metri				G	—
DATE: 03/10/2016				F	—
SIZE A3		ANAND TECHNOLOGIES		E	—
SCALE 1 : 1				D	—
WEIGHT (kg) XXX	DRAWING NUMBER AT-ANT-WIFI-YAGI-1		SHEET 1 / 1	C	—
				B	—
				A	—
This drawing is our property; it can't be reproduced or communicated without our written agreement.					