



ELECTRICAL SPECIFICATION

Part No : AT-ANT-IRNSS-5
Antenna Type : IRNSS
Frequency Range : L1: 1575.42±1.023 (MHz)
G1: 1602.5625-1615.5 (MHz)
L5: 1176.45±12 (MHz)
Center Frequency : L1/G1: 1593±2.5 (MHz)
L5: 1175±2.5 (MHz)
-10dB Bandwidth min : L1/G1: 16 (MHz)
L5: 3 (MHz)
VSWR at CF max : 1:8
Gain at Zenith : L1/G1: 28 dBi typ
L5: 22 dBi typ
Polarization : RHCP
Impedance : 50 Ω
RF Connector : SMA / UFL
RF COAXIAL CABLE : RG-174 5 MTRS LENGTH

MECHANICAL SPECIFICATION

Dimensions :
Mount Type : Surface Mount
Operating Temp : -40 to +125(°c)
Enclosure : -
Environment : 95% RH Humidity
Description : IRNSS Antenna

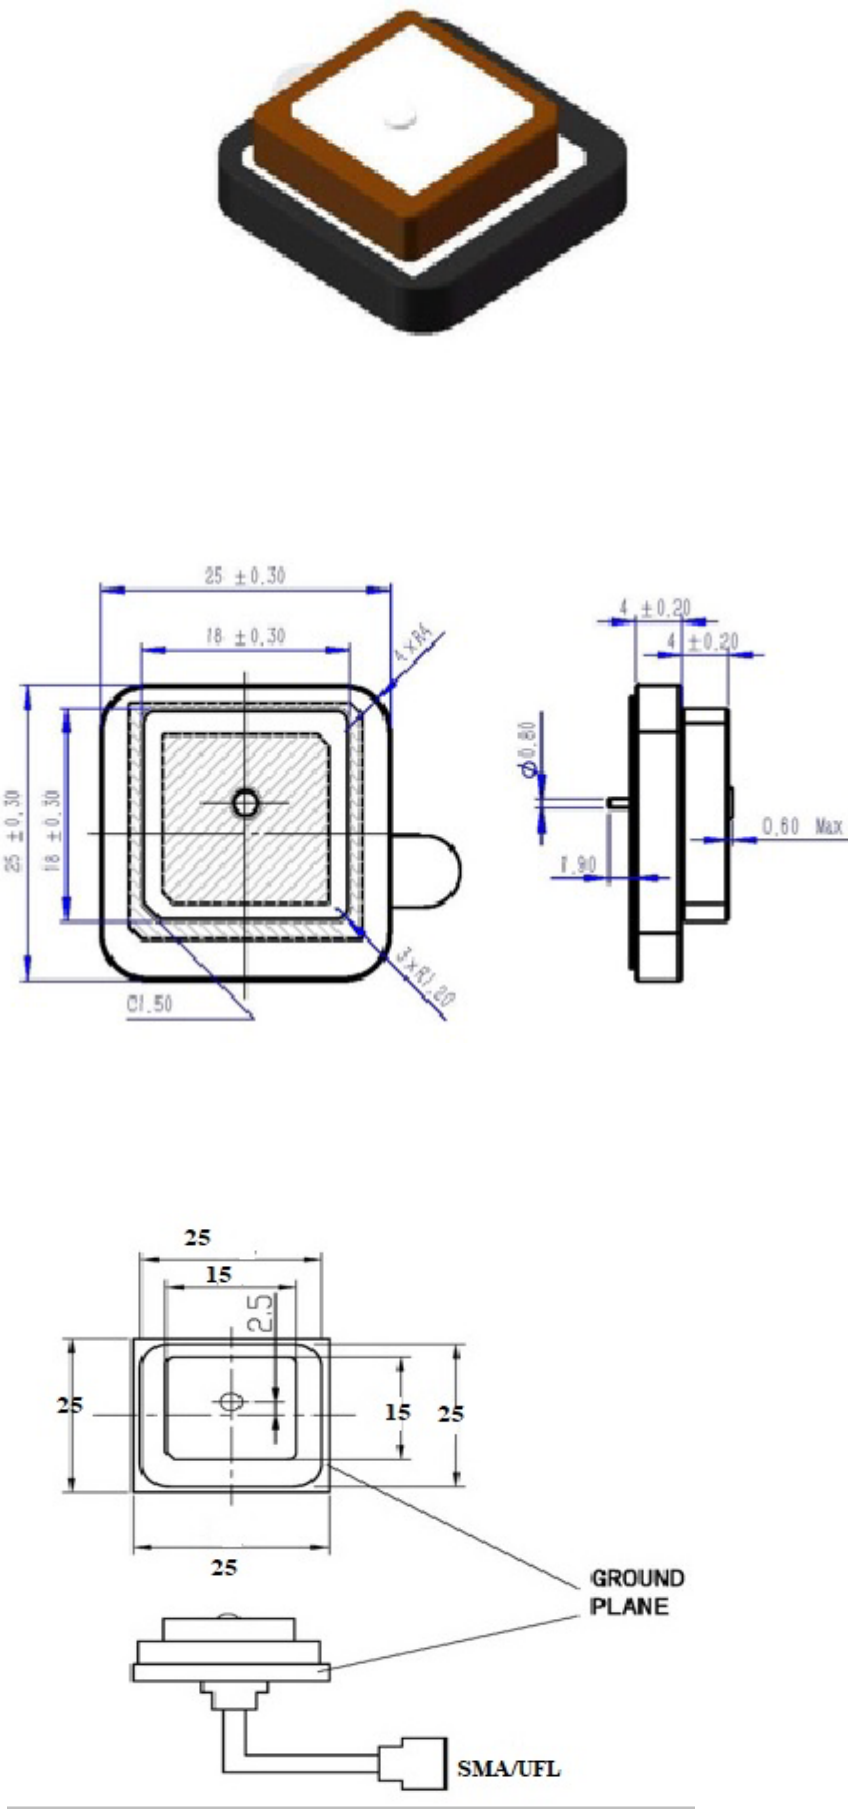

DESIGNED BY: Guru Biradar		IRNSS ANTENNA		I	-
DATE: 03/10/2016				H	-
CHECKED BY: Mr. S. Metri				G	-
DATE: 03/10/2016		ANAND TECHNOLOGIES		F	-
SIZE A3				E	-
SCALE 1 : 1	WEIGHT (kg) XXX			D	-
DRAWING NUMBER AT-ANT-IRNSS-5		SHEET 1 / 1		C	-
This drawing is our property; it can't be reproduced or communicated without our written agreement.				B	-
				A	-