


BILL OF MATERIAL


ITEM	PART#	QTY	DESCRIPTION
1	SWPC06.312-00001		6 5/16" O.D. S.W.P. x 10 GAUGE (.134" THICK) ASTM
			A139 CARBON STEEL CASING
2		5	MIDDLE SEGMENT AT 7 3/4" LG. CENTERLINE LENGTH
3		2	END SEGMENT AT 3 5/8" LG. CENTERLINE LENGTH
4	FLRC08.188-00001	2	10" O.D. x 6 13/16" I.D. x 5/8" THICK CARBON STEEL
			ROT'G FLG. w/ (8) 3/4"ø HOLES ON 8 3/16" B.C.D.
			(A.C.,3")
5	RINC08.188-00001	2	7 7/16" O.D. x 6 7/16" I.D. x 5/8" THICK CARBON
			STEEL RING (A.C.,3")
6		4	FLANGE STOP
7	ALEC02.600-00001		2.63" I.D. x 1" THICK KALOCER SEGMENTS
8			PORTLAND TYPE 1/2 CEMENT

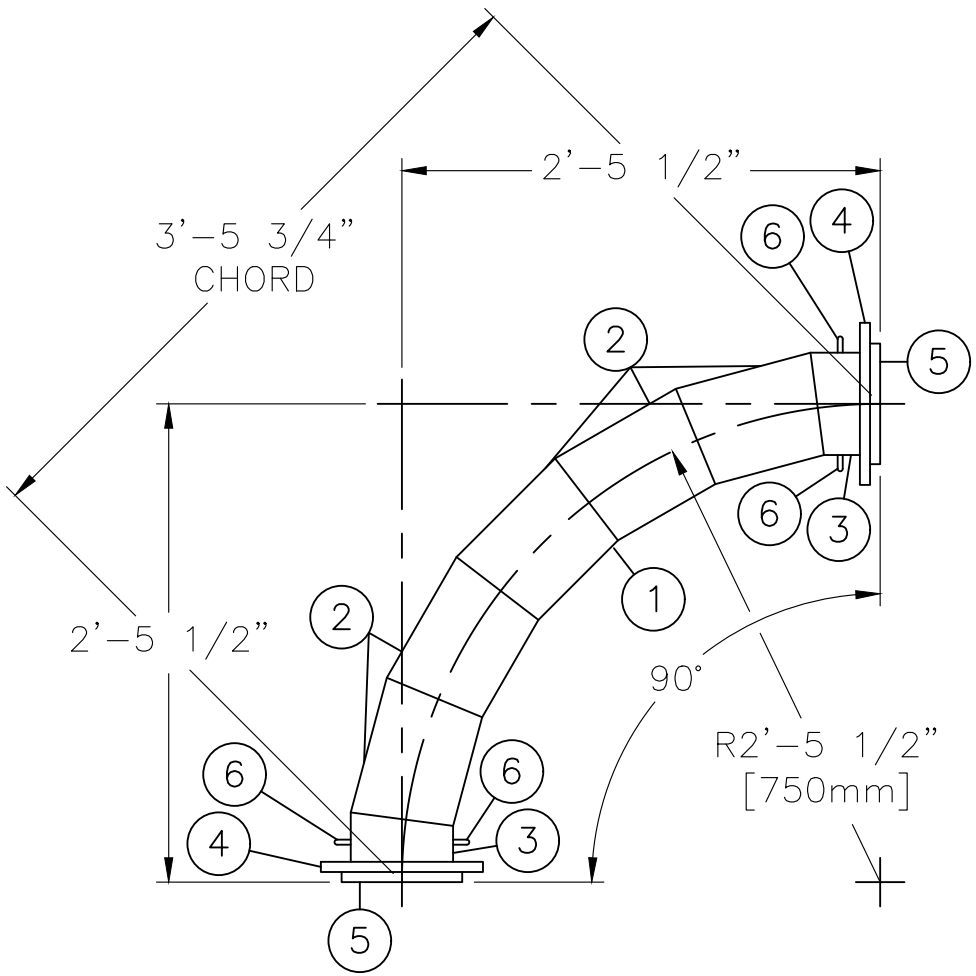



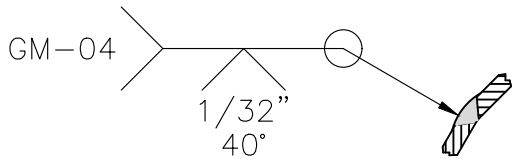

ELBOW SEGMENT WELD DETAIL
NOT TO SCALE

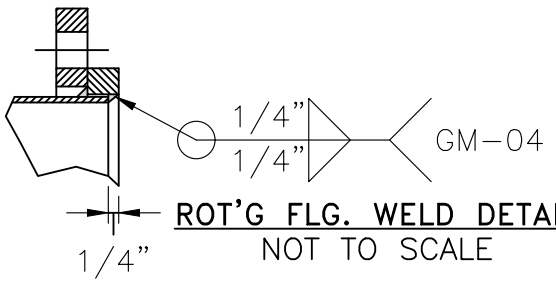

ROT'G FLG. WELD DETAIL
NOT TO SCALE

M.S.	OUT. LG. 8.599"	INS. LG. 6.936"	∠ =7.500°	E.S.	OUT. LG. 4.049"	INS. LG. 3.218"	∠ =7.500°

2.6" I.D. KALOCER LINED ELBOW

SHIP DATE
__/__/____

APPROVED FOR FABRICATION
OCTOBER 9, 2018

GENERAL NOTES:
1.) All pieces to receive (2) coats of lead free red oxide shop primer, prior to shipment.

MATERIAL MARKED "N" NOT FURNISHED BY ABRESIST CORPORATION

REV.	DATE	BY	DESCRIPTION
F			
E			
D			
C			
B			
A	10-09-18	CRK	APPROVED FOR FABRICATION

THIS DRAWING NOT TO BE DISCLOSED USED DUPLICATED OR RETAINED EXCEPT AS PERMITTED BY ABRESIST CORPORATION.

Kalenborn
Wear Protection Solutions

KALENBORN ABRESIST CORPORATION
5541 North State Road 13 URBANA, INDIANA 46990 (260)-774-3327 www.abresist.com

DFTR.	DATE:	PLT. MGR.	DATE:
CRK	10-08-18	SAD	
CHKD.	DATE:	CHKD.	DATE:
CWH	10-08-18	CEW	10-08-18

SCALE: 1"=1'-0" UNLESS OTHERWISE NOTED

APPARATUS: 2.6" I.D. x 90° x 2'-5 1/2" R.
KALOCER LINED ELBOW w/ A.C. ROT'G FLG'S

TOLERANCES: DIMENSIONS ± 1/8"
ANGULAR ± 1°

WELDS: EQUAL TO OR GREATER THAN THE THINNER OF THE TWO MATING STEEL THICKNESS'S

DWG. No.	Sheet No.	Rev. Lvl.
FGAE-02.60-90.00-29.50-001		A