
Board file — our closest fit

From Fryer-5'7-Squash-Flyer-Twin.brd
The file: 170.2 × 47.6 × 5.9 cm

TOP VIEW



SIDE VIEW · TRUE HEIGHT

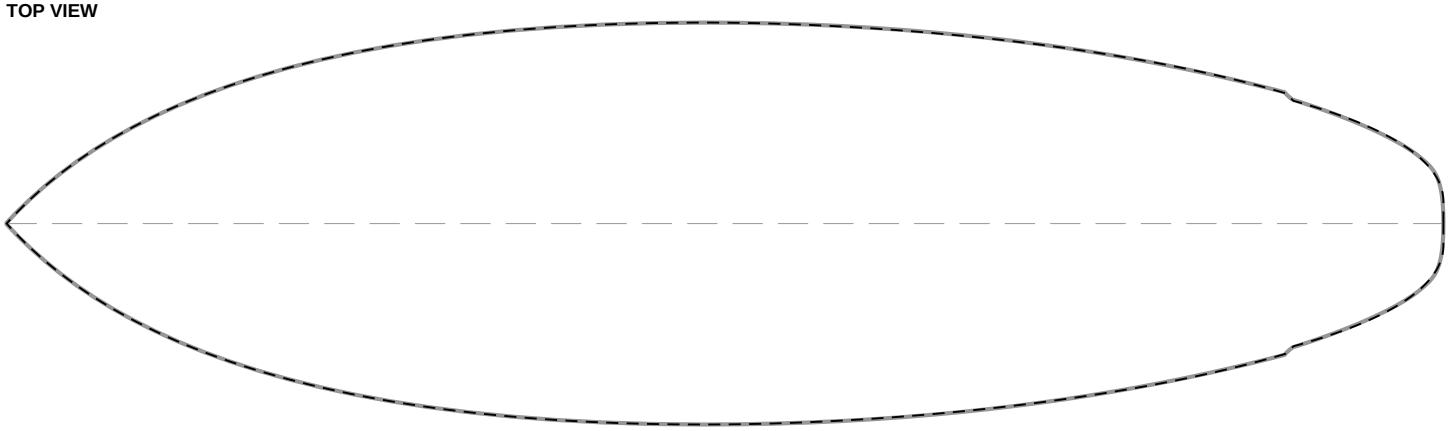

The file Our closest fit

HOW CLOSE

Outline: within 1 mm, typically less than 1 mm — the widest gap 1.5 cm from the tail, where the file is wider than our fit
Rocker: within 3 mm, typically 1 mm — the widest gap 54.5 cm from the nose
Thickness: within 1 mm, typically less than 1 mm — the widest gap 54.5 cm from the nose
Bottom: within 1 mm, typically less than 1 mm — the widest gap at the section 22.6 cm from the nose, 134 mm out from the stringer
Rails: within 1 mm, typically less than 1 mm — the widest gap at the section 22.6 cm from the nose, on the bottom 11 mm in from the rail
Wing 1 — the file: 6 mm deep over a 10 mm run along the stringer, 18.8 cm off the tail, sharp corners. Ours: 6 mm deep over a 10 mm run, 18.7 cm off the tail, sharp corners.
The rocker and thickness gaps leave out the last 2.5 cm at each end, where a file may round its tips over; our side view ends square.

WIDTHS

	Nose 30.5 cm	Wide point	Wide point sits	Tail 30.5 cm	Tail end
The file	35.2 cm	47.6 cm	2.5 cm forward	36.6 cm	No flat end
Our fit	35.3 cm	47.6 cm	2.5 cm forward	36.7 cm	5.2 cm

ROCKER

	Nose tip	Nose 30.5 cm	Centre	Tail 30.5 cm	Tail tip
The file	97 mm	21 mm	0 mm	26 mm	64 mm
Our fit	98 mm	21 mm	0 mm	26 mm	62 mm

THICKNESS

	Nose tip	Nose 30.5 cm	Centre	Tail 30.5 cm	Tail tip
The file	6 mm	41 mm	59 mm	41 mm	9 mm
Our fit	6 mm	41 mm	59 mm	41 mm	12 mm

To match the file's rocker exactly, pick a blank on ROCKER and use Customize Rocker to bring it to these figures.
The file's rocker is the finished board's, along the stringer; ours is the board before contours. Under a concave the finished rocker reads more, by the concave's depth there; under a flat, vee or belly the two are the same line.
Our fit's concaves lift its stringer by up to 4 mm (at Centre): the figures above are the finished stringer's. The board is planed that much lower there, and ROCKER shows the rocker before contours once the board is open.

OUR CLOSEST FIT

Length 170.2 cm · Width 47.6 cm · Offset +2.5 cm
Nose Angle 48.13° · Fullness 58.07% · Nose Rail 46.65%
Squash tail · Tail Block 5.2 cm · Tail Angle 89.98° · Fullness 69.46% · Tail Rail 4.57%
Rocker: nose 102 mm · nose 30.5 cm 23 mm · tail 30.5 cm 30 mm · tail 66 mm
Thickness: nose 6 mm · nose 30.5 cm 43 mm · centre 63 mm · tail 30.5 cm 41 mm · tail 12 mm
Bottom: Blended Nose Concave 2 mm · Deep Single Concave 5 mm · Double Concave Exit 3 mm
Rails: Nose med 60/40, Use Single Tuck · Centre med 65/35, Use Single Tuck · Tail med 66/34, Use Single Tuck

Fins aren't read from the file: the board opens with the fins a new board starts with.

SUGGESTED BLANKS

One blank from each maker that this board fits in by your App Default Settings, its rocker closest to the file's. The figures are the board's rocker on that blank against the file's ROCKER figures: + is more rocker, - less; the gaps leave out the last inch at each end.

US Blanks 6'7"P: within 12 mm, the widest gap 19.1 cm from the tail. Nose 0 mm, nose 30.5 cm +8 mm, tail 30.5 cm -7 mm, tail -3 mm.
Customize Rocker to +11/16"T: within 6 mm.

Arctic Foam 6'4" SBM: within 8 mm, the widest gap 27.2 cm from the tail. Nose +9 mm, nose 30.5 cm +4 mm, tail 30.5 cm -4 mm, tail +4 mm.
Customize Rocker to +1/4"T: within 6 mm.


Marko Foam 6'4" TP: within 15 mm, the widest gap 24.7 cm from the tail. Nose +17 mm, nose 30.5 cm +3 mm, tail 30.5 cm -10 mm, tail 0 mm.
Customize Rocker to -3/8"N35" +11/16"T: within 9 mm.

Millennium Foam 6'6"DG: within 10 mm, the widest gap 23.4 cm from the tail. Nose +4 mm, nose 30.5 cm +4 mm, tail 30.5 cm -5 mm, tail 0 mm.
Customize Rocker to +1/2"T: within 5 mm.


BOTTOM

CROSS-SECTIONS · HEIGHT ×4

22.6 CM FROM THE NOSE · 29.9 CM WIDE



81.6 CM FROM THE TAIL · 47.5 CM WIDE



26.8 CM FROM THE TAIL · 35.0 CM WIDE



	Nose	Centre	Tail
Read at	22.6 cm from the nose	81.6 cm from the tail	26.8 cm from the tail
The file	Single concave 2 mm	Single concave 5 mm	Double concave 3 mm
Our fit	Blended Nose Concave 2 mm	Deep Single Concave 5 mm	Double Concave Exit 3 mm
Start · Deepest At · End	5.1 cm · 30.5 cm · 91.4 cm from the nose	157.5 cm · 67.3 cm · 27.2 cm from the tail	121.9 cm · 27.2 cm · 10.2 cm from the tail
Across	Off Rail 41 mm	Off Rail 19 mm	Trough At 116 mm · Off Rail 0 mm · Off Stringer 19 mm

The bottom is read across each of the file's cross-sections, from the stringer to nine-tenths of the way out to the rail, or less where our fitted rail begins (the rail is read below). A section that is all but flat reads as flat.
Read from 3 of the file's 4 cross-sections; the ones within 2.5 cm of a tip are left out.

RAILS

CROSS-SECTIONS · TRUE HEIGHT

22.6 CM FROM THE NOSE · 29.9 CM WIDE



81.6 CM FROM THE TAIL · 47.5 CM WIDE



26.8 CM FROM THE TAIL · 35.0 CM WIDE



	Nose	Centre	Tail
Read at	22.6 cm from the nose	81.6 cm from the tail	26.8 cm from the tail
Deck Profile	33 mm	56 mm	40 mm
Family · Ratio	med 60/40	med 65/35	med 66/34
Ticked	Use Single Tuck	Use Single Tuck	Use Single Tuck
Advanced	Domed Deck Band +51 mm	Deck Mark 1 -6 mm · Domed Deck Band +13 mm	Apex Thickness +3 mm · Deck Mark 3 +13 mm
How close	within 1 mm, typically less than 1 mm	within 1 mm, typically less than 1 mm	within 1 mm, typically less than 1 mm

Each rail is read from the outer 7.6 cm of the file's bottom, round the rail and over the deck to the stringer, against our board's own cross-section at the same place — our bottom included. Between the three, RAILS blends one rail into the next.
Read from 3 of the file's 4 cross-sections; the ones within 2.5 cm of a tip are left out.
Tail Rail Blends From and Ends At are left where a new board puts them.