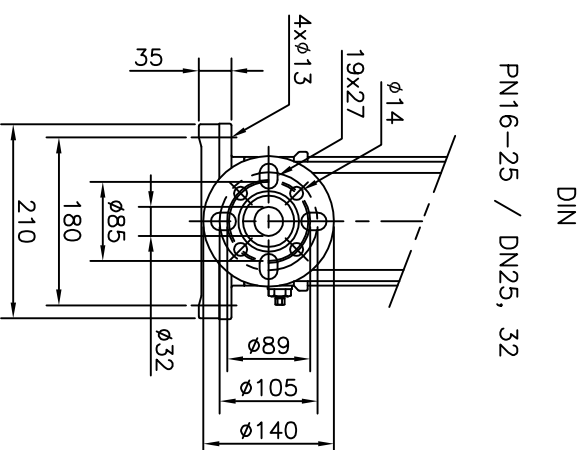
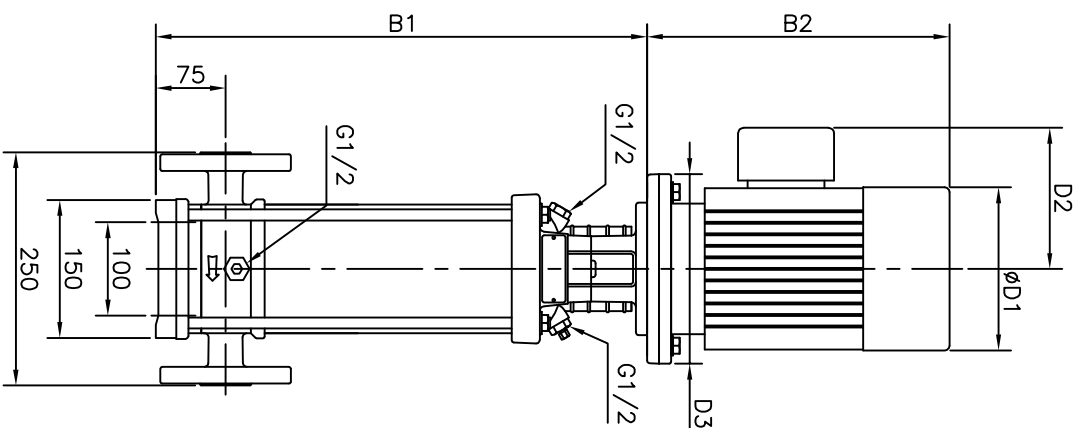



펌프형식	동력 (HP)	치수표 (mm)						중량(Kg)
		B1	B2	B1+B2	ØD1	D2	D3	
DVT 5-2	1.5	263	253	516	175	140	200	20
DVT 5-3	1.5	290	306	596	192	161	200	20
DVT 5-3	2	290	306	596	192	161	200	21
DVT 5-4	2	322	306	628	192	161	200	24
DVT 5-4	3	322	327	649	235	182	250	24
DVT 5-5	2	349	306	655	192	161	200	25
DVT 5-5	3	349	327	676	235	182	250	29
DVT 5-6	3	376	327	703	235	182	250	30
DVT 5-6	5	376	352	708	235	182	250	36
DVT 5-7	3	420	327	747	235	182	250	34
DVT 5-7	5	420	352	772	235	182	250	36
DVT 5-8	4	447	352	799	235	182	250	35
DVT 5-9	5	474	352	826	235	182	250	44
DVT 5-9	7.5	474	378	852	274	213	300	50
DVT 5-10	5.5	501	352	853	235	182	250	45
DVT 5-11	5.5	528	352	880	235	182	250	46
DVT 5-12	7.5	555	378	933	274	213	300	56
DVT 5-13	7.5	590	378	968	274	213	300	58
DVT 5-14	7.5	617	378	995	274	213	300	59
DVT 5-15	7.5	644	418	1062	274	213	300	68
DVT 5-16	7.5	671	418	1089	274	213	300	69

참고사항

1. OTIS-LG MOTOR 부착 치수임.
2. 타사 모터 부착시 치수 변경될수 있음.

210						TYPE						
						DVT 5				DWG.NAME		
						DRAWN	DESIGNED	CHECKED	APPROVED	OUTLINE DIMENSIONS		
						B.B. Shin	J.H. Ryu	S.S. Kim	I.S. Park	THIRD ANGLE PROJECTION		
										DATE	2006. 09. 12.	
										REF.DWG.NO		
REVISION										DWG. NO.	DPOKF0C△	
DATE						SIGN.				DESCRIPTION		NAME