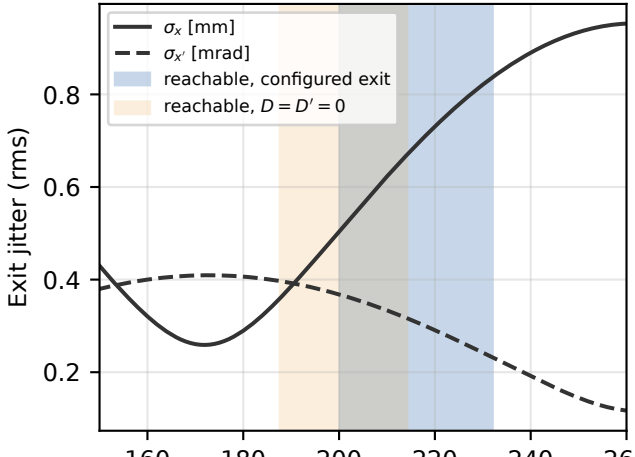
σ_x [mm]
$\sigma_{x'}$ [mrad]
reachable, configured exit
reachable, $D = D' = 0$
Exit jitter (rms)
0.8
0.6
0.4
0.2
160
180
200
220
240
260
Horizontal phase advance m1 → m4 [deg]

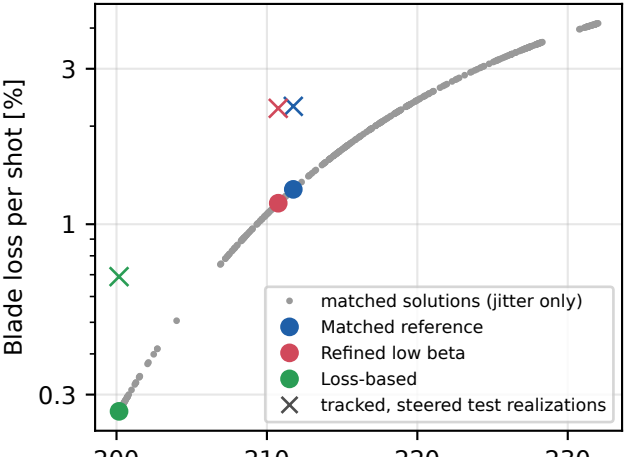
Blade loss per shot [%]
3
1
0.3
matched solutions (jitter only)
Matched reference
Refined low beta
Loss-based
tracked, steered test realizations
200
210
220
230
Horizontal phase advance m1 → m4 [deg]