

Gripper 3f Class

V1.1

Generated by Doxygen 1.8.11

Contents

1	Class Documentation	1
1.1	Gripper3f Class Reference	1
1.1.1	Detailed Description	1
1.1.2	Constructor & Destructor Documentation	2
1.1.2.1	Gripper3f()	2
1.1.3	Member Function Documentation	2
1.1.3.1	close(int tolerance=2)	2
1.1.3.2	getForce()	2
1.1.3.3	getMode()	2
1.1.3.4	getPose()	2
1.1.3.5	getSpeed()	2
1.1.3.6	gripper_statusCallback(const robotiq_s_model_control::SModel_robot_input::↵ ConstPtr &msg)	2
1.1.3.7	init()	3
1.1.3.8	moveto(int goal, int tolerance=1)	3
1.1.3.9	objectDetected()	3
1.1.3.10	open(int p=0)	3
1.1.3.11	setForce(int force)	3
1.1.3.12	setMode(int m)	4
1.1.3.13	setSpeed(int speed)	4
2	File Documentation	5
2.1	/home/ctai/catkin_ws2/src/gripper3f_control/include/gripper3f_control/gripper3f_control.h File Ref- erence	5

Chapter 1

Class Documentation

1.1 Gripper3f Class Reference

This class controls the 3-finger robotiq gripper.

```
#include <gripper3f_control.h>
```

Public Member Functions

- [Gripper3f](#) ()
- void [gripper_statusCallback](#) (const robotiq_s_model_control::SModel_robot_input::ConstPtr &msg)
- bool [init](#) ()
- void [close](#) (int tolerance=2)
- void [open](#) (int p=0)
- void [moveto](#) (int goal, int tolerance=1)
- bool [objectDetected](#) ()
- void [setMode](#) (int m)
- void [setSpeed](#) (int speed)
- void [setForce](#) (int force)
- int [getMode](#) ()
- int [getForce](#) ()
- int [getSpeed](#) ()
- int [getPose](#) ()

1.1.1 Detailed Description

This class controls the 3-finger robotiq gripper.

This class uses rostopics SModelRobotInput and SModelRobotOut to control the s-model robotiq gripper. This class subscribes to SmodelRobotInput in order to retrieve gripper's status information and publishes commands to the SModelOutput topic. Boost and robotiq_s_model_control are components required.

Author

Barrero Lizarazo, Nicolas

Date

August 2018

1.1.2 Constructor & Destructor Documentation

1.1.2.1 Gripper3f::Gripper3f ()

The constructor initializes the subscriber and publisher functions. Advertices the SModelRobotInput. Resizes vectors.

1.1.3 Member Function Documentation

1.1.3.1 void Gripper3f::close (int *tolerance* = 2)

This function closes the gripper according to the different mode in which the gripper is set.

Parameters

<i>(Optional)</i>	tolerance its a position goal interval +/- tolerance with respect to goal position (default 2)
-------------------	--

1.1.3.2 int Gripper3f::getForce ()

Gets the current gripper's force

Returns

int 0-255 see [setForce\(\)](#)

1.1.3.3 int Gripper3f::getMode ()

Gets the current gripper's mode

Returns

int 0-3 see [setMode\(\)](#)

1.1.3.4 int Gripper3f::getPose ()

Gets the current gripper's position

Returns

int 0-255 see [moveto\(\)](#)

1.1.3.5 int Gripper3f::getSpeed ()

Gets the current gripper's speed

Returns

int 0-255 see [setSpeed\(\)](#)

1.1.3.6 void Gripper3f::gripper_statusCallback (const robotiq_s_model_control::SModel_robot_input::ConstPtr & *msg*)

This is the regular Callback from a ros node, this function updates the data vector that stores the gripper status.

Parameters

<i>msg</i>	is the message type the nodes subscribes to: const robotiq_s_model_control::SModel_robot_input::ConstPtr&
------------	---

1.1.3.7 bool Gripper3f::init ()

The init function must be executed at first. It resets the gripper and executes the initialization routine. This function overrides other configured parameters previously defined. Once the init routine is done the gripper will move.

Returns

returns true when the routine is executed succesfully

1.1.3.8 void Gripper3f::moveto (int *goal*, int *tolerance* = 1)

This function moves the gripper to a given position between 0-255 and also has an optional tolerance position parameter executes the trajectory and waits until the goal is reached. Must be called after [init\(\)](#)

Parameters

<i>goal</i>	0-255 where 0 is totally open and 255 totally closed
<i>tolerance</i>	(optional) tolerance interval where +/-tolerance whith respect goal position is allowed

1.1.3.9 bool Gripper3f::objectDetected ()

Detects objects in gripper's fingers

Returns

true if and object is detected false otherwise.

1.1.3.10 void Gripper3f::open (int *p* = 0)

This function opens the gripper according to the different mode in which the gripper is set. Must be called after [init\(\)](#)

Parameters

(Optional)	p p=1 for not printing messages otherwise 0 (default 0)
------------	---

1.1.3.11 void Gripper3f::setForce (int *force*)

This function sets gripper's force

Parameters

<i>int</i>	force 0-255 where 255 is max force (default 100)
------------	--

1.1.3.12 void Gripper3f::setMode (int *m*)

Sets four different gripper's mode. Must be called after [init\(\)](#) 0:basic mode 1:pinch mode 2:wide mode 3:scissors mode

Parameters

<i>int</i>	mode 0-3 according desired mode (default basic mode)
------------	--

1.1.3.13 void Gripper3f::setSpeed (int *speed*)

This function sets gripper's speed

Parameters

<i>int</i>	speed 0-255 where 255 is max speed (default 150)
------------	--

The documentation for this class was generated from the following file:

- [/home/ctai/catkin_ws2/src/gripper3f_control/include/gripper3f_control/gripper3f_control.h](#)


Chapter 2

File Documentation

2.1 `/home/ctai/catkin_ws2/src/gripper3f_control/include/gripper3f_control/gripper3f_control.h` File Reference

```
#include <ros/ros.h>
#include <robotiq_s_model_control/SModel_robot_input.h>
#include <robotiq_s_model_control/SModel_robot_output.h>
```

Include dependency graph for gripper3f_control.h:

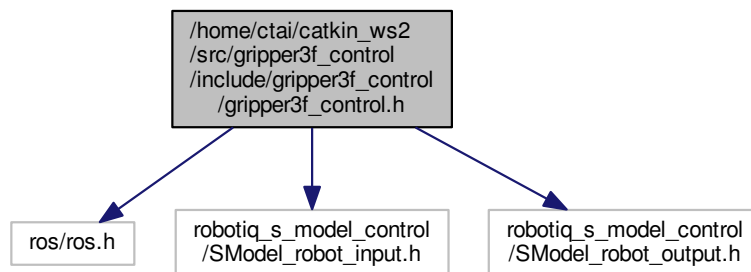

Classes

- class [Gripper3f](#)

This class controls the 3-finger robotiq gripper.

