


Ts Terminal Circuit

CIRCUIT DESCRIPTION

The sensor check circuit detects abnormalities in the speed sensor signal which cannot be detected by the DTC check.


Connecting terminals Ts and E₁ of the check connector in the engine compartment starts the check.

WIRING DIAGRAM

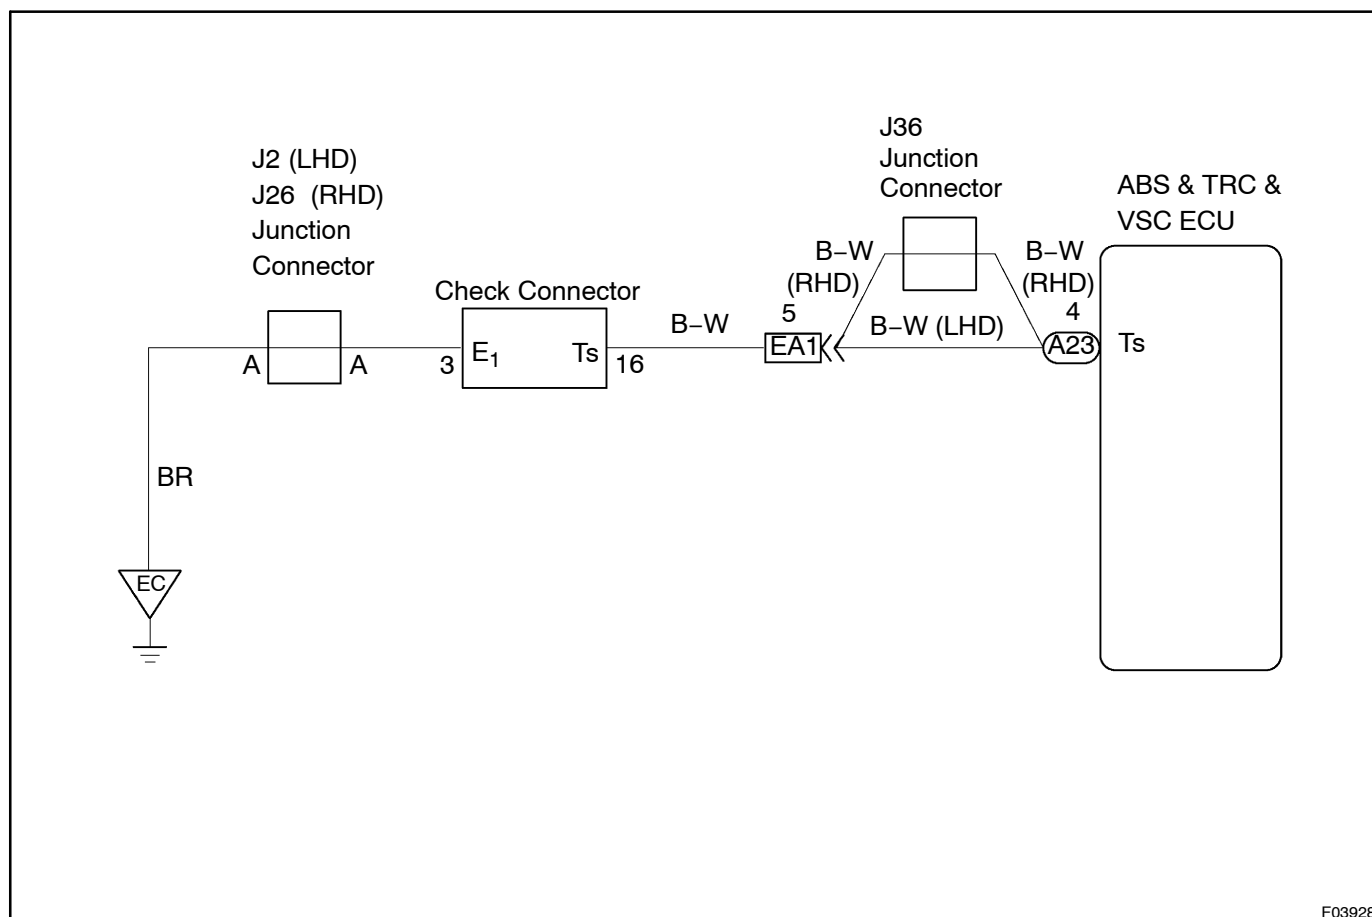

F03928

INSPECTION PROCEDURE

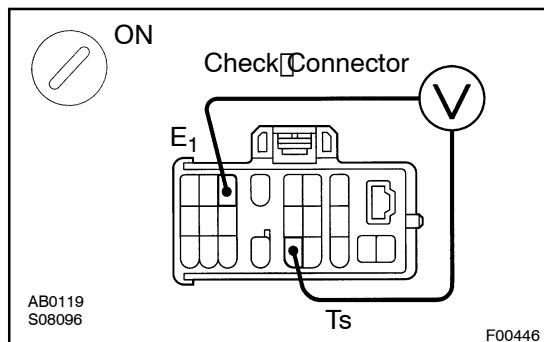1 Check voltage between terminals Ts and E₁ of check connector.**CHECK:**

- (a) Turn the ignition switch ON.
- (b) Measure voltage between terminals Ts and E₁ of check connector.

OK:

Voltage: 10 – 14 V

OK

If ABS warning light does not blink even after Ts and E₁ are connected, the ECU may be defective.

NG

2 Turn the IG switch OFF, and check for open and short circuit in harness and connector between ABS & TRC & VSC ECU and check connector, check connector and body ground (See page IN-29).

NG

Repair or replace harness or connector.

OK

Check and replace ABS & TRC & VSC ECU.