

Schwap CPU Design Documentation

Charlie Fenoglio, Alexander Hirschfeld, Andrew McKee, and Wesley Van Pelt

Winter 2015/2016

1 Registers

There are a total of 76 16-bit registers; 12 are fixed and 64 (spilt into 16 groups of 4) "schwapable" registers. Some registers have alias names, see Section 11.3.1 for a list.

1.1 Register Names and Descriptions

Name	Number	Description	Saved Across Call?
\$z0	0	The Value 0 [†]	-
\$a0	1	Assembler Temporary 0	No
\$a1	2	Assembler Temporary 1	No
\$pc	3	Program Counter [†]	Yes
\$sp	4	Stack Pointer	Yes
\$ra	5	Return Address	Yes
\$s0 - \$s1	6 - 7	User Saved Temporaries	Yes
\$t0 - \$t3	8 - 11	User Temporaries	No
\$h0 - \$h3	12 - 15	Schwap	-

[†]See Section 11.1.1-1 for details

1.2 Schwap Registers

The "schwap" registers are registers that appear to be swapped using a command. There is no data movement when schwapping, it only changes which registers the \$h0 - \$h3 refer to. There are 8 groups the user can use for general purpose and 8 reserved groups.

1.2.1 Schwap Group Numbers, Descriptions, and Uses

Group Number	ID	Uses	Saved Across Call?
0 - 3	0 - 3	User Temporaries	No
4 - 7	0 - 3	User Saved Temporaries	Yes
8	0 - 3	Arguments 0 - 3	No
9	0 - 3	Return Values 0 - 3	No
10	0	The constant 1	-
	1	The constant -1	-
	2	The constant 42	-
	3	The constant 1337	-
11	0	Port number for device 0	-
	1	I/O for device 0	-
	2	Port number for device 1	-
	3	I/O for device 1	-
12	0 - 3	Sudo values 0 - 3	No
13	0 - 3	Kernel Reserved	-
14 - 15	0 - 3	Illuminati Reserved	-

2 Instructions

All instructions are 16-bits. The destination register is also used as a source unless otherwise noted.

2.1 Instruction Types and Bit Layouts

Instructions can be manually translated by putting the bits for each of the components of the instructions in the places listed by the diagrams for each type. The OP codes can be found in section 2.2.* and function codes can be found in Section 2.2.1. The destination and source are register numbers, which can be found under the "Register Names and Descriptions" (1.1) table. Schwap group numbers can be found under the "Schwap Group Numbers, Descriptions, and Uses" (1.2.1) table. The active schwap group and sudo code number is not preserved over a function call.

2.1.1 A-Type

OP Code		Destination		Source		Func. Code	
15	12	11	8	7	4	3	0
Immediate							
15							0

Used for all ALU operations. It consists of a 4-bit OP code, 4-bit destination, 4-bit source, and a 4-bit function code. If the instruction has an immediate, it is inserted as the next instruction, and if a source is not given then it should be all 0's.

2.1.2 B-Type

OP Code		R0		R1		Offset	
15	12	11	8	7	4	3	0

If it is being used for branching it consists of a 4-bit OP code, 4-bit 1st source (R0), 4-bit 2nd source (R1), and a 4-bit (unsigned) offset. If it is being used for reading from memory it consists of a 4-bit OP code, 4-bit destination (R0 not used as a source), 4-bit source (R1, it is a memory address), and a 4-bit (unsigned) offset. If it is being used for writing to memory it consists of a 4-bit OP code, 4-bit source (R0), 4-bit destination (R1, it is a memory address), and a 4-bit (unsigned) offset. R0 and R1 are registers.

2.1.3 H-Type

OP Code						Group	
15	12					3	0

Used for schwapping and sudo. It consists of a 4-bit OP code, 8 unused bits, and a 4-bit schwap group number or sudo use case which are immediates.

2.1.4 J-Type

Used for jumping. It consists of a 4-bit OP code, 4-bit source register, and an 8-bit (signed) offset.

OP Code		Source		Offset			
15	12	11	8	7			0

2.2 Core Instructions

Some instructions have alias names, see Section 11.3.2 for a list. [dest], [src], [src0], [src1] all refer to a register in the register file, for example \$t0. "NAM" stands for the name of the instruction (for example, "and"). "OP" stands for whatever the op would be (for example, "&").

2.2.1 A-Type

Function Code	Name	Description
0x0	and	Bitwise ands 2 values
0x1	orr	Bitwise ors 2 values
0x2	xor	Bitwise xors 2 values
0x3	not	Bitwise nots the first value
0x4	tsc	Converts a number to 2's compliment
0x5	slt	Set less than
0x6	sgt	Set greater than
0x7	sll	Left logical bit shift
0x8	srl	Right logical bit shift
0x9	sra	Right arithmetic bit shift
0xA	add	Adds 2 values
0xB	sub	Subtracts 2 values
0xF	cpy	Copies the value in one register to another

All A-Type instructions, except for not, tsc, slt, and cpy, follow the syntax in the first section of the table below. Those three can be found in the next sections.

OP Code	Syntax	Meaning	Description
0x0	NAM [dest] [src]	dest = dest OP src	OPs the values in registers [dest] and [src]
0x1	NAM [dest] [src] [immediate]	src = immediate dest = dest OP src	Loads the immediate into the register [src] and then OPs the values in registers [dest] and [src]
	NAM [dest] [immediate]	dest = dest OP immediate	OPs the immediate and the value in the register [dest]
0x0	not [dest]	dest = ~dest	Bitwise nots the value in the register [dest]
0x0	tsc [dest]	dest = ~dest + 1	Converts the value in the register [dest] to 2's compliment
0x1	tsc [dest] [src] [immediate]	src = immediate dest = ~src + 1	Loads the immediate into the register [src] and then converts the value in register [src] to 2's compliment and stores into [dest]
0x0	slt [dest] [src]	dest = (dest < src) ? 1 : 0	If [dest] < [src], then [dest] gets set to 1 If [dest] ≥ [src], then [dest] gets set to 0
0x1	slt [dest] [src] [immediate]	src = immediate dest = (dest < src) ? 1 : 0	Loads the immediate into the register [src] then If [dest] < [src], then [dest] gets set to 1 If [dest] ≥ [src], then [dest] gets set to 0
	slt [dest] [immediate]	dest = (dest < immediate) ? 1 : 0	If [dest] < [immediate], then [dest] gets set to 1 If [dest] ≥ [immediate], then [dest] gets set to 0
0x0	cpy [dest] [src]	dest = src	Copies the value the in register [src] into [dest]
0x1	cpy [dest] [immediate]	dest = immediate	Loads the immediate into the register [dest]

2.2.2 B-Type

OP Code	Name	Description
0x2	beq	Branches if the 2 values are equal
0x3	bne	Branches if the 2 values are not equal
0x4	bgt	Branches if value0 > value1
0x5	blt	Branches if value0 < value1
0x7	r	Reads the value in memory into a register
0x8	w	Writes the value in a register into memory

The four different types of branches all follow the same syntax, "bnh" represents any branch name and "***" represents the condition. They will become pseudo instructions iff branching up, or down more than 16 instructions. Read and write each have their own syntaxes. [offset] is not a register, it is an immediate.

Syntax	Meaning	Description
bnh [src0] [src1] label	if(src0 *** src1) goto label	If [src0] *** [src1], branch to label
r [dest] [offset]([src])	dest = Mem[src + offset]	Reads the data in the address of [src] + [offset] in memory into [dest]
w [offset]([dest]) [src]	Mem[dest + offset] = src	Writes the data in the address of [dest] + [offset] in memory from [src]

2.2.3 H-Type

OP Code	Name	Syntax	Description
0xA	scp	scp	Switches PC to user PC from kernel PC
0xE	rsh	rsh [group]	Changes the schwap group number to [group], these numbers can be found in the table in 1.2.1
0xF	sudo	sudo [code]	Similar to syscall in MIPS, see kernel documentation for details

2.2.4 J-Type

OP Code	Name	Syntax	Meaning	Description
0x6	jr	jr [dest] [offset]	pc = dest + offset	Jumps to the instruction at the address in [dest] + [offset]

2.3 Pseudo Instructions

There are two types of pseudo instructions. One are instructions which are always pseudo instructions, the other are sometimes pseudo depending on the conditions. Some instructions have alias names, see Section 11.3.2 for a list.

2.3.1 Always Pseudo Instructions

Name	Syntax	Actual Code	Description
j	j label	cpy \$a0 [label pc] jr \$a0 0	Jumps to the instruction at label
jal	jal label	cpy \$ra \$pc j [label]	Stores the return address and then jumps to the label
bge	bge [src0] [src1] label	cpy \$a0 [src0] slt \$a0 [src1] beq \$a0 \$z0 label	If [src0] \geq [src1], branch to label
ble	ble [src0] [src1] label	cpy \$a0 [src1] slt \$a0 [src0] beq \$a0 \$z0 label	If [src0] \leq [src1], branch to label

2.3.2 Conditional Pseudo Instructions

Name	Syntax	Actual Code	Condition
beq	beq [src0] [src1] label	bnq [src0] [src1] Next j label Next:	Branching up or branching down more than 16 instructions
bne	bne [src0] [src1] label	beq [src0] [src1] Next j label Next:	Branching up or branching down more than 16 instructions
bgt	bgt [src0] [src1] label	blt [src0] [src1] Next j label Next:	Branching up or branching down more than 16 instructions
blt	blt [src0] [src1] label	bgt [src0] [src1] Next j label Next:	Branching up or branching down more than 16 instructions

2.4 Sudo

Sudo is the analogous to "syscall" in MIPS. It does a bunch of system stuff based on the code you give it.

Sudo modes	
Syntax	Description
sudo 0	Signifies the end of a program
sudo 10	Print all kernel registers
sudo 11	Multiply \$h0 and \$h1 in the kernel schwap
sudo 13	Push schwap (group number in kernel schwap \$h0) to stack
sudo 14	Pop schwap (group number in kernel schwap \$h0) from stack
sudo 15	Self destruct

3 RTL and Datapath

3.1 Components

3.1.1 Single 16-bit Register

I/O	Name	Size
In	in	16
Out	out	16
Control	write	1

Used as:	
IR	Stores the 16-bit instruction that comes from memory
NextInst	Stores the next 16-bit instruction that comes from memory
ALUout	Stores the value that comes out of the ALU
MemRead	Same as IR, but is used for values

3.1.2 Single 4-bit Register

I/O	Name	Size
In	in	4
Out	out	4
Control	writable	1

Used as:	
SchLatch	Stores schwap group number

3.1.3 SE

Sign extends

I/O	Name	Size
In	in	*
Out	out	*

3.1.4 16-bit Adder

I/O	Name	Size	Description
In	A	16	First input
In	B	16	Second input
Out	R	16	Result

3.1.5 ALU

I/O	Name	Size	Description
In	A	16	First input
In	B	16	Second input
Out	R	16	Result
Out	zero	1	If result is 0
Out	eq	1	If A == B
Out	lt	1	If A < B
Out	gt	1	If A > B
Control	op	4	Operation code

3.1.6 PC

I/O	Name	Size	Description
In	PCSrc	16	What the PC should be changed to
Out	PCOut	16	The PC value
Control	PCWrite	1	Set the PC to PCSrc
Control	KernelMode	1	Change
Control	FuncCode	4	Function Code

3.1.7 Register File


I/O	Name	Size	Description
In	regID0	4	ID for first register
In	regID1	4	ID for second register
In	DataIn	16	Data to write to regID0
In	DataInAlt	16	Data to write to regID1
Out	regOut0	16	Data from regID0
Out	regOut1	16	Data from regID1
Control	SchLatch	4	The schwap group number to use
Control	RegWrite	1	If data can be written to regID1

3.1.8 Main Memory

I/O	Name	Size	Description
In	Addr0	16	Address for data
In	Addr1	16	Address for data
In	Store	16	Stores data at Addr0
Out	Out0	16	Data at Addr0
Out	Out1	16	Data at Addr1
Control	memRead	1	Set to 1 when data is to be read
Control	memWrite	1	Set to 1 when data is to be written


3.2 Summary Charts - RTL and Datapath

Step	A-Type	B-Type			H-Type		J-Type
		Branches	Read	Write	Schwap	Sudo	
Get instruction	IR ::= MEM[PC]; NextInst ::= MEM[PC+1] PC++						
Decode	if(IR[15:12]==0x1) PC++ ALUout ::= PC + E(IR[3:0])						
Execute	ALUout::=reg#IR[11:8] aluop reg#IR[7:4]	if(reg#IR[11:8] aluop reg#IR[7:4] == 0) PC ::= ALUout	ALUout ::= reg#IR[7:4] + SE(IR[3:0])		SchLatch ::= IR[3:0]	Change on Code#	PC::=reg#IR[11:8] +SE(IR[7:0])
Output	reg#IR[8:11] ::= ALUout		MemRead ::= MEM[ALUout]	MEM[ALUout] ::= reg#IR[11:8]			
Output 2			reg#IR[8:11] ::= MemRead				

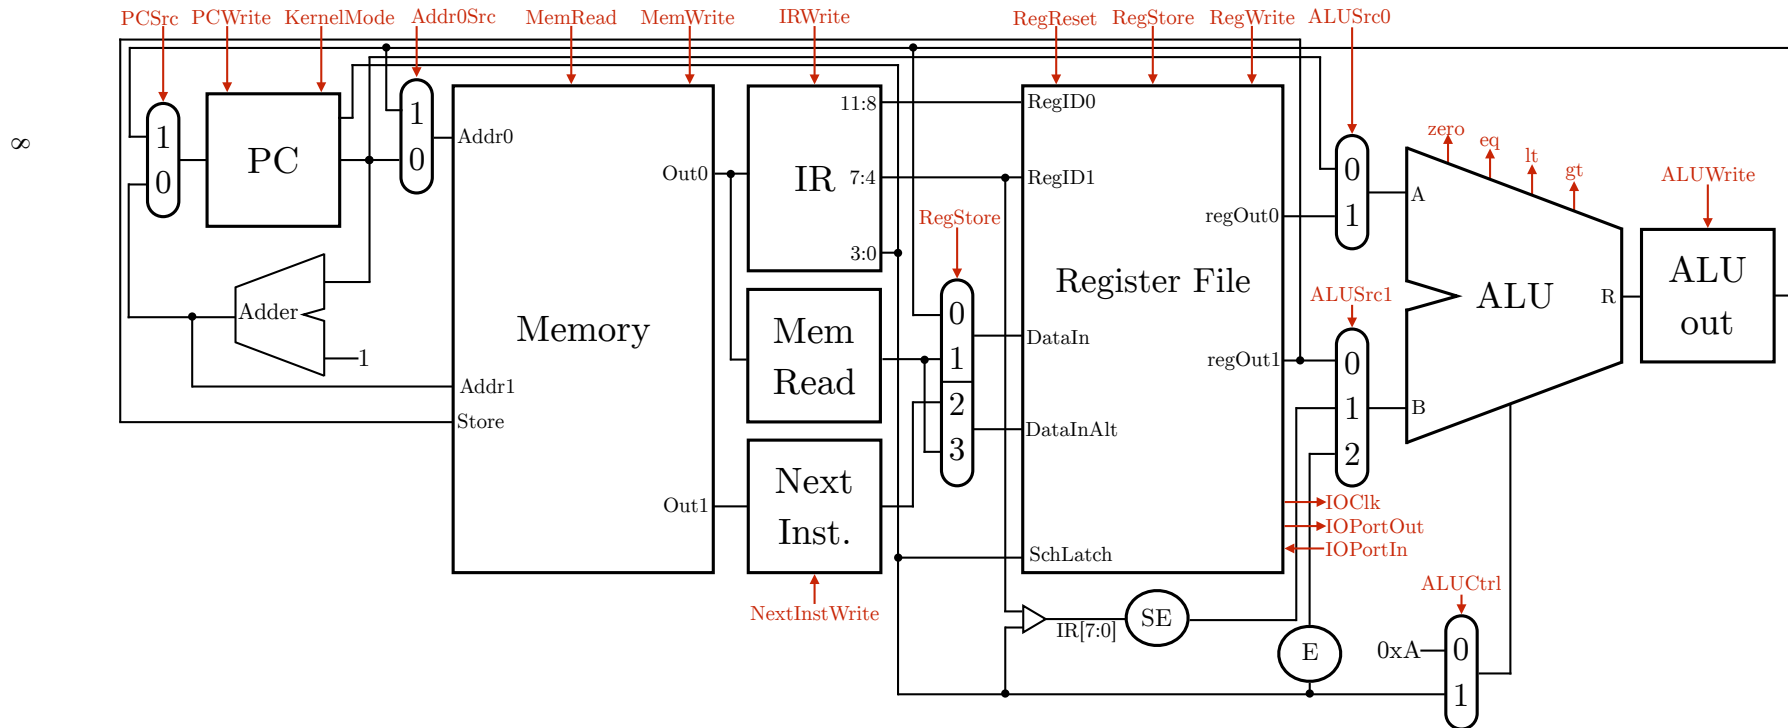

3.3 Control

All of the bits are in hex. If a control bit is listed below without a value, it is the opposite of it's default. If it is not named, then it is set to it's default, currently, all defaults are 0.

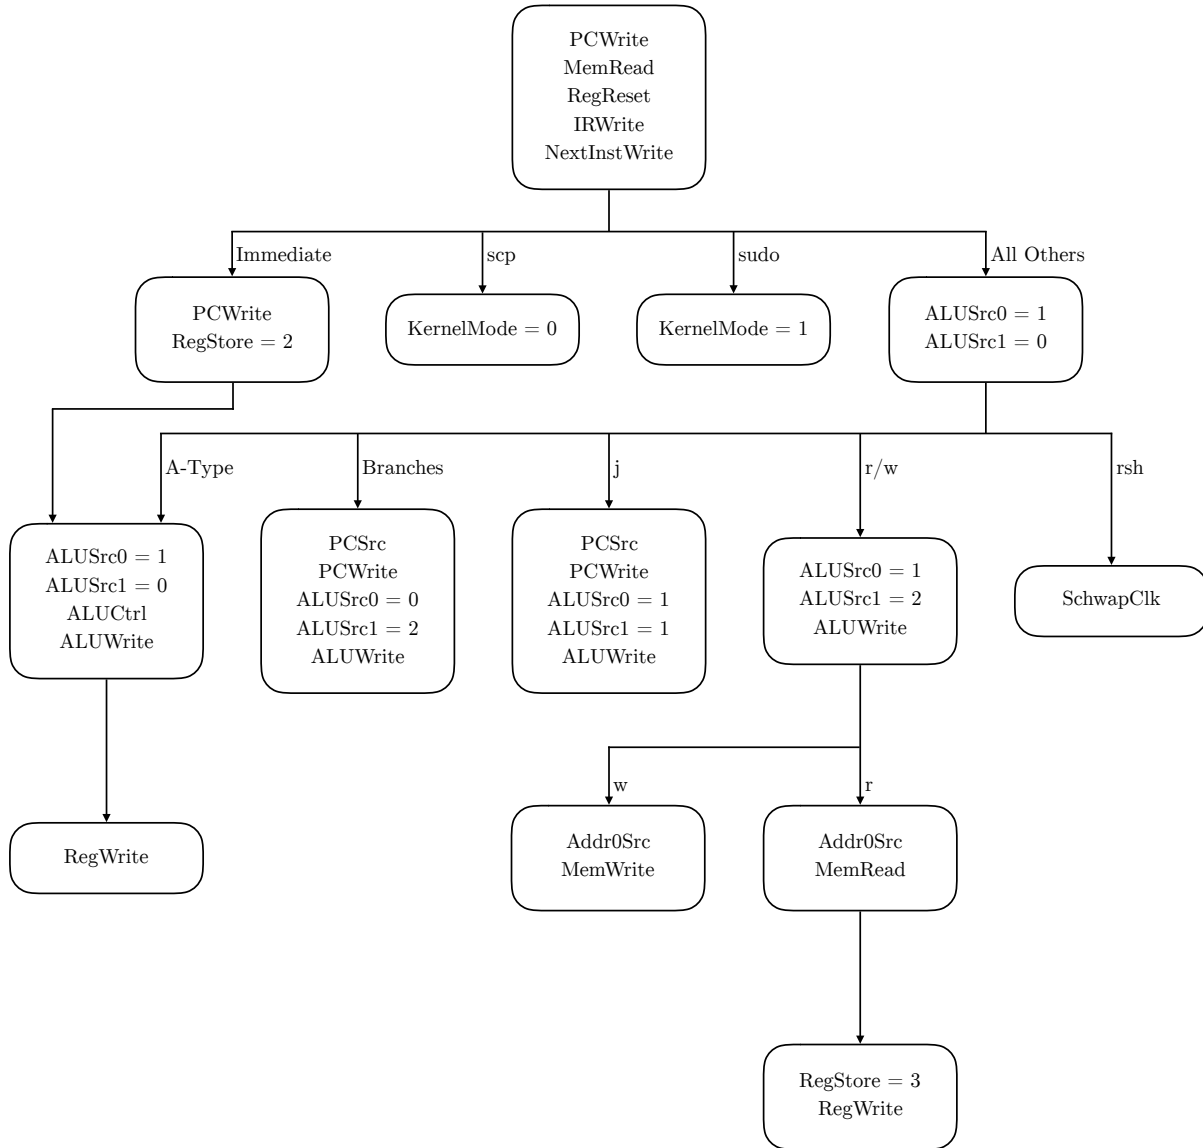

3.4 Unit Tests and Implementation

3.4.1 Single 16-bit Registers

Implementation: Use Micah's 16 bit register

- Tests:
1. Pass in a 16-bit value with writing enabled \Rightarrow The whole value should be stored
 2. Pass in a 16-bit value with writing disabled \Rightarrow The none of the value should be stored

3.4.2 SE

Implementation: Split the last wire to make as many more other output bits that are required.

- Tests:
1. Pass in a value which has a sign bit of 0 \Rightarrow All new bits should be 0
 2. Pass in a value which has a sign bit of 1 \Rightarrow All new bits should be 1

3.4.3 16-bit Adder

Implementation: Use 4 4-bit carry look ahead adders connected together like a ripple adder

- Tests:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0x1 \Rightarrow The result should be 0
 3. Pass in 0x1 and 0xFFFF \Rightarrow The result should be 0
 4. Pass in 0xFFFF and 0xFFFF \Rightarrow The result should be 0xFFFFE
 5. Pass in any other 2 values \Rightarrow The result should be the 2 inputs added together

3.4.4 ALU

Implementation: Use the 16-bit adder above

- Tests: Note: Any time the ALU result is 0, the "zero" output should be 1, all other times it should be 0
- and:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0xFFFF \Rightarrow The result should be 0xFFFF
 3. Pass in 0 and 0xFFFF \Rightarrow The result should be 0
 4. Pass in any other 2 values \Rightarrow The result should be the 2 inputs anded together
- orr:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0xFFFF \Rightarrow The result should be 0xFFFF
 3. Pass in 0 and 0xFFFF \Rightarrow The result should be 0xFFFF
 4. Pass in any other 2 values \Rightarrow The result should be the 2 inputs orred together
- xor:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0xFFFF \Rightarrow The result should be 0
 3. Pass in 0 and 0xFFFF \Rightarrow The result should be 0xFFFF
 4. Pass in any other 2 values \Rightarrow The result should be the 2 inputs xorred together
- not:
1. Pass in 0 \Rightarrow The result should be 0xFFFF
 2. Pass in 0xFFFF \Rightarrow The result should be 0
 3. Pass in any other value \Rightarrow The result should be the input notted
- tsc:
1. Pass in 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF \Rightarrow The result should be 0x1
 3. Pass in any other value \Rightarrow The result should be the input converted to 2's compliment
- slt:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0xFFFF \Rightarrow The result should be 0
 3. Pass in 0xFFFF and 0 \Rightarrow The result should be 0x1
 4. Pass in 0 and 0xFFFF \Rightarrow The result should be 0
 5. Pass in 2 values such that the first is smaller than the second \Rightarrow The result should be 0
 6. Pass in 2 values such that the second is smaller than the first \Rightarrow The result should be 0x1
- sll:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0 \Rightarrow The result should be 0xFFFF

3. Pass in 0xFFFF and 0x1 \Rightarrow The result should be 0xFFFE
 4. Pass in 0xFFFF and 0xF \Rightarrow The result should be 0x8000
 5. Pass in 0 and 0x1 \Rightarrow The result should be 0
 6. Pass in 0 and 0xF \Rightarrow The result should be 0
 7. Pass in any other 16-bit value for the first and 4-bit value for the second \Rightarrow The result should be the first input shifted to the left by the amount of the second
- srl:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0 \Rightarrow The result should be 0xFFFF
 3. Pass in 0xFFFF and 0x1 \Rightarrow The result should be 0x7FFF
 4. Pass in 0xFFFF and 0xF \Rightarrow The result should be 0x1
 5. Pass in 0 and 0x1 \Rightarrow The result should be 0
 6. Pass in 0 and 0xF \Rightarrow The result should be 0
 7. Pass in any other 16-bit value for the first and 4-bit value for the second \Rightarrow The result should be the first input shifted to the right by the amount of the second and the new spots should be filled with 0's
- sra:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0 \Rightarrow The result should be 0xFFFF
 3. Pass in 0xFFFF and 0x1 \Rightarrow The result should be 0xFFFF
 4. Pass in 0xFFFF and 0xF \Rightarrow The result should be 0xFFFF
 5. Pass in 0 and 0x1 \Rightarrow The result should be 0
 6. Pass in 0 and 0xF \Rightarrow The result should be 0
 7. Pass in 0x7FFF and 0x1 \Rightarrow The result should be 0x3FFF
 8. Pass in 0x7FFF and 0xE \Rightarrow The result should be 0x1
 9. Pass in 0x7FFF and 0xF \Rightarrow The result should be 0
 10. Pass in any other 16-bit value for the first and 4-bit value for the second \Rightarrow The result should be the first input shifted to the right by the amount of the second and the new spots should be filled with the leading digit
- add:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0x1 \Rightarrow The result should be 0
 3. Pass in 0x1 and 0xFFFF \Rightarrow The result should be 0
 4. Pass in 0xFFFF and 0xFFFF \Rightarrow The result should be 0xFFFE
 5. Pass in 0x7FFF and 0x1 \Rightarrow The result should be 0x8000
 6. Pass in 0x7FFF and 0x7FFF \Rightarrow The result should be 0xFFFE
 7. Pass in any other 2 values \Rightarrow The result should be the 2 inputs added together
- sub:
1. Pass in 0 and 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF and 0x1 \Rightarrow The result should be 0xFFFE
 3. Pass in 0x1 and 0xFFFF \Rightarrow The result should be 0x10
 4. Pass in 0xFFFF and 0xFFFF \Rightarrow The result should be 0
 5. Pass in 0x8000 and 0x1 \Rightarrow The result should be 0x7FFF
 6. Pass in 0x8000 and 0x7FFF \Rightarrow The result should be 0x1
 7. Pass in any other 2 values \Rightarrow The result should be the 2 inputs subtracted
- cpy:
1. Pass in 0 \Rightarrow The result should be 0
 2. Pass in 0xFFFF \Rightarrow The result should be 0xFFFF
 3. Pass in any other value \Rightarrow The result should be the value

3.4.5 Schwap

Implementation: Use 4 16-bit wide schmuxes which switch to 16 16-bit registers each, and then 4 16-bit deschmuxes to each group of the 16 registers

- Tests:
1. Set Schlatch to 0 \Rightarrow The schlatch should be set to 0 and should allow reading and writting to schwap group 0
 2. Write values \Rightarrow The values should be written to the group number according to the schlatch
 3. Change schlatch \Rightarrow The values in the preivious and new schwap group should not have been altered
 4. Write data to a new schwap group \Rightarrow The data should be written to the new schwap group and the data in the old group should not have been altered
 5. Change back to a preiviously used schlatch \Rightarrow The data preiviously written data should still be in the schwap group

3.4.6 Register File

Implementation: Create one 16-bit register hard-wired to 0, 11 normal 16-bit registers, and a schwap.

- Tests:
1. Pass in 2 register IDs between 0 and 11 into the to regID inputs \Rightarrow The result should be the values in the given registers (regOut0 has the value from regID0 and regOut1 has the value regID1)
 2. Pass in 2 register IDs between 12 and 15 into the to regID inputs \Rightarrow The result should be the values in the given registers (regOut0 has the value from regID0 and regOut1 has the value regID1) and use the correct schwap group
 3. Pass in a number between 0 and 14 to SchLatch \Rightarrow The data coming out of registers 12 - 15 should be from the schwap group number given to SchLatch
 4. Pass in a register ID using regID1 between 0 and 11 with a value to ImmIn0 and RegWrite set to 1 \Rightarrow The result should be stored in the register given on regID1, and regID0 should be ignored
 5. Pass in a register ID using regID1 between 12 and 15 with a value to ImmIn0 and RegWrite set to 1 \Rightarrow The result should be stored in the register given on regID1 in the correct schwap group, and regID0 should be ignored

3.4.7 Main Memory

Implementation: Use a Xilinx created memory with 2 address inputs, 2 outputs, and at least 1 write data input

- Tests:
1. Pass in 2 valid memory addresses and set the memRead to 1 \Rightarrow The data in at those memory addresses should be output
 2. Pass in data to Store and a valid memory address and set memWrite to 1 \Rightarrow The the data from Store should have been written to memory
 3. Pass in data to Store and a valid memory address and set memWrite to 0 \Rightarrow The the data from Store should not have been written to memory

3.5 Integration Tests

3.5.1 PC and Memory

1. Set PC to some initial value for testing
2. Clock PCWrite at least 16 times
3. Write data to those 16 addresses and set PC to the original value for testing
4. Clock PCWrite so it will iterate over the values put into memory, also check that the outputs from memory are correct

3.5.2 Register File and ALU

1. Write test data to each register in the register file
2. Do operations using the ALU to the values in the register file using every register and ALU op code
3. Check all of the values in the register file to ensure they are correct

3.6 System Tests

3.6.1 A-Type

- No Immediate:
1. Get this instruction
 2. Increase PC by 1 for the next instruction
 3. R0 and R1 should be loaded with the values from the first and second register in the instruction
 4. The ALUout should have the value of the two values combined using the function code that was passed in
 5. That value should be in the first specified register for the instruction

- With Immediate:
1. Get this and the next instruction
 2. Increase PC by 1 for the next instruction
 3. R0 should be loaded with the value from the first register in the instruction and R1 should have the immediate which was in NextInst, PC should have been increased by 2 again
 4. The ALUout should have the value of the two values combined using the function code that was passed in
 5. That value should be in the first specified register for the instruction, the immediate should also have been stored in the second register from the instruction if it was given

3.6.2 B-Type

- Branches:
1. Get this instruction
 2. Increase PC by 1 for the next instruction
 3. R0 and R1 should be loaded with the values from the first and second register in the instruction
 4. The ALUout should have the new PC value for use if the branch is supposed to branch
 5. ALUout should be transferred to PCtemp, the combination of R0 and R1 should be in ALUout
 6. If ALUout is 0 PC should have been changed to what is in PCtemp

- Read:
1. Get this instruction
 2. Increase PC by 1 for the next instruction
 3. R0 and R1 should be loaded with the values from the first and second register in the instruction, Hreg should have the offset from the instruction
 4. The ALUout should have the value of what's in R1 added to the sign extended value in Hreg
 5. ALUout should be passed into main memory and the value at that address should be in MemRead
 6. The first register specified in the instruction should have the value from memory

- Write:
1. Get this instruction
 2. Increase PC by 1 for the next instruction
 3. R0 and R1 should be loaded with the values from the first and second register in the instruction, Hreg should have the offset from the instruction

4. The ALUout should have the value of what's in R1 added to the sign extended value in Hreg
5. ALUout should be passed into memory as well as the value in R0, the value in R0 should be in memory at that address

3.6.3 H-Type

- Schwap:
1. Get this instruction
 2. Increase PC by 1 for the next instruction
 3. Hreg should get the schwap group number
 4. SchLatch should now be set to the new schwap group number
- Sudo:
1. Get this instruction
 2. Increase PC by 1 for the next instruction
 3. Hreg should get the sudo code number
 4. The correct action should now be performed based on the code number
- Spc:
1. Get the PC value
 2. Increment PC
 3. Switch to spc

3.6.4 J-Type

- jr:
1. Get this instruction
 2. Increase PC by 1 for the next instruction
 3. PC should be changed to the value in R0 added to the sign extended value in IR[7:0]

4 Coding Practices

1. Programs should always be ended with "sudo 0".
2. Avoid branching up and more than 16 instructions down. The hardware implementation of branching limits branching to only going down a maximum of 16 instructions, but the assembler will convert these to a combination of a branch and jump.
3. Schwap groups are not preserved across calls, including sudo calls.

5 Assembler

5.1 Using the Assembler

Calling the program: "assembler infile.asm <outfile.bin> <Program Start offset> <debug>"

- Use the "-h" flag to display help
- If the outfile is not specified, it will write to out.bin
- If 'debug'(all lowercase) is passed anywhere, it will toggle debugging mode
- If an integer (in decimal) is passed, it will offset the program counter so that all direct jumps are recorded accurately, it defaults to 4096(or 0x1000). This is highly recommended, do not touch unless you know what you are doing.

5.2 Supported Pseudo Instructions

jal: Jump and link. It will set RA to the PC after this instruction call. It takes a label.
Example: jal label

j: Jumps to a label. This instruction is extended to jr \$pc label.
Example: j label

psh: Push. Decrease the stack pointer by 1 and push a value in a register to the user stack.
Example: psh \$t0

pop: Pop. Reads a value from the stack and add 1 to the stack pointer.
Example: pop \$t0

nop: No Operator. Becomes and \$0 \$0.
Example: nop

bge: Branch if Greater Than or Equal To. Branch to a label if the value in register one is greater than or equal to the value in the second register.
Example: bge \$t0 \$t1 label

ble: Branch if Less Than or Equal To. Branch to a label if the value in register one is less than or equal to the value in the second register.
Example: ble \$t0 \$t1 label

5.3 Supported Shortcuts

5.3.1 Schwap

All instructions that use schwap registers can use the notation \$hn@m where \$hn is the target schwap register, and m is the target schwap group. This can be used if one or both registers are schwap. This should work with all instructions, but has only been thoroughly tested with ALU operations. These are not dependent on the position of the register in the instruction.

Example 1: add \$h0@5 \$t0
 Is translated to
 rsh 5
 add \$h0 \$t0

Example 2: slt \$h0@5 \$h0@8
 Is translated to
 rsh 8
 cpy \$a0 \$h0
 rsh 5
 slt \$h0 \$a0

5.4 Adding Pseudo Instructions

If you REALLY want to add pseudo instructions, there is documentation within the Python file. Remember to both add the instruction to the PseudoList at the top of the file, and to add the case in pseudoExpandHelper. Follow the patterns given. Any modification to the assembler code voids all warranty.

6 Emulator

The emulator can be run from the executable jar, JScpim.jar. Load the kernel and the program into memory. The kernel should be loaded at 0x0000, and the program to be run should be loaded at 0x1000. The file structure it takes is as follows. The file may optionally start with a hash sign and a 4-digit hex number. If not, #1000 is assumed. This is the location the memory will be loaded into. Memory is taken in the form "0xHHHH", where H is a hex digit. Each 16-bits of memory should be on its own line. Invalid lines will be ignored.

The emulator is slightly buggy, however basic things should work. Note that behavior for minimizing then unminimizing the window is... undefined. Behavior should be normal for using ALT+Tab to switch to/from the window, however, based on the way java handles events.

[insert image here]

6.1 Known Bugs

- If you try to become a professional Korean starcraft player on the reset button, the window will break
- The illuminati seem to have infiltrated parts of the code base. Don't listen to their lies
- It's java and swing... There's going to probably be a lot of bugs but if you're not stupid and/or trying to break it you shouldn't really run into that many

7 LINUXS

The Kernel (LINUXS) handles the initialization of the CPU, sudo calls, and exception handling. The kernel is always loaded starting at 0x0000. Instructions 0x0001 to 0x000F should jump to the sudo handlers for the same number as the address (e.g. 0x0001 should be a 16-bit jump to the sudo 1 handler). The initialization of the CPU includes waiting for 1,000,000 cycles @ 50MHz, setting the \$sp=0xFFFF, and jumping to 0x1000 where the program is loaded. The 1,000,000 cycles are representative of the amount of 50Hz cycles it would take LCD to initialize if it were implemented in the future. Sudo calls are outlined in section 2.2.4. While all the ones mentioned are currently implemented, the rest remain reserved for unspecified future use, and will do nothing if called. Exceptions are handled by jumping to 0x0000. Rather than performing sudo 0, which is dealt with in hardware, it will jump to the exception handler. Currently interrupts and exceptions will not occur naturally. However, we decided to include it so that programmer-defined exception handling was possible.

8 Program Loader

8.1 Using the Program Loader

Calling the loader: `programLoader program.bin jmemory.coe jkernel.bin`

Data can be preloaded into the memory file by adding "loc = data" to the end of the assembly

- loc being the exact location (in decimal) above the program and below 15480 (15480 to 20480 is user stack, can use but be careful) and above 10000 or the end of your program, your decision
- data is a 4 digit hex number, must be at most 4 digits, in hex. Also, please augment with zeroes, not doing so is untested because coe files are weird.
- Example: 10101 = abcd

There is not a lot of checking in this code, if it fails, it's on you. These are the ranges for memory:

kernel code	[0:4096)
user code	[4096:10000)
user space	[10000:15480)
stack	[15480:20480]

9 The Cb Programming Language and compiler

The Cb Programming Language is mostly just a watered down version of C and it is a Turing Complete programming language.

9.1 Supported Features

9.1.1 Data Types

Currently, the only supported data type is a 16-bit signed integer, which is called "int".

9.1.2 Scope

Scope is contained the same way in Cb as it is in C, with "{" and "}" to open and close the current scope respectively.

9.1.3 Operators

Operators for combining values and variables:

Syntax	Description
+	Adds the values on either side
-	Subtracts the values on either side

Operators for comparing values and variables:

Syntax	Description
==	Checks if the values on either side are the same
!=	Checks if the values on either side are the different
>	Checks if the value on the left side is greater than the value on the right side
>=	Checks if the value on the left side is greater than or equal to the value on the right side
<	Checks if the value on the left side is less than the value on the right side
<=	Checks if the value on the left side is less than or equal to the value on the right side

9.1.4 Declaring and assigning variables

Variable names should always start with letters and never contain spaces. Declaring a variable can use any of the following syntaxes:

Syntax	Description
int a;	Reserves a place in memory/registers for the variable "a"
int a, b;	Reserves places in memory/registers for the variables "a" and "b", this can pattern can be expanded to declare as many variables as desired
int a = 5;	Reserves a place in memory/registers for the variable "a" and then sets it to the value 5

Assigning variables can be done with any of the following syntaxes:

Syntax	Description
<code>a = 5;</code>	Sets the variable "a" to 5
<code>a = b + 5;</code>	Sets the variable "a" to "b" + 5, the + can be any valid combining operator
<code>a = b + c;</code>	Sets the variable "a" to "b" + "c", the + can be any valid combining operator
<code>a += 5;</code>	Adds 5 to the variable "a", the + can be any valid combining operator
<code>a = method();</code>	Sets the variable "a" to the return value of "method"

9.1.5 Conditionals

Opening an if statement should use the following syntax, "if (x == y) {", where x and y are variables, constants, or any mix of the two. The "==" can be any conditional operator. Closing an if should have either a "}", use the else if syntax, or the else syntax. Else if statements should use the the following syntax "} elif (x == y) {", where x and y are variables, constants, or any mix of the two. The "==" can be any conditional operator and the keyword "elif" can also be "else if". The else if statements should be closed with a "}" or have an else statement following it. Else statements should use the syntax "} else {" and then be closed with "}". These statements can be nested within each other or loops.

9.1.6 Loops

Starting a while loop should use the following syntax, "while (x == y) {", where x and y are variables, constants, method calls or any mix of the three. The "==" can be any conditional operator. The while loop should be closed with a "}". While loops can be nested inside of other loops and conditionals.

9.1.7 Methods

Defining a method can be done anywhere in the file without anything saying its defined (e.g. in C you must do something like "int method();" before adding the method itself). A method definition should be started with "int nameOfMethod(int arg0, int arg1, int arg2, int arg3) {", where the first "int" is the return variable type, "nameOfMethod" is the method name (these should never be duplicated in a file or contain spaces). Inside the parentheses are the 4 arguments, these are optional, the "int" part of each of them is the variable type and "arg" with a 0, 1, 2, or 3 after it is the variable name that the argument will take. Methods should always have a return. They should use the following syntax and can be used anywhere in the method. "return a, b, c, d;" where "a", "b", "c", and "d" are variables or constants, there can be between 1 and 4 returned values (1 return value would use the syntax "return a;"). Although returning 4 values is supported, it is currently not supported assigning more than the first value in the return. Methods should be called with the syntax "nameOfMethod(arg0, arg1)", where "nameOfMethod" is the name of the method to be called and "arg0" and "arg1" are arguments, there can be between 0 and 4 arguments and there should be as many as the method being called requires. A method can be called before it is defined as long as it is defined somewhere in the file.

9.2 Known bugs and glitches

1. Once the temp registers are all used it breaks because it has not been added to put things on and pull things off of the stack.
2. There is no syntax checker. If something is not stated in this documentation it may or may not work as intended.
3. Multiple lines cannot be put on one line using semicolons.

10 Examples

10.1 Loading an immediate into a register

```
cpy $t0 32      # Loads 32 into t0
```

```
0x180f
0x0020
```

10.2 Making a Procedure Call

```
rsh 8           # Args schwap
cpy $h0 $t0     # Put argument0 in
cpy $h1 $s1     # Put argument1 in
# Store any wanted temps somewhere
jal Call
rsh 9           # Returns schwap
cpy $s0 $h0     # Return value
```

```
0xe008
0x0c8f
0xd6f
0x150f
0x0001
0x053a
0x63f9
0xe009
0x06cf
```

10.3 Iteration and Conditionals

This is an example of which will iterate over 4 array elements in memory and add 32 to each of them. It will stop repeating after the 4 elements using beq.

```
# There is a base memory address
# for an array in memory at s0
cpy $t0 8
cpy $t1 $z0
loop:
r    $t2 0($s0)
add  $t2 32
w    0($s0) $t2
add  $t1 2
beq  $t0 $t1 loop
```

```
0x180f
0x0008
0x090f
0x76a0
0x1a0a
0x0020
0x86a0
0x190a
0x0002
0x3891
0x63f8
```

10.4 relPrime

```
RELPrime:
    rsh 4
    cpy $h0 $ra
    rsh 8
    cpy $s0 $h0
    cpy $s1 2
RELPrimeWhile:
    rsh 8
    cpy $h0 $s0
    cpy $h1 $s1
    jal GCD
    rsh 9
    cpy $t0 1
    beq $h0 $t0 RELPrimeRet
    add $s1 1
    j RELPrimeWhile
RELPrimeRet:
    rsh 9
    cpy $h0 $s1
    rsh 4
    jr $h0 0
```

```
0xe004
0xc5f
0xe008
0x06cf
0x170f
0x0002
0xe008
0xc6f
0xd7f
0x150f
0x0001
0x053a
0x630b
0xe009
0x180f
0x0001
0x2c83
0x170a
0x0001
0x63f2
0xe009
0xc7f
0xe004
0x6c00
```

10.5 gcd

```
GCD:
    rsh 8
    beq $h0 $0 GCDReturn
GCDWhile:
    beq $h1 $0 GCDReturn
    bgt $h0 $h1 GCDif
GCDelse:
    sub $h1 $h0
    j GCDWhile
GCDif:
    sub $h0 $h1
    j GCDWhile
GCDReturn:
    rsh 8
    cpy $t0 $h0
    rsh 9
    cpy $h0 $t0
    jr $ra 0
```

```
0xe008
0x2c06
0x2d05
0x4cd2
0x0dcb
0x63fc
0x0cdb
0x63fa
0xe008
0x08cf
0xe009
0x0c8f
0x6500
```

11 Notes

11.1 Registers

11.1.1 Non-Schwappable

1. \$z0 is reset on the rising edge of each CPU cycle, so it can be used for cycle-temporary storage.
2. The value in \$pc should always be what the current instruction address is +1.

11.2 Alias names

11.2.1 Registers

All registers can be called directly by their ID's in hex or decimal (e.g. \$h0, \$c, and \$12 can all be used)

\$z0: \$0, \$00, \$zz, \$zero

11.2.2 Instructions

orr: or

bne: bnq