




VIEW FROM TOP

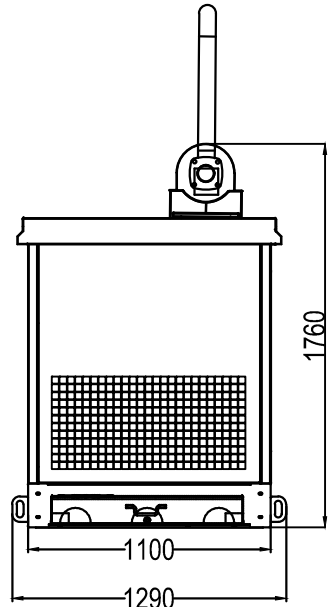

VIEW FROM ALTERNATOR END

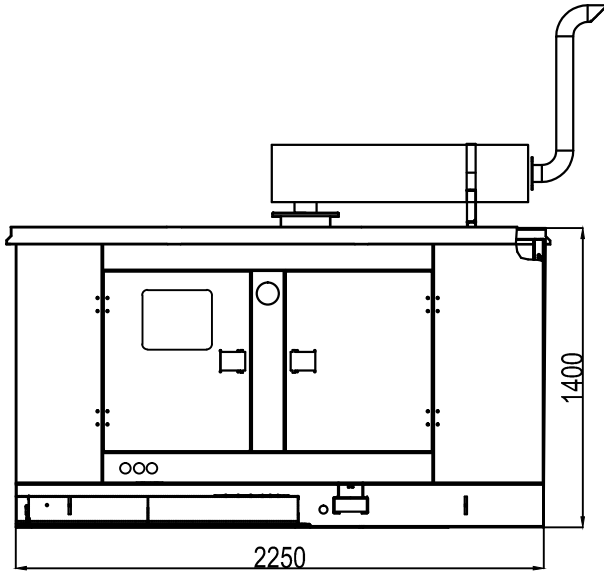

VIEW FROM FRONT

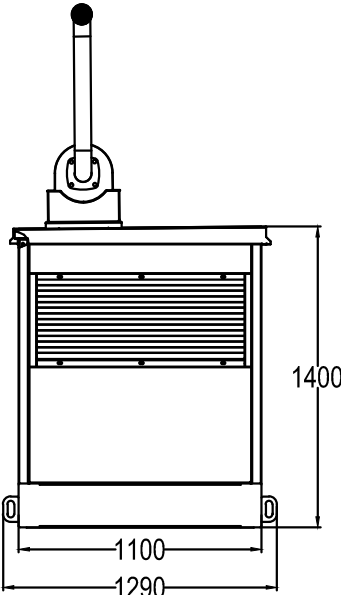

VIEW FROM RADIATOR END

TECHNICAL SPECIFICATION:

CONSTRUCTION- DISMANTLE TYPE

1. OUTER DIMENSION 2250(L) X 1100(W) X 1760(H)(with Silencer).
2. ENGINE COMPARTMENT INNER DIMENSION 1780 X 814 X 1100 HT.
3. WALL THICKNESS 40mm FOAM (DENSITY-38Kg/Cu.M).
4. OUT SIDE MS SHEET- 1.2 THK.
5. MAHINDRA TYPE HINGE
6. LOCK- SLAM PAD TYPE
7. ENCLOSURE TYPE - WRAP ON TYPE
8. ALL FASTNERS ARE GREEN PASSIVATED.

RUBBER	EPDM
HR 5 THK. TO 16 THK. STEEL	IS 2062 GRADE 'A'
3 THK. HR STEEL	IS 1079 GRADE 'O'
2.5 THK. HR STEEL	
2 THK HR STEEL	IS 513 GRADE 'O'
1.6 THK. CRCA STEEL	
1.2 THK CRCA STEEL	
0.6 THK. GI	IS 513, GRADE 'O'
MATERIAL	SPECIFICATION
MATERIAL SPECIFICATION	

NOTES:-

1. OUTER DIMENSION 2250(L)x1100(W)x1760(H) (WITH SILENCER).
2. SHEET METAL: ENCLOSURE-1.2mm, FUEL TANK-1.5 & 2mm, BASE-3 & 4THICK
3. PAINT- POWDER COATING (AS PER STD.)
4. GENSET TESTING (AS PER STANDARD)
5. GENSET MANUFACTURING (AS PER STANDARD)
6. ARAI CERTIFICATION NO.- --

UNLESS OTHERWISE STATED GENERAL TOLERANCE FOR FABRICATION SHOULD BE FOLLOWED AS PER THIS TABLE								
TOL.-	± 0.1	± 0.2	± 0.3	± 0.5				
DIM.-	0-100	100-500	500-2000	>2000	ALT	DESCRIPTION	DATE	APPD

TITLE : GA. DRG. FOR 25 KVA ACOUSTIC ENCLOSURE				ALL DIMENSIONS ARE IN mm.		
				IF ANY DOUBT ASK		A3
				SCALE	DRN	
				NTS	DGN	
				SHEET	CHD	
				1 OF 1	APPD	
SACS POWER PVT. LTD., 3/314 RAJAMAN NAGAR, CHINTHAMANI ROAD, MADURAI - 625009.			THIRD ANGLE		DRG. No.	ALT
					SACS/ACO/GA/WP25/01	0