


ELECTRICAL DEVICE WORKING MANUAL

Product Name	Smart-IC AFVI
Model Name	
Project Code	ID-B171-24-01
Serial Number	New 1st
Customer	AGENCOMM
Manufacturer	SYNAPSE IMAGING Co.,Ltd.
Designed by	전기석
Revision Date / No.	24.04.24 / R0
Drawing Code	L001 ~ L356
Note & Inform	


CONTROL PANEL LAYOUT

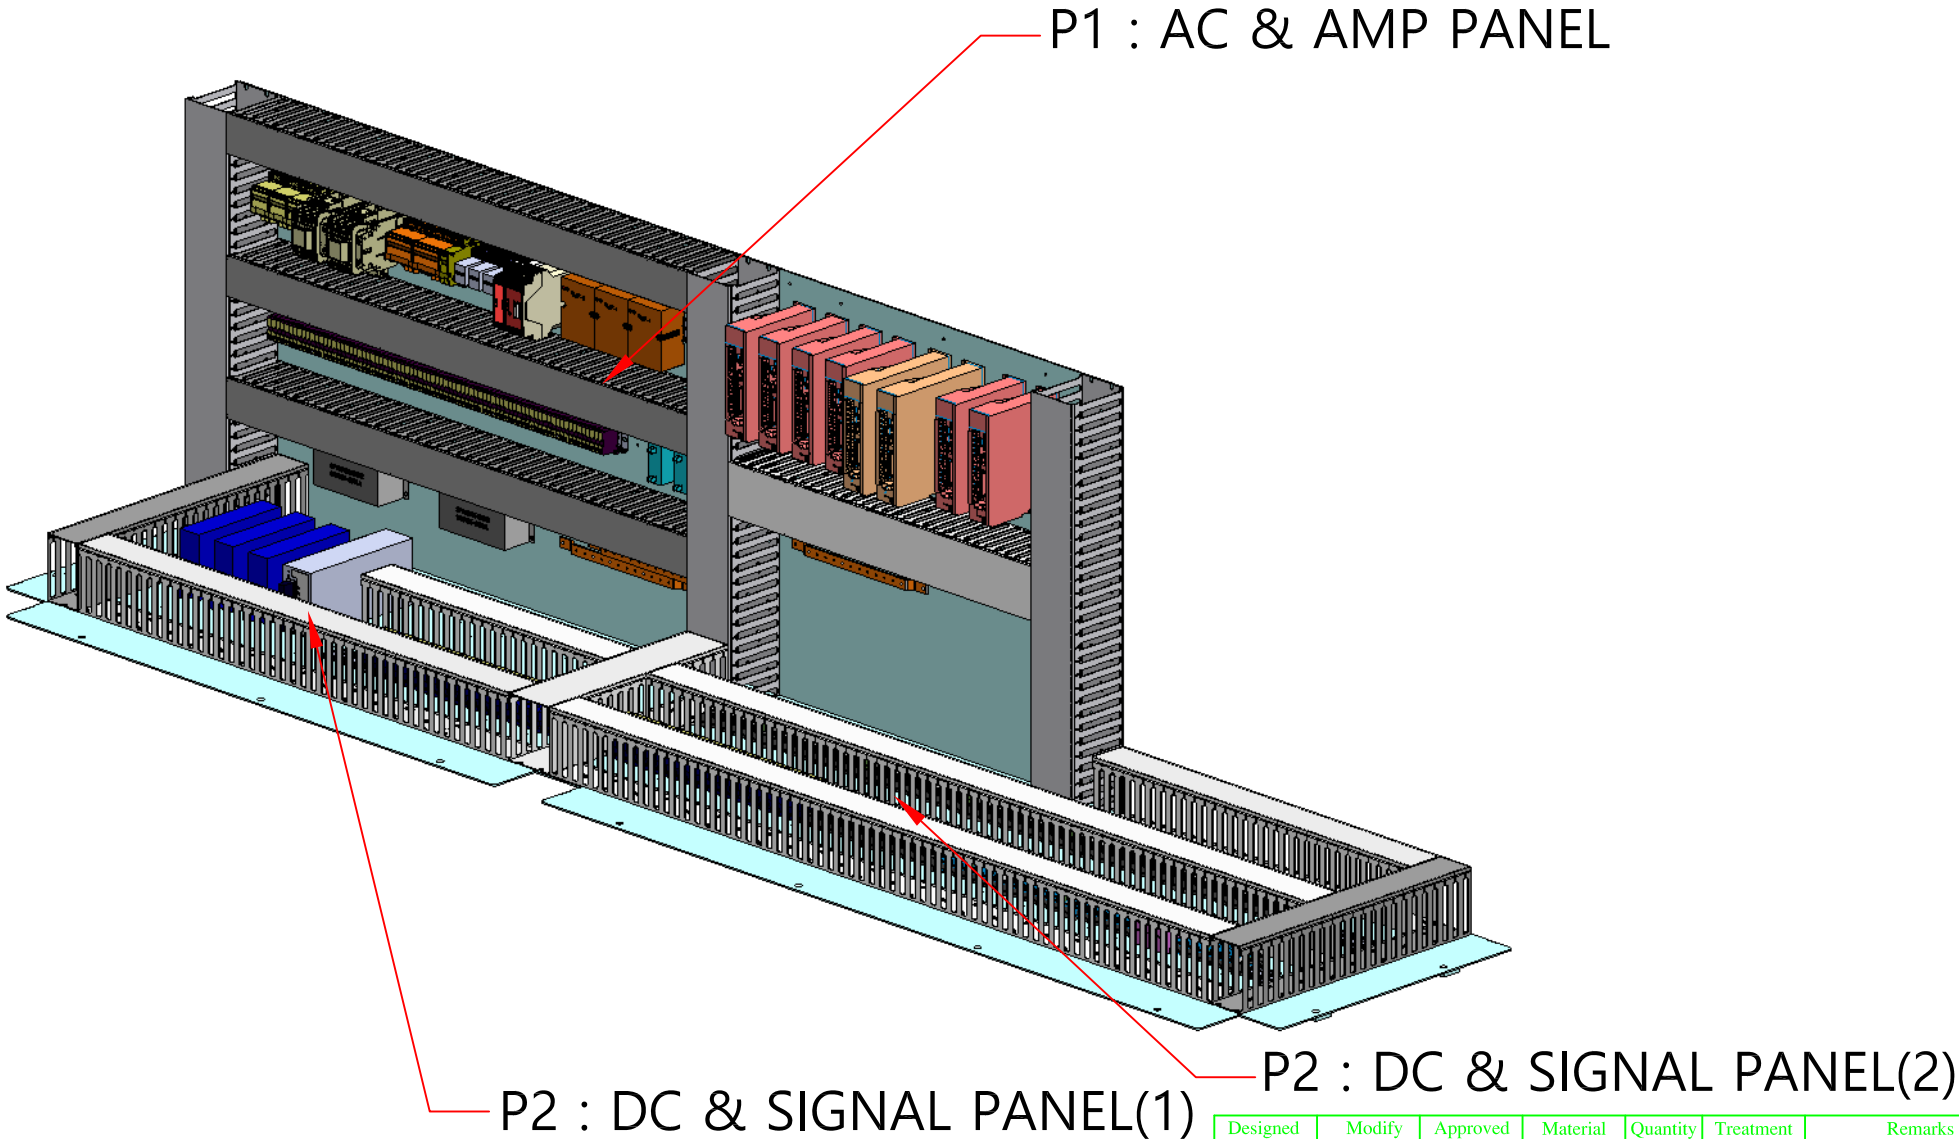

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : CONTROL PANEL LAYOUT			
Synapse  imaging			Size	Drawing No.		Sheet No
			A3			L1


P1 : AC & AMP PANEL

NO	LABEL	PARTS NAME	수량
①	CP 1	GCP-32ANM10A	1
	CP 2	GCP-32ANM10A	1
	CP 3	GCP-32ANM10A	1
②	MC 1	MC-40a/DC24	1
	MC 2	50/60Hz 2a2b + US-4	1
③	CP 4	GCP-33ANM10A	1
	CP 5	GCP-33ANM10A	1
	CP 11	GCP-31ANM10A	1
④	SC 1	G9SX-BC202RT	1
⑤	RY 1, 3, 4, 5	LY2N-D2-24VDC + PTF08A	4
⑥	AXIS 10	TMP-1	1
	AXIS 12	TMP-1	1
	AXIS 13	TMP-1	1
⑦			1
	AXIS 7	MR-J4-20A	1
	AXIS 6	MR-J4-20A	1
	AXIS 5	MR-J4-20A	1
	AXIS 4	MR-J4-20A	1
	AXIS 3	MR-J4-40A	1
	AXIS 2	MR-J4-40A	1
	AXIS 1	MR-J4-20A	1
	AXIS 0	MR-J4-20A	1
⑧	AC.TB 3L / 5L	KTB2-015,15A	78
⑨	NF 4 ~ 5	WYFT10T1A	1
⑩	CONDENSER 1, 3, 4	CH40BFAUL	3
⑪	E3 BAR 1 ~ 2	Cu/17P*M4/266.2*25	2
⑫	E3 BAR 3	Cu/17P*M4/266.2*25	1
⑬	RY 5	LY2N-D2-24VDC + PTF08A	1
A	PVC DUCT	60 x 100	900
B	DIN RAIL	KTB2-CVC	890.5
C	PVC DUCT	60 x 100	900
D	DIN RAIL	KTB2-CVC	685
E	PVC DUCT	60 x 100	900
F	PVC DUCT	80 x 100	627
G	PVC DUCT	80 x 100	627
H	PVC DUCT	80 x 100	627
J	PVC DUCT	80 x 100	590

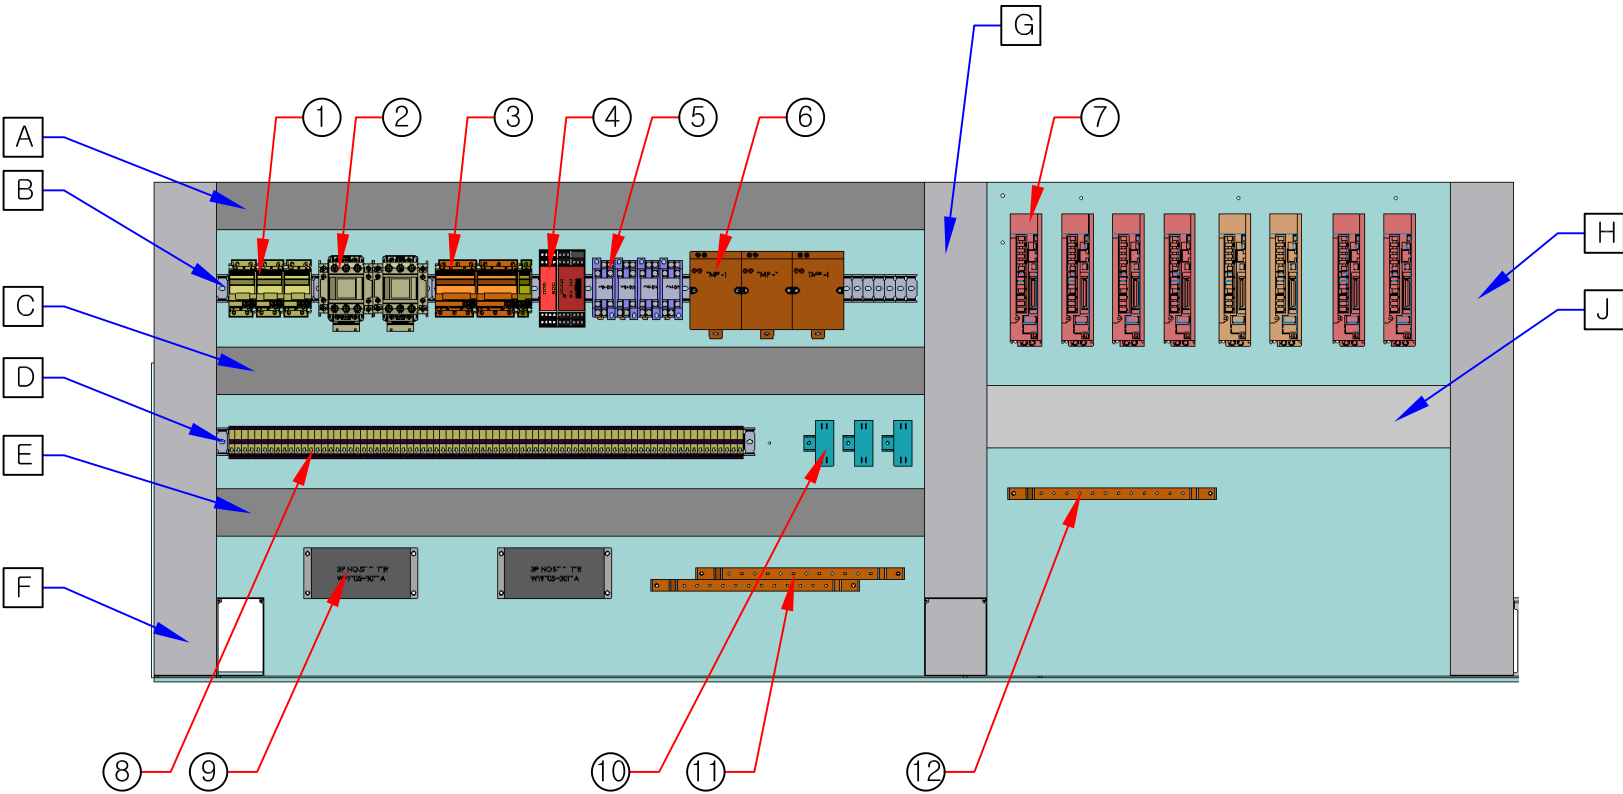


Designed	Modify	Approved	Material	Quantity	Treatment	Remarks	
전기석		전기석	Machine name : SMART-IC AFVI				
Date:		Unit : mm		Part name : P1 : AC & AMP PANEL			
Synapse  imaging			Size A3	Drawing No.			Sheet No L2

P2 : DC & SIGNAL PANEL (1)

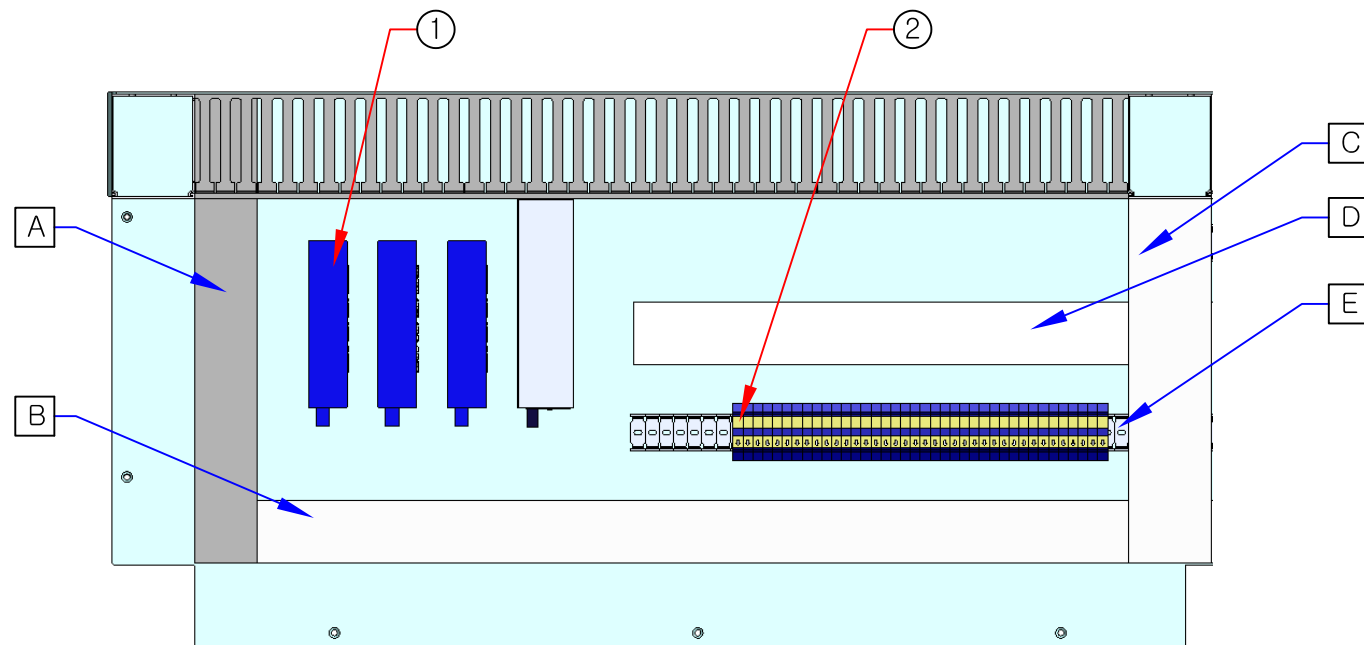[illegible]


Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : P2 : DC & SIGNAL PANEL (1)			
			Size A3	Drawing No.		Sheet No L3

P2 : DC & SIGNAL PANEL (2)

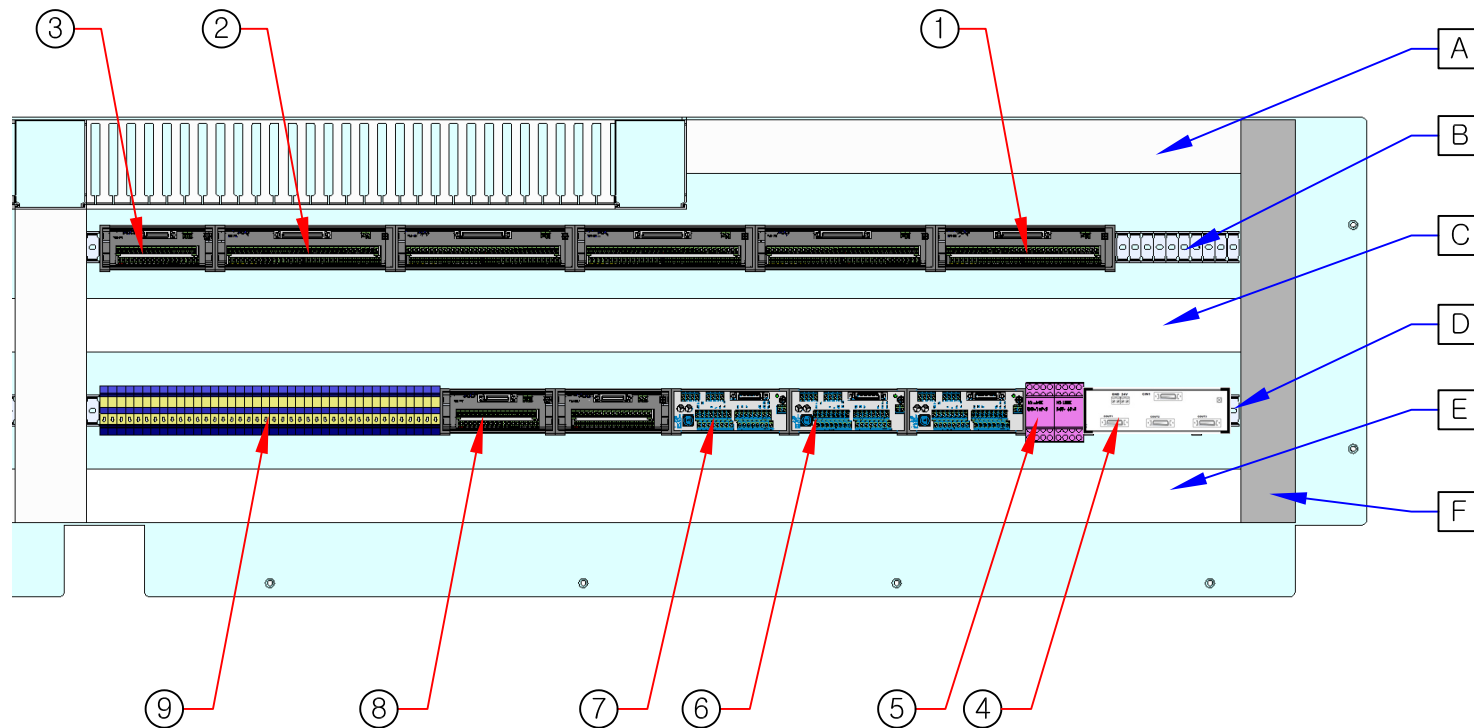[illegible]

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : P2 : DC & SIGNAL PANEL (2)			
			Size A3	Drawing No.		Sheet No L4

MOTION AXIS & LIMIT

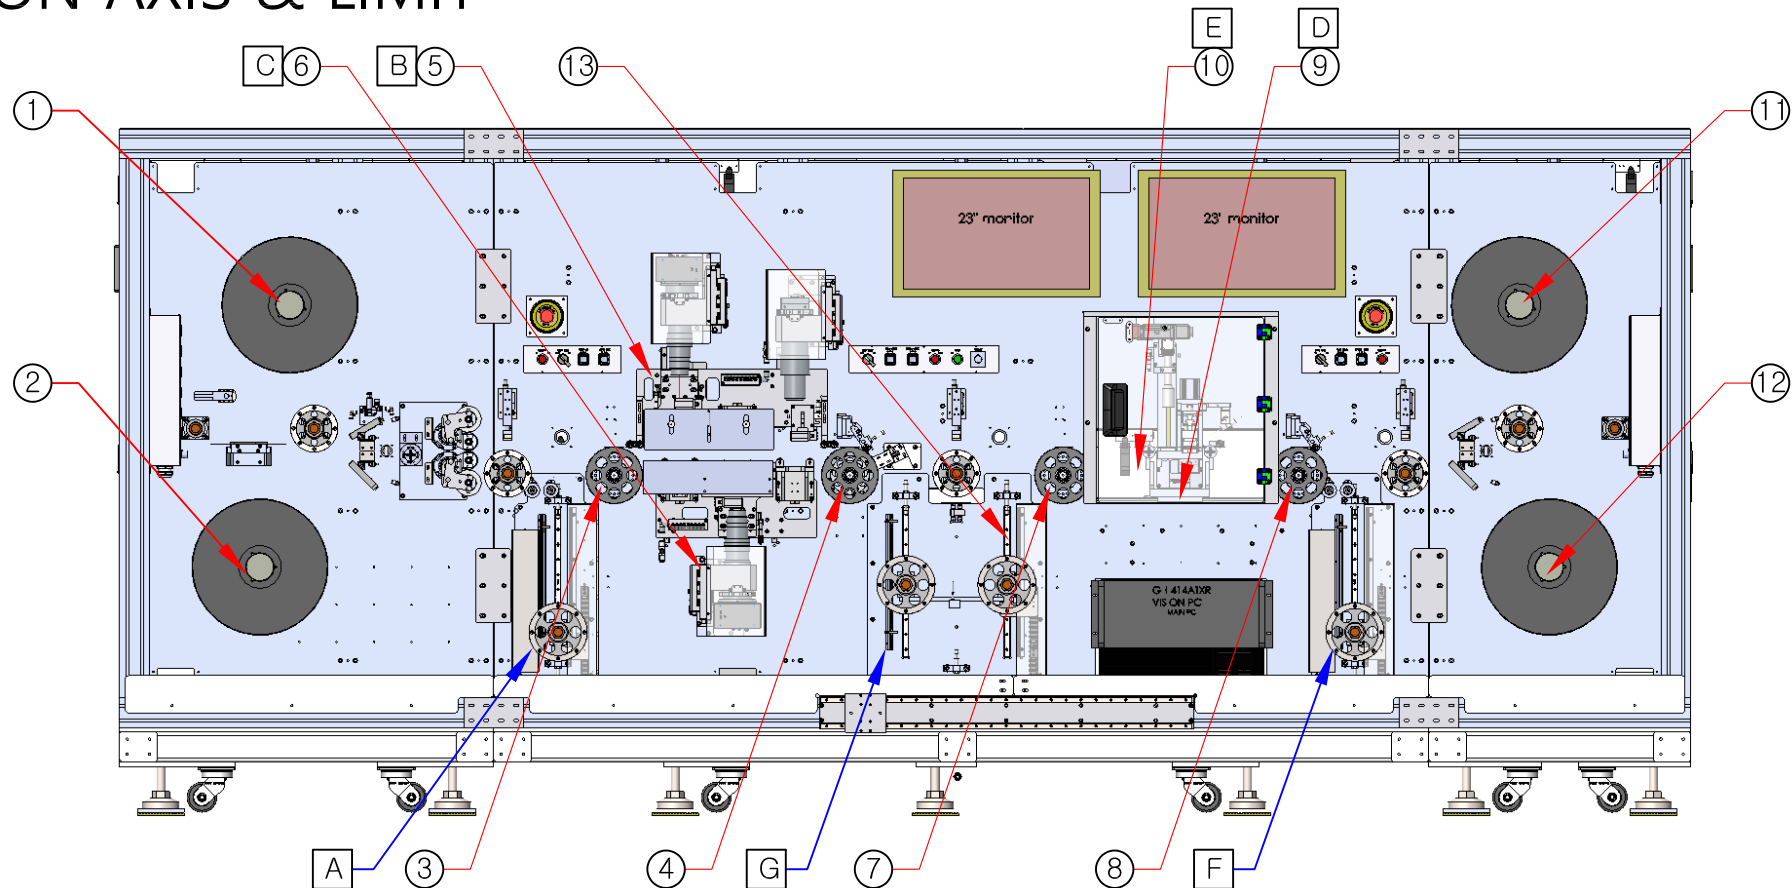


NO	LABEL	AXIS NAME	MOTOR TYPE	MOTOR MODEL
①	AXIS 0	Reel Uncoiler S-IC	SERVO	HG-KR23
②	AXIS 10	Reel Uncoiler 간지	TORQUE	TM520C-18SE
③		Vision - Uncoiler Sprocket		
④	AXIS 1	Vision - Recoiler Sprocket	SERVO	HG-KR23
⑤	AXIS 2	Vision - Top Z	SERVO	HG-KR43B
⑥	AXIS 3	Vision - Bottom Z	SERVO	HG-KR43B
⑦	AXIS 12	Punch - Uncoiler Sprocket	TORQUE	TM520C-AE
⑧	AXIS 4	Punch - Recoiler Sprocket	SERVO	HG-KR23
⑨	AXIS 5	Align & Punch X	SERVO	HG-KR23
⑩	AXIS 6	Align & Punch Y	SERVO	HG-KR23
⑪	AXIS 7	Reel Recoiler S-IC	SERVO	HG-KR23
⑫	AXIS 13	Reel Recoiler 간지	TORQUE	TM520C-18SE
⑬	AXIS 8	Buffer Roller Position	LINEAR ENCODER	MTE-20

NO	LABEL	LIMIT SENSOR
A	0-CW / CCW	EE-SX672
B	2-CW / CCW	EE-SX672A
C	3-CW / CCW	EE-SX672A
D	5-CW / CCW	D-F9N
E	6-CW / CCW	D-F9N
F	7-CW / CCW	EE-SX672
G	8-CW / CCW	EE-SX672

*Axis 2 : Upper = CCW.
 *Axis 5 : Left = CCW.
 *Axis 6 : Rear = CCW.
 *나머지 Axis : Upper = CW.

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : MOTION AXIS & LIMIT			
Synapse  imaging			Size A3	Drawing No.		Sheet No L11

MODULE

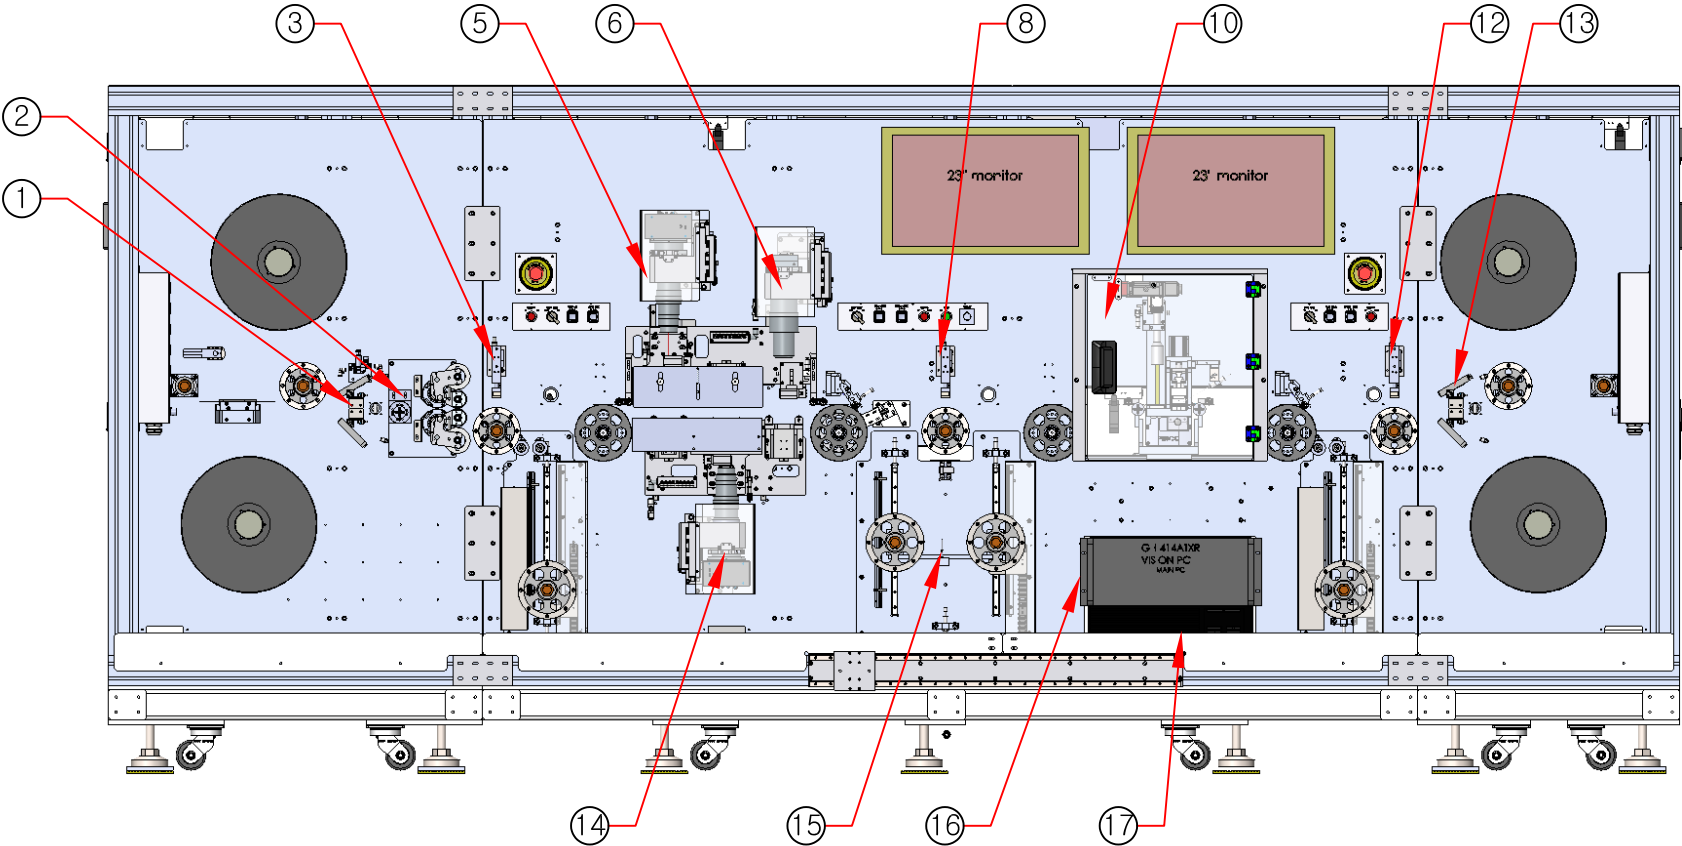


NO	MODULE NAME
①	Loader Ionizer
②	Clean Unit Roller
③	Vision Stopper
⑤	TOP 1 VISION
⑥	TOP 2 VISION
⑧	Buffer Stopper
⑩	Punch Module
⑫	Punch Stopper
⑬	Unloader Ionizer

NO	MODULE NAME
⑭	BOTTOM VISION
⑮	Dual Buffer
⑯	Handler PC
⑰	UPS 1

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks	
전기석		전기석	Machine name :				SMART-IC AFVI
Date:		Unit : mm		Part name :			
Synapse  imaging		MODULE					
		Size A3	Drawing No.				Sheet No L12


OPERATION SWITCH PANEL LAYOUT

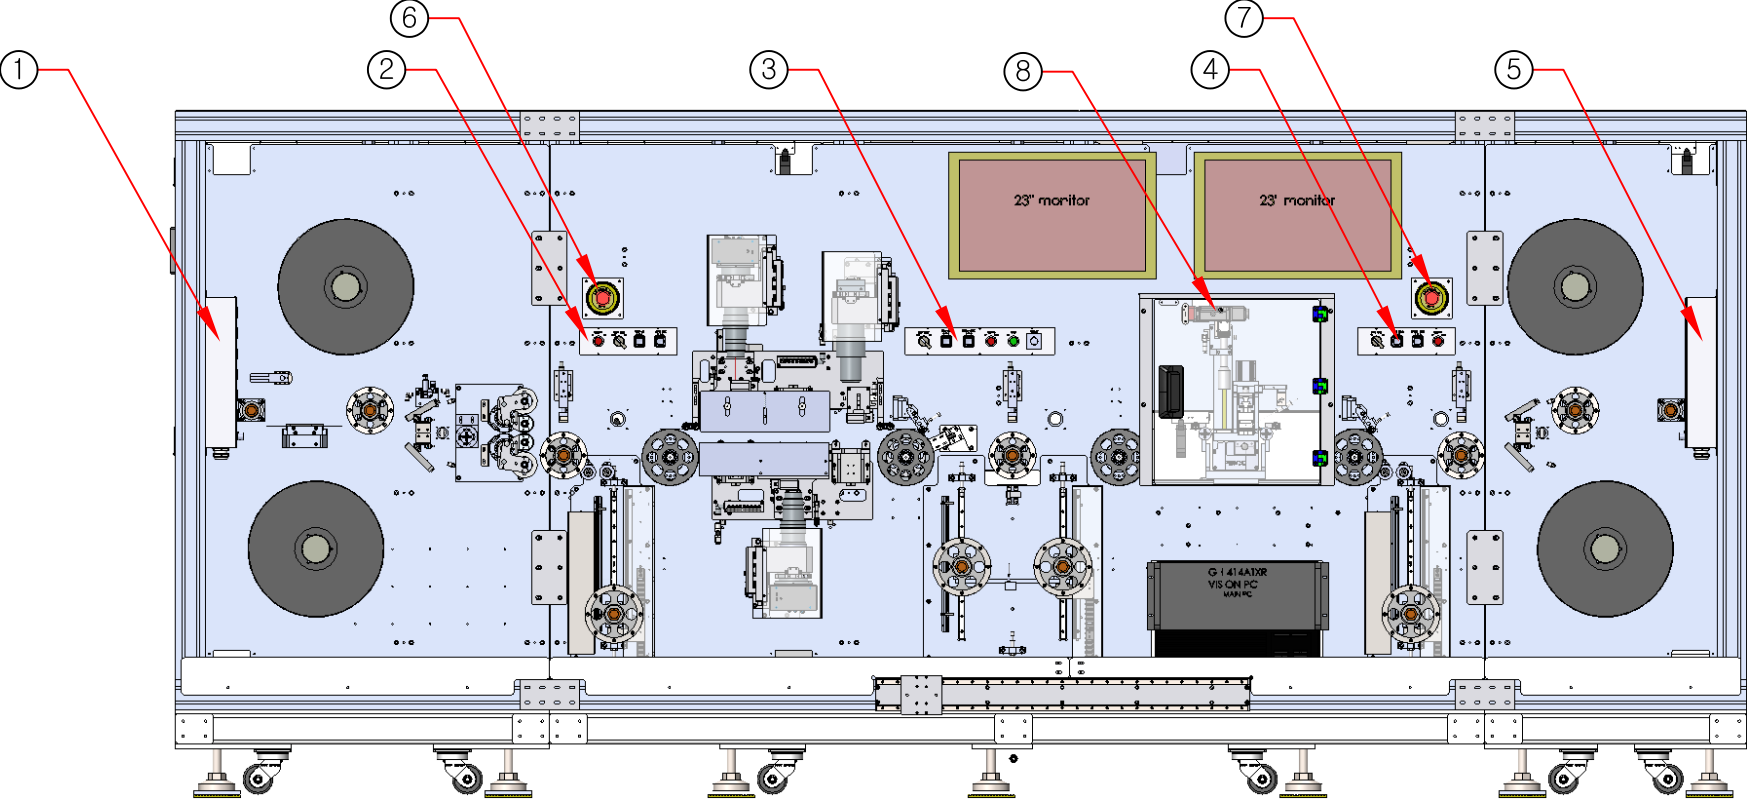

NO	OPERATION SWITCH PANEL NAME
①	LOADER OP
②	VISION OP
③	BUFFER OP
④	PUNCH OP
⑤	UNLOADER OP
⑥	EMO 1 - LEFT
⑦	EMO 2 - RIGHT
⑧	DR 01

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : OPERATION SWITCH PANEL LAYOUT			
Synapse imaging			Size A3	Drawing No.		Sheet No L13

LOADER / UNLOADER OPERATION SWITCH PANEL

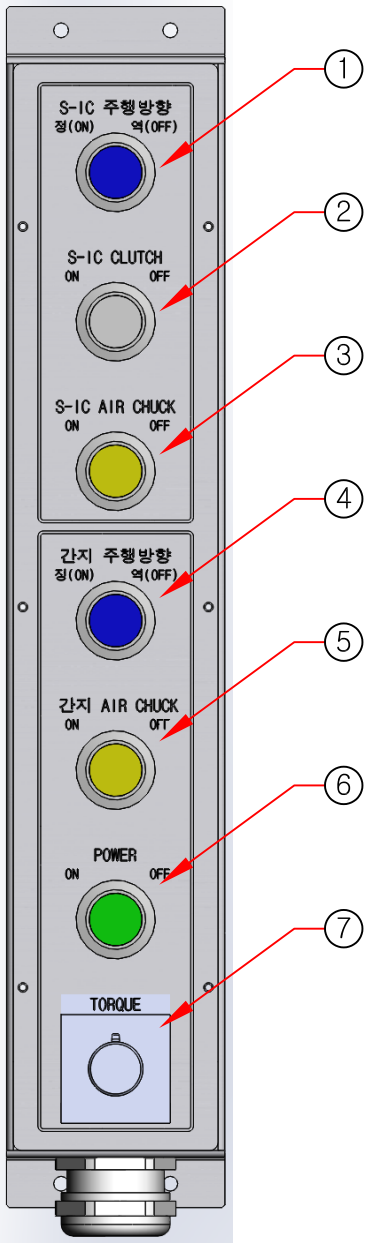

[LOADER OP]


NO	TYPE	COLOR	MODEL	FUNCTION
①	조광형 Push Button	BLUE	KGX-JAD21B	Reel Uncoiler S-IC 구동 방향 설정.
②	조광형 Push Button	WHITE	KGX-JAD21W	Reel Uncoiler S-IC 클러치 On/Off
③	조광형 Push Button	YELLOW	KGX-JAD21Y	Reel Uncoiler S-IC 에어척 Lock/Unlock
④	조광형 Push Button	BLUE	KGX-JAD21B	Reel Uncoiler 간지 구동 방향 설정.
⑤	조광형 Push Button	YELLOW	KGX-JAD21Y	Reel Uncoiler 간지 에어척 Lock/Unlock
⑥	조광형 Push Button	GREEN	KGX-JAD21G	Reel Uncoiler 간지 Torque Motor Drive Power On/Off
⑦	Volume	Blue	PAVR-20KZ	Reel Uncoiler 간지 Torque Motor Control

[UNLOADER OP]

NO	TYPE	COLOR	MODEL	FUNCTION
①	조광형 Push Button	BLUE	KGX-JAD21B	Reel Recoiler S-IC 구동 방향 설정.
②	조광형 Push Button	WHITE	KGX-JAD21W	Reel Recoiler S-IC 클러치 On/Off
③	조광형 Push Button	YELLOW	KGX-JAD21Y	Reel Recoiler S-IC 에어척 Lock/Unlock
④	조광형 Push Button	BLUE	KGX-JAD21B	Reel Recoiler 간지 구동 방향 설정.
⑤	조광형 Push Button	YELLOW	KGX-JAD21Y	Reel Recoiler 간지 에어척 Lock/Unlock
⑥	조광형 Push Button	GREEN	KGX-JAD21G	Reel Recoiler 간지 Torque Motor Drive Power On/Off
⑦	Volume	Blue	PAVR-20KZ	Reel Recoiler 간지 Torque Motor Control


Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : LOADER / UNLOADER OPERATION SWITCH PANEL			
Synapse  imaging			Size	Drawing No.		Sheet No
			A3			L14

VISION / BUFFER / PUNCH OPERATION SWITCH PANEL

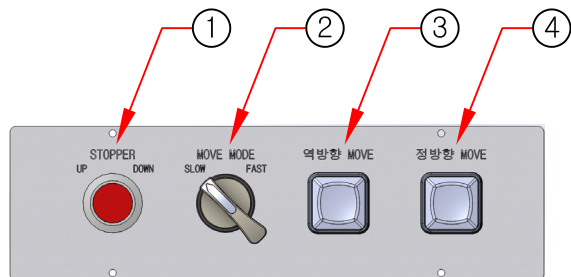


[VISION OP]

NO	TYPE	COLOR	MODEL	FUNCTION
①	조광형 Push Button	RED	KGX-JAD21R	Vision - Stopper Up/Down
②	2단 Select		S2SR-S4WAB	Vision - S-IC Moving Mode Select (SLOW / FAST) 2
③	조광형 Push Button	BLUE	S2PRS-P3BAD	Vision - S-IC 역방향 Moving 2
④	조광형 Push Button	BLUE	S2PRS-P3BAD	Vision - S-IC 정방향 Moving 2

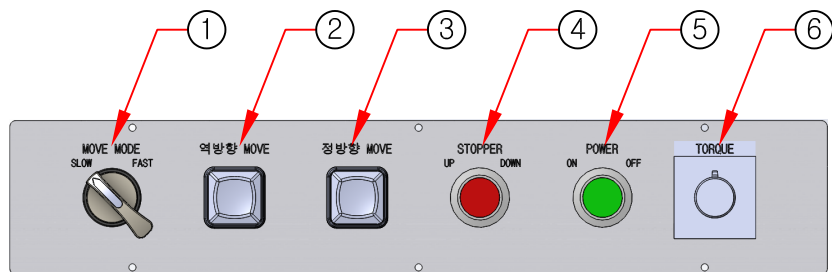

[BUFFER OP]

NO	TYPE	COLOR	MODEL	FUNCTION
①	2단 Select		S2SR-S4WAB	Vision - S-IC Moving Mode Select (SLOW / FAST) 1
②	조광형 Push Button	BLUE	S2PRS-P3BAD	Vision - S-IC 역방향 Moving 1
③	조광형 Push Button	BLUE	S2PRS-P3BAD	Vision - S-IC 정방향 Moving 1
④	조광형 Push Button	RED	KGX-JAD21R	Buffer - Stopper Up/Down
⑤	조광형 Push Button	GREEN	KGX-JAD21G	Punch - Uncoiler Sprocke Torque Motor Drive Power On/Off
⑥	Volume		PAVR-20KZ	Punch - Uncoiler Sprocke Torque Motor Control

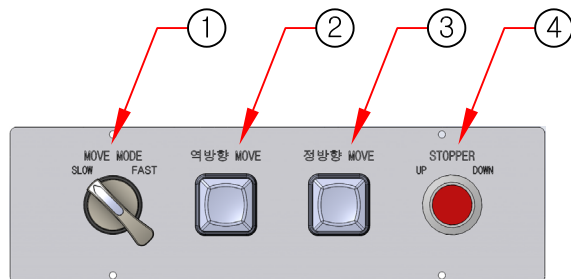


[PUNCH OP]

NO	TYPE	COLOR	MODEL	FUNCTION
①	2단 Select		S2SR-S4WAB	Punch - S-IC Moving Mode Select (SLOW / FAST)
②	조광형 Push Button	BLUE	S2PRS-P3BAD	Punch - S-IC 역방향 Moving
③	조광형 Push Button	BLUE	S2PRS-P3BAD	Punch - S-IC 정방향 Moving
④	조광형 Push Button	RED	KGX-JAD21R	Punch - Stopper Up/Down

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : VISION / BUFFER / PUNCH OPERATION SWITCH PANEL			
Synapse  imaging			Size A3	Drawing No.		Sheet No L15


TOP 1 & TOP 2 VISION

[TOP 1 VISION] [TOP 2 VISION]

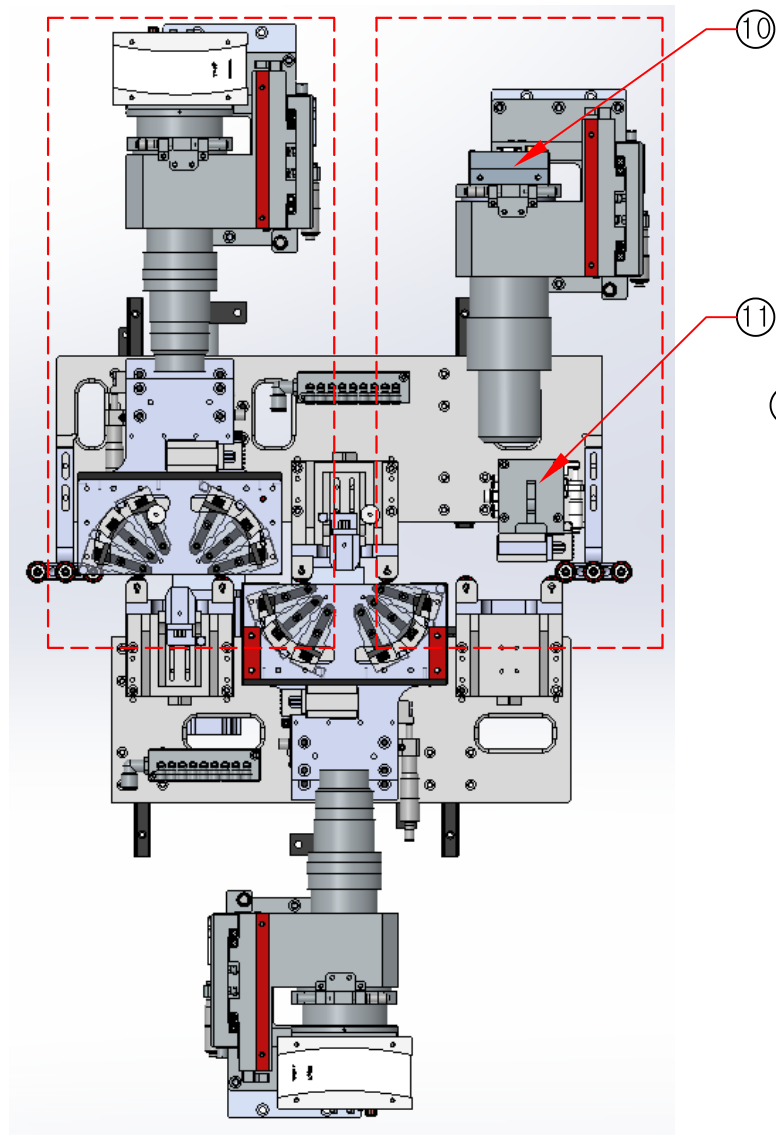

NO	LABEL	DESCRIPTION	LED CONTROLLER	SPEC
①	TOP1-CAM	TOP1 - Vision Color Camera		allPIXA 7.3K / Cromasens
②	LED 11	TOP1 - Coaxial Light	LED CTRL 1-CH1	Metal PCB(164mm x 14mm, White)
③	LED 12	TOP1 - Line Dome Light 1	LED CTRL 1-CH2	Metal PCB(164mm x 14mm, White)
④	LED 13	TOP1 - Line Dome Light 2	LED CTRL 1-CH3	Metal PCB(164mm x 14mm, White)
⑤	LED 14	TOP1 - Line Dome Light 3	LED CTRL 1-CH4	Metal PCB(164mm x 14mm, White)
⑥	LED 21	TOP1 - Line Dome Light 4	LED CTRL 2-CH1	Metal PCB(164mm x 14mm, White)
⑦	LED 22	TOP1 - Line Dome Light 5	LED CTRL 2-CH2	Metal PCB(164mm x 14mm, White)
⑧	LED 23	TOP1 - Line Dome Light 6	LED CTRL 2-CH3	Metal PCB(164mm x 14mm, White)
⑨	LED 24	TOP1 - Back Light	LED CTRL 2-CH4	Metal PCB(164mm x 14mm, White)
⑩	TOP2-CAM	TOP2 - Vision Mono Camera		LA-CM-08K08A-00-R / DALSA
⑪	LED 31	TOP2 - Coaxial Light	LED CTRL 3-CH1	Metal PCB(100mm x 14mm, BLUE)


[TOP 1 VISION]

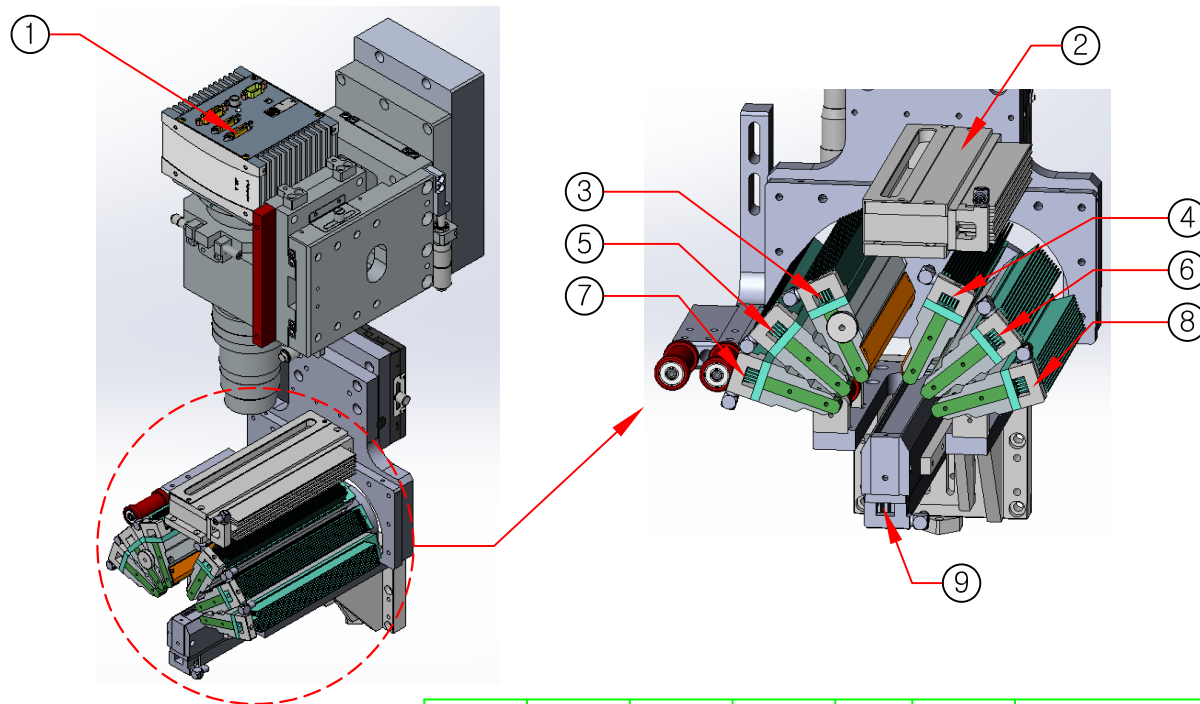

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : TOP 1 & TOP 2 VISION			
Synapse  imaging			Size A3	Drawing No.		Sheet No L16

1 2 3 4 5 6 7 8



BOTTOM VISION

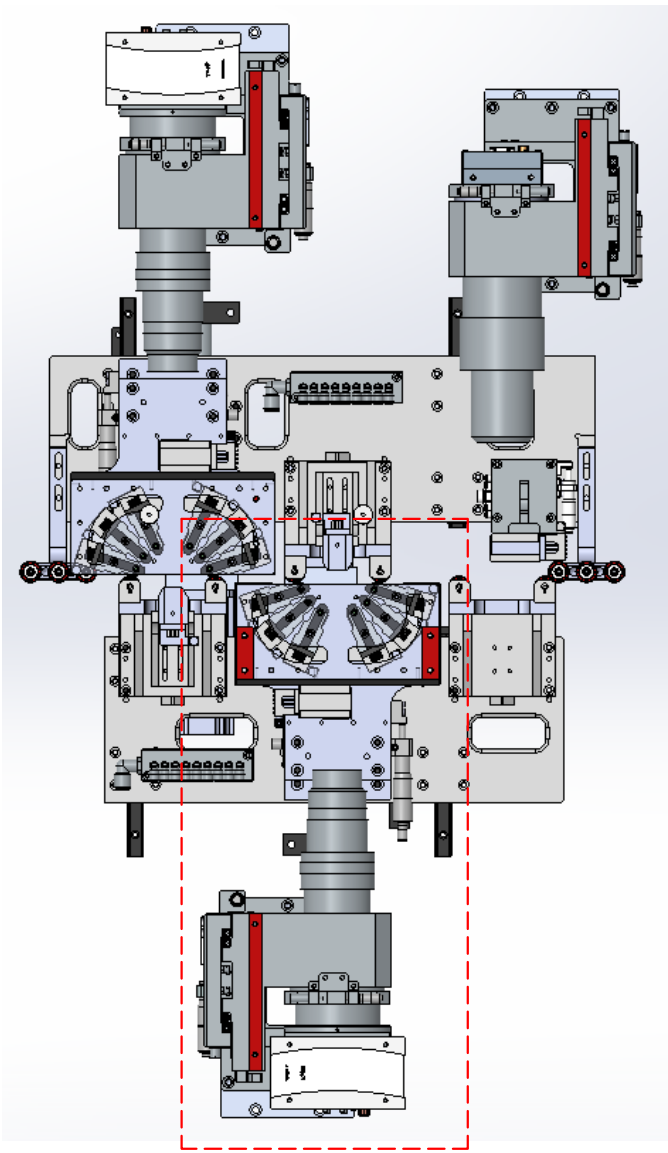

[BOTTOM VISION]


NO	LABEL	DESCRIPTION	LED CONTROLLER	SPEC
①	BOTTOM-CAM	BOTTOM - Vision Color Camera		allPIXA 7.3K / Cromasens
②	LED 41	BOTTOM - Coaxial Light	LED CTRL 4-CH1	Metal PCB(164mm x 14mm, White)
③	LED 42	BOTTOM - Line Dome Light 1	LED CTRL 4-CH2	Metal PCB(164mm x 14mm, White)
④	LED 43	BOTTOM - Line Dome Light 2	LED CTRL 4-CH3	Metal PCB(164mm x 14mm, White)
⑤	LED 44	BOTTOM - Line Dome Light 3	LED CTRL 4-CH4	Metal PCB(164mm x 14mm, White)
⑥	LED 51	BOTTOM - Line Dome Light 4	LED CTRL 5-CH1	Metal PCB(164mm x 14mm, White)
⑦	LED 52	BOTTOM - Line Dome Light 5	LED CTRL 5-CH2	Metal PCB(164mm x 14mm, White)
⑧	LED 53	BOTTOM - Line Dome Light 6	LED CTRL 5-CH3	Metal PCB(164mm x 14mm, White)
⑨	LED 54	BOTTOM - Back Light	LED CTRL 5-CH4	Metal PCB(164mm x 14mm, White)

[BOTTOM VISION]

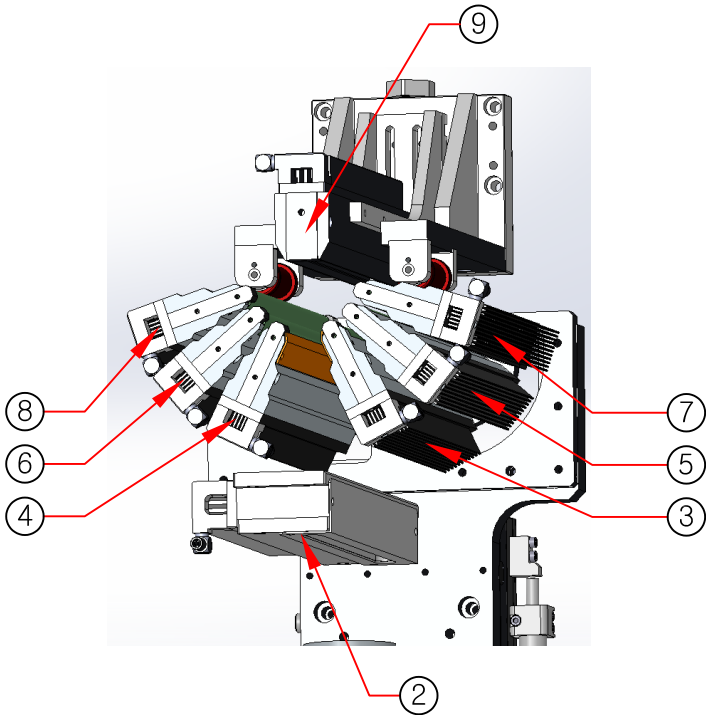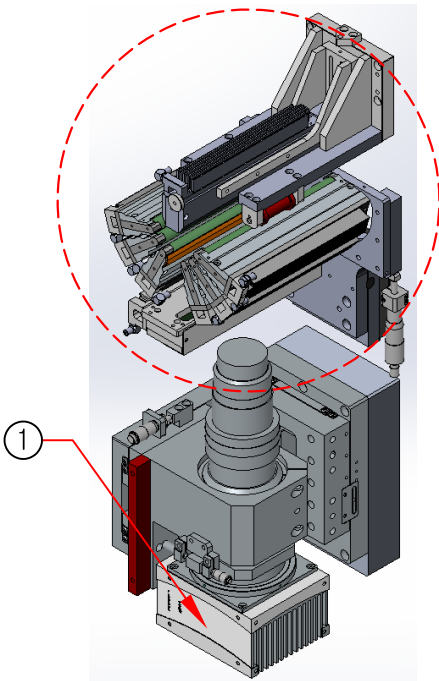



Designed	Modify	Approved	Material	Quantity	Treatment	Remarks	
전기석		전기석	Machine name : SMART-IC AFVI				
Date:		Unit : mm		Part name : BOTTOM VISION			
Synapseimaging		Size A3		Drawing No.		Sheet No L17	

MODULE 2 : Sprocket S-IC 이탈 방지 Guide

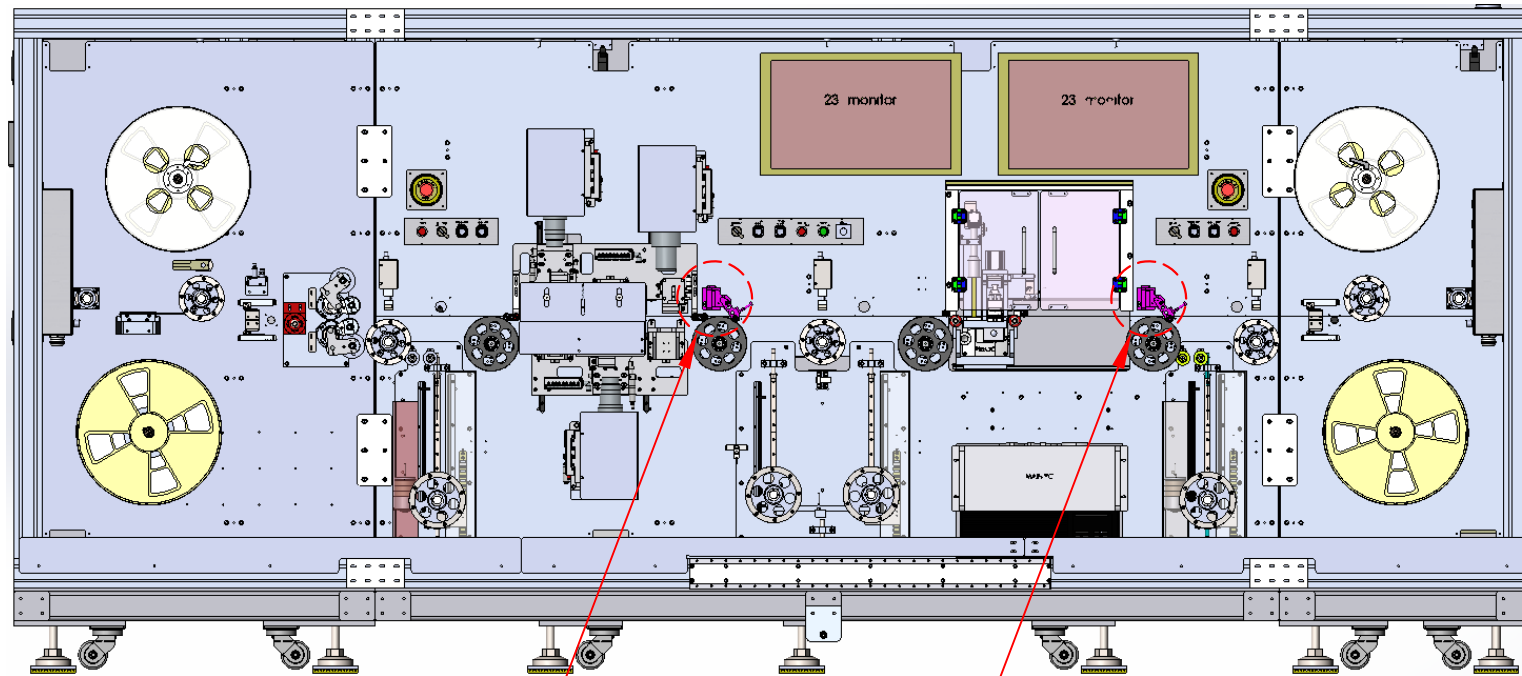

①

②

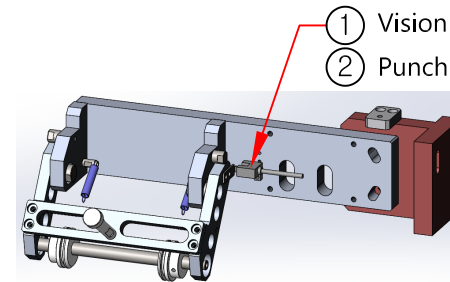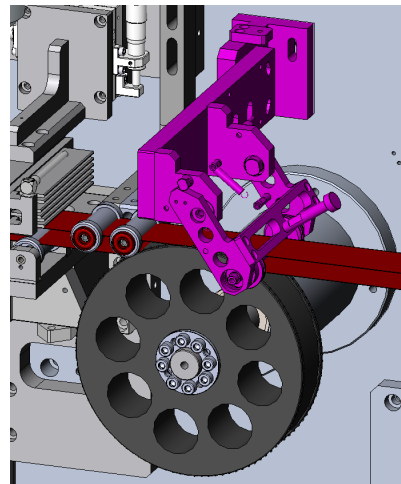


- ① Vision Recoiler Sprocket S-IC 이탈 방지 Guide : X108
- ② Punch Recoiler Sprocket S-IC 이탈 방지 Guide : X113

NO	MODULE NAME
①	Vision Recoiler Sprocket S-IC 이탈 방지 Guide
②	Punch Recoiler Sprocket S-IC 이탈 방지 Guide

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:	Unit: mm		Part name : MODULE 2 : Sprocket S-IC 이탈 방지 Guide			
Synapse imaging		Size A3	Drawing No.			Sheet No L18

External Rotary Encoder


[Front View]

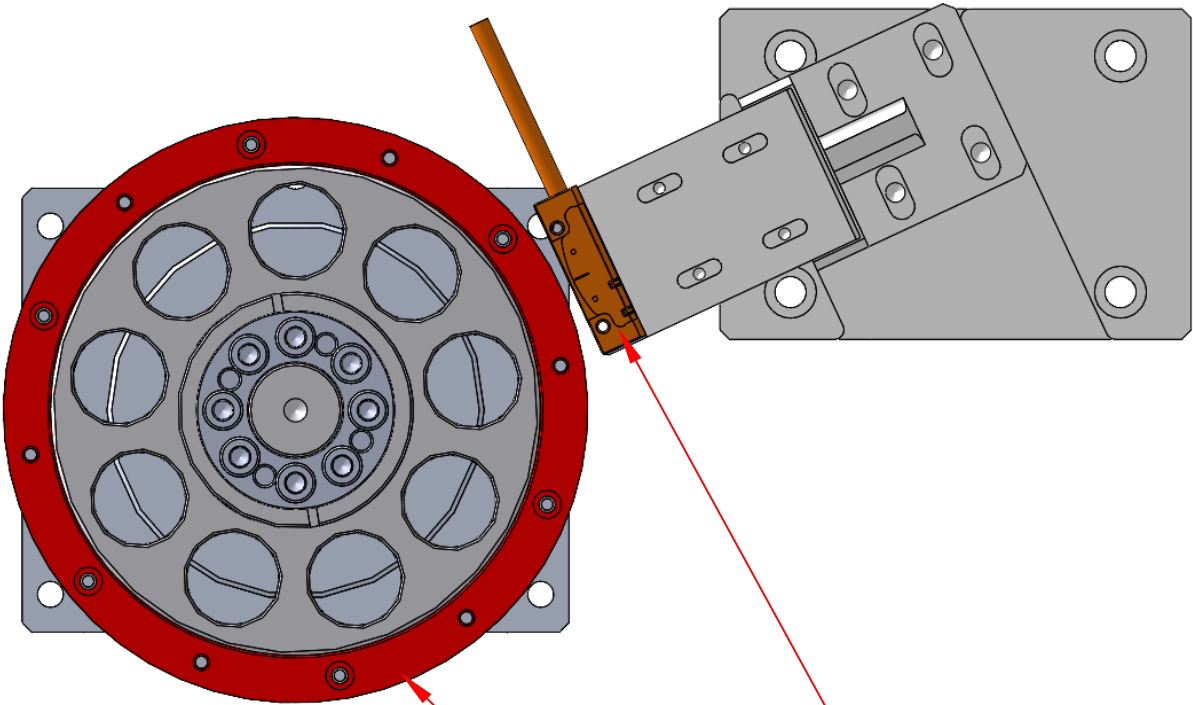


Rotary Encoder Scale
* RESM20USA124
* Scale Pitch : 20um

Encoder Scale Head
* T2001-10A / TONIC
* Interface : Ti2000A04A
* Resolution : 0.01um

[Isometric View]

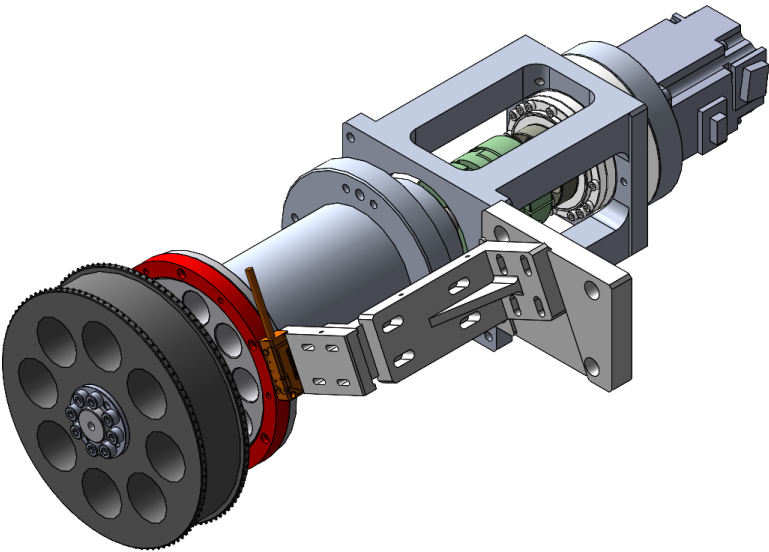


[Map : Front View]

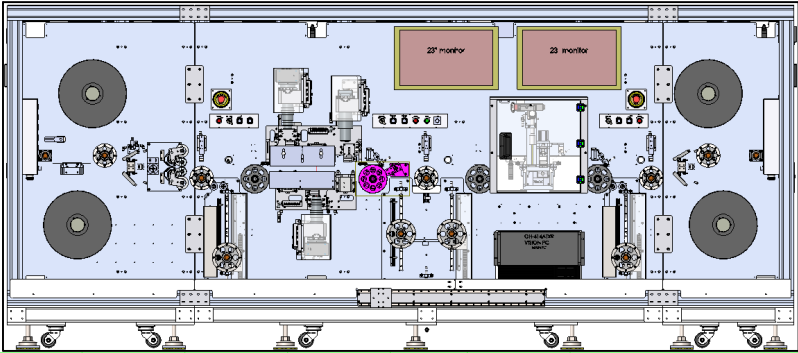

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks		
전기석		전기석	Machine name : SMART-IC AFVI					
Date:		Unit : mm		Part name : External Rotary Encoder				
Synapseimaging			Size A3			Drawing No.		Sheet No L19

ISOMETRIC VIEW

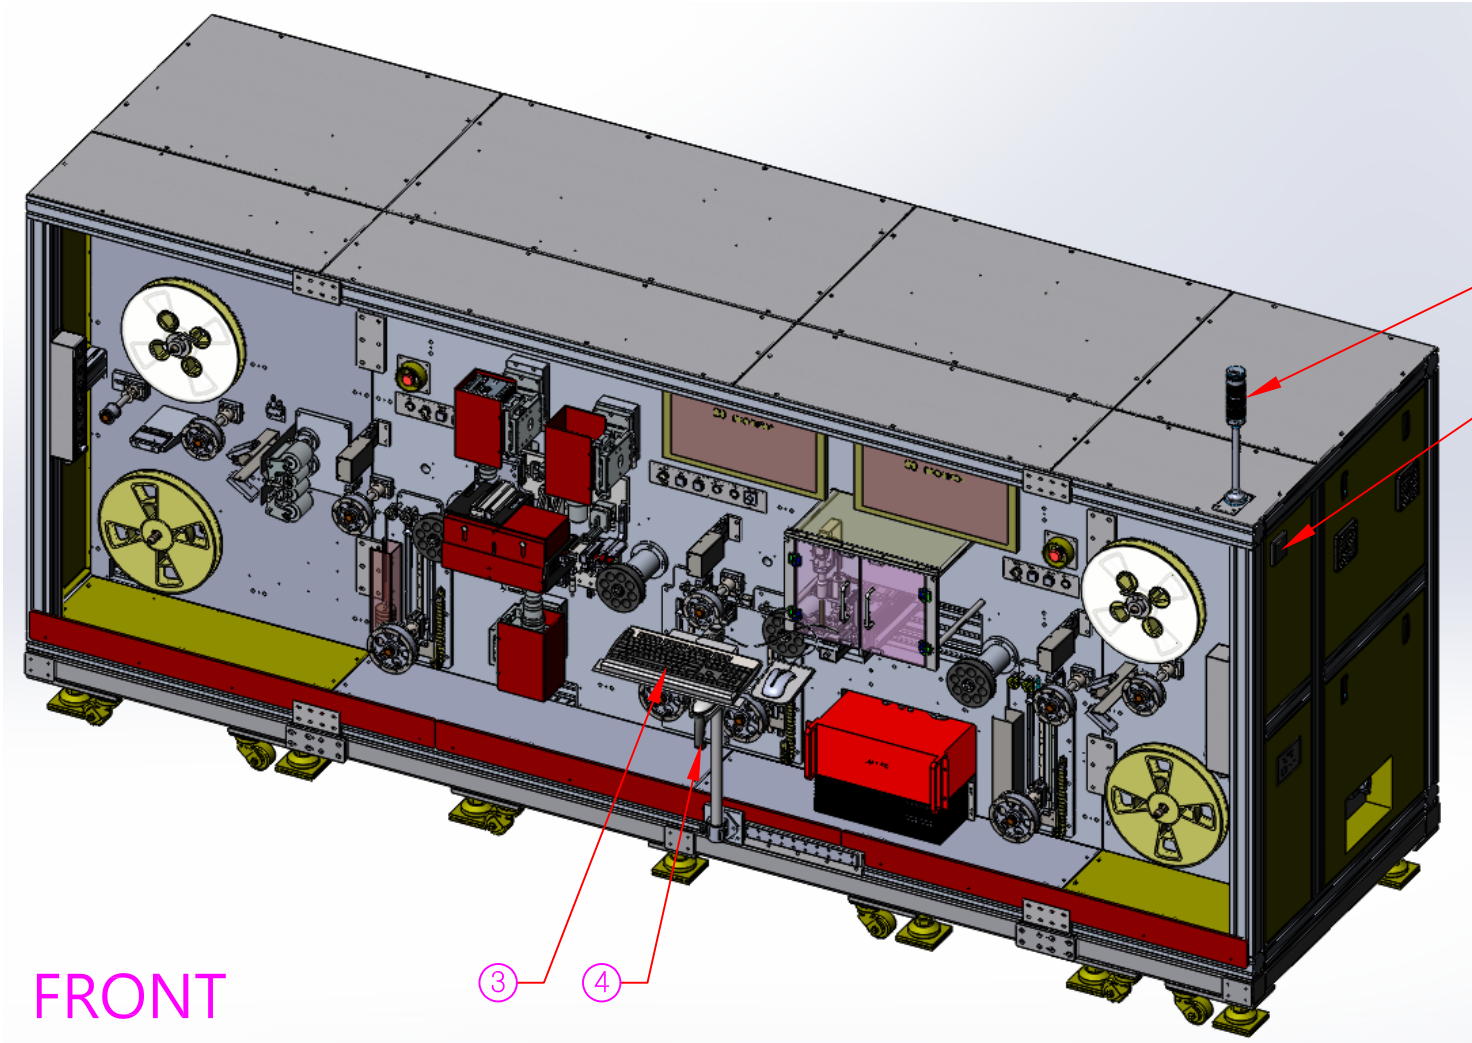


FRONT

NO	LABEL	NAME	수량
①	TOWER LAMP	PTE-DP-302-RYG	1
②	BUZZER	KSP-42S	1
③	KEYBOARD	104Key, LED, USB	1
	MOUSE	Optical Wheel, USB	1

NO	LABEL	NAME	수량
④	BARCODE READER	LS-2208AP	1
		USB (코알형 USB 케이블)	

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks	
전기석		전기석	Machine name : SMART-IC AFVI				
Date:		Unit : mm		Part name : ISOMETRIC VIEW			
Synapse  imaging			Size A3	Drawing No.			Sheet No L21

VISION SYSTEM : REAR SIDE 1 (REAR VIEW)

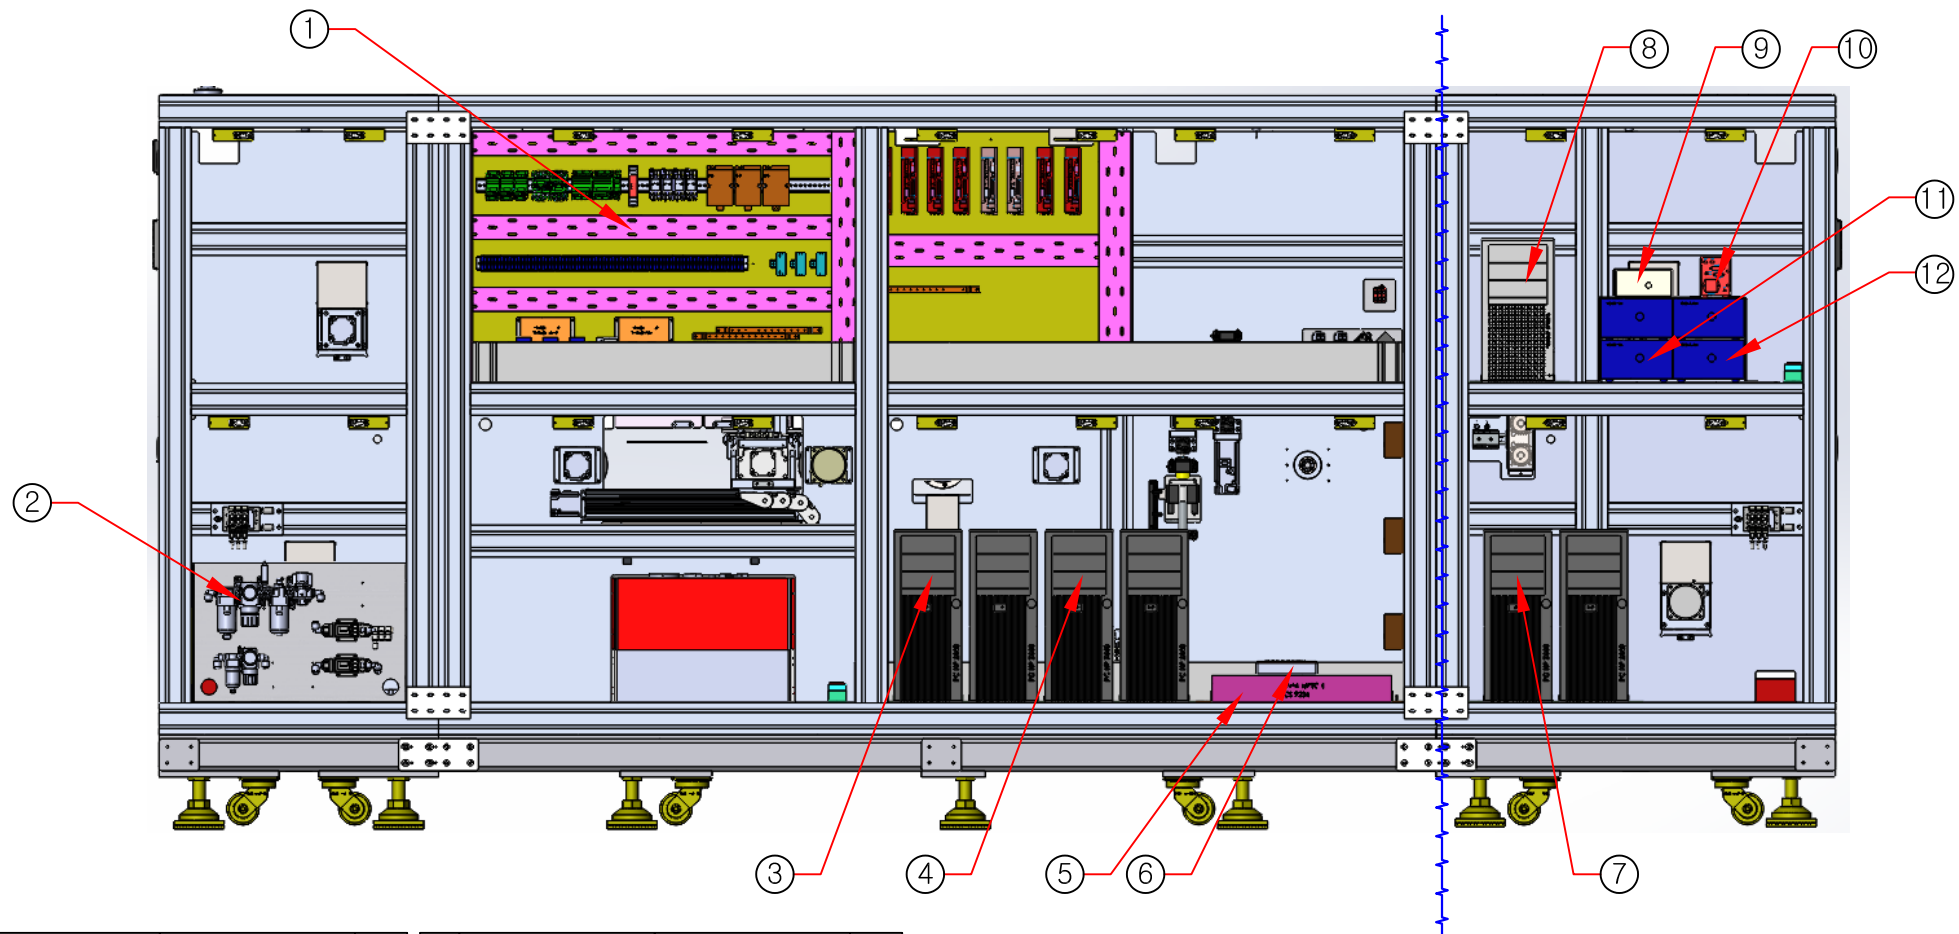

*출하 시 분리 되는 구간 임.


[작업 노트]

1. 출하 시 분리되는 구간이 있으니 전장 배선 작업시 고려 하여 작업 할 것.

NO	LABEL	NAME	수량	NO	LABEL	NAME	수량
①	C-BOX 1	Main Control Panel	1	⑨	LED LIGHT CTRL 3	SPO-LED-2CD-50W	1
②	Main Air Check	ISE30A-01-N-L	1	⑩	LED LIGHT CTRL 6	ALT-2RSD-12V(60W)	1
	Air Flow Switch 1, 2	PF2A721-03-27	2	⑪	LED LIGHT CTRL 1	SPO-LED-4CD-200W	1
③	VISION PC 1-1	SIC-VPC-402-X12-11900-64G	1		LED LIGHT CTRL 2	SPO-LED-4CD-200W	1
	VISION PC 1-2	SIC-VPC-402-X12-11900-64G	1	⑫	LED LIGHT CTRL 4	SPO-LED-4CD-200W	1
④	VISION PC 2-1	SIC-VPC-402-X12-11900-64G	1		LED LIGHT CTRL 5	SPO-LED-4CD-200W	1
	VISION PC 2-2	SIC-VPC-402-X12-11900-64G	1				
⑤	KVM SWITCH	CS1308	1				
⑥	L2 SWITCH	HP 1430 8G (R8R45A)	1				
⑦	VISION PC 3-1	SIC-VPC-402-X12-11900-64G	1				
	VISION PC 3-2	SIC-VPC-402-X12-11900-64G	1				
⑧	SERVER PC	SIC-SPC-j490-X11-1220-16G	1				

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : VISION SYSTEM : REAR SIDE 1 (REAR VIEW)			
Synapse imaging		Size A3	Drawing No.		Sheet No L22	

VISION SYSTEM : REAR SIDE 2 (REAR VIEW)

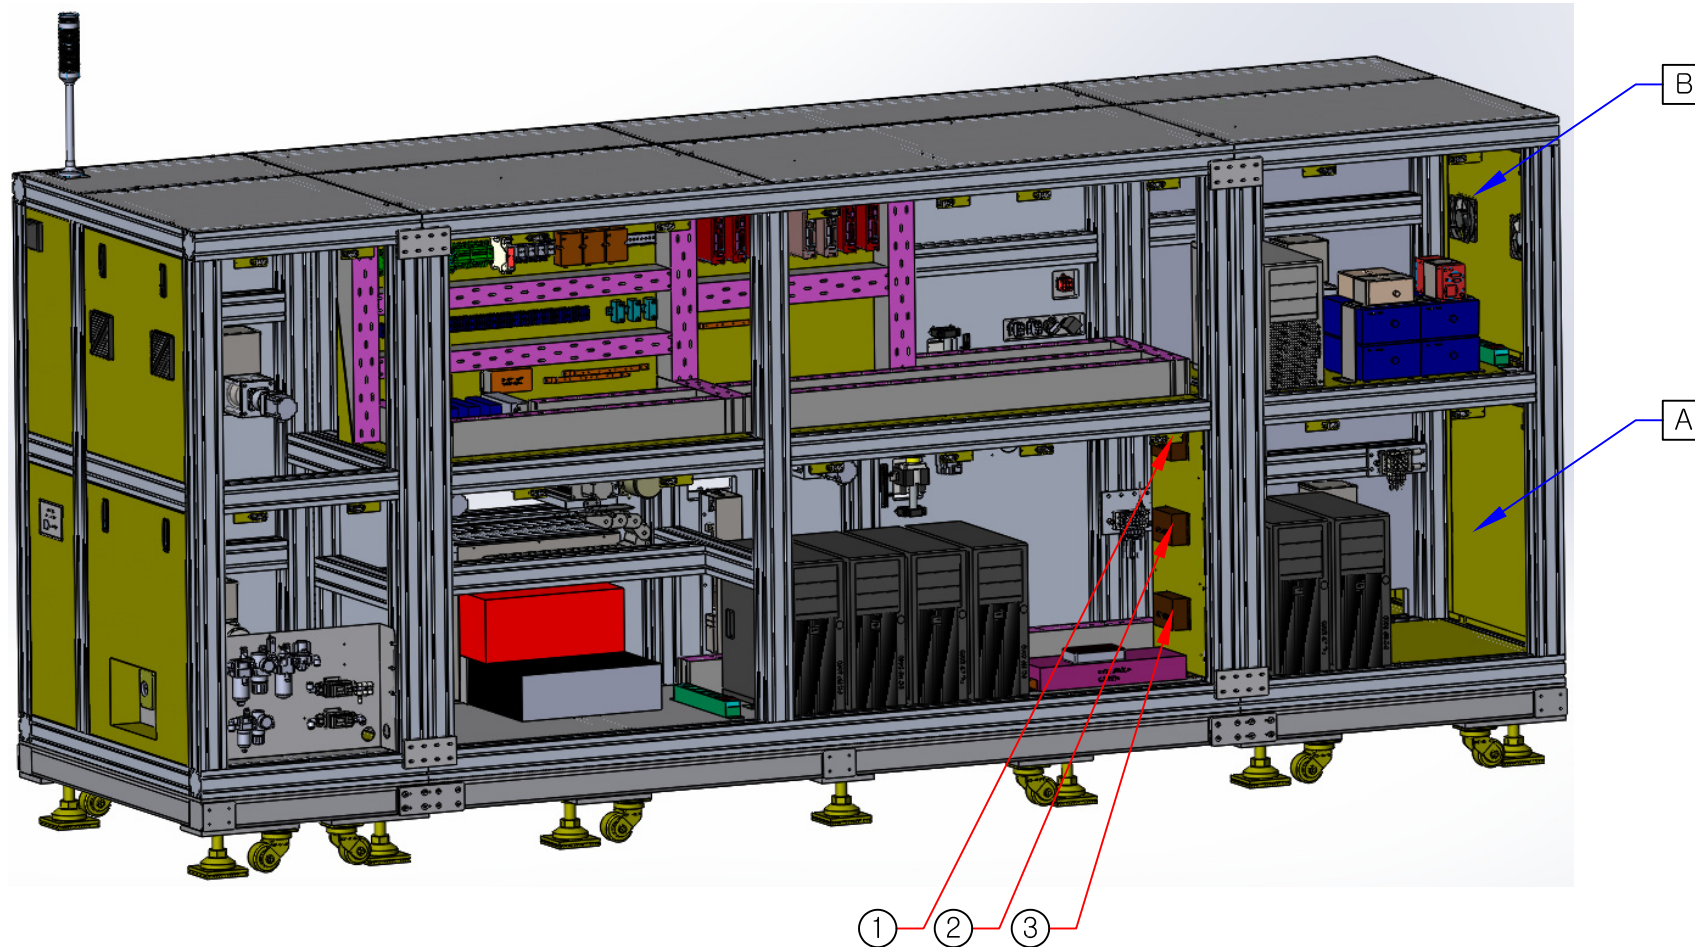

[작업 노트]


1. Camera Link Cable은 덕트에 매설하지 말고 마운트 및 케이블 타이 사용하여 기중 개방 및 독립 배선 할 것.
(남은 구간은 round 처리해서 Vision PC 3-2 옆의 빈 공간에 정리 한다.)
2. Vision PC 후면에 연결되는 Cable들은 매직 케이블(선정리기)를 사용하여 정리 배선 한다. (후크밴드 또는 헬리컬 밴드 사용 가능)

NO	LABEL	NAME	수량
①	SPLITTER 1	SCL-300T2	1
②	SPLITTER 2	SCL-300T2	1
③	SPLITTER 3	SCL-300T2	1

NO	LABEL	NAME	수량
A	1st FLOOR	Vision System	1
B	2nd FLOOR	Vision System	1

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : VISION SYSTEM : REAR SIDE 2 (REAR VIEW)			
Synapse  imaging			Size A3	Drawing No.		Sheet No L23

VISION SYSTEM : 1st FLOOR (TOP VIEW)

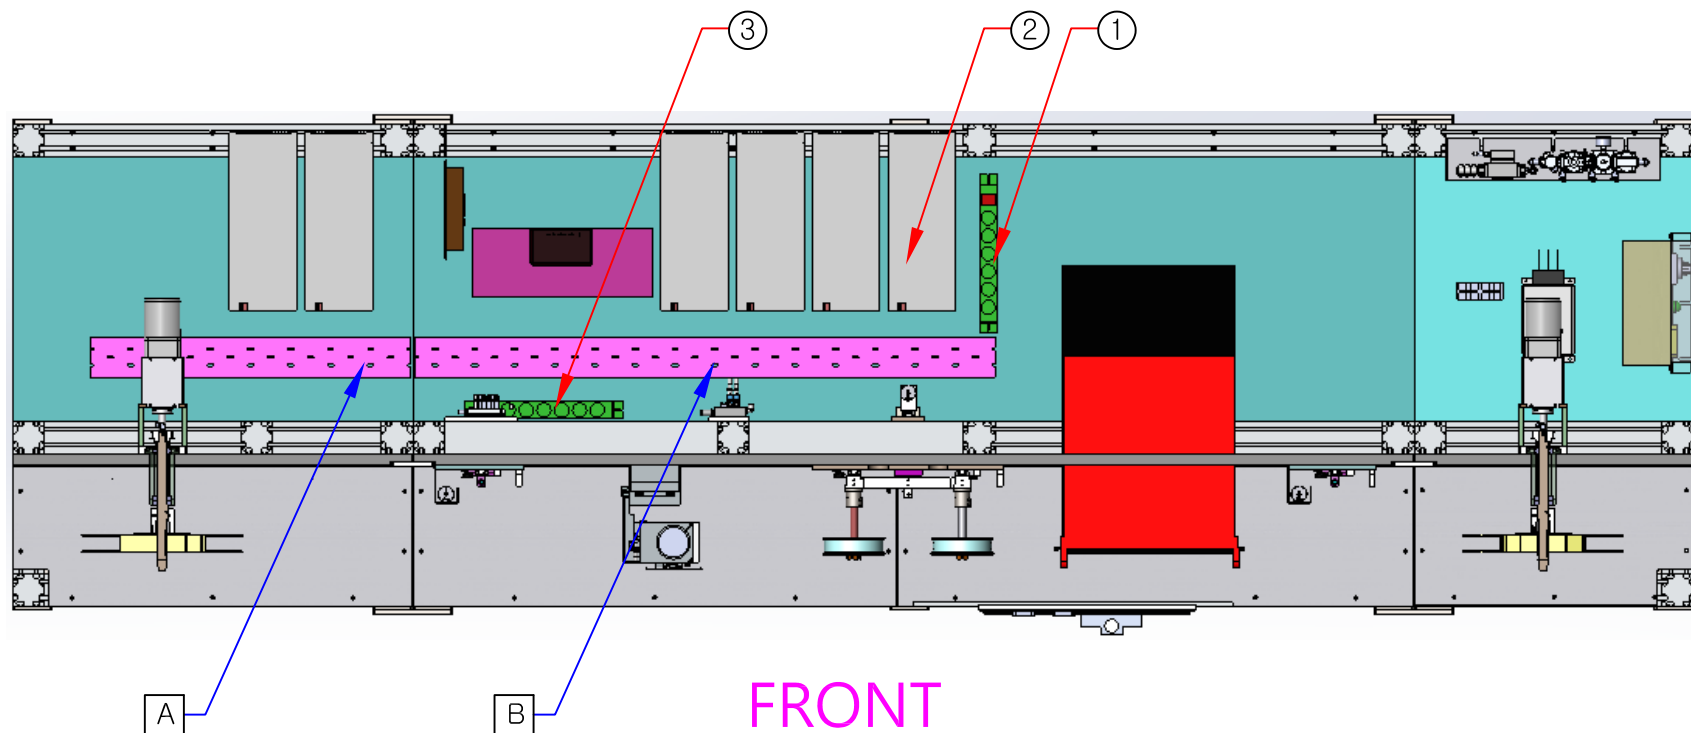


NO	LABEL	NAME	수량
①	멀티탭 1	6구,알루미늄,서버랙	1
②	VISION PC 1-1		1
③	멀티탭 2	6구,알루미늄,서버랙	1

NO	LABEL	NAME	수량
A	PVC DUCT	100 x 100	850
B	PVC DUCT	100 x 100	1550

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm		Part name : VISION SYSTEM : 1st FLOOR (TOP VIEW)		
Synapse  imaging		Size A3		Drawing No.		Sheet No L24

VISION SYSTEM : 2nd FLOOR (TOP VIEW)

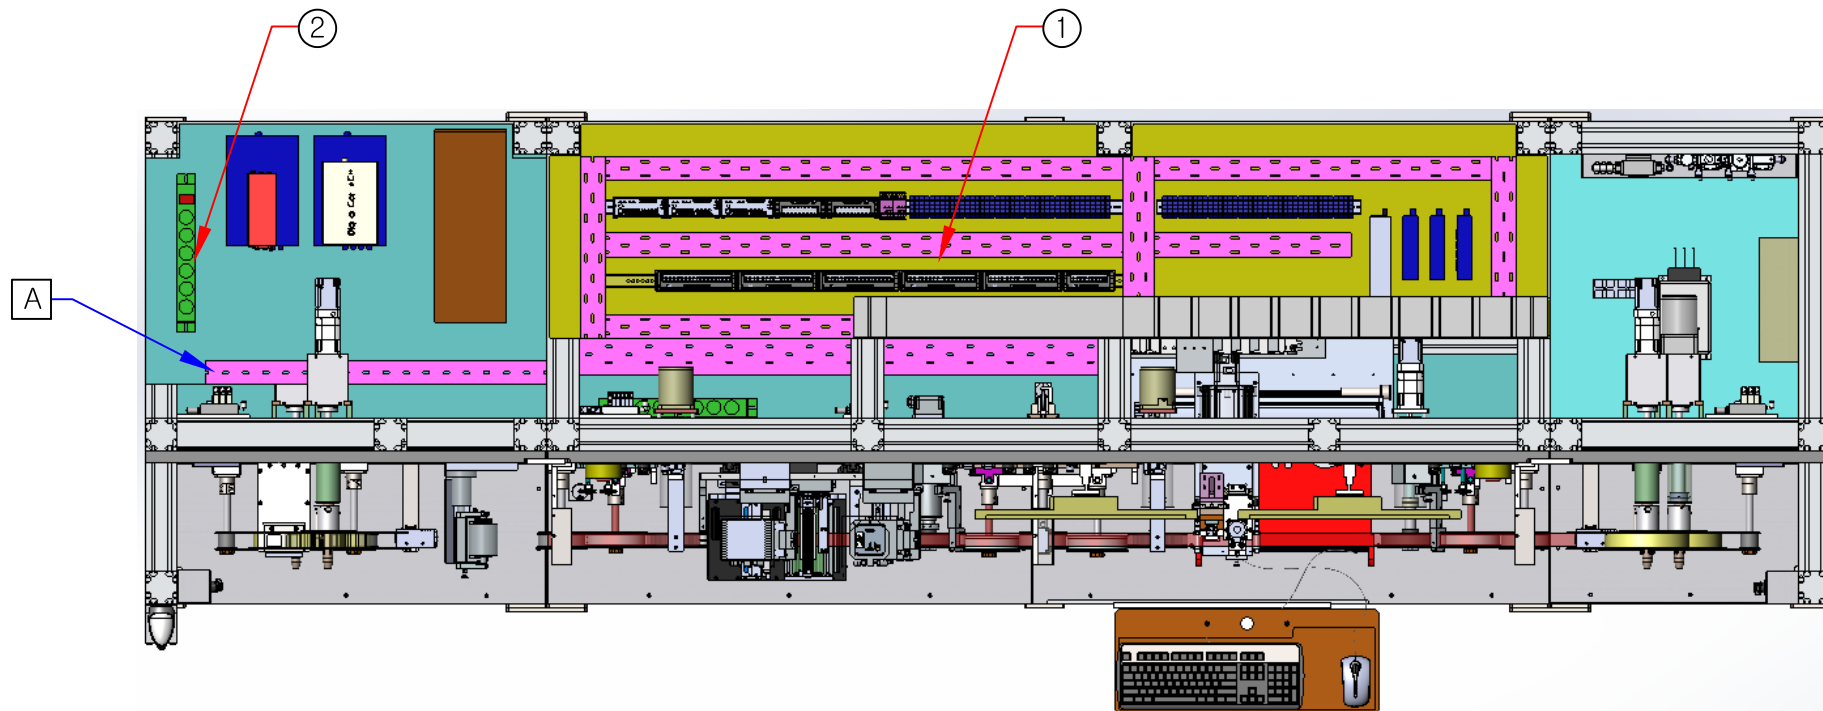

FRONT


NO	LABEL	NAME	수량
①	C-BOX1	Main Control Panel	1
②	멀티탭 3	6구,알루미늄,서버랙	1

NO	LABEL	NAME	수량
A	PVC DUCT	60 x 80	850


Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : VISION SYSTEM : 2nd FLOOR (TOP VIEW)			
Synapse  imaging			Size A3	Drawing No.		Sheet No L25

MONITOR 1, 2 & 멀티탭 4

[FRONT VIEW]

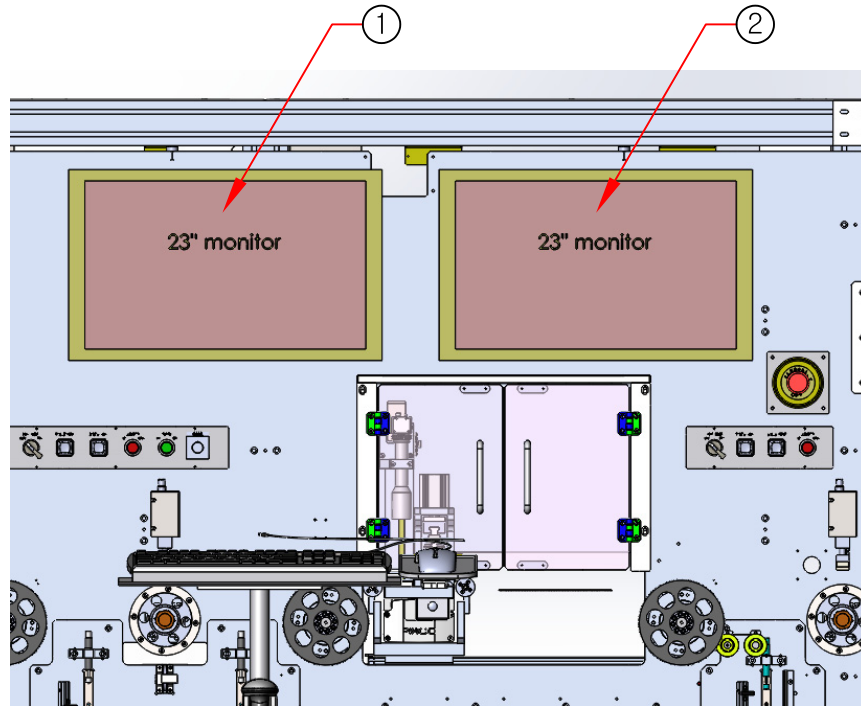

[REAR VIEW]

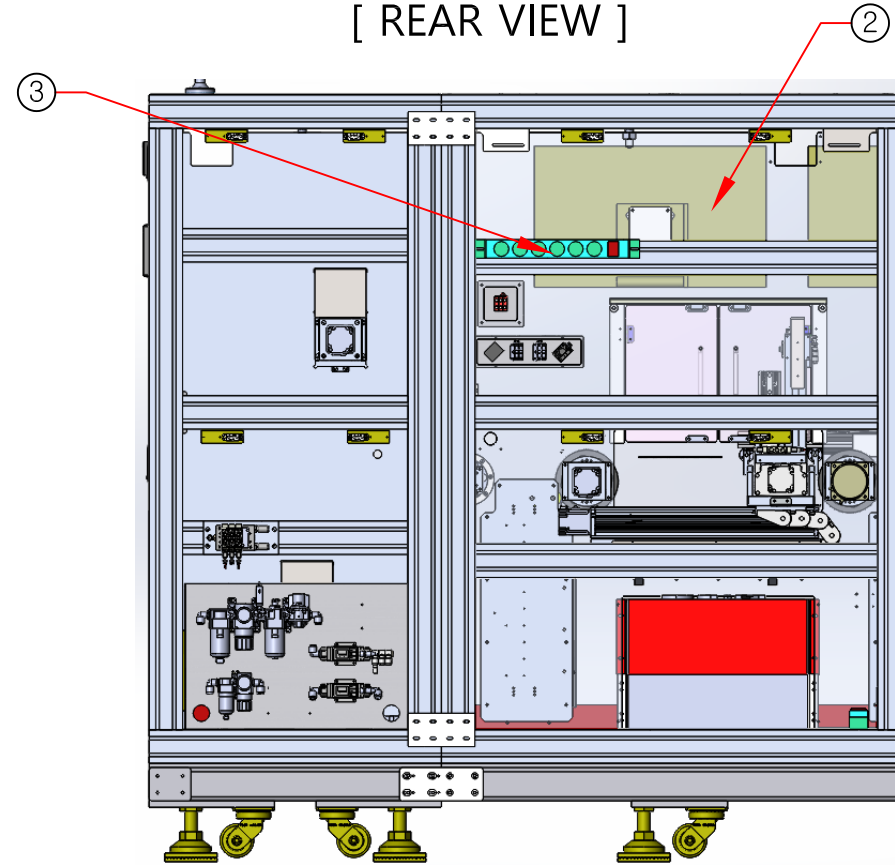



NO	NAME
①	MONITOR 1
②	MONITOR 2
③	L2-4S-5P / 4구, 5m, 알루미늄, 서버랙용

[작업 노트]

1. 후면부 프로파일에 멀티탭 4(4구 Type)를 설치한다. (C-BOX 1 Panel 설치 되면 가려져서 안보인다)
2. 멀티탭 4의 위치는 아답터 2개가 정상적으로 삽입 되도록 선정 한다.
3. 배선은 멀티탭 4의 Cable(5m)에 AC Plug (IEC320 C14)를 작업해서 UPS에 삽입한다.

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : MONITOR 1, 2 & 멀티탭 4			
Synapse  imaging			Size A3	Drawing No.		Sheet No L31

UTILITY PANEL : RIGHT SIDE

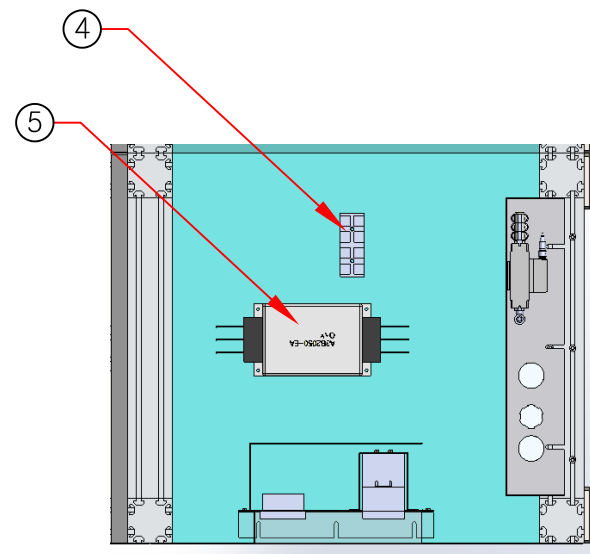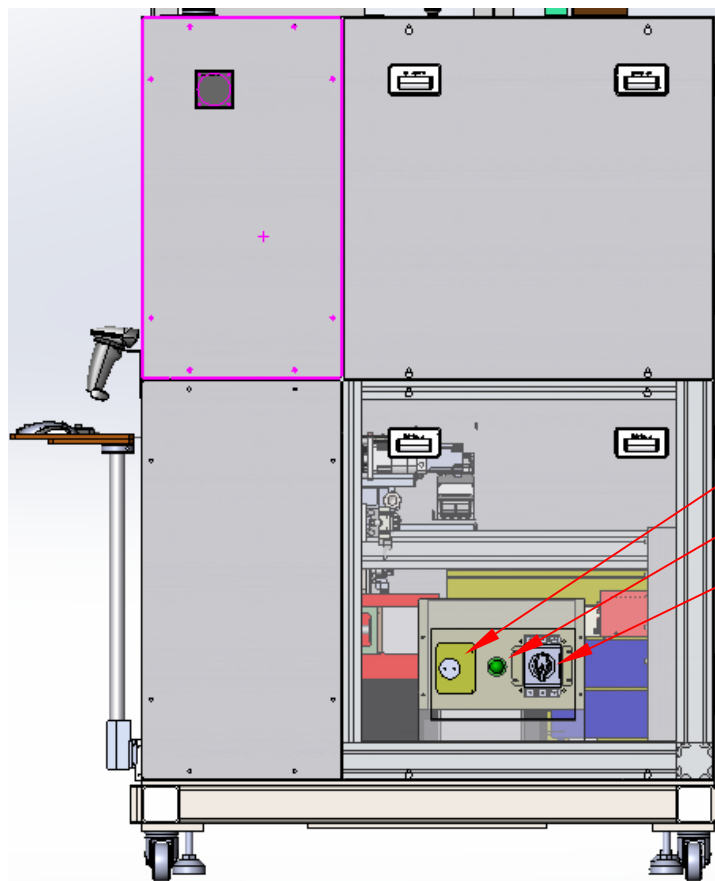

* Main Noise Filter 및 주전원 단자대는 Utility Panel
후면 안쪽에 위치함.

NO	LABEL	MODEL	수량
①	ELCB (주전원차단기)	EBN53C/50/100	1
	ELCB HANDLE	DH100	1
②	수전램프	L2RR-L1WL	1
③	SERVICE SOCKET	KDU-200-9LUA	1
		1x AC220V, 7A 콘센트	
		1x RJ-45 (MES I/F)	
④	TB 00 (주 전원 연결 단자대)	KTB1-06004 (4P, 60A)	1
⑤	NF 00 (Main Noise Filter)	WYNF T60T2A	1


Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : UTILITY PANEL : RIGHT SIDE			
Synapse  imaging			Size A3	Drawing No.		Sheet No L32

COVER : COOLING FAN (REAR VIEW)

[RIGHT SIDE]

[REAR SIDE]

[LEFT SIDE]

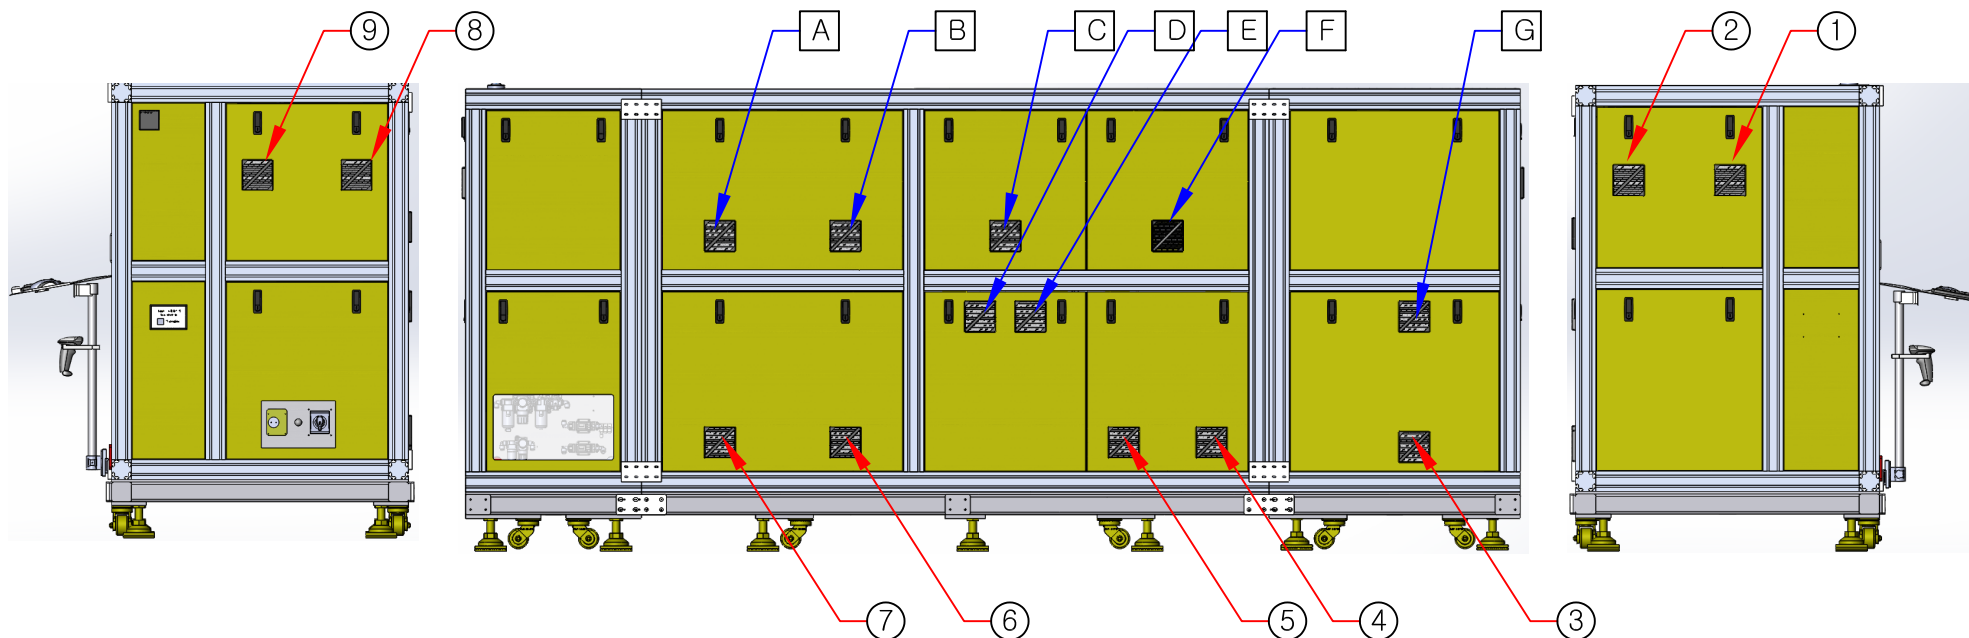


[작업 노트]

1. Cooling FAN 번호는 설비 전면을 기준으로 좌측면 상단 Cover FAN 부터 1번.
2. Cooling FAN의 Air Flow는 모두 흡기 방향으로 설치 한다.
3. FAN 이 설치 되지 않는 곳은 FAN 사각 Filter만 설치 한다. (A~G)

NO	LABEL	MODEL	수량
①	FAN 1	S109AP-22-1TB	1
②	FAN 2	S109AP-22-1TB	1
③	FAN 3	S109AP-22-1TB	1
④	FAN 4	S109AP-22-1TB	1
⑤	FAN 5	S109AP-22-1TB	1
⑥	FAN 6	S109AP-22-1TB	1
⑦	FAN 7	S109AP-22-1TB	1
⑧	FAN 8	S109AP-22-1TB	1
⑨	FAN 9	S109AP-22-1TB	1

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : COVER : COOLING FAN (REAR VIEW)			
Synapse  imaging			Size A3	Drawing No.		Sheet No L41

LAMP 1, 2 (FRONT VIEW)

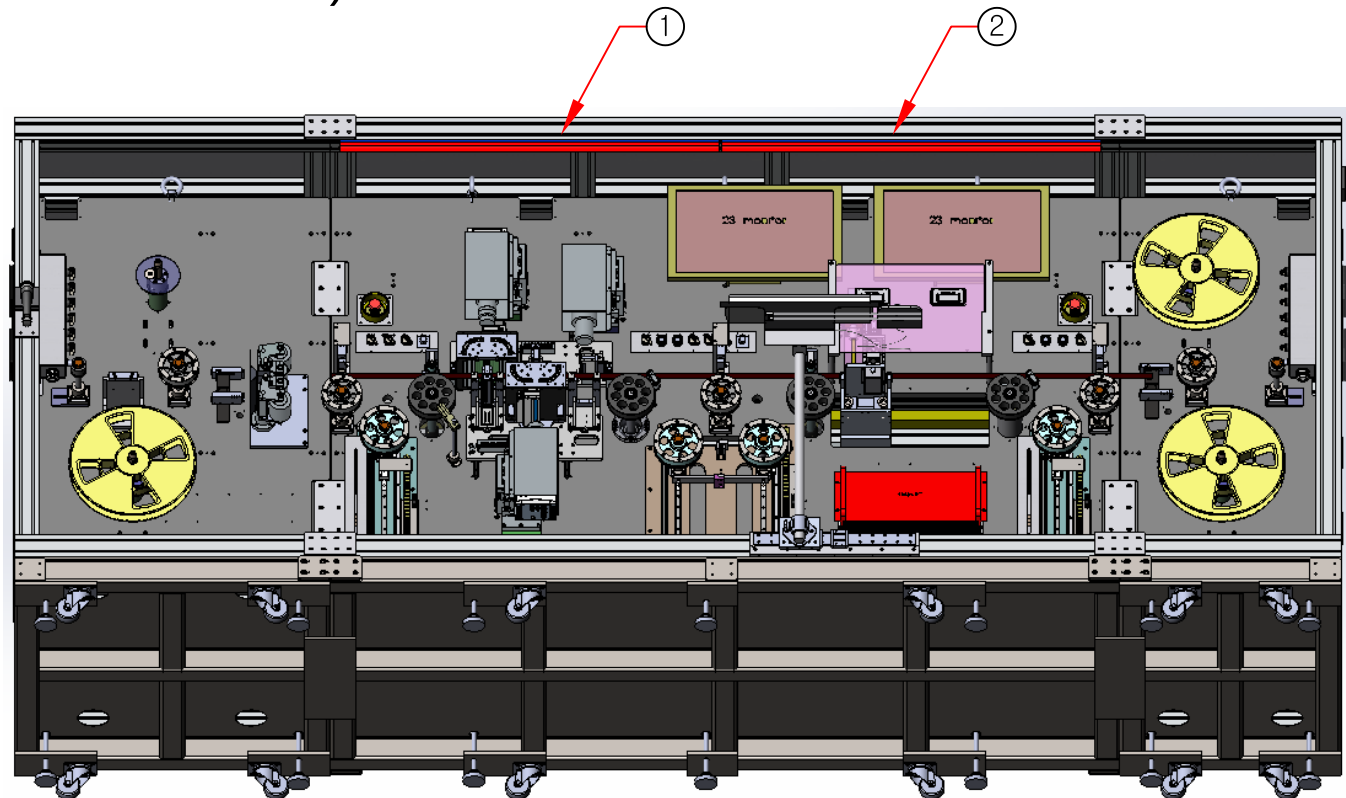


[작업 노트]

1. LAMP에 부착되어 있는 고정 클립을 사용하여 장착 한다.
2. LAMP 각도 조절이 설비 측으로 조절 될 수 있도록 장착 한다.
3. LAMP 1번과 2번을 연결 할 때는 직접 연결잭(부속품) 또는 연결 케이블(별매품) 을 사용한다.

NO	LABEL	MODEL	수량
①	LAMP 1	EZ LED COMBI 1200/18W/5700K/확산	1
②	LAMP 2	EZ LED COMBI 1200/18W/5700K/확산	1

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : LAMP 1, 2 (FRONT VIEW)			
Synapse  imaging			Size A3	Drawing No.		Sheet No L42

LAMP 3, 4 (REAR VIEW)

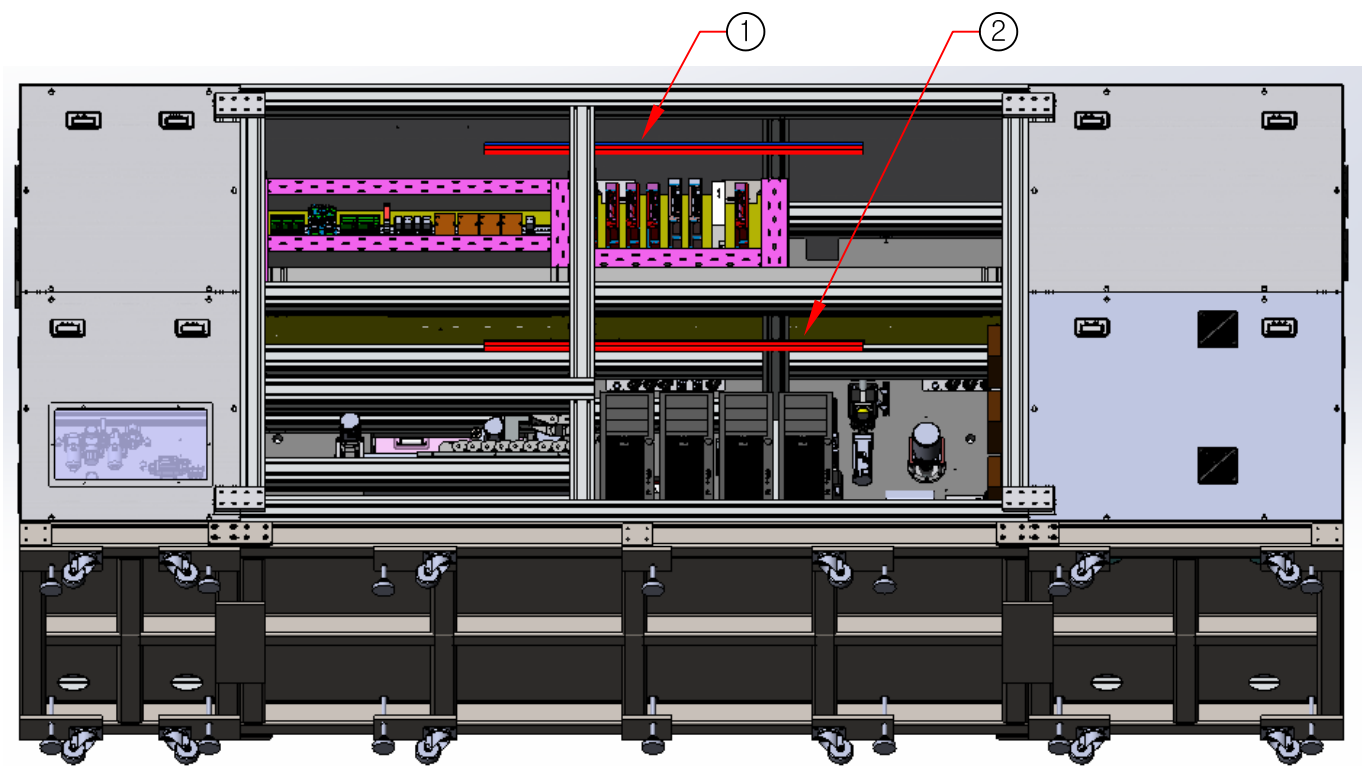

[작업 노트]

- 1. LAMP에 부착되어 있는 고정 클립을 사용하여 장착 한다.
- 2. LAMP의 장착 위치는 유지, 보수 작업시 어두워서 잘 보이지 않는 곳을 조명 할 수 있는 곳으로 선정 한다.
- 3. 노출 중간 스위치의 장착 위치는 사용자가 동작 시키기 편리한 위치를 고려하여 선정 한다

NO	LABEL	MODEL	수량
①	LAMP 3	EZ LED COMBI 1200/18W/5700K/확산	1
②	LAMP 4	EZ LED COMBI 1200/18W/5700K/확산	1

Designed	Modify	Approved	Material	Quantity	Treatment	Remarks
전기석		전기석	Machine name : SMART-IC AFVI			
Date:		Unit : mm	Part name : LAMP 3, 4 (REAR VIEW)			
Synapse  imaging			Size	Drawing No.		Sheet No
			A3			L43