

检测报告
Test Report

报告编号 A225038127210100101E

第 1 页 共 7 页

Report No. A225038127210100101E

Page 1 of 7

报告抬头公司 广州博雅新材料制造有限公司

Company Name GUANGZHOU BROADYA NEW MATERIALS MANUFACTURING CO.,LTD

地 址 广州市花都区华侨经济开发试验区华植西路 10 号

Address NO.10 HUAZHI WEST ROAD,HUAQIAO ECONOMIC DEVELOPMENT
EXPERIMENTAL ZONE,HUADU DISTRICT GUANGZHOU CITY

以下测试之样品及样品信息由申请者提供并确认

The following sample(s) and sample information was/were submitted and identified by/on the behalf of the client

样品名称	阻燃棉纸胶带
Sample Name	Flame Retardant Double Sided Tape
型号	FR 120
Type	FR 120
批号	2025, 4, 25
Lot No.	2025, 4, 25
材质	离型纸+棉纸+丙烯酸胶水
Material	Release paper+tissue+acrylic adhesive
样品接收日期	2025.06.04
Sample Received Date	Jun. 4, 2025
样品检测日期	2025.06.04-2025.06.12
Testing Period	Jun. 4, 2025- Jun. 12, 2025

批 准
Approved by 李侠日 期
Date 2025.06.19
Jun. 19, 2025

李侠

授权签字人

Approved Signatory

广州市华测检测认证技术有限公司

Centre Testing International (Guang zhou) Co., Ltd.

No. RAC8FE64AF

广东省广州市黄埔区博华一路 203 号

No.203, Bohua 1st Road, Huangpu District,
Guangzhou,Guangdong, China

检测报告
Test Report

报告编号 A225038127210100101E
Report No. A225038127210100101E

第 2 页 共 7 页
Page 2 of 7

检测要求

Test Requested

序号 No.	测试项目 Test Item
1	燃烧性（垂直燃烧） Flammability (Vertical burning)

检测结果：请参见后续页面。

Test Result(s): Please see the following pages.


测试样品

Tested Sample(s)

样品编号 Sample No.	样品名称 Sample Name	样品型号 Type	材质 Material
A2250381272101001	阻燃棉纸胶带 Flame Retardant Double Sided Tape	FR 120 FR 120	离型纸+棉纸+丙烯酸胶水 Release paper+tissue+acrylic adhesive

样品图片

Sample Photo(s)

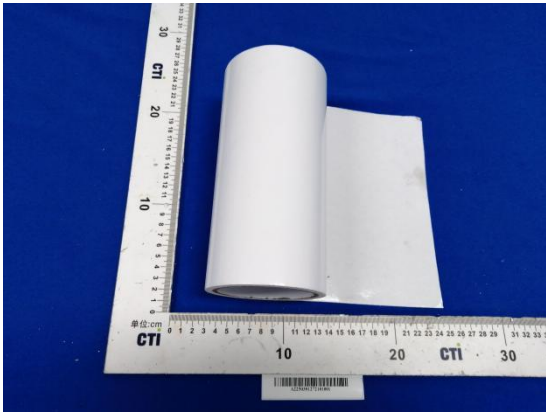

A2250381272101001

检测报告
Test Report

报告编号 A225038127210100101E

第 3 页 共 7 页

Report No. A225038127210100101E

Page 3 of 7

测试项目：燃烧性（垂直燃烧）

Test Item: Flammability (Vertical burning)

1. 测试设备 Test Equipment

设备名称 Equipment Name	型 号 Model
电子数显卡尺 Digimatic caliper	150mm/0.01mm
薄膜测厚仪 Film thickness gauges	CH-10-STSX
水平&垂直燃烧试验箱 Horizontal & Vertical Combustion Test Chamber	RH-6033A

2. 环境条件 Environmental Conditions

温度：（ 23 ± 2 ）℃；湿度：（ 50 ± 5 ）%RHTemperature: (23 ± 2)℃; Humidity: (50 ± 5)%RH

3. 测试条件

Test Condition

测试标准：UL94-2023;

火焰高度：(20+1)mm，第一次施火时间：(3+0.5)s，第二次施火时间：(3±0.5)s

Test standard: UL94-2023;

Flame height :(20+1)mm, first time :(3+0.5)s, second time :(3±0.5)s

检测报告
Test Report

报告编号 A225038127210100101E

第 4 页 共 7 页

Report No. A225038127210100101E

Page 4 of 7

4. 测试结果

Test Result(s)

处理条件 Condition	常温: (23±2)°C, (50±10)%RH, ≥48h Room temperature: (23±2)°C, (50±10)%RH, ≥48h				
测试样品: A2250381272101001 Test Sample: A2250381272101001	1	2	3	4	5
第一次施加火焰后余焰时间 t_1 (s) Afterflame time after the first flame application t_1 (s)	0.22	0.25	0.36	0.22	0.32
第二次施加火焰后余焰时间 t_2 (s) Afterflame time after the second flame application t_2 (s)	0.58	0.55	0.67	0.56	0.62
第二次施加火焰后余辉时间 t_3 (s) Afterglow time after the second flame application t_3 (s)	0.30	0.12	0.21	0.26	0.32
对任意处理组的五个样品的总的余焰时间(t_1+t_2) (s) Afterflame plus afterglow time for each individual specimen after the second flame application (t_2+t_3) (s)	4.35				
在第二次火焰施加后, 每个独立的样品余焰时间和余辉时间(t_2+t_3) (s) Afterflame plus afterglow time for each individual specimen after the second flame application (t_2+t_3) (s)	0.88	0.67	0.88	0.82	0.94
余焰和 (或) 余辉是否蔓延至夹具 Afterflame or afterglow of any specimen up to the holding clamp	否/NO	否/NO	否/NO	否/NO	否/NO
是否有燃烧颗粒或滴落物 Flaming particles or drops	否/NO	否/NO	否/NO	否/NO	否/NO
燃烧颗粒或滴落物是否引燃棉垫 Cotton indicator ignited by flaming particles or drops	否/NO	否/NO	否/NO	否/NO	否/NO

检测报告
Test Report

报告编号A225038127210100101E第 5 页 共 7 页

Report No. A225038127210100101EPage 5 of 7

结论 Conclusion	样品常温测试结果符合VTM-0的要求。 The sample to be preconditioned at room temperature test results pass the requirements of VTM-0.
------------------	---

备注：

1.试样尺寸 50mm×200mm×0.106mm。

2.表格中“-”表示样品在第一次施加火焰后余焰蔓延至夹具。

Remark:

1. Size 50mm×200mm×0.106mm.

2. “-” in the table means sample afterflame up to the holding clamp after the first flame application.

附表：垂直燃烧分级
Table: Vertical burning classification

判定条件 Criteria conditions	VTM-0	VTM-1	VTM-2
每个独立的样品余焰时间 t ₁ 和 t ₂ Afterflame time for each individual specimen t ₁ and t ₂	≤10s	≤30s	≤30s
对任意处理组的五个样品的总的余焰时间(t ₁ +t ₂) Total afterflame time for any condition set (t ₁ plus t ₂ for the 5 specimens)	≤50s	≤250s	≤250s
在第二次火焰施加后，每个独立的样品余焰时间和余辉时间(t ₂ +t ₃) Afterflame plus afterglow time for each individual specimen after the second flame application(t ₂ +t ₃)	≤30s	≤60s	≤60s
任一样品余焰和（或）余辉是否蔓延至夹具 Afterflame or afterglow of any specimen up to the holding clamp	否/NO	否/NO	否/NO
燃烧颗粒或滴落物是否引燃棉垫 Cotton indicator ignited by flaming particles or drops	否/NO	否/NO	是/YES

检测报告

Test Report

报告编号 A225038127210100101E

第 6 页 共 7 页

Report No. A225038127210100101E

Page 6 of 7

测试后样品图片**Sample Photo(s) after the test**测试后
After test

备注：本报告中的数据结果供科研、教学、企业内部质量控制、企业产品研发等目的用。

Remark: The testing data and result(s) in this report is(are) just for scientific research, education, internal quality control and product development etc.

声明：**Statement:**

- 1.检测报告无批准人签字、“专用章”及报告骑缝章无效；

This report is considered invalid without approved signature, special seal and the seal on the perforation;

- 2.样品及样品信息由申请者提供，申请者应对其真实性负责，CTI 未核实其真实性；

The sample(s) and sample information was/were provided by the client who should be responsible for the authenticity which CTI hasn't verified;

- 3.本报告检测结果仅对受测样品负责；

The result(s) shown in this report refer(s) only to the sample(s) tested;

- 4.未经 CTI 书面同意，不得部分复制本报告。

Without written approval of CTI, this report can't be reproduced except in full;

- 5.如检测报告中的英文内容与中文内容有差异，以中文为准。

In case of any discrepancy between the English version and Chinese version of the testing reports(if generated), the Chinese version shall prevail.

*** 报告结束 ***

*** End of Report ***

检测报告 Test Report

报告编号 A225038127210100101E

第 7 页 共 7 页

Report No. A225038127210100101E

Page 7 of 7

附录 Appendix

以下样品信息由客户提供同材质保证书证明为同一材质样品，实验室对此真实性不承担责任

The following sample information is provided by the customer with a quality assurance certificate of the same material, which proves that it is a sample of the same material. The laboratory is not responsible for the authenticity of this information

同材型号：FR100, FR140

声明 Statement

附录内容由申请者提供，申请者应对其真实性负责，CTI 未核实其真实性。

The Appendix Information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

