

Packet Tracer - WLAN Configuration

Name: Danica Marie A. Dumalagan

Date: April 29, 2023

Addressing Table

Device	Interface	IP Address
Home Wireless Router	Internet	DHCP
	LAN	192.168.6.1/27
RTR-1	G0/0/0.2	192.168.2.1/24
	G0/0/0.5	192.168.5.1/24
	G0/0/0.100	192.168.100.1/24
	G0/0/1	10.6.0.1/24
SW1	VLAN 200	192.168.100.100/24
LAP-1	G0	DHCP
WLC-1	Management	192.168.100.254/24
RADIUS Server	NIC	10.6.0.254/24
Home Admin	NIC	DHCP
Enterprise Admin	NIC	192.168.100.200/24
Web Server	NIC	203.0.113.78/24
DNS Server	NIC	10.100.100.252
Laptop	NIC	DHCP
Tablet PC	Wireless0	DHCP
Smartphone	Wireless0	DHCP
Wireless Host 1	Wireless0	DHCP
Wireless Host 2	Wireless0	DHCP

WLAN Information

WLAN	SSID	Authentication	Username	Password
Home Network	HomeSSID	WPA2-Personal	N/A	Cisco123
WLAN VLAN 2	SSID-2	WPA-2 Personal	N/A	Cisco123
WLAN VLAN 5	SSID-5	WPA-2 Enterprise	userWLAN5	userW5pass

Note: It is not a good practice to reuse passwords as is done in this activity. Passwords have been reused to make it easier to work through the tasks.

Objectives

In this activity, you will configure both a wireless home router and a WLC-based network. You will implement both WPA2-PSK and WPA2-Enterprise security.

- Configure a home router to provide Wi-Fi connectivity to a variety of devices.
- Configure WPA2-PSK security on a home router.
- Configure interfaces on a WLC.
- Configure WLANs on a WLC.
- Configure WPA2-PSK security on a WLAN and connect hosts to WLAN.
- Configure WPA2-Enterprise on a WLAN and connect hosts to the WLAN.
- Verify connectivity WLAN connectivity.

Background / Scenario

You will apply your WLAN skills and knowledge by configuring a home wireless router and an enterprise WLC. You will implement both WPA2-PSK and WPA2-Enterprise security. Finally, you will connect hosts to each WLAN and verify connectivity.

Instructions

Part 1: Configure a Home Wireless Router.


You are installing a new home wireless router at a friend's house. You will need to change settings on the router to enhance security and meet your friend's requirements.

Step 1: Change DHCP settings.

- Open the Home Wireless Router GUI and change the router IP and DHCP settings according to the information in the Addressing Table.
- Permit a maximum of **20** addresses to be issued by the router.
- Configure the DHCP server to start with IP address **.3** of the LAN network.
- Configure the internet interface of the router to receive its IP address over DHCP.

Verify the address. What address did it receive?

10.100.200.2

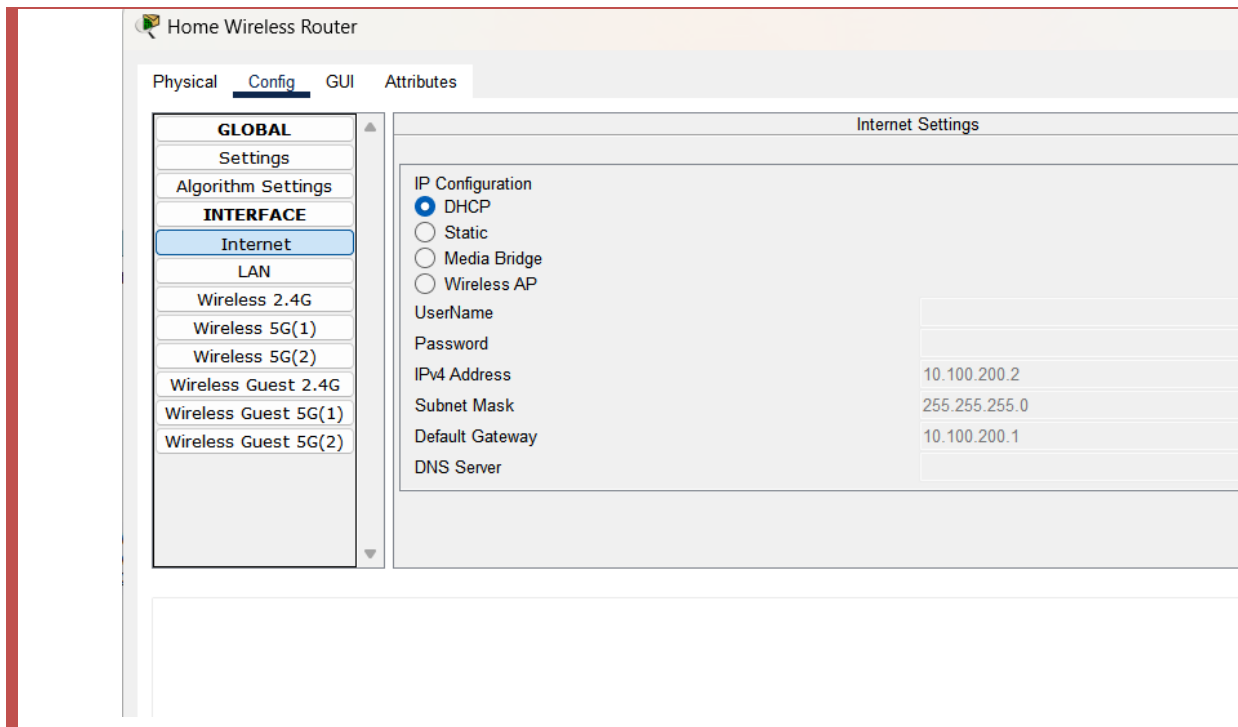

- e. Configure the static DNS server to the address in the Addressing Table.

Step 2: Configure the Wireless LAN.

- a. The network will use the 2.4GHz Wireless LAN interface. Configure the interface with the SSID shown in the Wireless LAN information table.
- b. Use **channel 6**.
- c. Be sure that all wireless hosts in the home will be able to see the SSID.

Step 3: Configure security.

- a. Configure wireless LAN security. Use WPA2 Personal and the passphrase shown in the Wireless LAN information table.
- b. Secure the router by changing the default password to the value shown in the Wireless LAN information table.

Step 4: Connect clients to the network.

- a. Open the PC Wireless app on the desktop of the laptop and configure the client to connect to the network.
- b. Open the Config tab on the Tablet PC and Smartphone and configure the wireless interfaces to connect to the wireless network.
- c. Verify connectivity. The hosts should be able to ping each other and the web server. They should also be able to reach the web server URL.

Part 2: Configure a WLC Controller Network

Configure the wireless LAN controller with two WLANs. One WLAN will use WPA2-PSK authentication. The other WLAN will use WPA2-Enterprise authentication. You will also configure the WLC to use an SNMP server and configure a DHCP scope that will be used by the wireless management network.

Step 1: Configure VLAN interfaces.

- a. From the Enterprise Admin, navigate to the WLC-1 management interface via a web browser. To log into WLC-1, use **admin** as the username and **Cisco123** as the password.

- b. Configure an interface for the first WLAN.
Name: **WLAN 2**
VLAN Identifier: **2**
Port Number: **1**
Interface IP Address: **192.168.2.254**
Netmask: **255.255.255.0**
Gateway: **RTR-1 G0/0/0.2 address**
Primary DHCP Server: **Gateway address**
- c. Configure an interface for the second WLAN.
Name: **WLAN 5**
VLAN Identifier: **5**
Port Number: **1**
Interface IP Address: **192.168.5.254**
Netmask: **255.255.255.0**
Gateway: **RTR-1 interface G0/0/0.5 address**
Primary DHCP Server: **Gateway address**

Step 2: Configure a DHCP scope for the wireless management network.

Configure and enable an internal DHCP scope as follows:

Scope Name: **management**
Pool Start Address: **192.168.100.235**
Pool End Address: **192.168.100.245**
Network: **192.168.100.0**
Netmask: **255.255.255.0**
Default Routers: **192.168.100.1**

Step 3: Configure the WLC with external server addresses.

- a. Configure the RADIUS server information as follows:
Sever Index: **1**
Sever Address: **10.6.0.254**
Shared Secret: **RadiusPW**
- b. Configure the WLC to send logs information to an SNMP server.
Community Name: **WLAN**
IP Address: **10.6.0.254**

Step 4: Create the WLANs.

- a. Create the first WLAN:
Profile Name: **Wireless VLAN 2**
WLAN SSID: **SSID-2**
ID: **2**
Interface: **WLAN 2**
Security: **WPA2-PSK**

Passphrase: **Cisco123**

Under the Advanced tab, go to the FlexConnect section. Enable **FlexConnect Local Switching** and **FlexConnect Local Auth**.

- b. Create the second WLAN:

Profile Name: **Wireless VLAN 5**

WLAN SSID: **SSID-5**

Interface: **WLAN 5**

ID: **5**

Security: **802.1x - WPA2-Enterprise**

Configure the WLAN to use the RADIUS server for authentication.

Make the **FlexConnect** settings as was done in Step 4a.

Step 5: Configure the hosts to connect to the WLANs.

Use the desktop PC Wireless app to configure the hosts as follows:

- a. Wireless Host 1 should connect to Wireless VLAN 2.
- b. Wireless Host 2 should connect to Wireless VLAN 5 using the credentials in the WLAN information table.

Step 6: Test connectivity.

Test connectivity between the wireless hosts and the Web Server by ping and URL.

Part 3: Post your screenshots

On the PT Activity window, make sure that the completion grade is **100%**. Click on the **Check Results** button and select the **Assessment Items** tab. Take a screen shot of the whole window, showing the table of assessment items, and the score/item count. Own your photo by placing a watermark on your photo with your name and USC ID Number. Paste your screenshot below:

Packet Tracer - WLAN Configuration

Cisco Packet Tracer - D:\JinBus\CpE 3212\Submission\13.5.1 Packet Tracer - WLAN Configuration.pka

File Edit Options View Tools Extensions Window Help

Activity Results Time Elapsed: 02:41:48

Congratulations Guest! You completed the activity.

Overall Feedback **Assessment Items** Connectivity Tests

Expand/Collapse All Show Incorrect Items

Assessment Items	Status	Points	Component
Network			
Home Wireless Router			
✓ Default Gateway	Correct	1	Ip
DHCP Server			
Pools			
Pool linksysPool			
✓ Default Gateway	Correct	1	Ip
✓ DNS server IP	Correct	1	Ip
✓ Max User	Correct	1	Ip
✓ Start IP address	Correct	1	Ip
✓ Subnet mask	Correct	1	Ip
✓ Password	Correct	1	Other
Ports		0	Other
Internet			Other
✓ DHCP client enable	Correct	1	Ip
Wireless 2.4G			
Security Mode			
✓ Authen Type	Correct	1	Other
✓ Pass Phrase	Correct	1	Other
✓ SSID	Correct	1	Other
✓ SSID BroadCast	Correct	1	Other
Laptop			
Wireless			
Security Mode			

Score : 52/52

Item Count : 52/52

Component	Items/Total	Score
Ip	21/21	21/21
Other	29/29	29/29
Physical	2/2	2/2

Danica Marie A. Dumalagan
18103276

Close