PRODUCT SPECIFICATION KPS-0069-A01

Product Specification

Product Name: VGM128064A6W02

Product Code: M00191

Customer
Approved by Customer
Approved Date:

Designed By	Checked By	Approved By	
		R&D	QA
曹朝平 09.06.18	陈建强 09.6.18	09.6.18	6/25

E-mail: sales@visionox.com http:// www.visionox.com 1 / 24

CONTENT

REVISION RECORD

REV.	REVISION DESCRIPTION	REV. DATE	REMARK
E01	Initial release.	2009-05-12	
E02	Modify FPC pin assignment.	2009-05-14	
Y01	Updata content.	2009-06-18	

1 Overview

VGM128064A6W02 is an OLED monochrome 128×64 dot matrix display module. The characteristics of this display module are high brightness, self-emission, high contrast ratio, slim/thin outline, wide viewing angle, wide temperature range, and low power consumption.

2 Features

- Display Color: White
- Dot Matrix:128×64
- Driver IC: SSD1308Z
- Interface:8-bit 8080,8-bit 6800, 4-wire SPI, I^2C
- Wide range of operating temperature: -20℃~70℃

3 Mechanical Data

NO.	ITEM	SPECIFICATION	UNIT
1	Dot Matrix	128(W)×64(H)	-
2	Dot Size	0.15(W)×0.155 (H)	mm^2
3	Dot Pitch	0.17(W)×0.175 (H)	mm^2
4	Aperture Rate	78	%
5	Active Area	21.74(W)×11.18 (H)	mm^2
6	Panel Size	26.7(W)×19.26(H)	mm^2
7	Module Size	According to the annexed mechanical drawing	mm^3
8	Diagonal A/A Size	0.96	inch
9	Module Weight	1.39±10%	gram

4 Mechanical Drawing

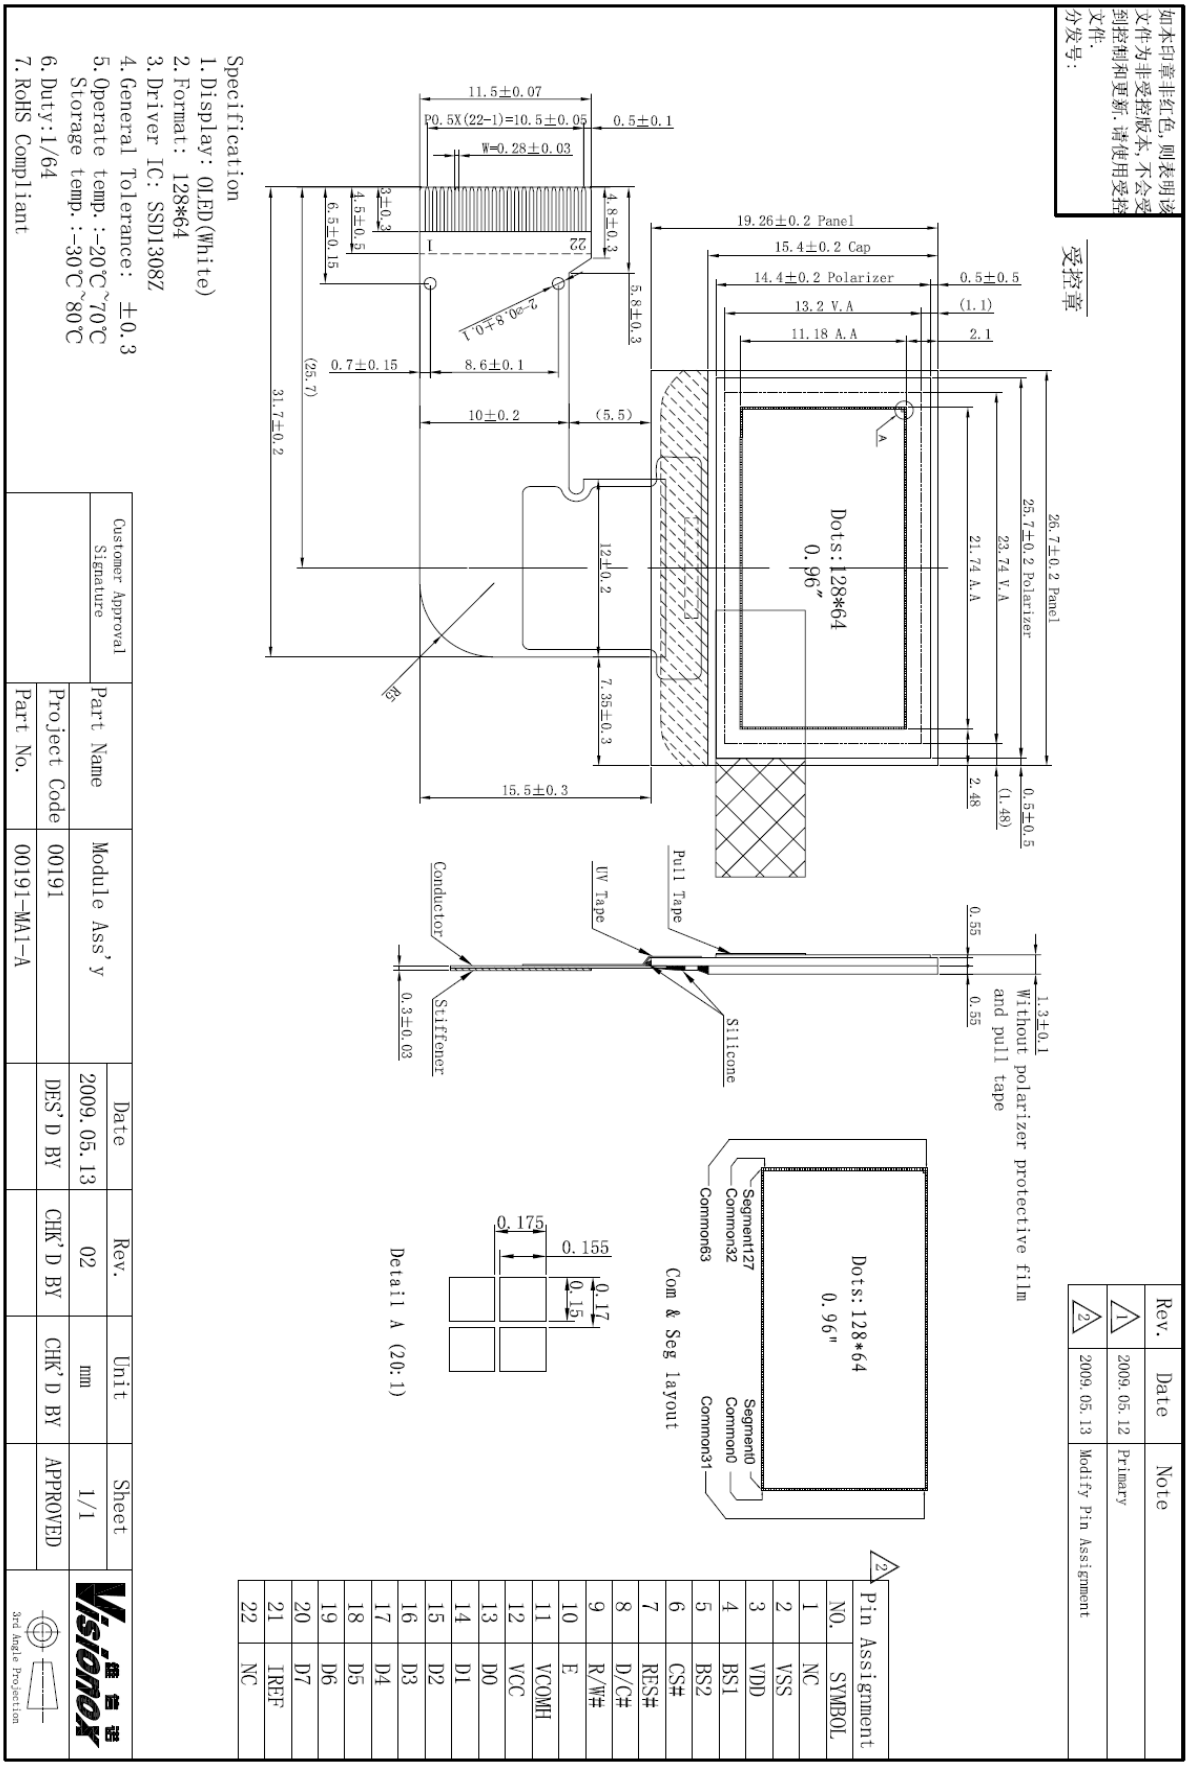

5 Module Interface

<table>
<tr><th>PIN NO.</th><th>PIN NAME</th><th>DESCRIPTION</th></tr>
<tr><td>1</td><td>NC</td><td>No Connection.</td></tr>
<tr><td>2</td><td>VSS</td><td>Ground.</td></tr>
<tr><td>3</td><td>VDD</td><td>Power supply pin for core logic operation.</td></tr>
<tr><td>4</td><td>BS1</td><td rowspan="2">MCU bus interface selection pins.
<table>
<tr><th>SSD1308 Pin Name</th><th>I²C Interface</th><th>6800-parallel interface (8 bit)</th><th>8080-parallel interface (8 bit)</th><th>4-wire Serial interface</th></tr>
<tr><td>BS1</td><td>1</td><td>0</td><td>1</td><td>0</td></tr>
<tr><td>BS2</td><td>0</td><td>1</td><td>1</td><td>0</td></tr>
</table></td></tr>
<tr><td>5</td><td>BS2</td></tr>
<tr><td>6</td><td>CS#</td><td>Chip Select, active low.</td></tr>
<tr><td>7</td><td>RES#</td><td>Reset, active low.</td></tr>
<tr><td>8</td><td>D/C#</td><td>H:Data; L :Command.</td></tr>
<tr><td>9</td><td>R/W#</td><td>6800: Read or Write ; 8080: Write; SPI or I²C:connected to VSS.</td></tr>
<tr><td>10</td><td>E(/RD)</td><td>6800: Enable (E); 8080:Read; SPI or I²C:connected to VSS.</td></tr>
<tr><td>11</td><td>VCOMH</td><td>Common signal deselected voltage level.Connected a capacitor to VSS.</td></tr>
<tr><td>12</td><td>VCC</td><td>Power supply for panel driving voltage.</td></tr>
<tr><td>13~20</td><td>D0~D7</td><td>Data bus.
<table>
<tr><th>Pin Name / Bus Interface</th><th colspan="8">Data/Command Interface</th></tr>
<tr><th></th><th>D7</th><th>D6</th><th>D5</th><th>D4</th><th>D3</th><th>D2</th><th>D1</th><th>D0</th></tr>
<tr><td>8-bit 8080</td><td colspan="8">D[7:0]</td></tr>
<tr><td>8-bit 6800</td><td colspan="8">D[7:0]</td></tr>
<tr><td>4-wire SPI</td><td colspan="5">Tie LOW</td><td>NC</td><td>SDIN</td><td>SCLK</td></tr>
<tr><td>I²C</td><td colspan="5">Tie LOW</td><td>SDA_{OUT}</td><td>SDA_{IN}</td><td>SCL</td></tr>
</table></td></tr>
<tr><td>21</td><td>IREF</td><td>Segment output current reference pin.Connected a resistor to VSS.</td></tr>
<tr><td>22</td><td>NC</td><td>No Connection.</td></tr>
</table>

6 Function Block Diagram

6.1 Function Block Diagram

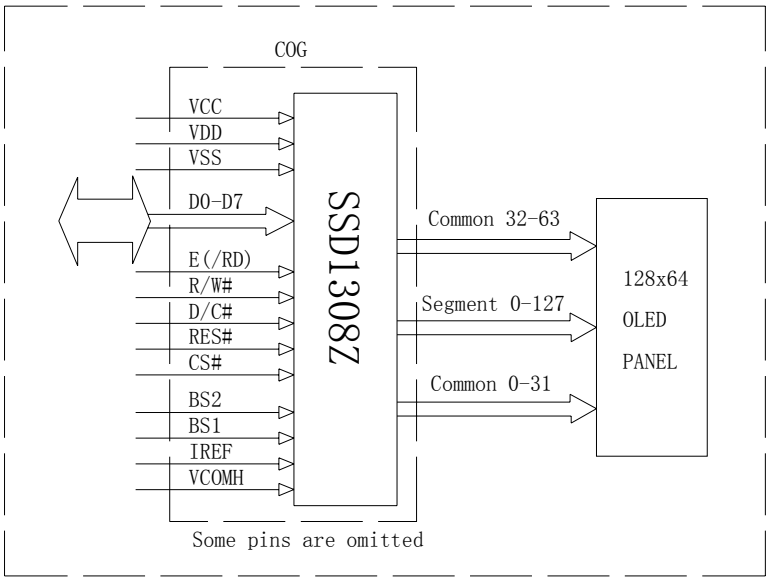

6.2 Panel Layout Diagram

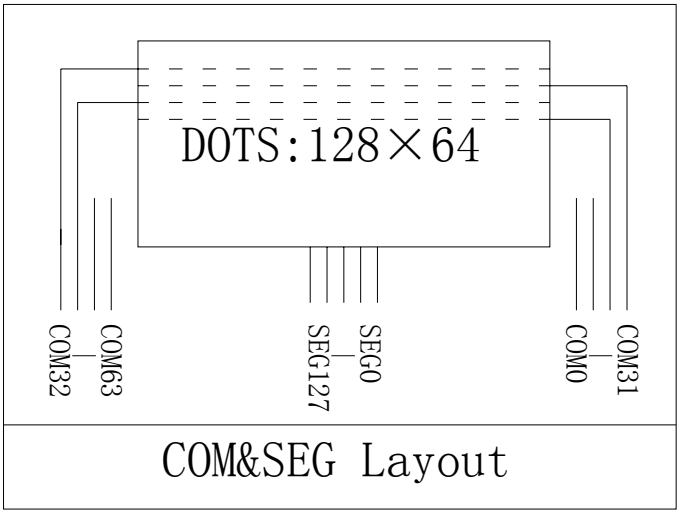

7 Absolute Maximum Ratings

ITEM	SYMBOL	MIN	MAX	UNIT	REMARK
Logic supply voltage	V_{DD}	-0.3	4	V	IC maximum rating
OLED Operating voltage	V_{CC}	0	16	V	IC maximum rating
Operating Temp.	Top	-20	70	℃	-
Storage Temp	Tstg	-30	80	℃	-

Note (1): All of the voltages are on the basis of "VSS = 0V".

Note (2): Permanent breakage of module may occur if the module is used beyond the maximum rating. The module can be normal operated under the conditions according to Section 8 "Electrical Characteristics". Malfunctioning of the module may occur and the reliability of the module may deteriorate if the module is used beyond the conditions.

8 Electrical Characteristics

8.1 DC Electrical Characteristics

ITEM	SYMBOL	TEST CONDITION	MIN	TYPE	MAX	UNIT
Logic Supply Voltage	V_{DD}	22±3°C, 55±15%R.H	1.65	3	3.3	V
OLED Driver Supply Voltage	V_{CC}	22±3°C, 55±15%R.H	11.5	12	12.5	V
High-level Input Voltage	V_{IH}	-	$0.8\times V_{DD}$	-	-	V
Low-level Input Voltage	V_{IL}	-	0	-	$0.2\times V_{DD}$	V
High-level Output Voltage	V_{OH}	-	$0.9\times V_{DD}$	-	-	V
Low-level Output Voltage	V_{OL}	-	0	-	$0.1\times V_{DD}$	V

Note : The V_{CC} input must be kept in a stable value; ripple and noise are not allowed.

8.2 Electro-optical Characteristics

ITEM	SYMBOL	TEST CONDITION	MIN	TYPE	MAX	UNIT
Normal Mode Brightness	L_{br}	All pixels ON(1)	80	100	-	cd/m^2
Standby Mode Brightness		Standby Mode 10% pixels ON(2)	-	25	-	cd/m^2
Normal Mode Power Consumption	Pt	All pixels ON(1)	-	96	120	mW
Standby Mode Power Consumption		Standby Mode 10% pixels ON(2)	-	7.2	-	mW
C.I.E(White)	(x)	x,y(CIE1931)	0.26	0.30	0.34	-
	(y)		0.28	0.32	0.36	-
Dark Room Contrast	CR	-	≥2000:1	-	-	-
Response Time	-	-	-	10	-	μ s
View Angle	-	-	≥160	-	-	Degree

Note(1): Normal Mode test conditions are as follows:

- Driving voltage :12V
- Contrast setting : 0x50
- Frame rate : 107Hz
- Duty setting : 1/64

Note(2): Standby Mode test conditions are as follows:

- Driving voltage : 12V
- Contrast setting : 0x00
- Frame rate : 107Hz
- Duty setting : 1/64

8.3 AC Electrical Characteristics

(1)6800-Series MPU Parallel Interface Timing Characteristics

(VDD - VSS = 1.65V to 3.3V, TA = 25°C)

Symbol	Parameter	Min	Typ	Max	Unit
t_{cycle}	Clock Cycle Time	300	-	-	ns
t_{AS}	Address Setup Time	0	-	-	ns
t_{AH}	Address Hold Time	0	-	-	ns
t_{DSW}	Write Data Setup Time	40	-	-	ns
t_{DHW}	Write Data Hold Time	7	-	-	ns
t_{DHR}	Read Data Hold Time	20	-	-	ns
t_{OH}	Output Disable Time	-	-	70	ns
t_{ACC}	Access Time	-	-	140	ns
PW_{CSL}	Chip Select Low Pulse Width (read) Chip Select Low Pulse Width (write)	120 60	-	-	ns
PW_{CSH}	Chip Select High Pulse Width (read) Chip Select High Pulse Width (write)	60 60	-	-	ns
t_R	Rise Time	-	-	40	ns
t_F	Fall Time	-	-	40	ns

6800-series MCU parallel interface characteristics

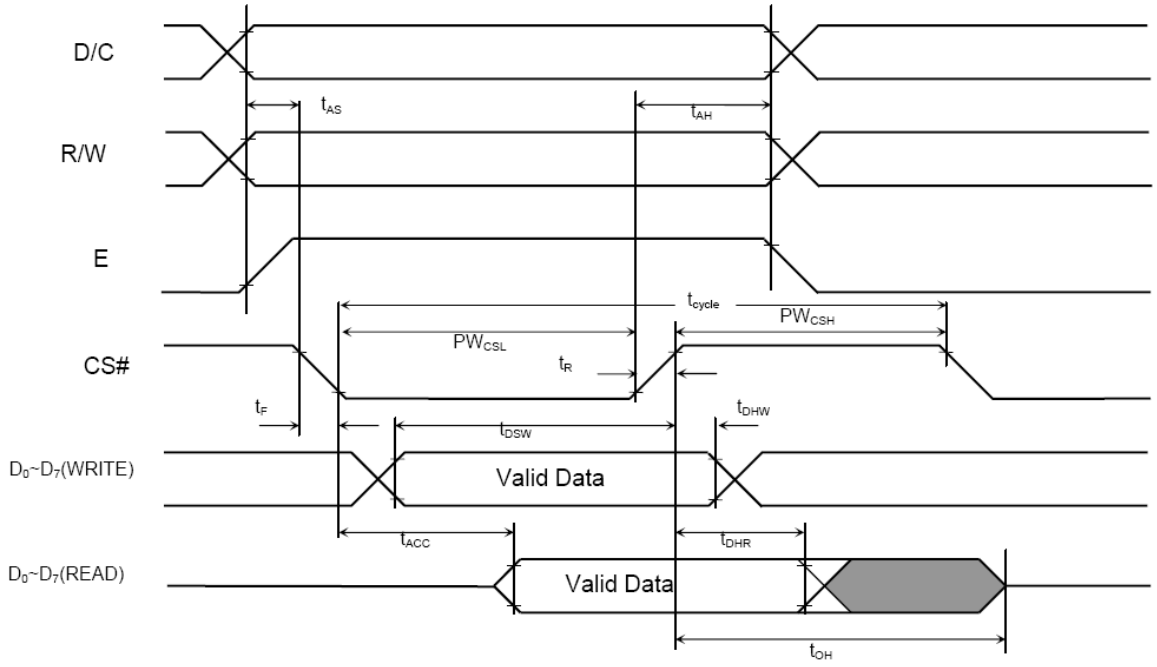

(2)8080-Series MPU Parallel Interface Timing Characteristics

(VDD - VSS = 1.65V to 3.3V, TA = 25°C)

Symbol	Parameter	Min	Typ	Max	Unit
t_{cycle}	Clock Cycle Time	300	-	-	ns
t_{AS}	Address Setup Time	10	-	-	ns
t_{AH}	Address Hold Time	0	-	-	ns
t_{DSW}	Write Data Setup Time	40	-	-	ns
t_{DHW}	Write Data Hold Time	7	-	-	ns
t_{DHR}	Read Data Hold Time	20	-	-	ns
t_{OH}	Output Disable Time	-	-	70	ns
t_{ACC}	Access Time	-	-	140	ns
t_{PWLR}	Read Low Time	120	-	-	ns
t_{PWLW}	Write Low Time	60	-	-	ns
t_{PWHR}	Read High Time	60	-	-	ns
t_{PWHW}	Write High Time	60	-	-	ns
t_R	Rise Time	-	-	40	ns
t_F	Fall Time	-	-	40	ns
t_{CS}	Chip select setup time	0	-	-	ns
t_{CSH}	Chip select hold time to read signal	0	-	-	ns
t_{CSF}	Chip select hold time	20	-	-	ns

8080-series parallel interface characteristics

Write Cycle

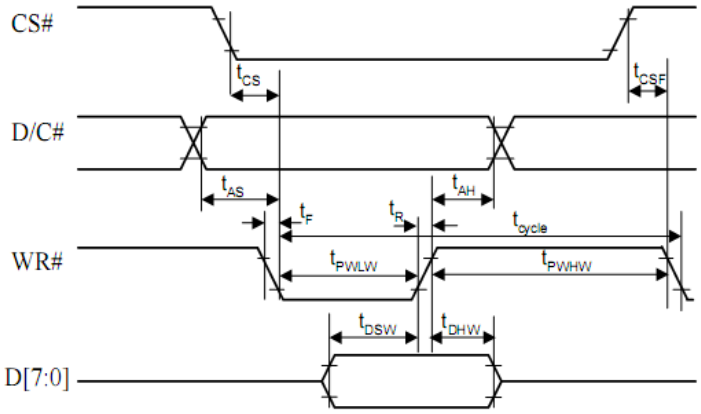

Read cycle

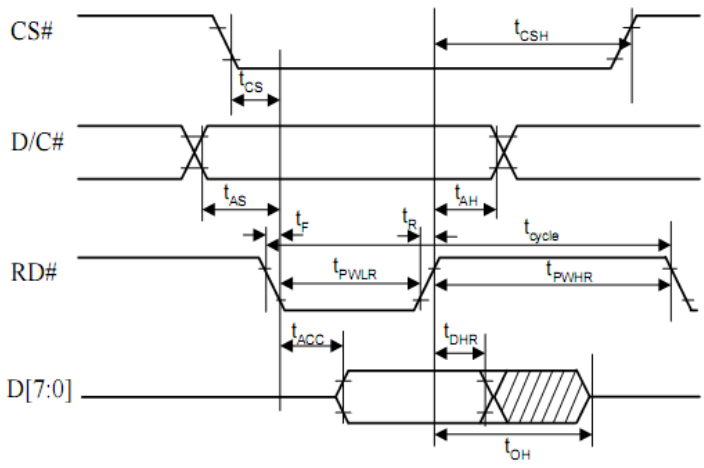

(3)4-wire Serial Interface Timing Characteristics

(VDD - VSS = 1.65V to 3.3V, TA = 25°C)

Symbol	Parameter	Min	Typ	Max	Unit
t_{cycle}	Clock Cycle Time	100	-	-	ns
t_{AS}	Address Setup Time	15	-	-	ns
t_{AH}	Address Hold Time	15	-	-	ns
t_{CSS}	Chip Select Setup Time	20	-	-	ns
t_{CSH}	Chip Select Hold Time	10	-	-	ns
t_{DSW}	Write Data Setup Time	15	-	-	ns
t_{DHW}	Write Data Hold Time	15	-	-	ns
t_{CLKL}	Clock Low Time	20	-	-	ns
t_{CLKH}	Clock High Time	20	-	-	ns
t_R	Rise Time	-	-	40	ns
t_F	Fall Time	-	-	40	ns

4-wire Serial interface characteristics

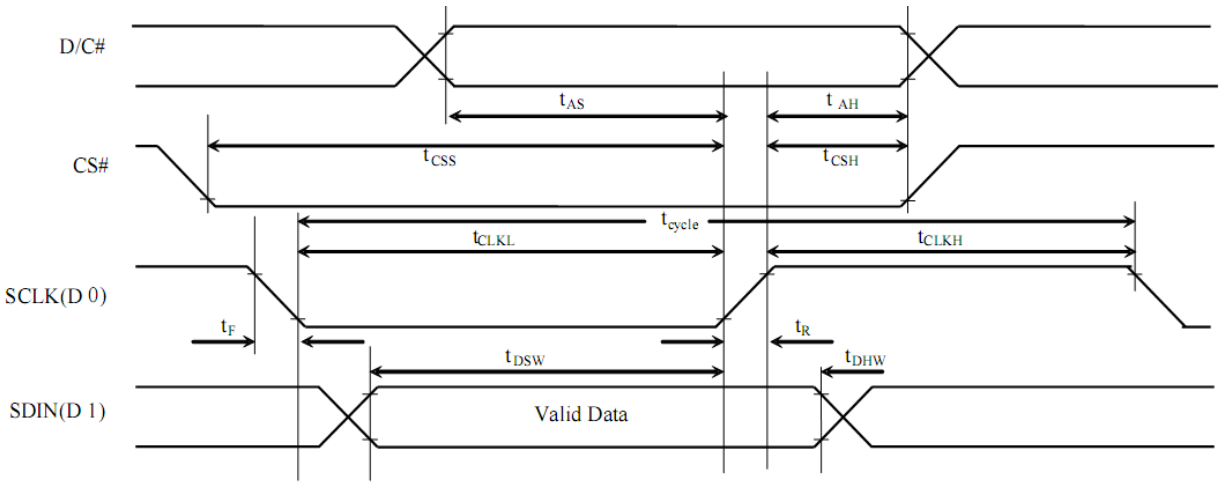

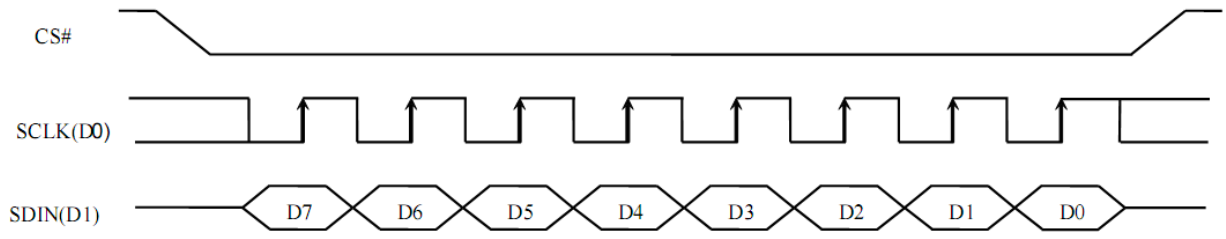

(4) I^2C interface Timing Characteristics

(VDD - VSS = 1.65V to 3.3V, TA = 25°C)

Symbol	Parameter	Min	Typ	Max	Unit
t_{cycle}	Clock Cycle Time	2.5	-	-	us
t_{HSTART}	Start condition Hold Time	0.6	-	-	us
t_{HD}	Data Hold Time (for "SDA_{OUT}" pin)	0	-	-	ns
	Data Hold Time (for "SDA_{IN}" pin)	300	-	-	ns
t_{SD}	Data Setup Time	100	-	-	ns
t_{SSTART}	Start condition Setup Time (Only relevant for a repeated Start condition)	0.6	-	-	us
t_{SSTOP}	Stop condition Setup Time	0.6	-	-	us
t_R	Rise Time for data and clock pin	-	-	300	ns
t_F	Fall Time for data and clock pin	-	-	300	ns
t_{IDLE}	Idle Time before a new transmission can start	1.3	-	-	us

I^2C interface Timing characteristics

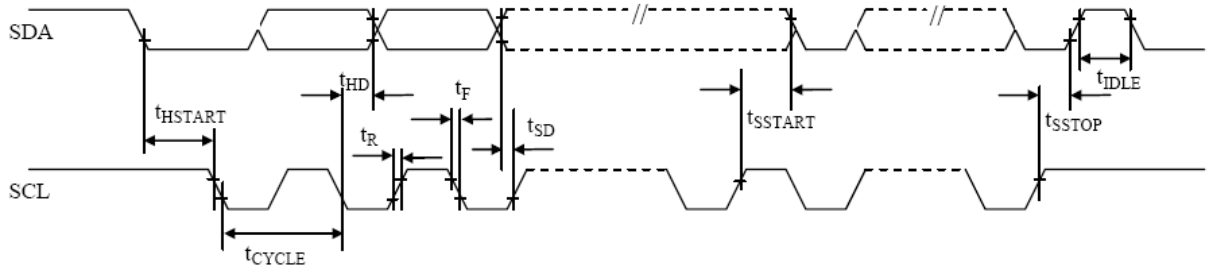

9 Functional Specification and Application Circuit

9.1 Power ON and Power OFF Sequence

Power ON Sequence:

1. Power ON V_{DD}
2. After V_{DD} become stable, set RES# pin LOW (logic low) for at least 3us (t_1)[4] and then HIGH (logic high).
3. After set RES# pin LOW (logic low), wait for at least 3us (t_2). Then Power ON V_{CC}[1].
4. After V_{CC} become stable, send command AFh for display ON. SEG/COM will be ON after 100ms(t_{AF}).

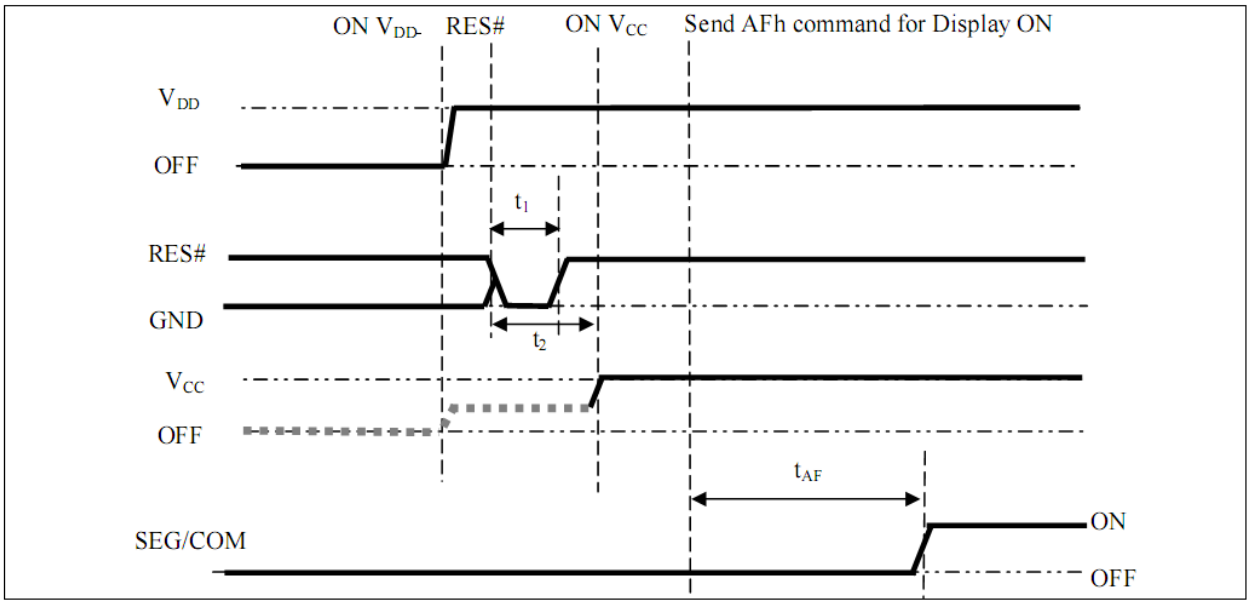

Power OFF Sequence:

1. Send command AEh for display OFF.
2. Power OFF V_{CC}[1],[2],[3].
3. Power OFF V_{DD} after t_{OFF}. [5] (Typical t_{OFF}=100ms)

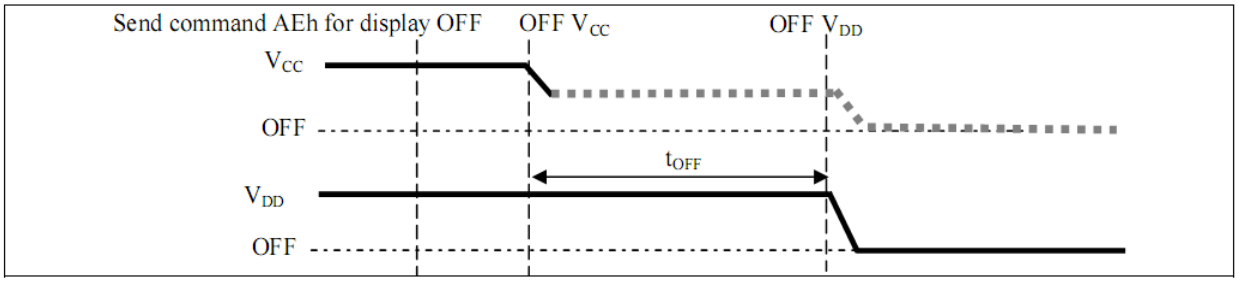

Note:

(1)Since an ESD protection circuit is connected between V_{DD} and V_{CC}, V_{CC} becomes lower than V_{DD} whenever V_{DD} is ON and V_{CC} is OFF as shown in the dotted line of V_{CC} in above figures.

(2) V_{CC} should be kept float (disable) when it is OFF.

(3) Power Pins(V_{DD}, V_{CC}) can never be pulled to ground under any circumstance.

(4) The register values are reset after t_1.

(5) V_{DD} should not be Power OFF before V_{CC} Power OFF

9.2 Application Circuit

The configuration for 8080-parallel interface mode, external VCC is shown in the following diagram:

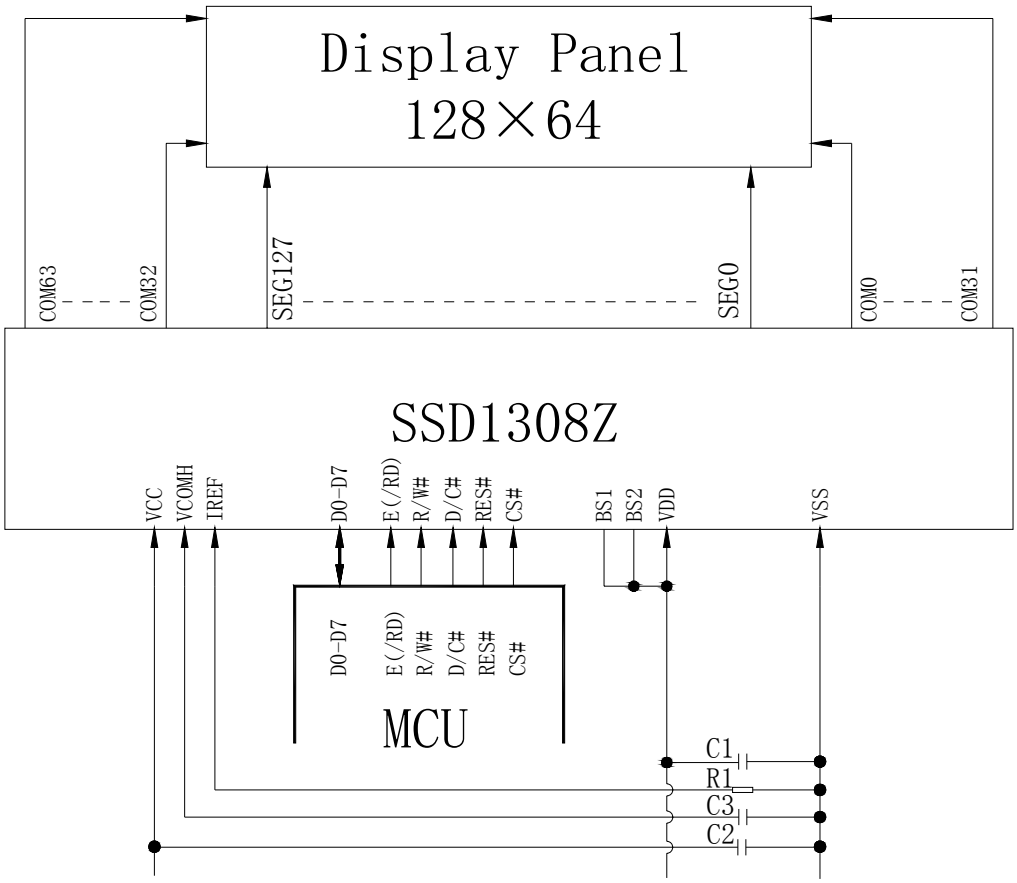

Pin connected to MCU interface: D[7:0], E(/RD), R/W#, D/C#, RES# , CS#

Recommended components

C1: 1.0µF

C2: 2.2µF

C3: 2.2µF

R1: 500kΩ, R1 = (Voltage at IREF - GND) / IREF

Voltage at IREF pin = VCC-3V

9.3 Display Control Instruction

Refer to SSD1308 IC Specification.

9.4 Recommended Software Initialization

```
void init_program()
   {
    write_c(0xae);       // display off
    write_c(0xa1);       //segment remap
    write_c(0xda);       //common pads hardware: alternative
    write_c(0x12);
    write_c(0xc8);       //common output scan direction:com63~com0
    write_c(0xa8);       //multiplex ration mode:63
    write_c(0x3f);
    write_c(0xd5);       //display divide ratio/osc. freq. mode
    write_c(0x80);
    write_c(0x81);       //contrast control
    write_c(0x50);
    write_c(0xd9);       //set pre-charge period
    write_c(0x21);
    write_c(0x20);       //Set Memory Addressing Mode
    write_c(0x02);
    write_c(0xdb);       //VCOM deselect level mode
    write_c(0x30);
    write_c(0xad);       //master configuration
    write_c(0x00);
    write_c(0xa4);       //out follows RAM content
    write_c(0xa6);       //set normal display
    write_c(0xaf);       // display on
}
```

10 Package Specification

Package order (1) ~ (9)

(1) Tray: 370*273 t=0.8mm
Add EPE in every contained tray

EPE

(2)

② 180° revers

normal ①

TRAY

(3) order ①、②、①、②
fix trays with tape
Package quantity products:
490 pcs of 1 small carton
1 tray contain 35 pcs
14 contained trays, 1 empty tray

(4) package with plastic bags
add five desiccants
create a power vacuum

*5

(5)

EPE

(6)

EPE

(7)

small carton package
L425*W330*L175 mm

(8)

2 small cartons in 1 big carton

(9)
28 contained trays, 2 empty trays,
Package quantity products:
980 pcs of 1 big carton

Package finished
L450*W350*L360 mm

NOTE:Tape on the small carton & big carton

11 Reliability

11.1 Reliability Test

NO.	ITEM	CONDITION	QUANTITY
1	High Temperature (Non-operation)	80℃,240hrs	4
2	Low Temperature (Non-operation)	-30℃,240hrs	4
3	High Temperature (Operation)	70℃,240hrs	4
4	Low Temperature (Operation)	-20℃,240hrs	4
5	High Temperature / High Humidity (Operation)	60℃,90%RH,240hrs	4
6	Thermal shock (Non-operation)	-30℃~80℃(-30℃/30min;transit/3min;80℃/30min;transit/3min) 1cycle: 66min,30cycles	4
7	Vibration	Frequency: 5~50Hz,0.5G Scan rate: 1 oct/min Time: 2 hrs/axis Test axis: X,Y, Z	1 Carton
8	Drop	Height: 100 cm Sequence: 1 angle, 3 edges and 6 faces	1 Carton

Test and measurement conditions

1. All measurements shall not be started until the specimens attain to temperature stability, the stable time is at least 15 minutes.
2. The degradation of polarizer is ignored for item 5.
3. The tolerance of temperature is ±3℃, and the tolerance of relative humidity is ±5%.

Evaluation criteria

1. The function test is OK.
2. No observable defects.
3. Luminance:≥50% of initial value.
4. Current consumption: within ± 50% of initial value.

11.2 Lifetime

End of lifetime is specified as 50% of initial brightness and the test pattern at operating condition is 50% alternating checkerboard.

ITEM	MIN	MAX	UNIT	CONDITION
Operation Life Time	20000	-	hrs	100 cd/m^2,50% Checkerboard

An average operating lifetime of more than 10,000 hrs (checkerboard) at room temperature is approached by 240 hrs @ 80°C operating.

11.3 Failure Check Standard

After the completion of the described reliability test, the samples were left at room temperature for 2 hrs prior to conducting the failure test at 22±3°C; 55±15% RH.

12 Illustration of OLED Product Name



Flow No. :

01~99

Display Color :

R—red

G—green

B—blue

Y—yellow

W—white

A—area color

F—full color

Panel Flow No. :

A0~A9, B0~B9…Z0~Z9

Display Format :

Graphic—columns and rows

Character—characters and line number

Segment—segment number

Icon—pixel number

Product Type :

P—panel

M—module

Display Type :

G—graphic

C—character

S—segment

I—Icon

M—mixed

Company :

V—Visionox

13 Outgoing Quality Control Specifications

13.1 Sampling Method

(1) GB/T 2828.1-2003/ISO2859-1：1999, inspection level Ⅱ, normal inspection, single sample inspection

(2) AQL: Major 0.65; Minor 1.0

13.2 Inspection Conditions

The environmental conditions for test and measurement are performed as follows.

Temperature: 22±3°C

Humidity: 55±15%R.H

Fluorescent Lamp: 30W

Distance between the Panel & Lamp: ≥50cm

Distance between the Panel & Eyes: ≥30cm

Viewing angle from the vertical in each direction: ≤45°

(See the sketch below)

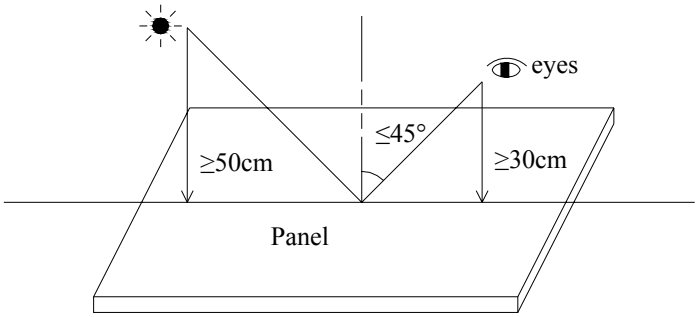

13.3 Quality Assurance Zones

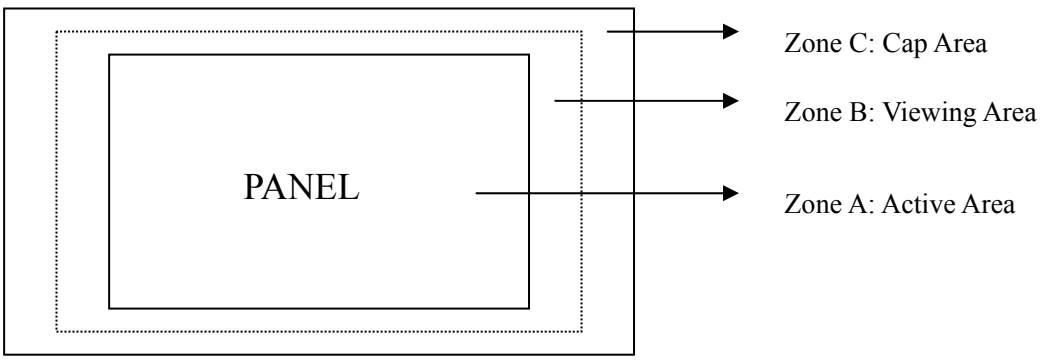

13.4 Inspection Standard

Definition of Φ&L&W (Unit: mm)



Φ=(a+b)/2

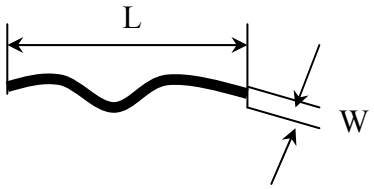

Ⅰ. Appearance Defects

<table>
<tr><th>NO.</th><th>ITEM</th><th>CRITERIA</th><th>CLASSIFICATION</th></tr>
<tr><td>1</td><td>Polarizer Black or White spot, Dirty spot, Foreign matter, Dent on the polarizer</td><td>
<table>
<tr><td rowspan="2">Average Diameter (mm)</td><td colspan="2">Acceptable Number</td></tr>
<tr><td>Zone A,B</td><td>Zone C</td></tr>
<tr><td>Φ≤0.15</td><td>Ignore</td><td rowspan="3">Ignore</td></tr>
<tr><td>0.15<Φ≤0.30</td><td>3</td></tr>
<tr><td>Φ>0.30</td><td>0</td></tr>
</table>
</td><td>Minor</td></tr>
<tr><td>2</td><td>Scratch/line on the glass/Polarizer</td><td>
<table>
<tr><td rowspan="2">Width (mm)</td><td rowspan="2">Length (mm)</td><td colspan="2">Acceptable Number</td></tr>
<tr><td>Zone A,B</td><td>Zone C</td></tr>
<tr><td>W≤0.03</td><td>---</td><td>Ignore</td><td rowspan="3">Ignore</td></tr>
<tr><td>0.03<W≤0.08</td><td>L≤5.0</td><td>3</td></tr>
<tr><td>W>0.08</td><td>---</td><td>0</td></tr>
</table>
</td><td>Minor</td></tr>
<tr><td>3</td><td>Polarizer Bubble</td><td>
<table>
<tr><td rowspan="2">Average Diameter (mm)</td><td colspan="2">Acceptable Number</td></tr>
<tr><td>Zone A,B</td><td>Zone C</td></tr>
<tr><td>Φ>0.5</td><td>0</td><td rowspan="3">Ignore</td></tr>
<tr><td>0.2<Φ≤0.5</td><td>3</td></tr>
<tr><td>Φ≤0.2</td><td>Ignore</td></tr>
</table>
</td><td>Minor</td></tr>
<tr><td>4</td><td>Any Dirt & Scratch on Polarizer’s Protective Film</td><td>Ignore for not affect the polarizer.</td><td>Acceptable</td></tr>
<tr><td>5</td><td>Any Dirt on Cap Glass</td><td>
<table>
<tr><td>Average Diameter (mm)</td><td>Acceptable Number</td></tr>
<tr><td>Φ≤0.5</td><td>Ignore</td></tr>
<tr><td>0.5<Φ≤1.0</td><td>3</td></tr>
<tr><td>Φ>1.0</td><td>0</td></tr>
</table>
</td><td>Minor</td></tr>
</table>

5	Glass Crack	 Propagation crack is not acceptable.	Major
6	Corner Chip	 t= Glass thickness Accept a≤2.0mm or b≤2.0mm, c≤t	Minor
7	Corner Chip on Cap Glass	 t= Glass thickness Accept a≤1.5mm or b≤1.5mm, c≤t	Minor
8	Chip on Contact Pad	 t= Glass thickness Accept a≤3.0mm or b≤0.8mm, c≤t (on the contact pin) a≤3.0mm or b≤1.5mm, c≤t (outside of the contact pin)	Minor
9	Chip on Face of Display	 t= Glass thickness Accept a≤1.5mm or b≤1.5mm, c≤t	Minor
10	Chip on Cap Glass	 t= Glass thickness Accept a≤3.0mm or b≤3.0mm, c≤t/2 a≤1.5mm or b≤1.5mm, t/2≤c≤t	Minor
11	Stain on Surface	Stain removable by soft cloth or air blow is acceptable.	Minor
12	TCP/FPC Damage	(1) Crack, deep scratch, deep hole and deep pressure mark on the TCP/FPC are not acceptable. (2) Terminal lead twisted or broken is not allowable. (3) Copper exposed is not allowed by naked eye inspection.	Minor
13	Dimension Unconformity	Checking by mechanical drawing.	Major

Ⅱ. **Displaying Defects**

<table>
<tr><th>NO.</th><th>ITEM</th><th>CRITERIA</th><th>CLASSIFICATION</th></tr>
<tr><td>1</td><td>Black/White spot
Dirty spot
Foreign matter</td><td>
<table>
<tr><td rowspan="2">Average Diameter (mm)</td><td colspan="2">Pieces Permitted</td></tr>
<tr><td>Zone A,B</td><td>Zone C</td></tr>
<tr><td>Φ≤0.10</td><td>Ignore</td><td rowspan="3">Ignore</td></tr>
<tr><td>0.10<Φ≤0.20</td><td>3</td></tr>
<tr><td>Φ>0.20</td><td>0</td></tr>
</table>
</td><td>Minor</td></tr>
<tr><td>2</td><td>No Display</td><td>Not allowable.</td><td>Major</td></tr>
<tr><td>3</td><td>Irregular Display</td><td>Not allowable.</td><td>Major</td></tr>
<tr><td>4</td><td>Missing Line
(row or column)</td><td>Not allowable.</td><td>Major</td></tr>
<tr><td>5</td><td>Short</td><td>Not allowable.</td><td>Major</td></tr>
<tr><td>6</td><td>Flicker</td><td>Not allowable.</td><td>Major</td></tr>
<tr><td>7</td><td>Abnormal Color</td><td>Refer to the SPEC.</td><td>Major</td></tr>
<tr><td>8</td><td>Luminance NG</td><td>Refer to the SPEC.</td><td>Major</td></tr>
<tr><td>9</td><td>Over Current</td><td>Refer to the SPEC.</td><td>Major</td></tr>
</table>

14 Precautions for operation and Storage

14.1 Precautions for Operation

(1) Since OLED panel is made of glass, do not apply any mechanical shock or impact or excessive force to it when installing the OLED module. Any strong mechanical impact due to falling dropping etc. may cause damage (breakage or cracking).

(2) The polarizer on the OLED surface is made of soft material and is easily scratched. Please take most care when handing. When the surface of the polarizer of OLED Module is contaminated, please wipe it off gently by using moisten soft cloth with isopropyl alcohol, do not use water, ketone or aromatics. If there is saliva or water on the OLED surface, please wipe it off immediately.

(3) When handling OLED module, please be sure that the body and the tools are properly grounded. And do not touch I/O pins with bare hands or contaminate I/O pins, it will cause disconnection or defective insulation of terminals.

(4) Do not attempt to disassemble or process the OLED module.

(5) OLED module should be used under recommended operating conditions shown in the specification. Since the higher voltage leads to the shorter lifetime, be sure to use the specified operating voltage.

(6) Foggy dew, moisture condensation or water droplets deposited on surface and contact terminals will cause polarizer stain or damage, the deteriorated display quality and electrochemical reaction then leads to shorter life time and permanent damage to the module probably. Please pay attention to the environmental temperature and humidity.

(7) An afterimage is created by the difference in brightness between unused dot and the fixed dot, according to the decrease of brightness of the emitting time. Therefore, to avoid having an afterimage, the full set should be thoroughly used instead of using a fixed dot. When the fixed dot emits, an afterimage can be created.

(8) Flicker could be come out at full on display. And it disappears when frame frequency increase, but brightness decreases too.

14.2 Soldering

(1) Soldering should be performed only on the I/O terminals.
(2) Use soldering irons with proper grounding and no leakage.
(3) Iron: no higher than 300℃ and 3~4 sec during soldering.

14.3 Precautions for Storage

(1) Please store OLED module in a dark place. Avoid exposure to sunlight, the light of fluorescent lamp or any ultraviolet ray.
(2) Keep the environment temperature between 10℃ and 35℃ and the relative humidity less than 60%. Avoid high temperature and high humidity.
(3) Keep the OLED modules stored in the container when shipped from supplier before using them is recommended.
(4) Do not leave any article on the OLED module surface for an extended period of time.

14.4 Warranty period

Visionox Display Co., Ltd. warrants for a period of 12 months from the shipping date when stored or used under normal condition.