


Rocket Design

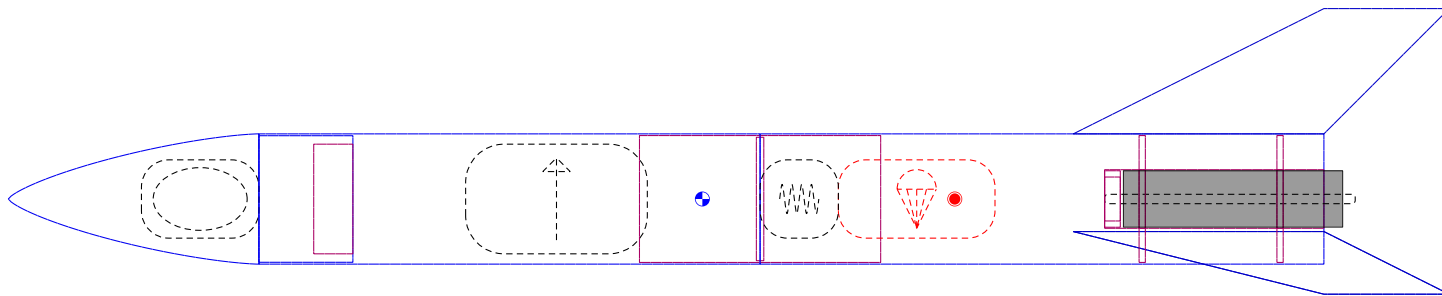

Rocket

Stages: 1

Mass (with motor): 130 g

Stability: 1.94 cal

CG: 22.2 cm

CP: 30.2 cm

Parts Detail

Sustainer

	Nose cone	PLA (1.25 g/cm ³)	Haack series	Len: 8 cm	Mass: 21.7 g
	Qual Egg		Dia _{out} 2.5 cm		Mass: 13.6 g
	Removable Bulkhead	PLA (1.25 g/cm ³)	Dia _{out} 3.5 cm	Len: 1.25 cm	Mass: 6.2 g
	Mid Body tube Estes EST 3089	Paper (0.609 g/cm ³)	Dia _{in} 4.05 cm Dia _{out} 4.16 cm	Len: 16 cm	Mass: 6.7 g
	Altimeter		Dia _{out} 3.5 cm		Mass: 24.5 g
	Tube Coupler	Cardboard (0.68 g/cm ³)	Dia _{in} 3.94 cm Dia _{out} 4.05 cm	Len: 7.7 cm	Mass: 3.66 g
	Bulkhead	Balsa (0.17 g/cm ³)	Dia _{out} 3.94 cm	Len: 0.238 cm	Mass: 0.493 g
	Aft Body Tube Estes EST 3089	Paper (0.609 g/cm ³)	Dia _{in} 4.05 cm Dia _{out} 4.16 cm	Len: 18 cm	Mass: 7.54 g
	Trapezoidal fin set (3)	Balsa (0.17 g/cm ³)	Thick: 0.238 cm		Mass: 8.78 g
	Motor Mount Estes EST 3085	Paper (0.609 g/cm ³)	Dia _{in} 1.8 cm Dia _{out} 1.87 cm	Len: 7 cm	Mass: 0.812 g
	Engine Hook		Dia _{out} 0.3 cm		Mass: 1.4 g
	Engine block	PLA (1.25 g/cm ³)	Dia _{in} 1.4 cm Dia _{out} 1.8 cm	Len: 0.5 cm	Mass: 0.63 g
	Centering ring	PLA (1.25 g/cm ³)	Dia _{in} 1.87 cm Dia _{out} 4.05 cm	Len: 0.2 cm	Mass: 2.54 g
	Centering ring	PLA (1.25 g/cm ³)	Dia _{in} 1.87 cm Dia _{out} 4.05 cm	Len: 0.2 cm	Mass: 2.54 g
	Parachute Estes 302264	Polyethylene LDPE (0 g/m ²)	Dia _{out} 30.5 cm	Len: 5 cm	Mass: 3.95 g
	Shroud Lines Estes 302264	Carpet String (0.33 g/m)	Lines: 6	Len: 30.5 cm	
	Shock cord	Elastic cord (flat 6 mm, 1/4 in) (4.3 g/m)		Len: 40 cm	Mass: 1.72 g