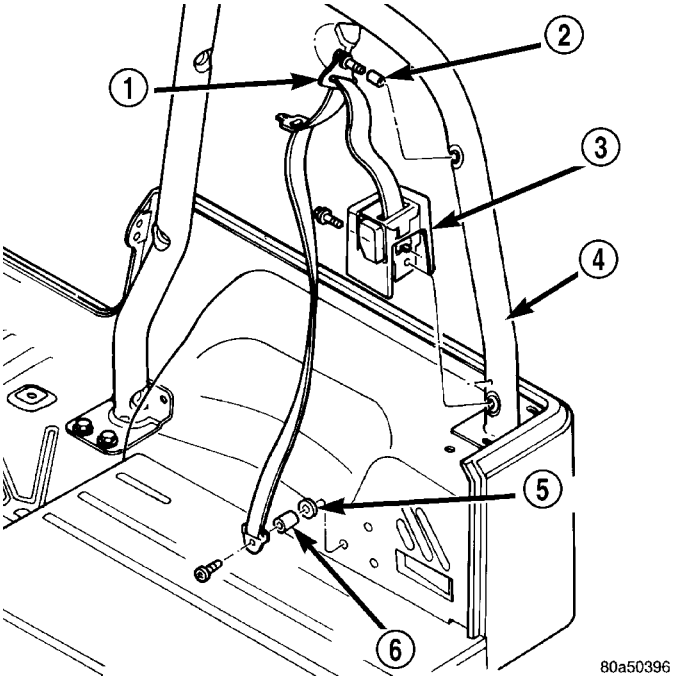

Fig. 38 Rear Seat Shoulder Belt & Retractor Remove/Install

1 - TURNING LOOP
2 - SPACER
3 - BELT & RETRACTOR
4 - SPORT BAR
5 - WASHER
6 - SPACER

(4) Remove the rear seat belt lower anchor from the inner rear wheel house panel.

(5) Unsnap and lift the trim cover from the rear seat belt turning loop to access the screw that secures the turning loop to the upper sport bar (Fig. 39).

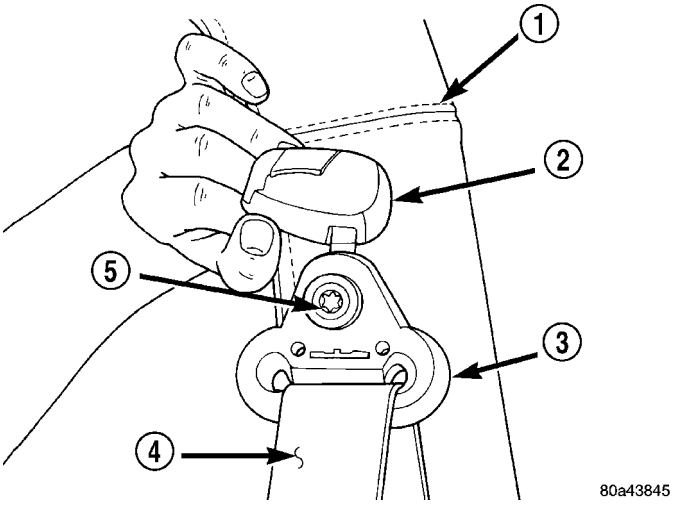

Fig. 39 Turning Loop

1 - SPORT BAR
2 - TURNING LOOP COVER
3 - TURNING LOOP
4 - REAR SEAT BELT
5 - SCREW

(6) Remove the screw that secures the seat belt turning loop to the upper sport bar.

(7) Remove the seat belt turning loop from the upper sport bar.

(8) Remove the screw that secures the rear seat belt retractor to the lower sport bar near the top of the inner rear wheel house panel.

(9) Remove the rear seat belt and retractor from the lower sport bar.

INSTALLATION

WARNING: TO AVOID PERSONAL INJURY OR DEATH, DURING AND FOLLOWING ANY SEAT BELT OR CHILD RESTRAINT ANCHOR SERVICE, CAREFULLY INSPECT ALL SEAT BELTS, BUCKLES, MOUNTING HARDWARE, RETRACTORS, TETHER STRAPS, AND ANCHORS FOR PROPER INSTALLATION, OPERATION, OR DAMAGE. REPLACE ANY BELT THAT IS CUT, FRAYED, OR TORN. STRAIGHTEN ANY BELT THAT IS TWISTED. TIGHTEN ANY LOOSE FASTENERS. REPLACE ANY BELT THAT HAS A DAMAGED OR INOPERATIVE BUCKLE OR RETRACTOR. REPLACE ANY BELT THAT HAS A BENT OR DAMAGED LATCH PLATE OR ANCHOR PLATE. REPLACE ANY CHILD RESTRAINT ANCHOR OR THE UNIT TO WHICH THE ANCHOR IS INTEGRAL THAT HAS BEEN BENT OR DAMAGED. NEVER ATTEMPT TO REPAIR A SEAT BELT OR CHILD RESTRAINT COMPONENT. ALWAYS REPLACE DAMAGED OR FAULTY SEAT BELT AND CHILD RESTRAINT COMPONENTS WITH THE CORRECT, NEW AND UNUSED REPLACEMENT PARTS LISTED IN THE DAIMLERCHRYSLER MOPAR PARTS CATALOG.

(1) Position the rear seat belt and retractor to the lower sport bar near the top of the inner rear wheel house panel (Fig. 38). Be certain to engage the locator tab on the retractor in the locator hole on the sport bar.

(2) Install and tighten the screw that secures the rear seat belt retractor to the lower sport bar. Tighten the screw to 43 N·m (32 ft. lbs.).

(3) Position the rear seat belt turning loop to the upper sport bar (Fig. 39).

(4) Install and tighten the screw that secures the rear seat belt turning loop to the upper sport bar. Tighten the screw to 43 N·m (32 ft. lbs.).

(5) Fold and snap the trim cover for the rear seat belt turning loop back into place over the screw that secures the turning loop to the upper sport bar.

(6) Position the rear seat belt lower anchor to the inner rear wheel house panel.

(7) Install and tighten the screw that secures the rear seat belt lower anchor to the inner rear wheel house panel. Tighten the screw to 43 N·m (32 ft. lbs.).