(9) Install plugs in, or tape over the opened suction line fittings and the accumulator and compressor ports.

(10) Remove the suction lines from the vehicle.

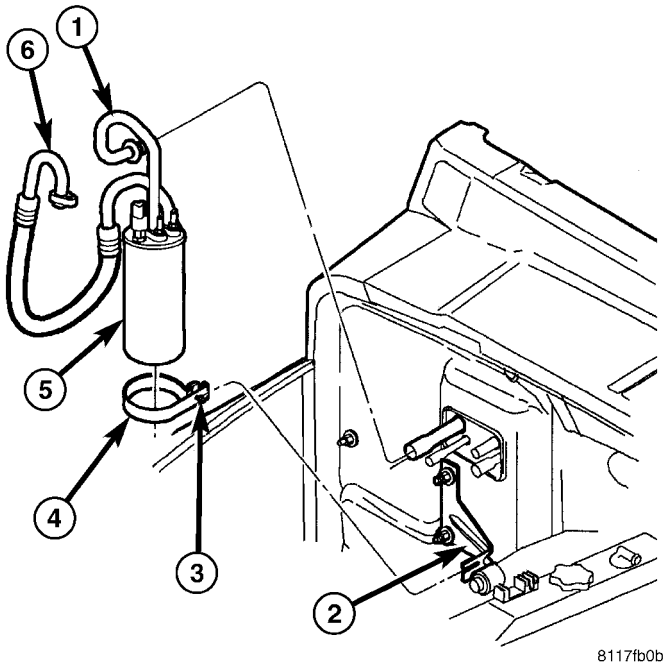

Fig. 23 Suction Lines - 4.0L LHD shown, 2.4L and RHD similar

1 - SUCTION LINE (EVAPORATOR SIDE)
2 - SUPPORT BRACKET
3 - BOLT
4 - RETAINING BAND
5 - ACCUMULATOR
6 - SUCTION LINE (COMPRESSOR SIDE)

INSTALLATION

NOTE: Replacement of the refrigerant line O-ring seals is required anytime a refrigerant line is opened. Failure to replace the rubber O-ring seals could result in a refrigerant system leak.

(1) Position the A/C suction line into the engine compartment, as required.

(2) Remove the tape or plugs from the opened suction line fittings and the A/C accumulator, A/C compressor and A/C evaporator as required.

(3) Lubricate new rubber O-ring seals with clean refrigerant oil and install them on the suction line fittings. Use only the specified O-ring seals as they are made of a special material for the R-134a system. Use only refrigerant oil of the type recommended for the A/C compressor in the vehicle.

(4) Connect the suction lines onto the A/C accumulator and A/C compressor, as required.

(5) Install the nuts that secure the suction lines to the accumulator. Tighten the nuts to 9 N·m (80 in. lbs.).

(6) Install the nut that secures the suction line to the A/C compressor. Tighten the nut to 25 N·m (18 ft. lbs.).

(7) Connect the suction line spring-lock coupler to the A/C evaporator (Refer to 24 - HEATING & AIR CONDITIONING/PLUMBING/REFRIGERANT LINE COUPLER - INSTALLATION).

(8) Install the secondary retaining clip onto the spring-lock coupler that secures the suction line to the A/C evaporator.

(9) Install the suction line into the retaining clip located near the accumulator.

(10) Reconnect the negative battery cable.

(11) Evacuate the refrigerant system (Refer to 24 - HEATING & AIR CONDITIONING/PLUMBING - STANDARD PROCEDURE - REFRIGERANT SYSTEM EVACUATE).

(12) Charge the refrigerant system (Refer to 24 - HEATING & AIR CONDITIONING/PLUMBING - STANDARD PROCEDURE - REFRIGERANT SYSTEM CHARGE).