REAR AXLE - 194RBI (Continued)

(26) Install new side bearing cones and cups on differential case.

(27) Install spreader W-129-B and some components of Adapter Set 6987 on differential housing and spread axle opening enough to receive differential case.

(28) Place side bearing shims into the housing against the differential bearing bore.

(29) Install differential case in the housing.

(30) Rotate the differential case several times to seat the side bearings.

(31) Position the indicator plunger against a ring gear tooth (Fig. 19).

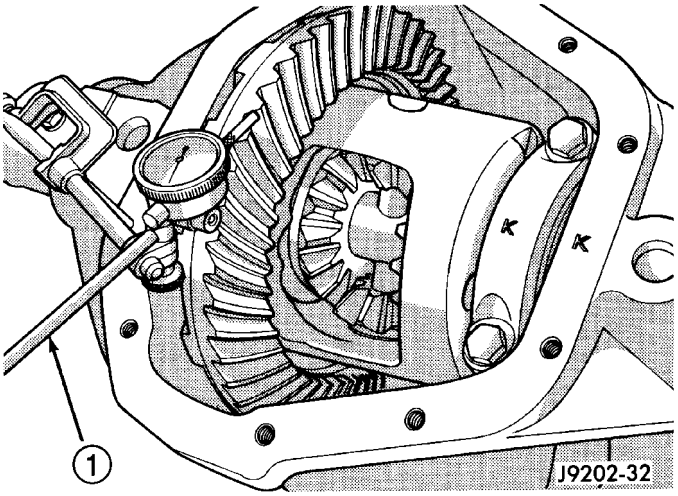


Fig. 19 RING GEAR BACKLASH

1 - DIAL INDICATOR

(32) Push and hold ring gear upward while not allowing the pinion gear to rotate.

(33) Zero dial indicator face to pointer.

(34) Push and hold ring gear downward while not allowing the pinion gear to rotate. Dial indicator reading should be between 0.12 mm - 0.20 mm (0.005 in. - 0.008 in.). If backlash is not within specifications transfer the necessary amount of shim thickness from one side of the differential housing to the other (Fig. 20).

(35) Verify differential case and ring gear runout by measuring ring to pinion gear backlash at eight locations around the ring gear. Readings should not vary more than 0.05 mm (0.002 in.). If readings vary more than specified, the ring gear or the differential case is defective.

After the proper backlash is achieved, perform the Gear Contact Pattern Analysis procedure.

GEAR CONTACT PATTERN

The ring gear and pinion teeth contact patterns will show if the pinion depth is correct in the housing. It will also show if the ring gear backlash has been adjusted correctly. The backlash can be adjusted

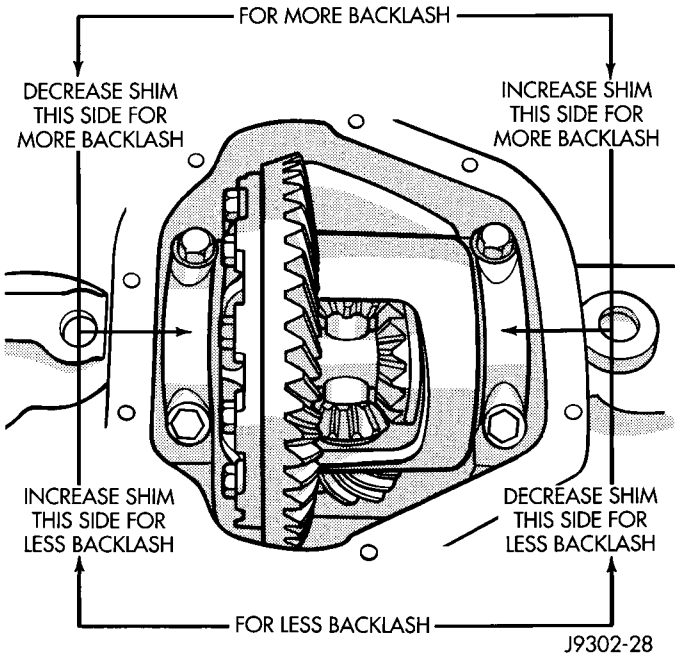


Fig. 20 BACKLASH SHIM ADJUSTMENT

within specifications to achieve desired tooth contact patterns.

The TOP LAND of the gear tooth is the top surface of the tooth. The PROFILE of the gear tooth is the depth of the tooth. The TOE of the gear is the portion of the tooth surface at the end towards the center. The HEEL of the gear is the portion of the tooth at the outer-end. The ROOT of the gear tooth is the lowest portion of the tooth (Fig. 21).

NOTE: If the PROFILE across the tooth is the same it is a 3 Axis cut gear. If the PROFILE across the tooth is tapered it is a 2 Axis cut gear.

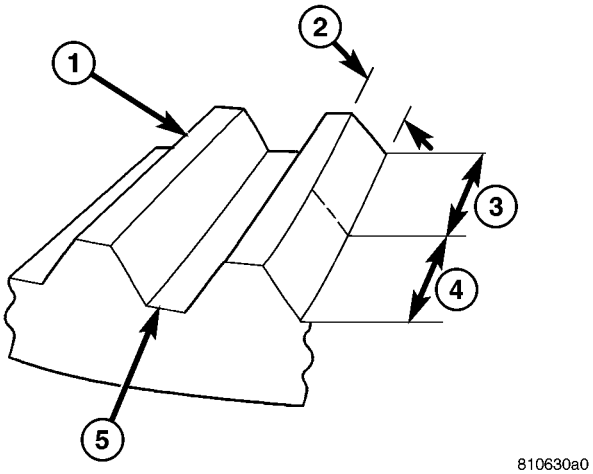


Fig. 21 GEAR DESCRIPTION

1 - TOP LAND
2 - PROFILE
3 - TOE
4 - HEEL
5 - ROOT