ROTORS (Continued)

simultaneously with dual cutter heads. The rotor mounting surface must be clean before placing on the lathe. Equipment capable of machining only one side at a time may produce a tapered rotor.

NOTE: A hub mounted on-vehicle lathe is recommended. This type of lathe trues the rotor to the vehicles hub/bearing.

CAUTION: Brake rotors that do not meet minimum thickness specifications before or after machining must be replaced.

STANDARD PROCEDURE - BRAKE DRUM IN HAT ROTOR MACHINING

The brake drum in hat rotor can be machined on a drum lathe when necessary. Initial machining cuts should be limited to 0.12 - 0.20 mm (0.005 - 0.008 in.) at a time as heavier feed rates can produce taper and surface variation. Final finish cuts of 0.025 to 0.038 mm (0.001 to 0.0015 in.) are recommended and will generally provide the best surface finish.

Be sure the drum in hat rotor is securely mounted in the lathe before machining operations. A damper strap should always be used around the drum to reduce vibration and avoid chatter marks.

The maximum allowable diameter of the drum braking surface is stamped or cast into the drum in hat rotor.

CAUTION: Replace the drum in hat rotor if machining will cause the drum to exceed the maximum allowable diameter.

REMOVAL

REMOVAL - FRONT

(1) Remove wheel and tire assemble.

(2) Remove caliper. (Refer to 5 - BRAKES/HYDRAULIC/MECHANICAL/DISC BRAKE CALIPERS - REMOVAL).

(3) Remove retainers securing rotor to hub studs (Fig. 54).

(4) Remove rotor from hub.

(5) If rotor shield requires service, remove front hub and bearing assembly.

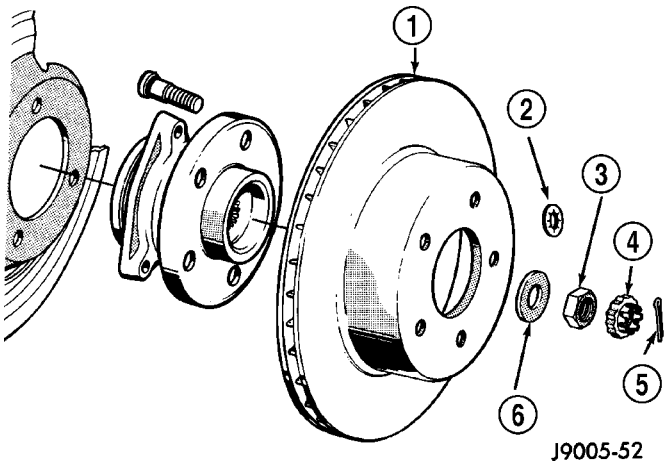

Fig. 54 Rotor & Hub

1 - ROTOR
2 - RETAINER
3 - BEARING NUT
4 - NUT LOCK
5 - COTTER PIN
6 - WASHER

REMOVAL - REAR

(1) Raise and support the vehicle

(2) Remove the tire and wheel assembly (Fig. 55).

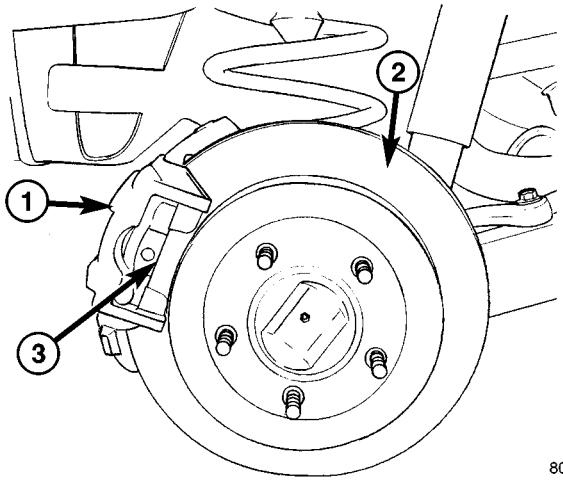

Fig. 55 ROTOR/CALIPER

1 - CALIPER
2 - ROTOR
3 - OUTBOARD DISC BRAKE PAD

(3) Remove the disc brake caliper and pads, (Refer to 5 - BRAKES/HYDRAULIC/MECHANICAL/DISC BRAKE CALIPERS - REMOVAL) (Fig. 56).

(4) Remove the retianing clips and rotor assembly.