SOFT TOP (Continued)

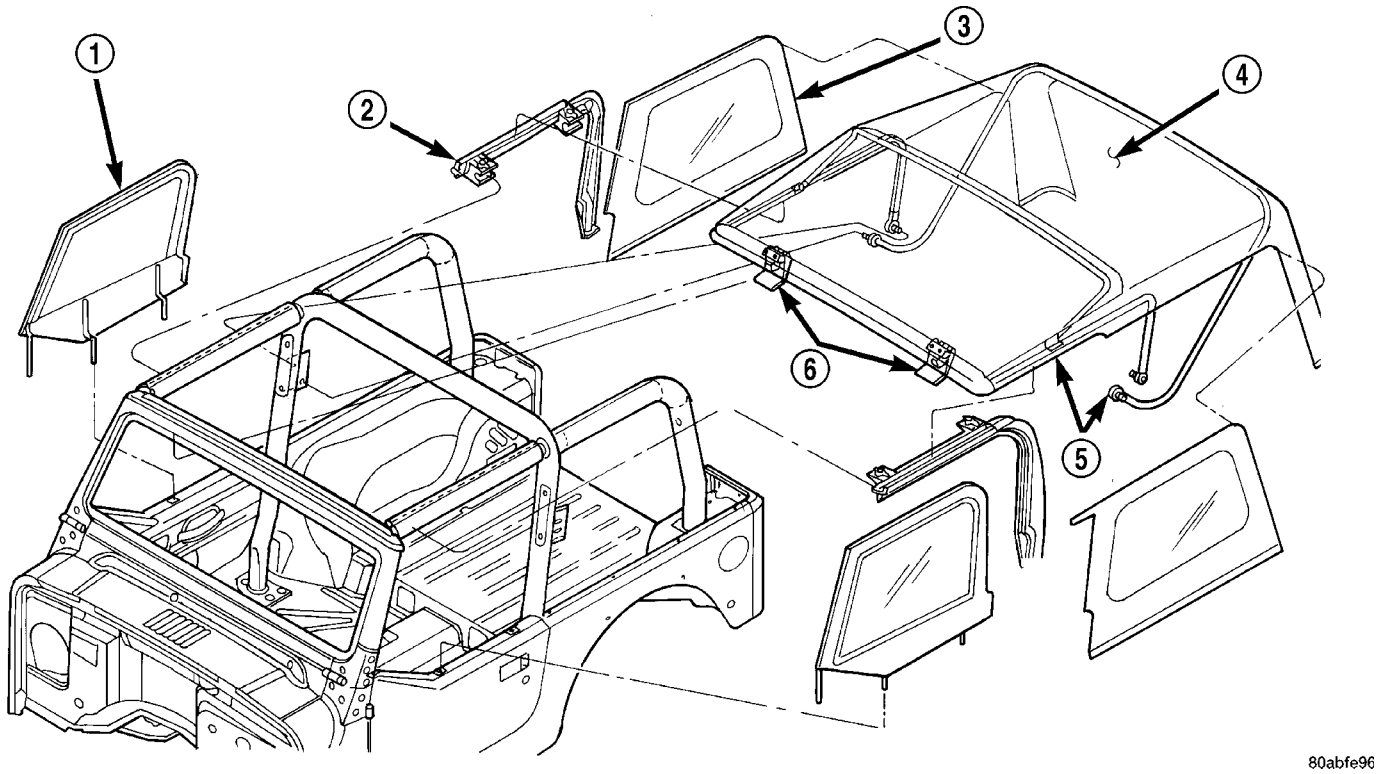

Fig. 7 SOFT TOP

1 - HALF DOOR WINDOW
2 - DOOR OPENING FRAME
3 - QUARTER WINDOW
4 - SOFT TOP
5 - ROOF BOW
6 - LATCH REINFORCEMENT

(9) Working from front to rear, engage J-straps at soft top rear corners.

(10) Engage the retainers attaching the rear window to the body.

(11) Close latch at windshield frame.

SOFT TOP FABRIC

REMOVAL

(1) Disengage the snaps attaching the soft top fabric to the rear roof bow.

(2) Disengage the hook and loop fastener attaching soft top fabric to the center roof bow.

(3) Lower the soft top.

(4) Remove the screws attaching the soft top fabric to the front roof bow and fold back fabric.

(5) Separate the soft top fabric from the frame.

INSTALLATION

(1) Position the soft top fabric on the frame.

(2) Install the screws attaching the soft top fabric to the front roof bow.

(3) Engage the hook and loop fastener attaching soft top fabric to the center roof bow.

(4) Engage the snaps attaching the soft top fabric to the rear roof bow.

(5) Raise and secure the soft top.