




ABS

STRONGER, BIGGER, AND MORE COST-EFFECTIVE!

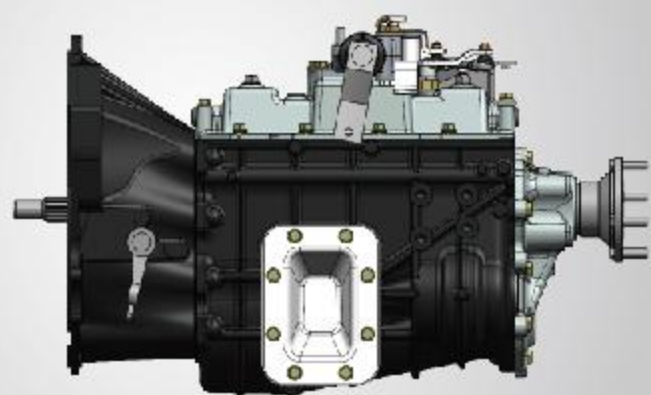

Powerful and fuel efficient.

Equipped with a super common rail engine, model ISUZU 4HK1-TCG61, 150 horsepower, providing high torque, and similar to ISUZU The gearbox cooperates to provide continuous power.



Multifunctional cabin design

Features a large, strong, durable chassis.



Drive with confidence

Using anti-roll bars (stabilizers) front and rear helpS.Excellent grip when entering corners.



It adopts carefully designed suspension and is extremely stable.

When transporting, it is best equipped with tubeless tires to better maintain the road surface.


Air brake system: double guarantee of safe braking and reliable starting.

Equipped with ABS, it improves the stability and reliability of braking and starting, making every driving safer.

One-stop R&D And Integration Solution Provider

ISUZU BUS CHASSIS PRODUCTS

THREE TYPE CHASSIS SPECIFICATION						
General information						
Cabin Status	No Cabin	Cut cabin	No Cabin	Cut cabin	No Cabin	Cut cabin
Wheelbase(mm)	4175	4175	4475	4475	5200	5200
Drive Type	4x2	4x2	4x2	4x2	4x2	4x2
GVW (kg)	10500	10500	10500	10500	10500	10500
Curb Weight (kg)	2600	3005	2795	3025	2980	3445
Front Axle Load(Kg)	3500	3500	3500	3500	3500	3500
Rear Axle Load(Kg)	7050	7050	7050	7050	7050	7050
Engine						
Model	4HK1-TCG61					
Type	4 Cylinders in line, high presure, electrical commom-rail diesel fuel injection system, water cooling, turb charging, inter cooling					
Emission Standard	Euro VI					
Displacement (L)	5.139					
Rated Power (Kw/rpm)	139KW/2600rpm					
Max. Torque (N.m/rpm)	507N.m/1600-2600rpm					
Transmission						
Model	Manual MLD / 6 Forward + 1 Reverse					
Gearbox Ratio	6.720;4.244;2.580;1.540;1.000;0.763;R;6.823					
Brake System						
Service Brake	Front and Rear Drum Brake					
Brake(Air/Oil)	Air Brake					
Parking Brake	Air Cut Brake Valve					
Fuel tank						
Capacity	100L					
Material	Carbon Steel					
Brake System						
Approaching/Departure Angle	17/15,20/19					
Reax Axle Ratio	4.1/5.375					
Max. Speed (km/h)	110					
Frame						
Width(mm)	850					
Suspension						
qty	8/10+6					
Tires	235/75R17.5					

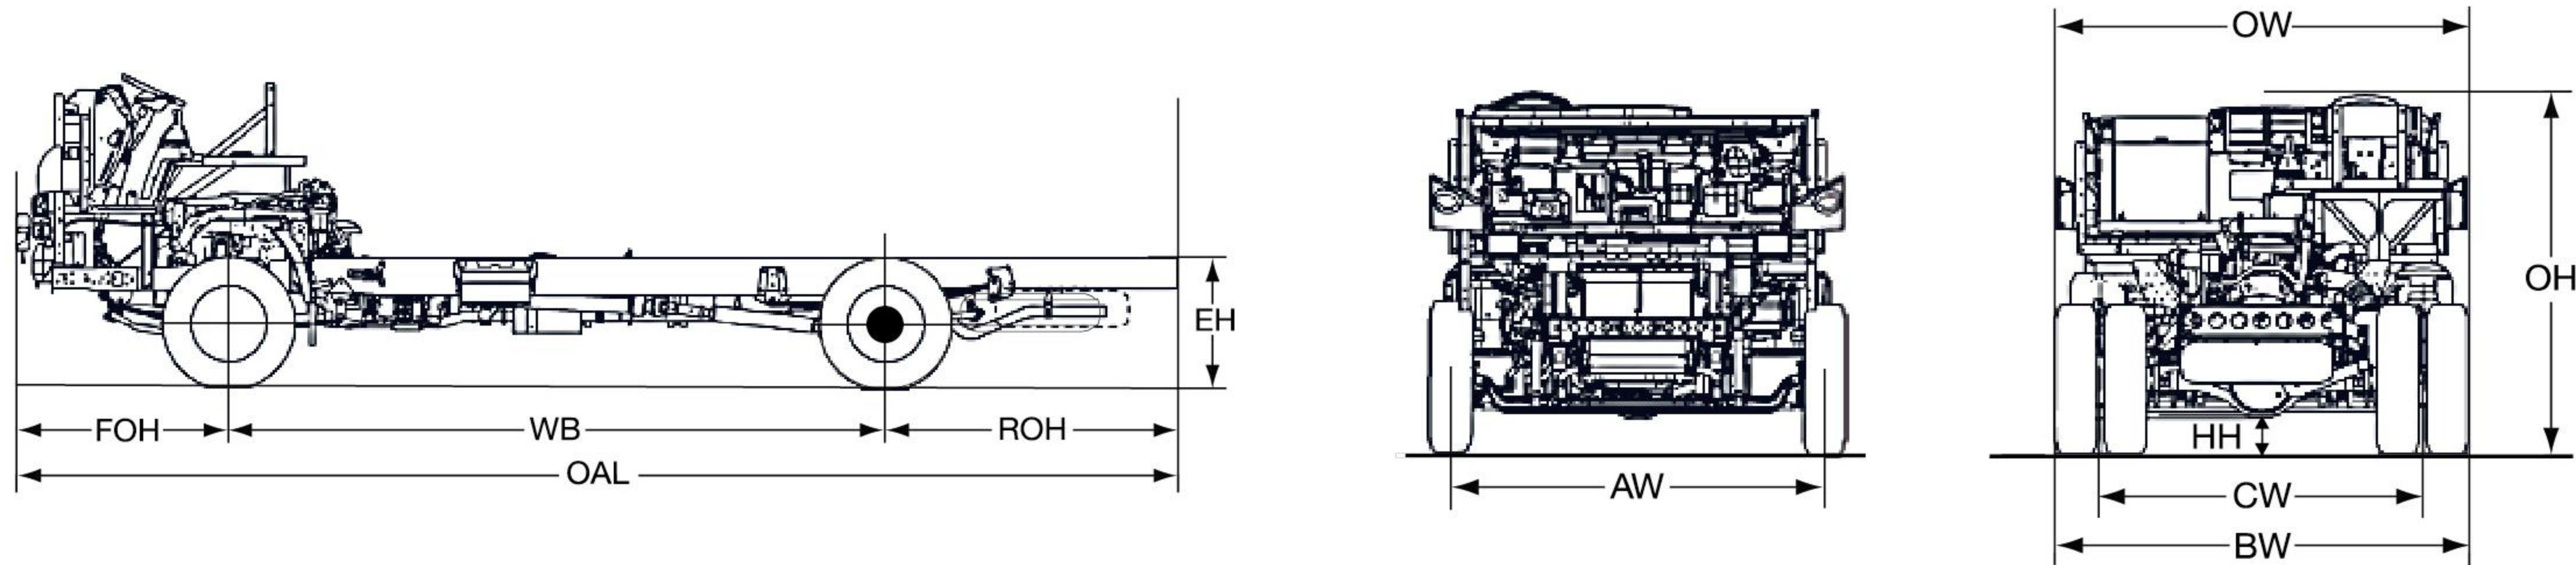

* THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTU AL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.

高标汽车技术（重庆）有限公司
GP MOTORS TECHNOLOGY (CHONGQING)CO.LTD

Tell: 0086 13594129198 Email:LuckyXia@gobestgroup.com Web:www.isuzukd.com
Add:Rm. 27-04, YugaoZhibo Center, No.68 Kecheng Road, Jiulongpo District,
ChongQing, China

