Ringdown of a black hole surrounded by a thin shell of matter: a reanalysis with Advanced LIGO noise

Darin La Rocca
University of Milano-Bicocca

November 13, 2026

1 Goal

This note reanalyses the public waveforms of Laeuger, Weller, Li & Chen, *The ringdown of a black hole surrounded by a thin shell of matter*, arXiv:2506.00367 (data: Zenodo, DOI 10.5281/zenodo.15586889). The question is whether a fit of the ringdown can tell a black hole with a shell of matter apart from a black hole in vacuum, and whether this still holds with realistic detector noise. The paper itself does not include detector noise; the last test (Advanced LIGO noise) is an extension of this work.

2 Data and method

Three shell configurations are studied (Table 1). The code uses $M = 0.5$; below, times are in units of M and frequencies are given as $M\omega$. Each fit uses a window that starts $10M$ after the peak of the signal.

Case	Shell	$\delta M/M$	R/M	α	Window $[M]$	Shell modes
Case 1	heavy, close shell (dM = M/2, R = 6M)	0.5	6	1.1547	10-200	2
Case 2	light, distant shell (dM = M/100, R = 30M)	0.01	30	1.0004	10-135	8
Case 3	heavy, distant shell (dM = M/2, R = 30M) - echo	0.5	30	1.0184	10-135	9

Table 1: Shell configurations. $\alpha = \sqrt{(1-2M/R)/(1-2(M+\delta M)/R)}$ is the redshift factor between the inside of the shell and infinity (eq. 17 of the paper).

1. Fixed-mode fits. The signal is fitted with $N = 1, \dots, 4$ damped sinusoids whose complex frequencies ω_k are fixed,

$$h(t) \simeq \sum_k e^{\mathrm{Im}\,\omega_k t}\left[a_k \cos(\mathrm{Re}\,\omega_k t) + b_k \sin(\mathrm{Re}\,\omega_k t)\right], \tag{1}$$

and the amplitudes a_k, b_k are found by linear least squares. Three sets of frequencies are compared: the Schwarzschild $\ell = 2$ modes $n = 0, \dots, 3$ (Berti, Cardoso & Starinets 2009), the shell modes as listed in the data files, and the shell modes divided by α. As in the paper, at most four modes are used, the least damped ones for the shell. The quality of a fit is the mismatch (eqs. 30–31 of the paper)

$$\mathcal{M} = 1 - \frac{\langle h, h_{\rm fit}\rangle}{\sqrt{\langle h, h\rangle \langle h_{\rm fit}, h_{\rm fit}\rangle}}, \qquad \langle a, b\rangle = \int_{t_0}^{t_1} a\, b\, dt. \tag{2}$$

2. Free fit. 2 damped sinusoids $A\, e^{-\gamma t}\cos(\omega t + \varphi)$ with free ω and γ are fitted (several starting points, best fit kept). Each fitted frequency $\omega - i\gamma$ is compared with the closest mode of each set.

3. Bias test. The same free fit is repeated on a synthetic signal built only from vacuum modes. Any deviation from the vacuum modes found here is produced by the method, not by the shell.

4. Advanced LIGO noise. To use detector noise, a physical mass is needed: $M = 60\,M_\odot$, so that $1M = 0.30\,\mathrm{ms}$ and the fundamental vacuum mode is at 201 Hz. Gaussian noise is drawn from the Advanced LIGO design sensitivity (PyCBC, `aLIGOZeroDetHighPower`, $f > 20\,\mathrm{Hz}$). The signal on the fit window is rescaled to an optimal SNR $\rho = \sqrt{\langle h, h\rangle}$, and both the fits and the mismatch use the noise-weighted inner product

$$\langle a, b\rangle = 4\,\mathrm{Re}\int_{f_{\mathrm{low}}}^{\infty} \frac{\tilde{a}(f)\,\tilde{b}^*(f)}{S_n(f)}\,df. \tag{3}$$

For each SNR, 100 noise realizations are generated and the fraction in which the shell modes (divided by α) give a lower χ^2 than the vacuum modes is recorded (the fraction with a lower noise-weighted mismatch is also saved, and gives the same result).

3 Results

3.1 Fixed-mode fits

Case	vacuum	shell (as listed)	shell / α	vacuum, 10–100M	shell / α, 10–100M
Case 1	2.04×10^{-2} (4)	6.21×10^{-2} (2)	1.08×10^{-4} (2)	1.49×10^{-2}	1.06×10^{-4}
Case 2	6.99×10^{-6} (4)	2.14×10^{-5} (4)	2.13×10^{-5} (4)	6.49×10^{-6}	2.08×10^{-5}
Case 3	1.14×10^{-3} (4)	5.79×10^{-4} (4)	7.13×10^{-4} (4)	1.09×10^{-3}	7.11×10^{-4}

Table 2: Mismatch with $N = 4$ requested modes (number actually used in brackets) on the fit window, and on the window of the paper ($10M$–$100M$). Best set in bold.

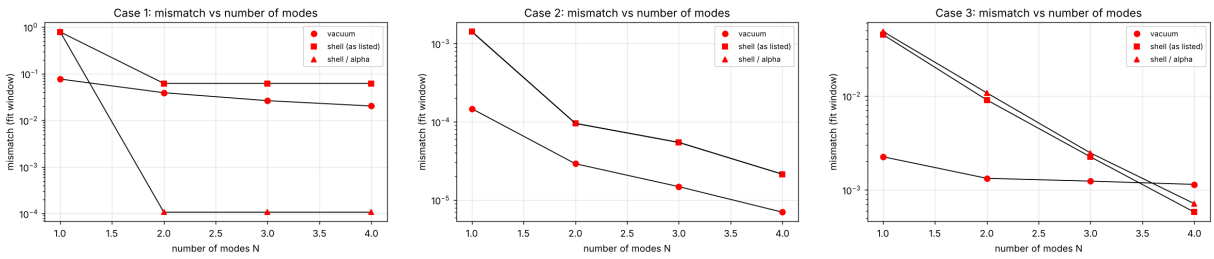


Figure 1: Mismatch as a function of the number of modes.

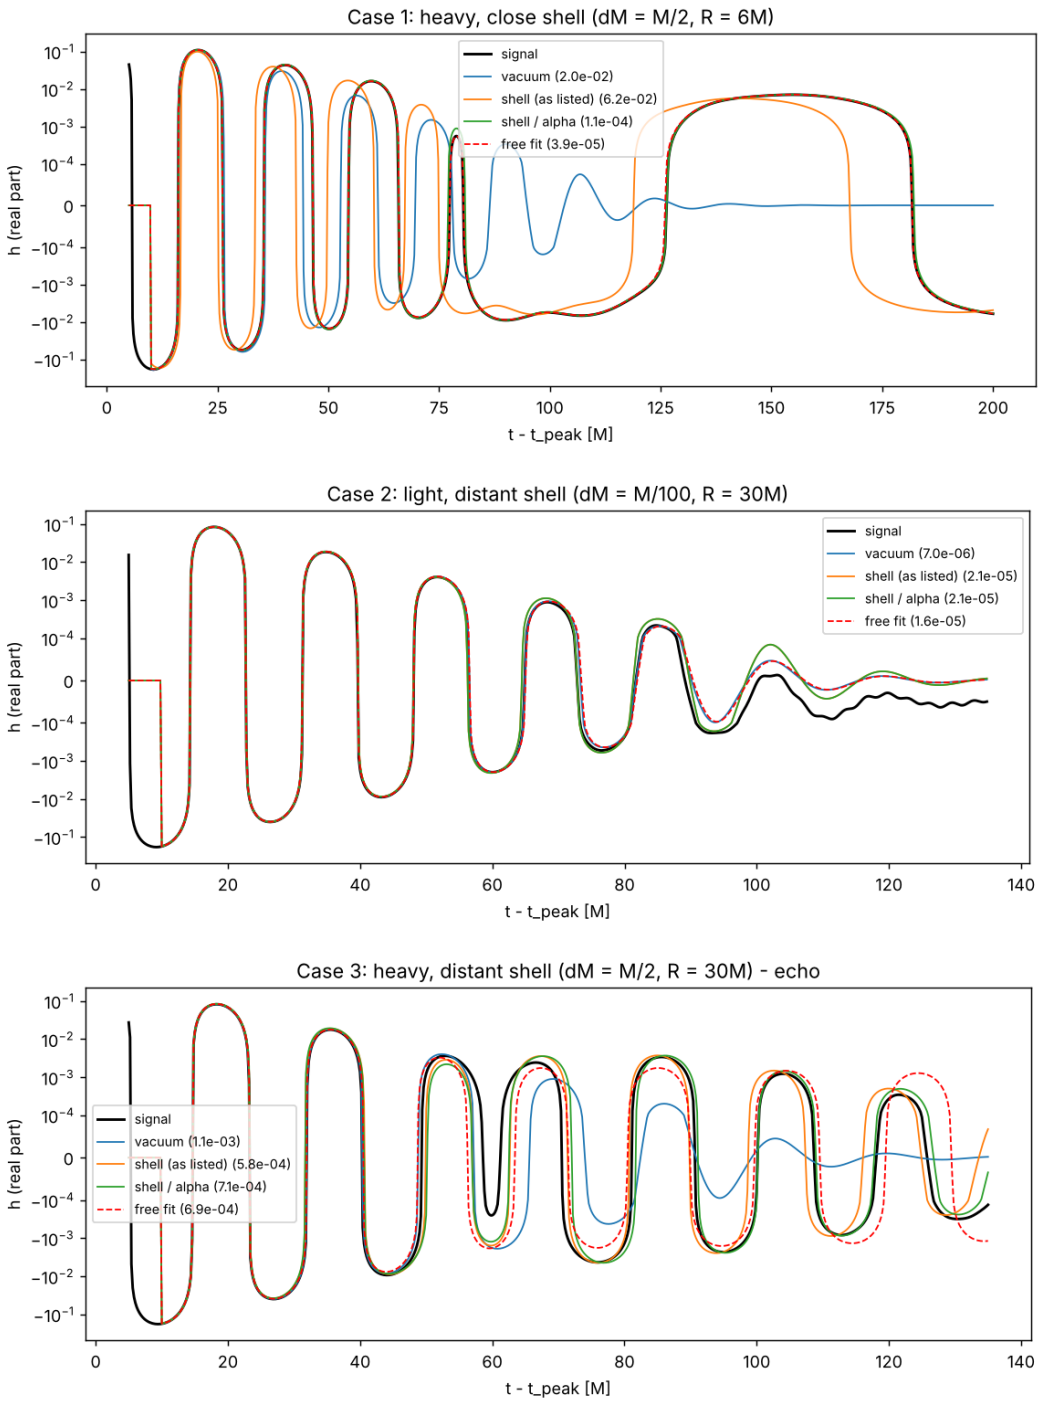


Figure 2: Signal and best fits with $N = 4$ modes (mismatch in the legend).

3.2 Free fit and bias test

Case	Mode	$M\omega$	$M\gamma$	Closest set	$\mathcal{M}$ of free fit
Case 1	1	0.3188	0.0547	shell / α	3.87×10^{-5}
Case 1	2	0.0560	0.0000	shell / α	3.87×10^{-5}
Case 2	1	0.3718	0.0890	vacuum	1.59×10^{-5}
Case 2	2	0.5740	0.2767	shell (as listed)	1.59×10^{-5}
Case 3	1	0.3651	0.0843	vacuum	6.86×10^{-4}
Case 3	2	0.3153	0.0055	shell (as listed)	6.86×10^{-4}

Table 3: Free fit: fitted frequency and damping, and the closest set of modes.

Case	Mode	$M\omega$ fitted	$M\gamma$ fitted	$M\omega$ vacuum	$M\gamma$ vacuum	Distance ($M\lvert\Delta\omega\rvert$)
Case 1	1	0.2916	0.0889	0.3737	0.0890	0.0820
Case 1	2	0.3761	0.0498	0.3737	0.0890	0.0392
Case 2	1	0.3714	0.0885	0.3737	0.0890	0.0023
Case 2	2	0.6523	0.3972	0.3467	0.2739	0.3295
Case 3	1	0.3666	0.0899	0.3737	0.0890	0.0071
Case 3	2	0.4658	0.1176	0.3737	0.0890	0.0965

Table 4: Bias test: free fit on a vacuum-only signal, compared with the nearest vacuum mode.

3.3 Advanced LIGO noise

For each case and SNR, 100 independent realizations of Advanced LIGO noise are added to the signal and both fits (vacuum modes and shell modes) are repeated on each of them. Table 5 gives the fraction of realizations in which the shell modes give the lower χ^2. A value of 100% means that the shell modes always describe the data better, so the shell is clearly identified; a value around 50% means that the outcome is random, as for a coin toss, so the two hypotheses cannot be distinguished; a value below 50% means that the vacuum modes are preferred. In the summary, the shell is called distinguishable when its modes win in at least 90% of the realizations.

Case	SNR 10	SNR 30	SNR 100	SNR 300	SNR 1000
Case 1	26 ± 4%	90 ± 3%	100 ± 0%	100 ± 0%	100 ± 0%
Case 2	51 ± 5%	40 ± 5%	31 ± 5%	34 ± 5%	3 ± 2%
Case 3	40 ± 5%	49 ± 5%	89 ± 3%	100 ± 0%	100 ± 0%

Table 5: Fraction of the 100 noise realizations in which the shell modes fit better than the vacuum modes. Values near 50% mean that the two cannot be distinguished.

The fit with fixed modes is a noise-weighted least-squares fit, so its minimum is $\chi^2 = \langle d - h_{\rm fit}, d - h_{\rm fit}\rangle$. The number of degrees of freedom is $N_{\rm eff} - 2N_{\rm modes}$, where $N_{\rm eff}$ is the mean of $\langle n, n\rangle$ over 300 pure-noise realizations (the effective number of independent points). Table 6 gives, for each SNR, the mean χ^2/ndof of the two fits with its p-value, and the difference $\Delta\chi^2 = \chi^2_{\rm vac} - \chi^2_{\rm shell}$. Since both models have the same number of parameters, $\Delta\chi^2$ is twice the log-likelihood ratio: positive values favour the shell. The two models are not nested, so no p-value is attached to $\Delta\chi^2$; its mean and spread over the noise realizations are reported instead. The errors on the fractions are binomial, $\sqrt{f(1-f)/N}$ (zero when f is exactly 0 or 1).

Case	SNR	χ^2/ndof vac.	p vac.	χ^2/ndof shell	p shell	$\Delta\chi^2$ (mean $\pm$ std)	lower $\mathcal{M}$
Case 1	10	1.00	0.5	1.00	0.5	-3.0 $\pm$ 6.0	26%
Case 1	30	1.01	0.37	1.00	0.53	13.0 $\pm$ 11.2	90%
Case 1	100	1.23	2e-06	1.00	0.46	207.2 $\pm$ 30.3	100%
Case 1	300	3.04	1e-193	1.01	0.39	1917.3 $\pm$ 103.9	100%
Case 1	1000	23.62	0	1.17	0.00024	21263.8 $\pm$ 302.2	100%
Case 2	10	1.00	0.48	1.00	0.49	0.2 $\pm$ 3.6	51%
Case 2	30	0.99	0.53	1.00	0.52	-1.0 $\pm$ 2.8	40%
Case 2	100	0.99	0.58	0.99	0.56	-1.2 $\pm$ 3.5	31%
Case 2	300	1.00	0.51	1.00	0.49	-1.7 $\pm$ 4.0	34%
Case 2	1000	1.00	0.46	1.02	0.33	-12.1 $\pm$ 7.6	3%
Case 3	10	1.01	0.45	1.01	0.44	-1.3 $\pm$ 4.1	40%
Case 3	30	1.00	0.46	1.00	0.46	-0.1 $\pm$ 6.8	49%
Case 3	100	1.05	0.21	1.02	0.33	13.6 $\pm$ 11.2	89%
Case 3	300	1.34	2.6e-08	1.11	0.029	142.4 $\pm$ 38.6	100%
Case 3	1000	4.68	3.4e-289	2.27	1.4e-62	1488.8 $\pm$ 127.1	100%

Table 6: Goodness of fit with Advanced LIGO noise (means over 100 realizations; $N_{\rm eff} \approx 736$).

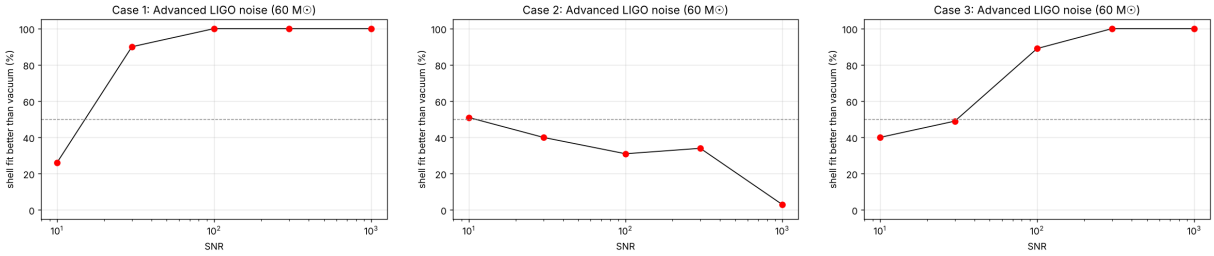


Figure 3: Advanced LIGO noise test ($60\,M_\odot$).

4 Summary

- **Case 1** (heavy, close shell (dM = M/2, R = 6M)): best fixed-mode set shell / α; with Advanced LIGO noise the shell modes win in at least 90% of the realizations from SNR 30 on (at SNR 10: 26 $\pm$ 4%).
- **Case 2** (light, distant shell (dM = M/100, R = 30M)): best fixed-mode set vacuum; with Advanced LIGO noise the shell cannot be told apart from vacuum at any SNR studied.
- **Case 3** (heavy, distant shell (dM = M/2, R = 30M) - echo): best fixed-mode set shell (as listed); with Advanced LIGO noise the shell modes win in at least 90% of the realizations from SNR 300 on (at SNR 100: 89 $\pm$ 3%).

5 Open questions

Which shell modes were used in the paper's fits, and are the listed shell frequencies already as seen from infinity, or should they be divided by α? The results with detector noise depend on the chosen mass, which moves the ringdown frequency along the sensitivity curve; the waveform is also cut to the fit window, so this is a simplified version of a real ringdown analysis.