


P.PORTO



Chapter 2: Static Routing

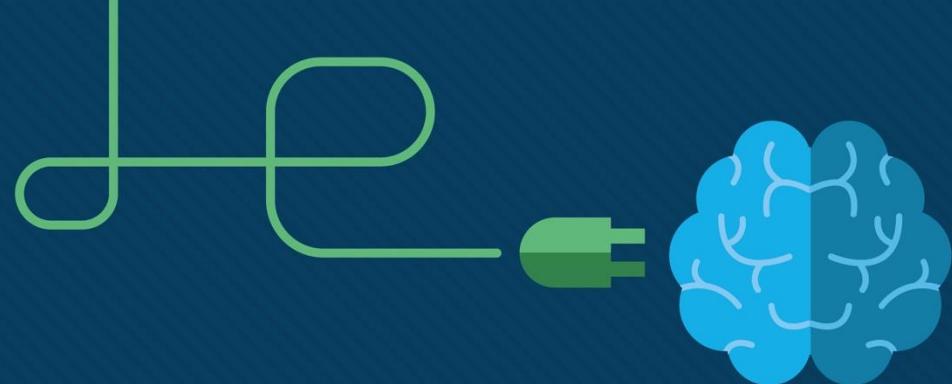


Chapter 2: Static Routing

**Routing and Switching Essentials 6.0
Planning Guide**



P.PORTO

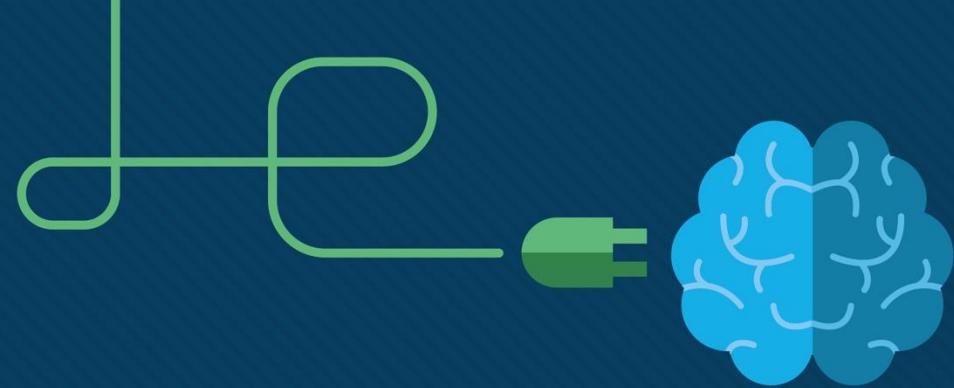

Chapter 2: Static Routing

CCNA Routing and Switching

Routing and Switching Essentials v6.0



Chapter 2 - Sections & Objectives

- **2.1 Static Routing Advantages**

- Explain how static routes are implemented in a small to medium-sized business network.
- Explain advantages and disadvantages of static routing.
- Explain the purpose of different types of static routes.

- **2.2 Configure Static and Default Routes**

- Configure static routes to enable connectivity in a small to medium-sized business network.
- Configure IPv4 static routes by specifying a next-hop address.
- Configure an IPv4 default route.
- Configure IPv6 static routes by specifying a next-hop address.
- Configure an IPv6 default route.
- Configure a floating static route to provide a backup connection.
- Configure IPv4 and IPv6 static host routes that direct traffic to a specific host.

Chapter 2 - Sections & Objectives (Cont.)

- 2.3 Troubleshoot Static and Default Routes

- Given an IP addressing scheme, configure IP address parameters on devices to provide end-to-end connectivity in a small to medium-sized business network.
- Explain how a router processes packets when a static route is configured.
- Troubleshoot common static and default route configuration issues.


2.1 Implement Static Routes

Static Routing


Reach Remote Networks

- A router learns about remote networks in two ways:
 - Manually entered into the route table using static routes
 - Static routes are not automatically updated and must be reconfigured when topology changes
 - Dynamically (Automatically) learned using a routing protocol

Static and Default Routes

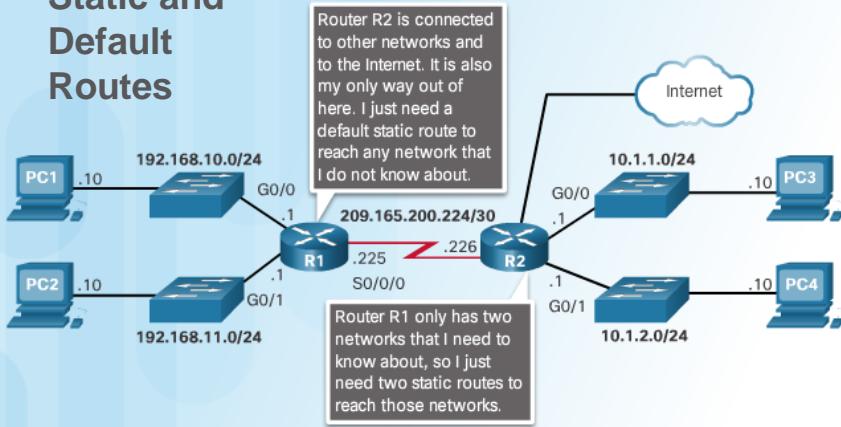

Dynamic Routing

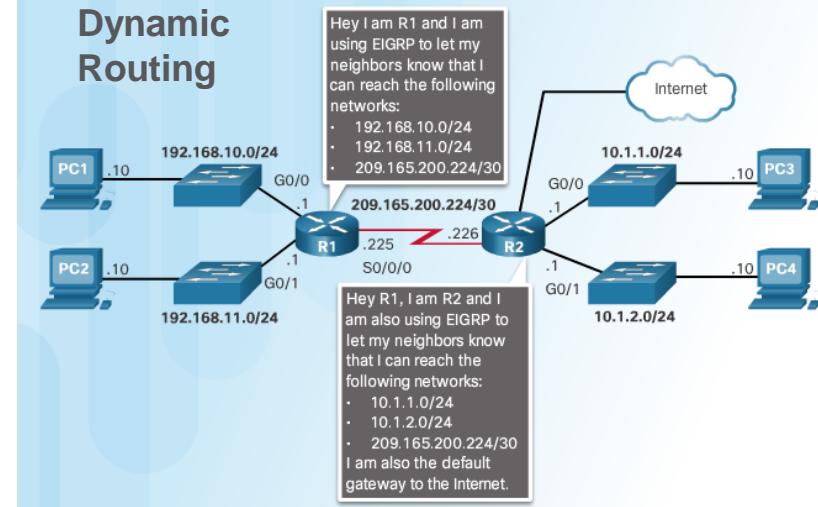

Why Use Static Routing?

Dynamic versus Static Routing


	Dynamic Routing	Static Routing
Configuration Complexity	Generally independent of the network size	Increases with network size
Topology Changes	Automatically adapts to topology changes	Administrator intervention required
Scaling	Suitable for simple and complex topologies	Suitable for simple topologies
Security	Less secure	More secure
Resource Usage	Uses CPU, memory, link bandwidth	No extra resources needed
Predictability	Route depends on the current topology	Route to destination is always the same

Static Routing

When to Use Static Routes

Three uses for static routes:

- Smaller networks that are not expected to grow
- Routing to and from stub networks
 - Stub network accessed by a single route and has one neighbor
 - 172.16.3.0 is a stub network
- A single default route to represent a path to any network not found in the routing table
 - Use default route on R1 to point to R2 for all other networks

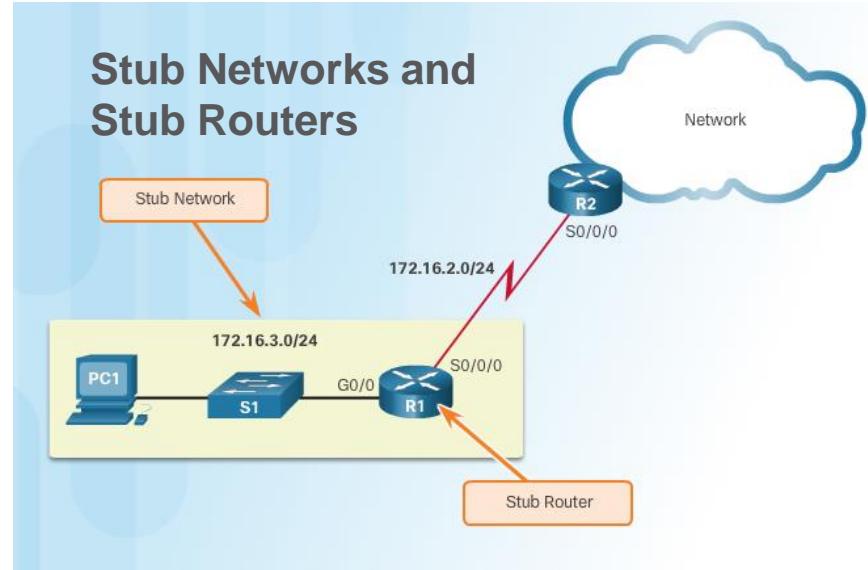

Static Route Applications


Use Static Routes To:

- Connect to a specific network
- Connect a stub router
- Summarize routing table entries which reduces size of routing advertisements
- Create a backup route in case a primary route link fails

Types of Static Routes

Standard Static Route


- R2 configured with a static route to reach the stub network 172.16.3.0/24

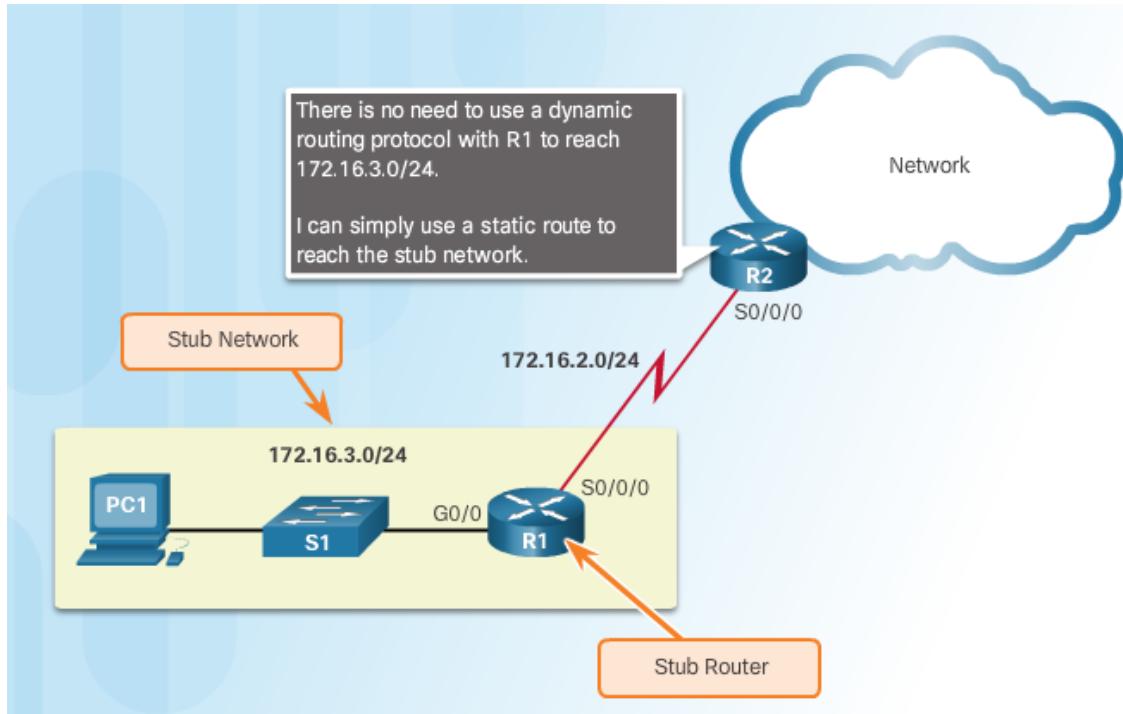

Types of Static Routes

Default Static Route


- Default route matches all packets and is used when a packet does not match a specific route in the routing table
- Can be dynamically learned or statically configured
- Default Static route uses 0.0.0.0/0 as the destination IPv4 address
- Creates a Gateway of Last Resort
- Common use is when connecting a company's edge router to the ISP network
- Router has only one router to which it is connected

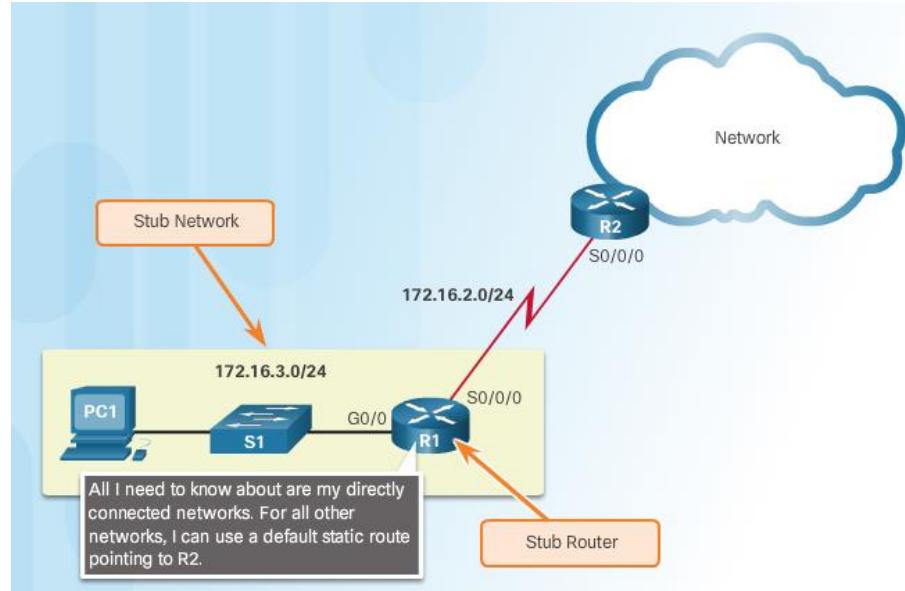

Types of Static Routes


Summary Static Route

- Multiple static routes can be summarized into a single network address
 - Destination networks must be contiguous
 - Multiple static routes must use the same exit interface or next hop
 - In figure, four networks is summarized into one summary static route

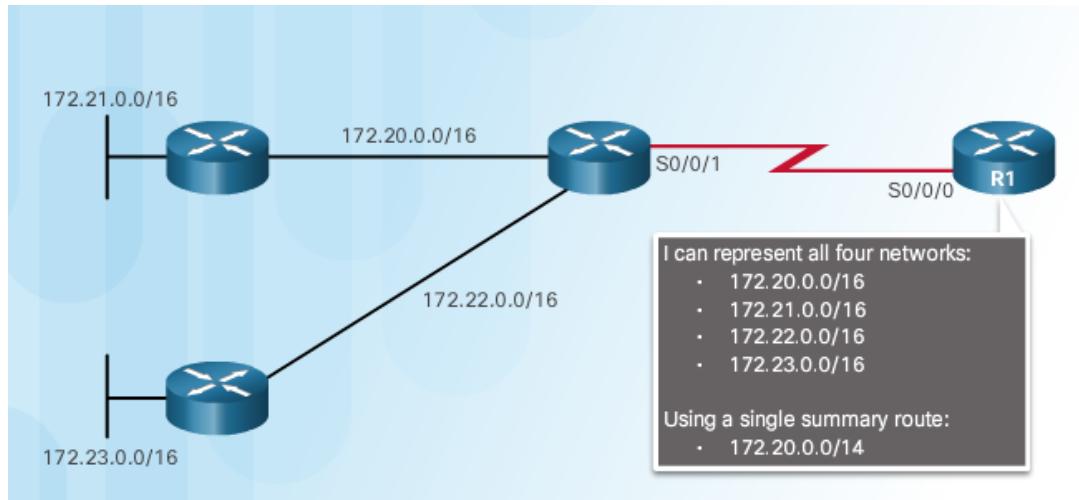

Floating Static Route

- Static routes that are used to provide a backup path
- Used when primary route is not available
- Configured with a higher administrative distance (trustworthiness) than the primary route
- Example: EIGRP administrative distance equals 90. A floating static route with an AD of 91 or higher would serve as backup route and will be used if EIGRP route goes down.

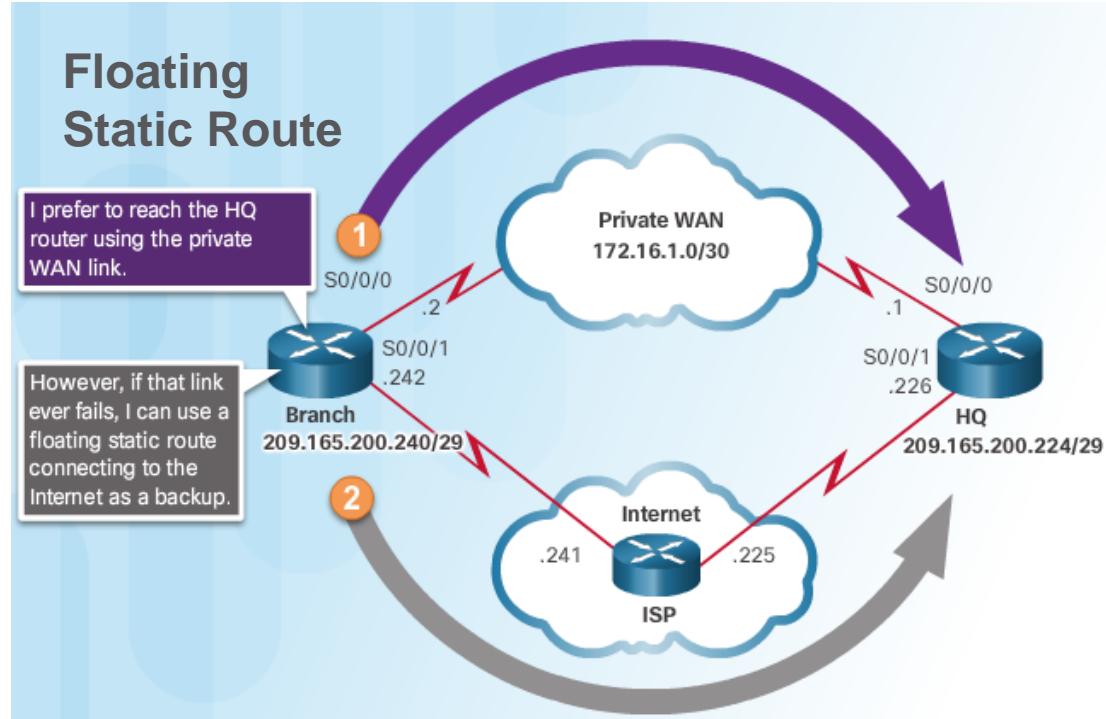

2.2 Configure Static and Default Routes

Configure IPv4 Static Routes

ip route Command




ip route Command Syntax

```
Router(config)# ip route network-address subnet-mask {ip-address | exit-intf}
```

Parameter	Description
network-address	Destination network address of the remote network to be added to the routing table
subnet-mask	<ul style="list-style-type: none">Subnet mask of the remote network to be added to the routing table.The subnet mask can be modified to summarize a group of networks.
ip-address	<ul style="list-style-type: none">Commonly referred to as the next-hop router's IP address.Typically used when connecting to a broadcast media (i.e., Ethernet).Commonly creates a recursive lookup
exit-intf	<ul style="list-style-type: none">Use the outgoing interface to forward packets to the destination network.Also referred to as a directly attached static route.Typically used when connecting in a point-to-point configuration.
distance	<ul style="list-style-type: none">(Optional) Configures an administrative distance.Typically used to configure a floating static route.



Configure IPv4 Static Routes Next-Hop Options

- In this example, each router only has entries for directly connected network

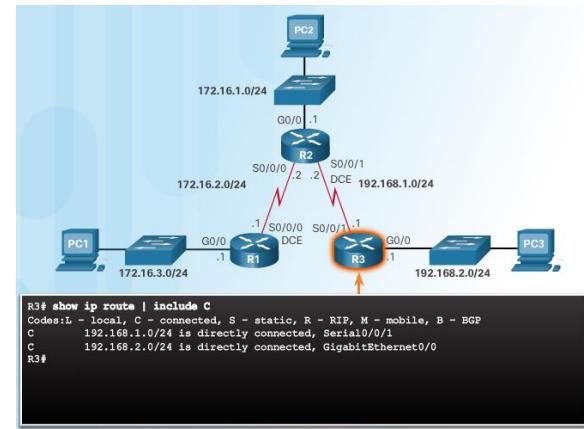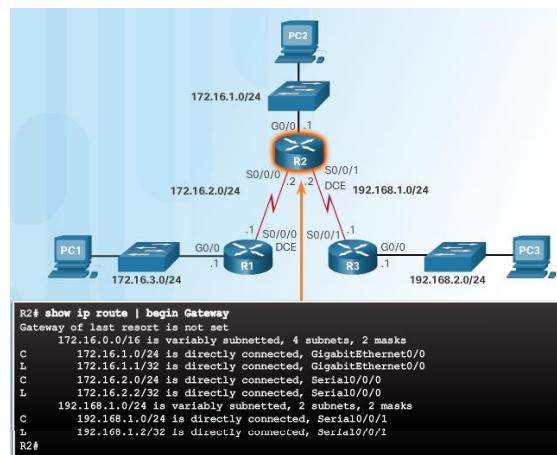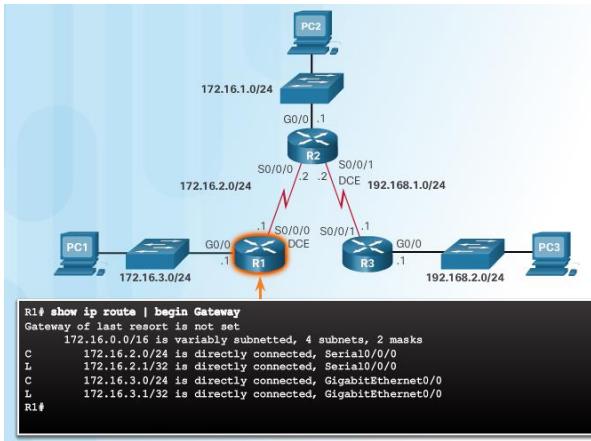

Configure IPv4 Static Routes Next-Hop Options (Cont.)


- R1 does not have an entry in its routing table for the R3 LAN network
- In a static route next-hop can be identified by
 - Next-hop IP address
 - Router exit interface
 - Next-hop IP address and exit interface

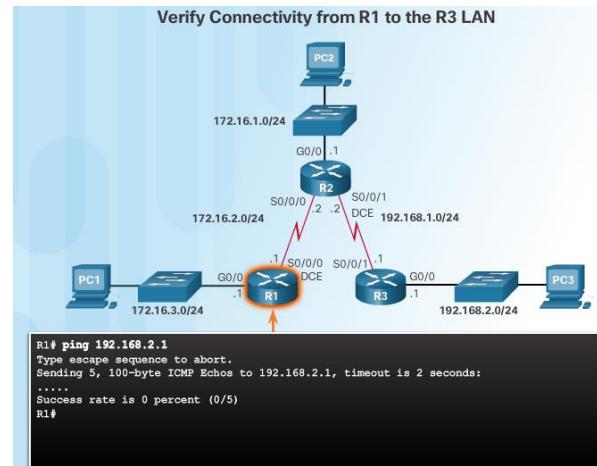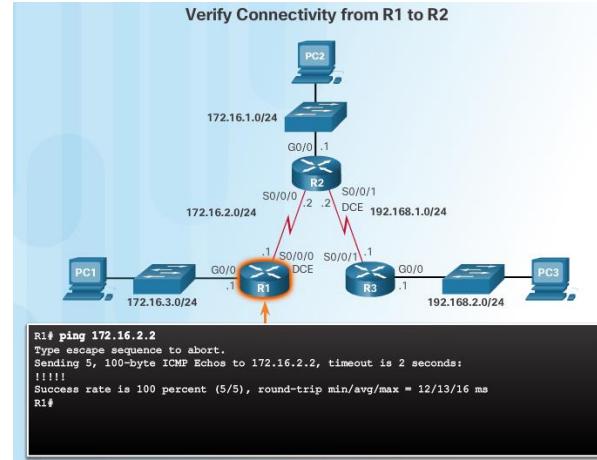

Configure IPv4 Static Routes

Configure a Next-Hop Static Route


- In this example, only the next-hop IP address is specified
- Before packet is forwarded the router must determine the exit interface to use (route resolvability)

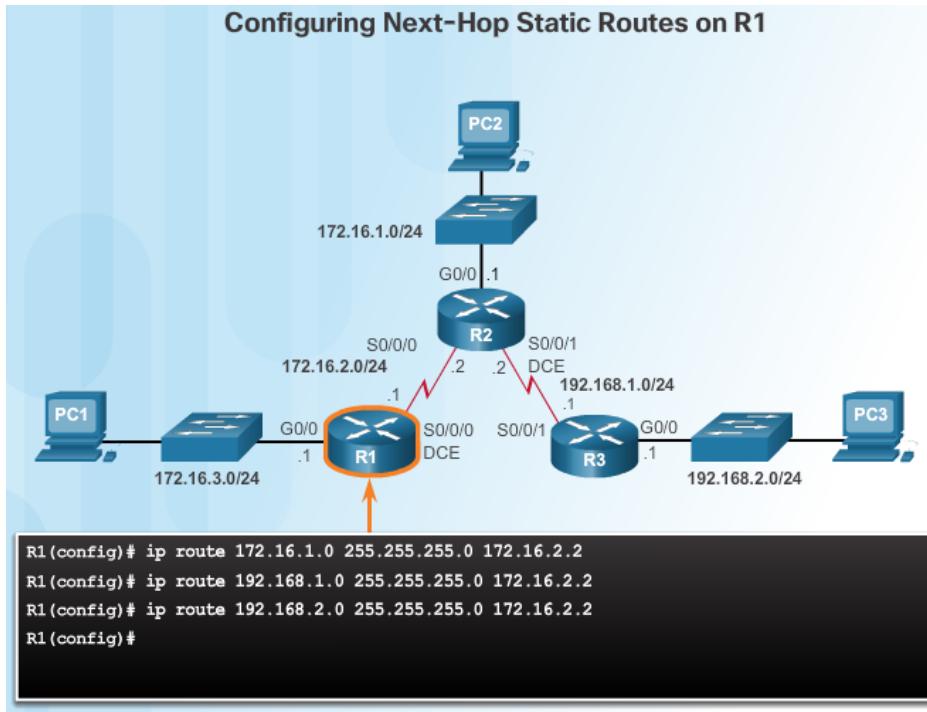

Configure IPv4 Static Routes

Configure a Next-Hop Static Route (Cont.)



- In example, when a packet is destined for 192.168.2.0/24 network, R1:
 - Looks for match (#1) and needs to forward packets to 172.16.2.2
 - R1 must determine how to reach 172.16.2.2 first
 - Searches a second time for 172.16.2.0/24 (#2) and matches to exit interface s0/0/0
 - Takes two routing table lookups, process referred to as recursive lookup
 - If the exit interface is “down” or “administratively down” then the static route configured with next-hop will not be installed in routing table

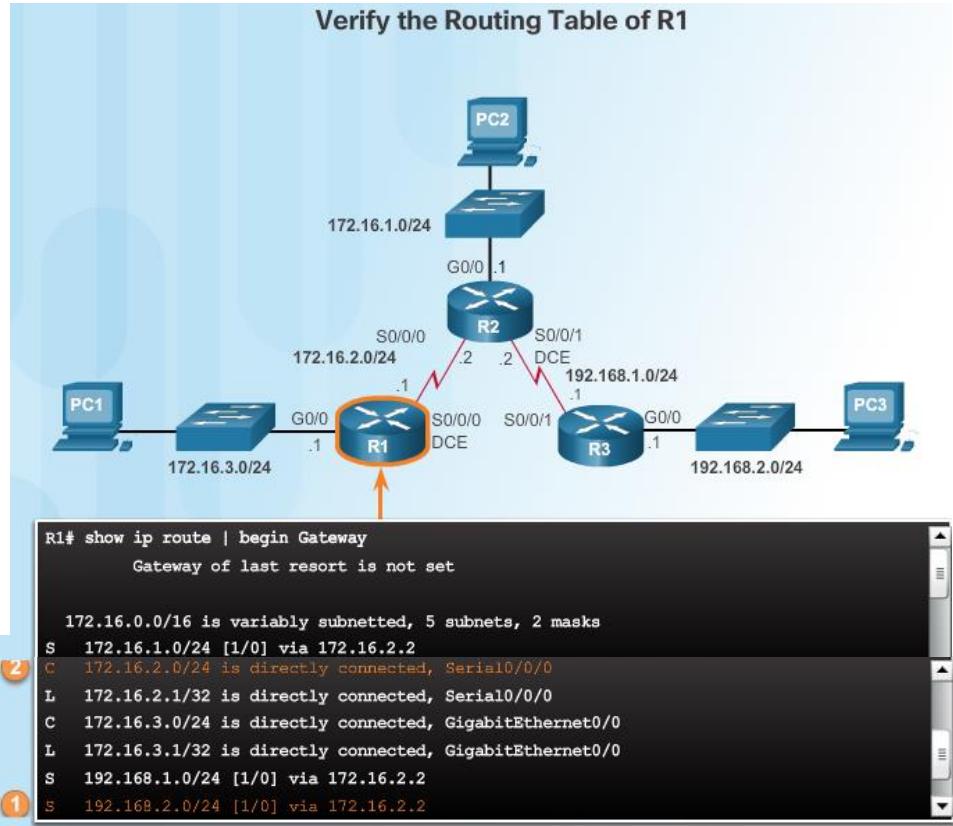

Configure IPv4 Static Routes

Configure a Directly Connected Static Route

- Use the exit interface to specify next-hop so no other lookups are required
- Administrative distance of static route is 1

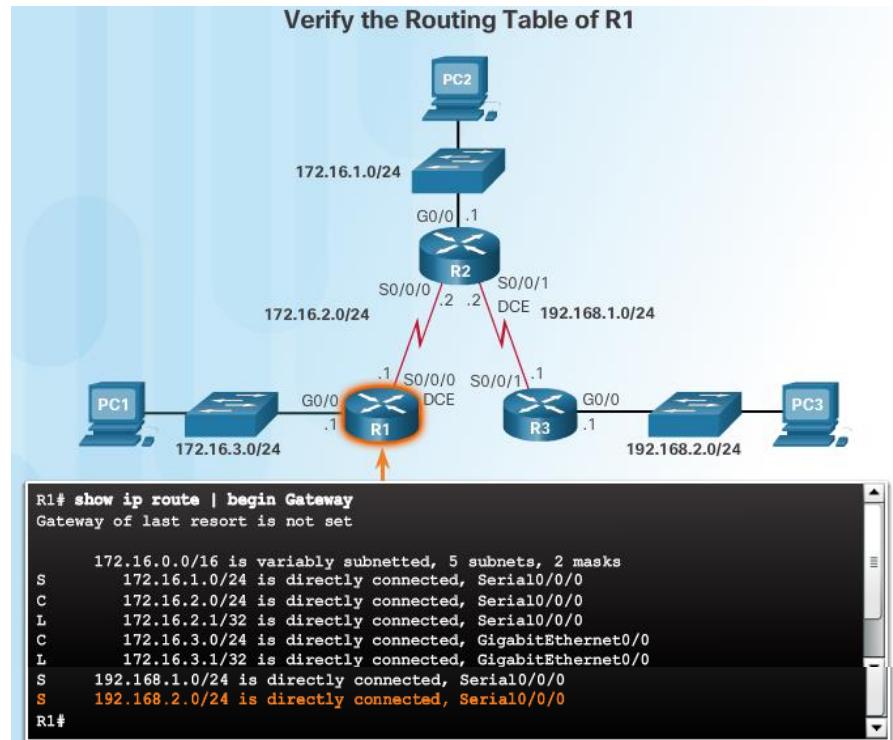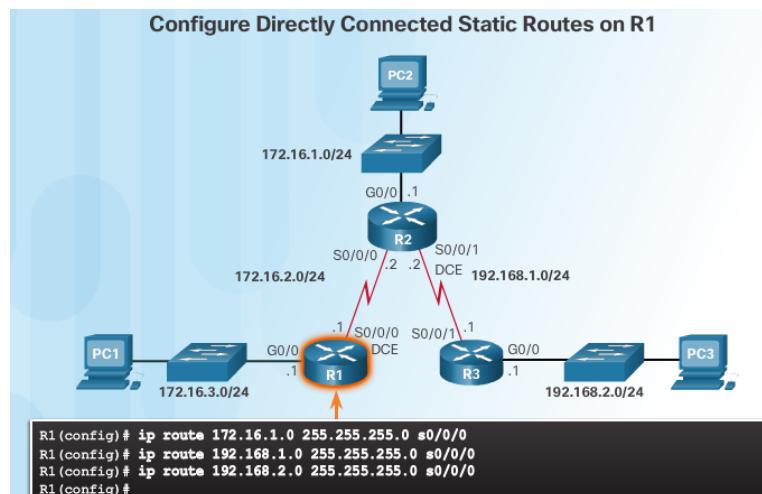



Configure a Directly Connected Static Route (Cont.)

- Cisco Express Forwarding (CEF)
 - default behavior on IOS 12.0 or later
 - provides optimized lookup
 - uses a Forwarding Information Base (FIB) which is a copy of the routing table and an adjacency table that includes Layer 2 addresses
 - no recursive lookup needed for next-hop IP address lookups

Configure IPv4 Static Routes

Configure a Fully Specified Static Route


- Both the exit interface and the next-hop IP address are specified
- When exit interface is an Ethernet network, fully specified static route is used
- Note: With CEF, a next-hop address could be used instead

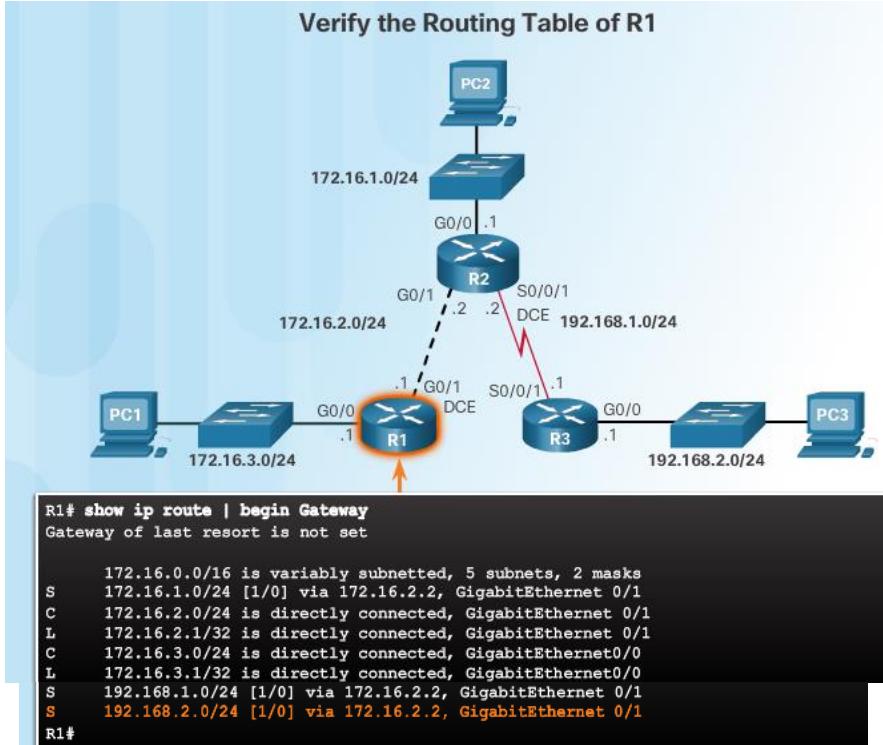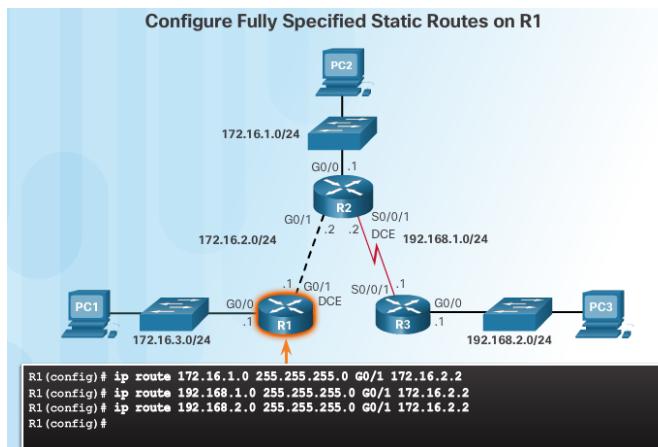


Configure IPv4 Static Routes

Verify a Static Route


Verify the Routing Table of R1

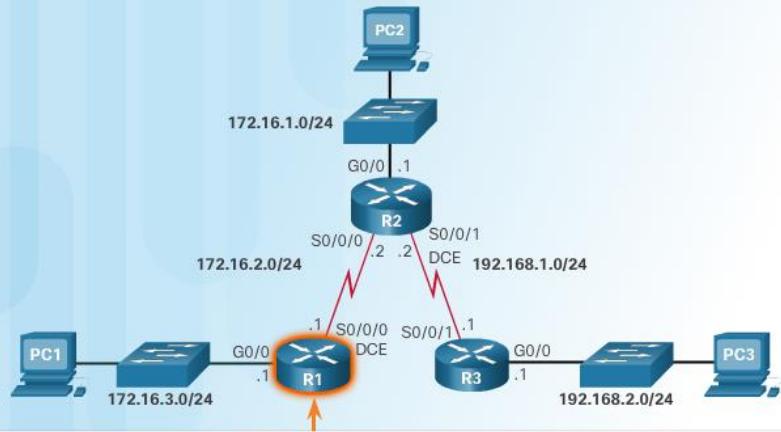

Verify a Specific Entry in the Routing Table

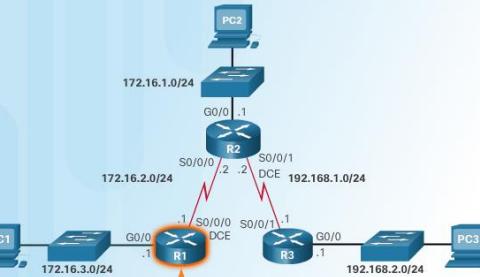

Verify the Static Route Configuration

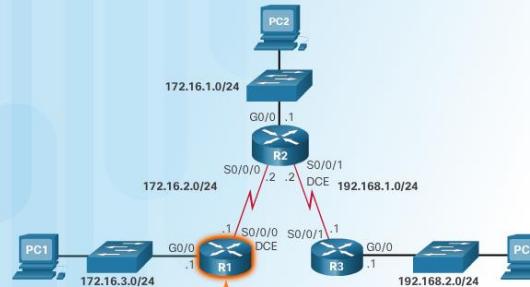

Default Static Route

- Default static routes are commonly used when connecting:
 - An edge router to a service provider network
 - A stub router (a router with only one upstream neighbor router)
- Default route is used when no other routes in the routing table match the destination IP


Default Static Route Syntax

```
Router(config)#ip route 0.0.0.0 0.0.0.0 {ip-address | exit-intf}
```

Parameter	Description
0.0.0.0 0.0.0.0	Matches any network address.
ip-address	<ul style="list-style-type: none">• Commonly referred to as the next-hop router's IP address.• Typically used when connecting to a broadcast media (i.e., Ethernet).• Commonly creates a recursive lookup.
exit-intf	<ul style="list-style-type: none">• Use the outgoing interface to forward packets to the destination network.• Also referred to as a directly attached static route.• Typically used when connecting in a point-to-point configuration.

Configure IPv4 Default Routes


Configure a Default Static Route

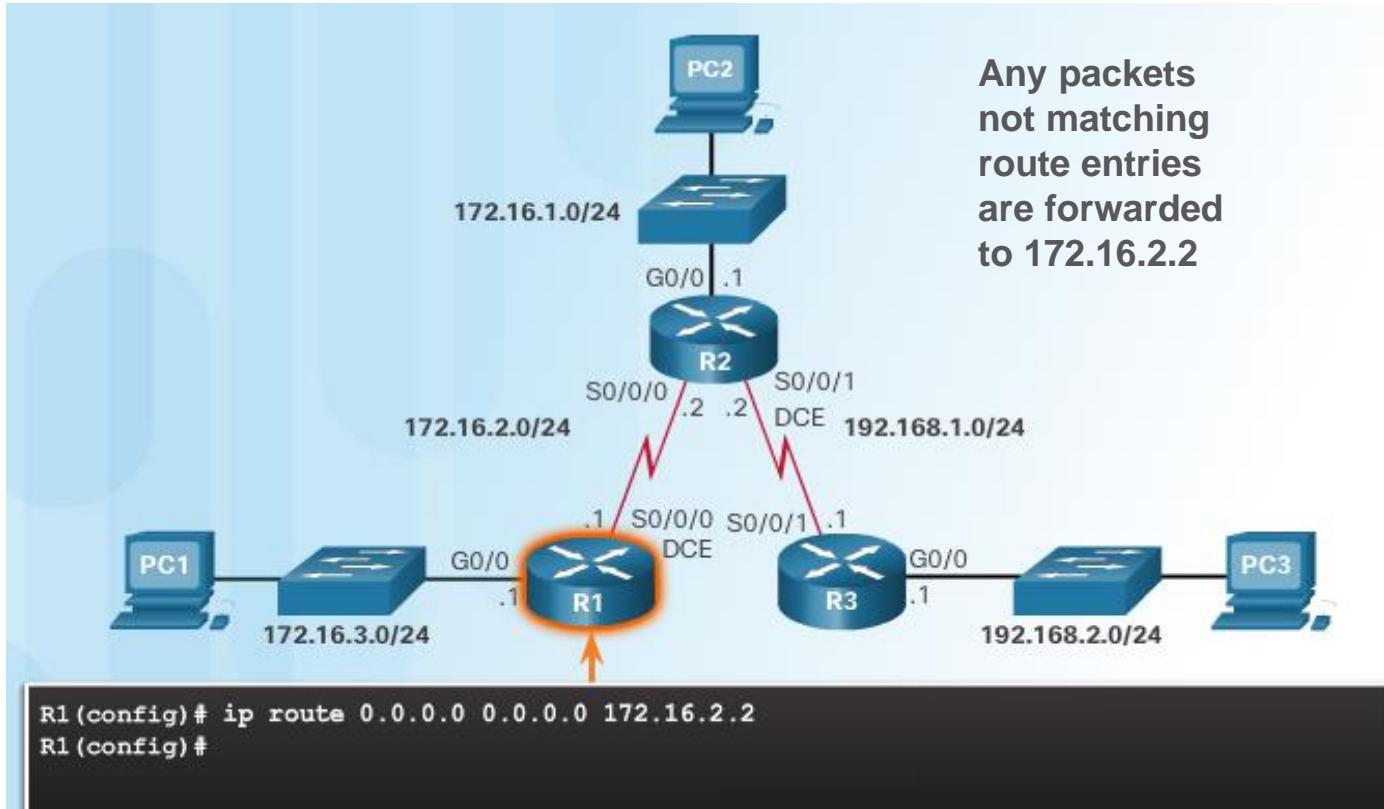

Configure IPv4 Default Routes

Verify a Default Static Route

- **show ip route static** displays just the static routes
 - **S** indicates static route
 - candidate default route indicated by *
 - /0 mask in route entry indicates none of the bits are required to match

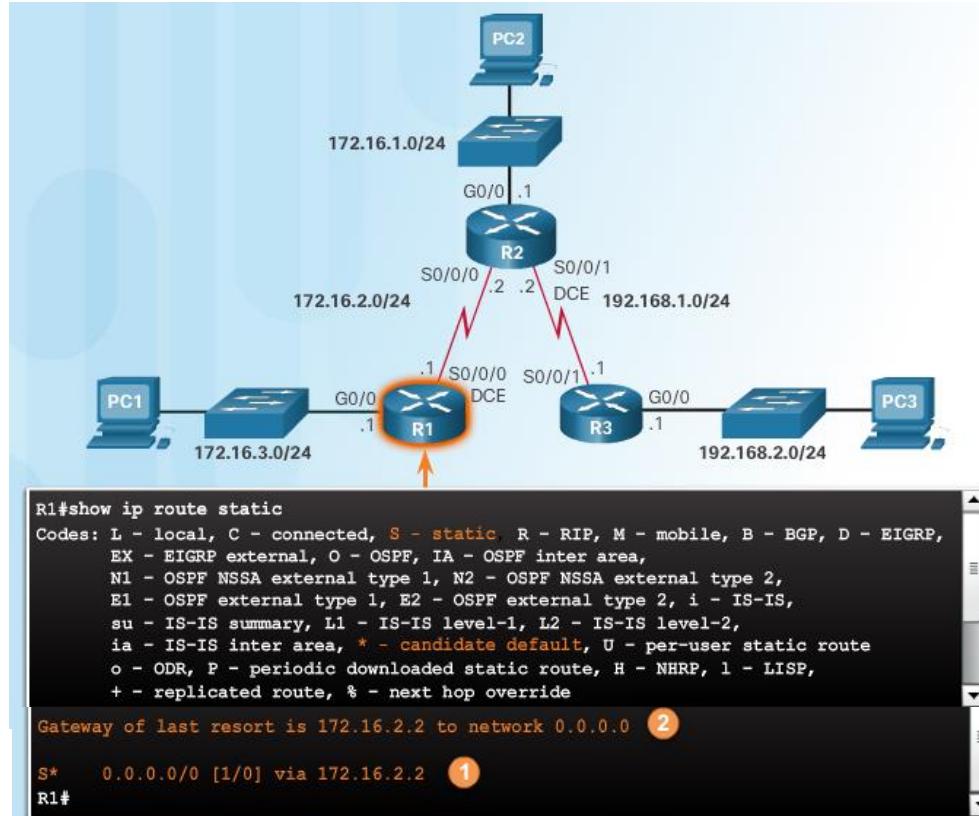

Configure IPv4 Default Routes

Packet Tracer – Configuring IPv4 Static and Default Routes

Cisco Networking Academy® Mind Wide Open™

Packet Tracer - Configuring IPv4 Static and Default Routes

Topology

```
graph LR; PC1 --- S1[Router R1]; S1 --- R1[R1]; R1 --- S2[Router R2]; R1 --- S3[Router R3]; S2 --- PC2[PC2]; S2 --- R2[R2]; R2 --- PC3[PC3]; R2 --- S3; S3 --- R3[R3]; R3 --- S2;
```

Addressing Table

Device	Interface	IPv4 Address	Subnet Mask	Default Gateway
R1	G0/0	172.31.1.1	255.255.255.128	N/A
R1	S0/0/0	172.31.1.104	255.255.255.252	N/A


Configure IPv4 Default Routes

Lab – Configuring IPv4 Static and Default Routes

 Cisco Networking Academy® Mind Wide Open™

Lab – Configuring IPv4 Static and Default Routes

Topology

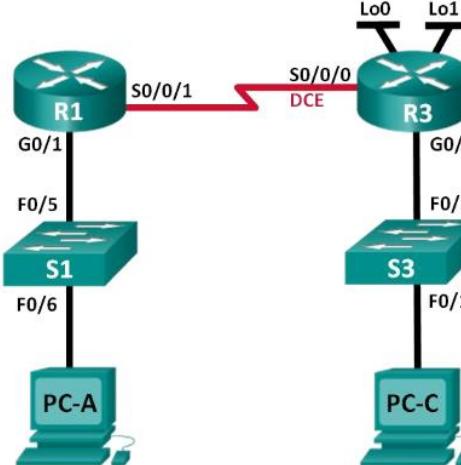

The diagram illustrates a network topology. Router R1 (G0/1) is connected to Switch S1 (F0/5) and a PC (PC-A) via F0/6. Router R3 (G0/1) is connected to Switch S3 (F0/5) and a PC (PC-C) via F0/18. A serial link connects R1 (S0/0/1) and R3 (S0/0/0) labeled "DCE". Router R3 also has two loopback interfaces, Lo0 and Lo1.

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	G0/1	192.168.0.1	255.255.255.0	N/A
	S0/0/1	10.1.1.1	255.255.255.252	N/A
R3	G0/1	192.168.1.1	255.255.255.0	N/A

P.PORTO

All rights reserved. Cisco Confidential

Configure IPv6 Static Routes

The **ipv6 route** Command


```
Router(config)# ipv6 route ipv6-prefix/prefix-length {ipv6-address | exit-intf}
```

Parameter	Description
ipv6-prefix	Destination network address of the remote network to be added to the routing table.
prefix-length	Prefix length of the remote network to be added to the routing table.
ipv6-address	<ul style="list-style-type: none">Commonly referred to as the next-hop router's IP address.Typically used when connecting to a broadcast media (i.e., Ethernet).Commonly creates a recursive lookup.
exit-intf	<ul style="list-style-type: none">Use the outgoing interface to forward packets to the destination network.Also referred to as a directly attached static route.Typically used when connecting in a point-to-point configuration.

Configure IPv6 Static Routes


The `ipv6 route` Command (Cont.)

- **`ipv6 unicast-routing`**
enables the router to forward IPv6 packets

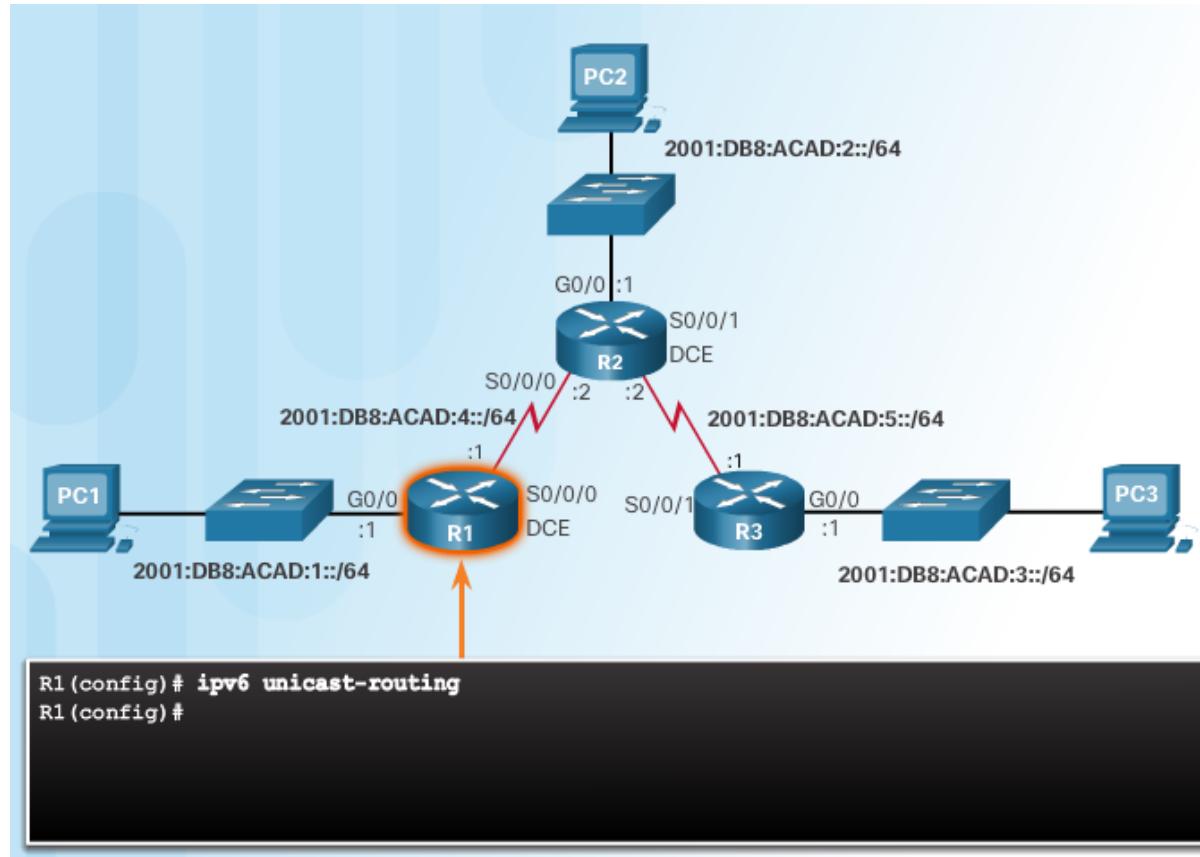

Configure IPv6 Static Routes Next-Hop Options

- Each router only knows about directly connected networks
 - R1 can ping R2 (ipv6 2001:DB8:ACAD:4::2) but cannot ping R3 (ipv6 2001:DB8:ACAD:3::2)

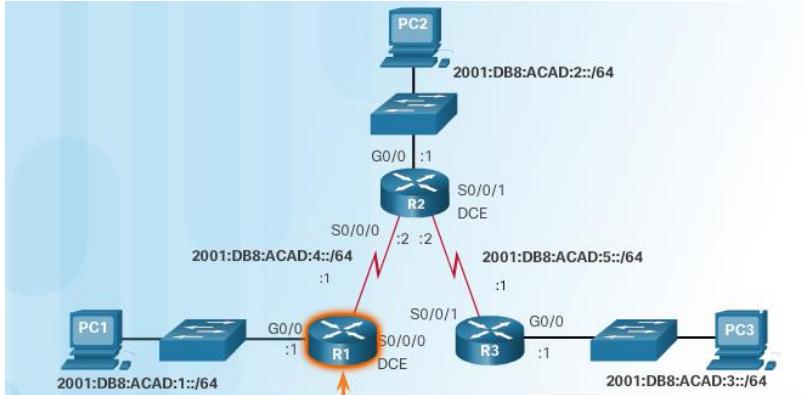

```
R1#show ipv6 route
<output omitted>
C 2001:DB8:ACAD:1::/64 [0/0]
    via GigabitEthernet0/0, directly connected
L 2001:DB8:ACAD:1::1/128 [0/0]
    via GigabitEthernet0/0, receive
C 2001:DB8:ACAD:4::/64 [0/0]
    via Serial0/0/0, directly connected
L 2001:DB8:ACAD:4::1/128 [0/0]
    via Serial0/0/0, receive
L FF00::/8 [0/0]
    via Null0, receive
R1#
```

```
R2#show ipv6 route
<output omitted>
C 2001:DB8:ACAD:2::/64 [0/0]
    via GigabitEthernet0/0, directly connected
L 2001:DB8:ACAD:2::1/128 [0/0]
    via GigabitEthernet0/0, receive
C 2001:DB8:ACAD:4::/64 [0/0]
    via Serial0/0/0, directly connected
L 2001:DB8:ACAD:4::2/128 [0/0]
    via Serial0/0/0, receive
C 2001:DB8:ACAD:5::/64 [0/0]
    via Serial0/0/1, directly connected
L 2001:DB8:ACAD:5::2/128 [0/0]
    via Serial0/0/1, receive
L FF00::/8 [0/0]
    via Null0, receive
R2#
```

```
R3#show ipv6 route
<output omitted>
C 2001:DB8:ACAD:3::/64 [0/0]
    via GigabitEthernet0/0, directly connected
L 2001:DB8:ACAD:3::1/128 [0/0]
    via GigabitEthernet0/0, receive
C 2001:DB8:ACAD:5::/64 [0/0]
    via Serial0/0/1, directly connected
L 2001:DB8:ACAD:5::1/128 [0/0]
    via Serial0/0/1, receive
L FF00::/8 [0/0]
    via Null0, receive
R3#
```


Next-Hop Options (Cont.)

- Next hop can be identified by an IPv6 address, exit interface, or both.
- Destination is specified by one of three route types:
 - **Next-hop static IPv6 route** - Only the next-hop IPv6 address is specified
 - **Directly connected static IPv6 route** - Only the router exit interface is specified
 - **Fully specified static IPv6 route** - The next-hop IPv6 address and exit interface are specified

Configure IPv6 Static Routes

Configure a Next Hop Static IPv6 Route

Three next-hop static routes are configured on R1

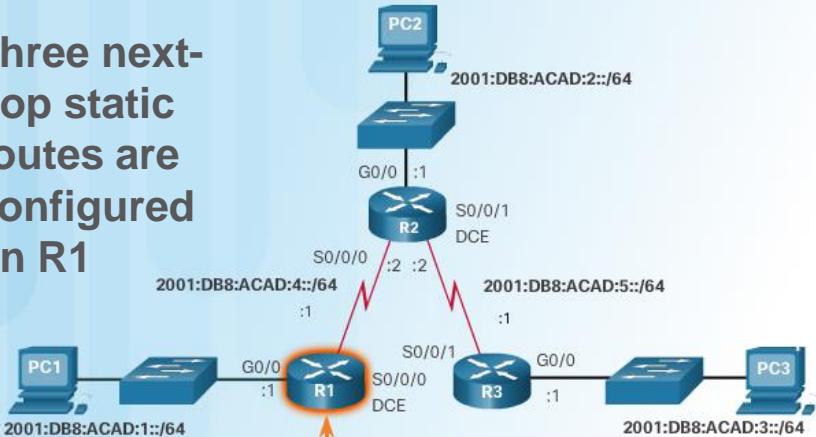

As with IPv4, must resolve the route to determine the exit interface to use to forward the packet

```
R1# show ipv6 route
IPv6 Routing Table - default - 8 entries
Codes: C - Connected, L - Local, S - Static, U - Per-user Static route, B - BGP,
       R - RIP, H - NHRP, I1 - ISIS L1, I2 - ISIS L2, IA - ISIS interarea,
       IS - ISIS summary, D - EIGRP, EX - EIGRP external, ND - ND Default,
       NDp - ND Prefix, DCE - Destination, Ndr - Redirect, O - OSPF Intra,
       OI - OSPF Inter, OEL - OSPF ext 1, OE2 - OSPF ext 2, ON1 - OSPF NSSA ext 1,
       ON2 - OSPF NSSA ext 2


C 2001:DB8:ACAD:1::/64 [0/0]
   via GigabitEthernet0/0, directly connected
L 2001:DB8:ACAD:1::1/128 [0/0]
   via GigabitEthernet0/0, receive
S 2001:DB8:ACAD:2::/64 [1/0]
   via 2001:DB8:ACAD:4::2
S 2001:DB8:ACAD:3::/64 [1/0]
   via 2001:DB8:ACAD:4::2
C 2001:DB8:ACAD:4::/64 [0/0]
   via Serial0/0/0, directly connected
L 2001:DB8:ACAD:4::1/128 [0/0]
   via Serial0/0/0, receive
S 2001:DB8:ACAD:5::/64 [1/0]
   via 2001:DB8:ACAD:4::2
L FF00::/8 [0/0]
   via Null0, receive
R1#
```

The IPv6 address matches the route for the directly connected network 2001:DB8:ACAD:4::/64 with the exit interface Serial 0/0/0.

Configure IPv6 Static Routes

Configure a Directly Connected Static IPv6 Route

- Alternative to next hop is to specify the exit interface
- Packet destined for 2001:DB8:ACAD:3::/64 network, forwarded out Serial 0/0/0 – no other lookups needed

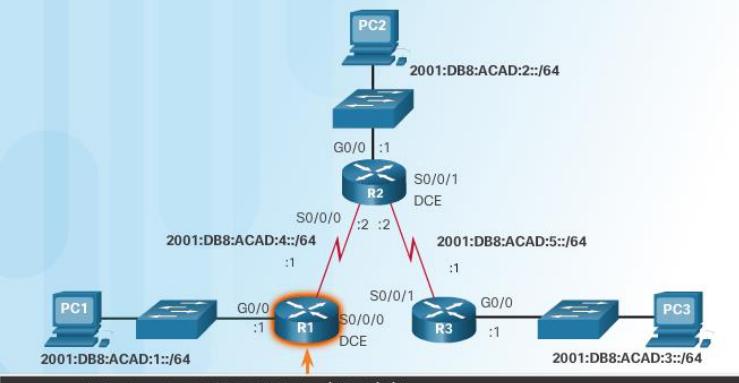


```
R1# show ipv6 route
IPv6 Routing Table - default - 8 entries
Codes: C - Connected, L - Local, S - Static, U - Per-user Static route
      B - BGP, R - RIP, I1 - ISIS L1, I2 - ISIS L2
      IA - ISIS interarea, IS - ISIS summary, D - EIGRP, EX - EIGRP external
      ND - ND Default, NDp - ND Prefix, DCE - Destination, NDr - Redirect
      O - OSPF Intra, OI - OSPF Inter, OE1 - OSPF ext 1, OE2 - OSPF ext 2
      ON1 - OSPF NSSA ext 1, ON2 - OSPF NSSA ext 2
C  2001:DB8:ACAD:1::/64 [0/0]
  via GigabitEthernet0/0, directly connected
L  2001:DB8:ACAD:1::1/128 [0/0]
  via GigabitEthernet0/0, receive
S  2001:DB8:ACAD:2::/64 [1/0]
  via Serial0/0/0, directly connected
S  2001:DB8:ACAD:3::/64 [1/0]
  via Serial0/0/0, directly connected
C  2001:DB8:ACAD:4::/64 [0/0]
  via Serial0/0/0, directly connected
L  2001:DB8:ACAD:4::1/128 [0/0]
  via Serial0/0/0, receive
S  2001:DB8:ACAD:5::/64 [1/0]
  via Serial0/0/0, directly connected
L  FF00::/8 [0/0]
  via Null0, receive
R1#
```

Configure IPv6 Static Routes

Configure a Fully Specified Static IPv6 Route

- Fully specified static route must be used if IPv6 link-local address is used as next-hop

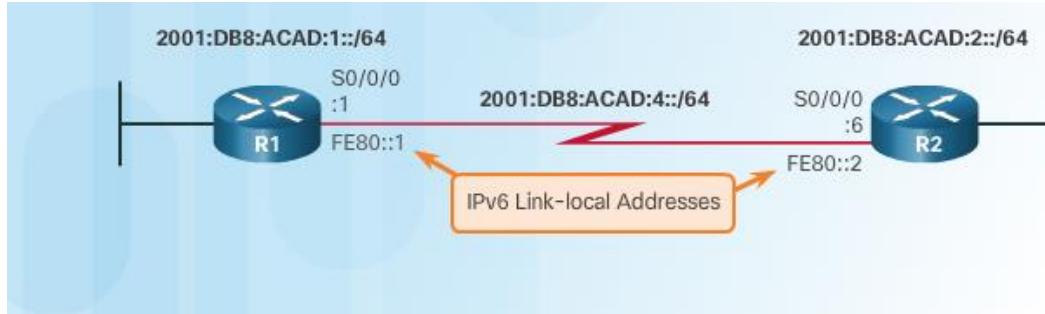


```
R1(config)# ipv6 route 2001:db8:acad:2::/64 fe80::2  
% Interface has to be specified for a link-local nexthop  
R1(config)# ipv6 route 2001:db8:acad:2::/64 s0/0/0 fe80::2  
R1(config)#
```

```
R1# show ipv6 route static | begin 2001:DB8:ACAD:2::/64  
S 2001:DB8:ACAD:2::/64 [1/0]  
    via FE80::2, Serial0/0/0
```

Configure IPv6 Static Routes

Verify IPv6 Static Routes

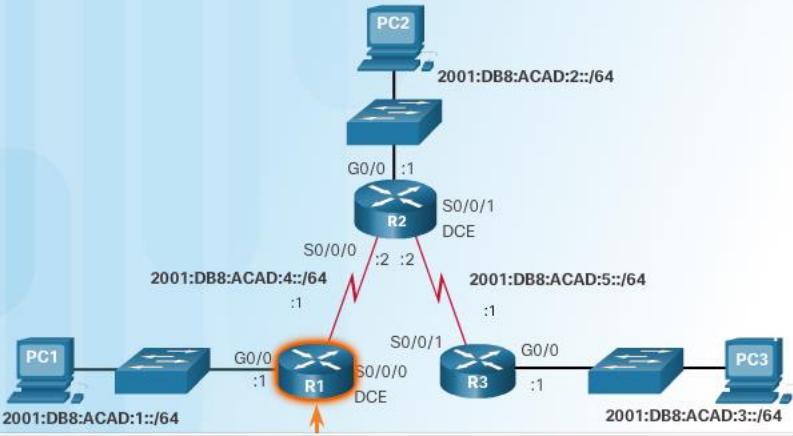

```
R1# show ipv6 route static
IPv6 Routing Table - default - 8 entries
Codes: C - Connected, L - Local, S - Static, U - Per-user Static route, B - BGP,
       R - RIP, I1 - ISIS L1, I2 - ISIS L2, IA - ISIS interarea, IS - ISIS summary,
       D - EIGRP, EX - EIGRP external, ND - ND Default, NDp - ND Prefix,
       DCE - Destination, NDr - Redirect, O - OSPF Intra, OI - OSPF Inter,
       OE1 - OSPF ext 1, OE2 - OSPF ext 2, ON1 - OSPF NSSA ext 1,
       ON2 - OSPF NSSA ext 2
S  2001:DB8:ACAD:2::/64 [1/0]
   via 2001:DB8:ACAD:4::2
S  2001:DB8:ACAD:3::/64 [1/0]
   via 2001:DB8:ACAD:4::2
S  2001:DB8:ACAD:5::/64 [1/0]
   via 2001:DB8:ACAD:4::2
R1#
```

```
R1# show ipv6 route 2001:db8:acad:3::
Routing entry for 2001:DB8:ACAD:3::/64
Known via "static", distance 1, metric 0
Route count is 1/1, share count 0
Routing paths:
  2001:DB8:ACAD:4::2
    Last updated 00:19:11 ago
R1#
```

```
R1# show running-config | section ipv6 route
ipv6 route 2001:DB8:ACAD:2::/64 2001:DB8:ACAD:4::2
ipv6 route 2001:DB8:ACAD:3::/64 2001:DB8:ACAD:4::2
ipv6 route 2001:DB8:ACAD:5::/64 2001:DB8:ACAD:4::2
R1#
```

Configure IPv6 Default Routes

Default Static IPv6 Route


- Default static route matches all packets not specified in routing table

```
Router(config)# ipv6 route ::/0 (ipv6-address | exit-intf)
```

Parameter	Description
::/0	Matches any IPv6 prefix regardless of prefix length.
ipv6-address	<ul style="list-style-type: none">• Commonly referred to as the next-hop router's IPv6 address.• Typically used when connecting to a broadcast media (i.e., Ethernet).• Commonly creates a recursive lookup.
exit-intf	<ul style="list-style-type: none">• Use the outgoing interface to forward packets to the destination network.• Also referred to as a directly attached static route.• Typically used when connecting in a point-to-point configuration.

Configure IPv6 Default Routes

Configure a Default Static IPv6 Route

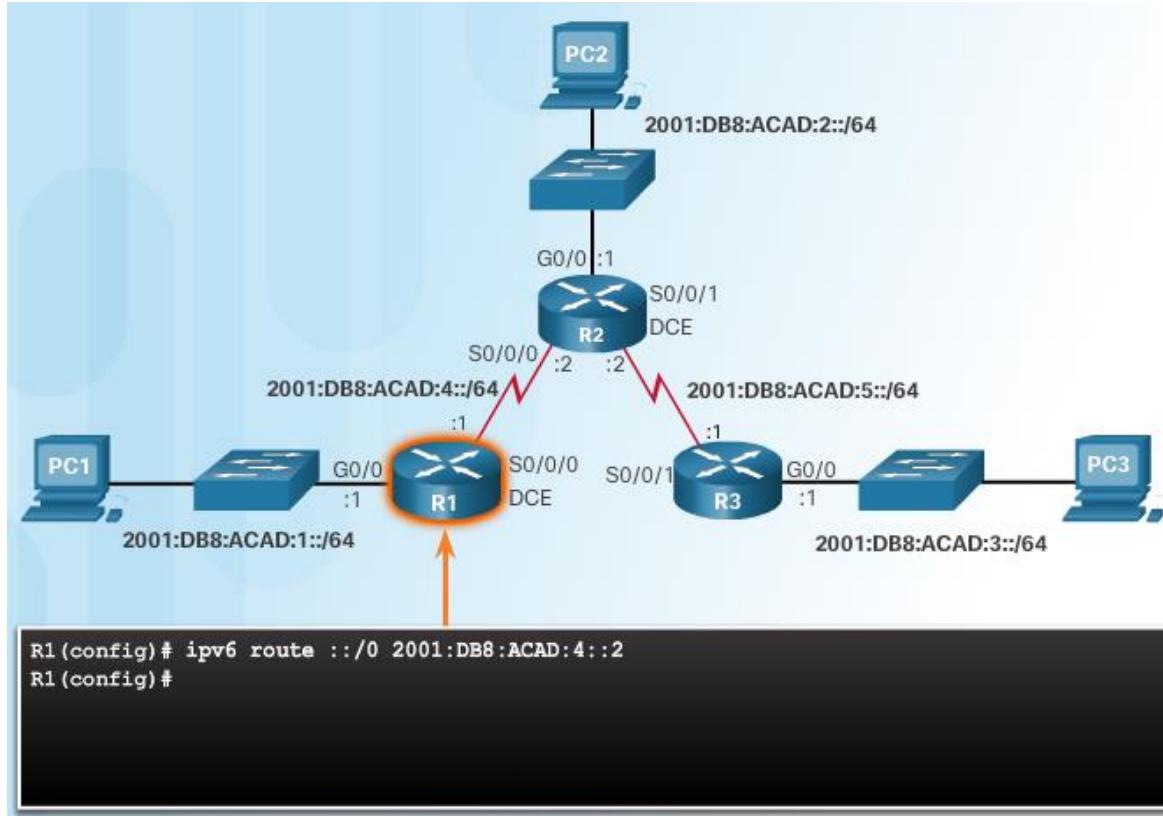


- R1 is a stub router because it is only connected to R2
- More efficient to configure a default static IPv6 route in this topology

Configure IPv6 Default Routes

Verify a Default Static Route

- **::/0** mask indicates that none of the bits are required to match
- If a more specific match does not exist, the default static IPv6 route matches all packets.

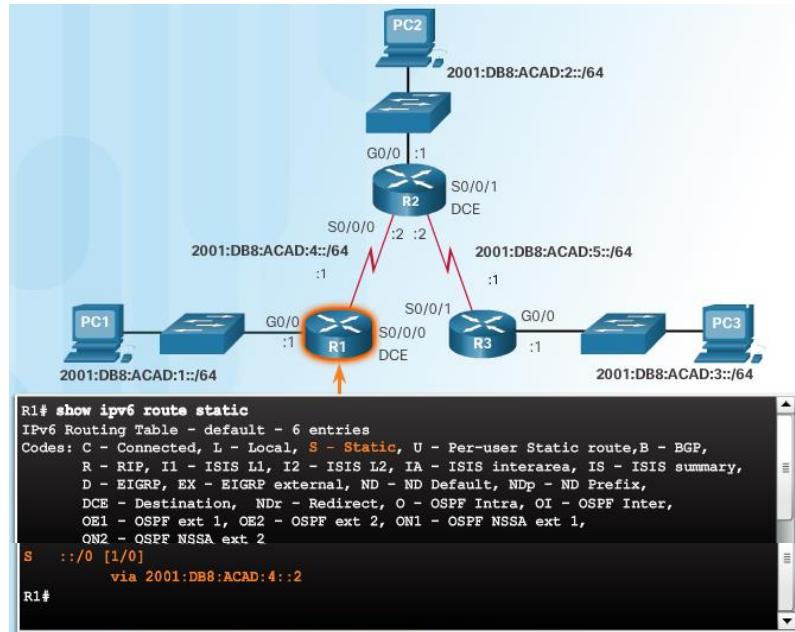

```
R1# ping 2001:0DB8:ACAD:3::1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echoes to 2001:DB8:ACAD:3::1,
timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max
= 28/28/28 ms
R1#
```

Configure IPv6 Default Routes

Packet Tracer – Configuring IPv6 Static and Default Routes

Cisco Networking Academy® Mind Wide Open™

Packet Tracer - Configuring IPv6 Static and Default Routes

2001:DB8:1:2::/64

2001:DB8:1:A001::/64

2001:DB8:1:1::/64

2001:DB8:1:A002::/64

2001:DB8:1:3::/64

IPv6 Addressing Table

Device	Interface	IPv6 Address/Prefix	Default Gateway
R1	G0/0	2001:DB8:1:1::1/64	N/A
	S0/0/0	2001:DB8:1:A001::1/64	N/A
	G0/0	2001:DB8:1:2::1/64	N/A

P.PORTO

is reserved. Cisco Confidential

50

Configure IPv6 Default Routes

Lab – Configuring IPv6 Static and Default Routes




Cisco Networking Academy®

Mind Wide Open™

Lab – Configuring IPv6 Static and Default Routes

Topology

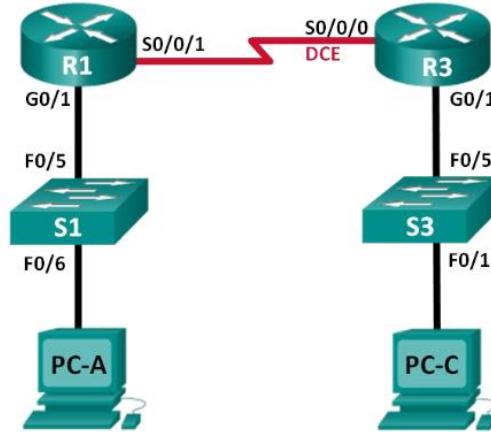


Addressing Table

Device	Interface	IPv6 Address / Prefix Length	Default Gateway
R1	G0/1	2001:DB8:ACAD:A::/64 eui-64	N/A
	S0/0/1	FC00::1/64	N/A

Floating Static Routes

Floating static routes have an administrative distance greater than the dynamic routing protocol or other static route


- Used as backup routes
- Administrative distance of common routing protocols
 - EIGRP = 90
 - IGRP = 100
 - OSPF = 110
 - IS-IS = 115
 - RIP = 120
- By default, AD of static route = 1
- Static route AD can be increased to make route less desirable until preferred route is lost

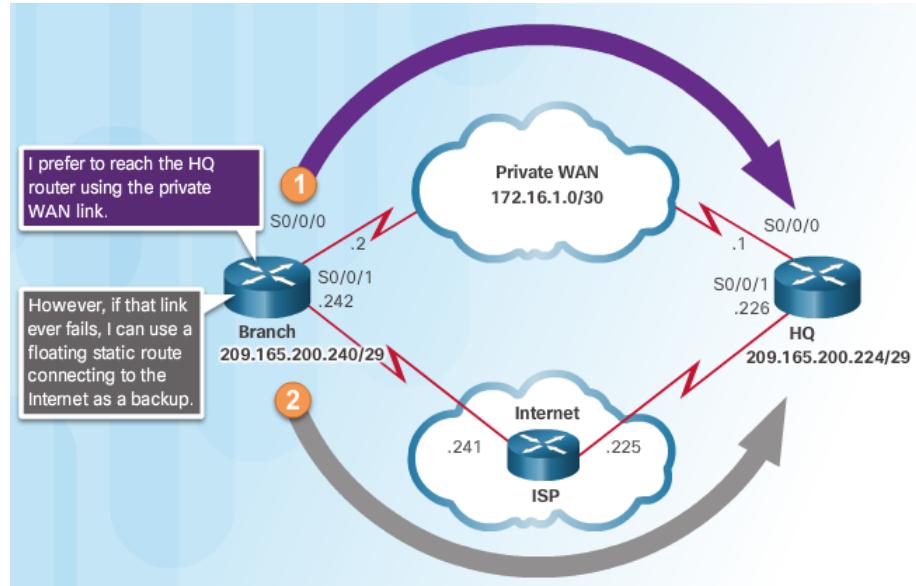

Configure Floating Static Routes

Configure a Floating Static Route

Configuring a Floating Static Route to R3

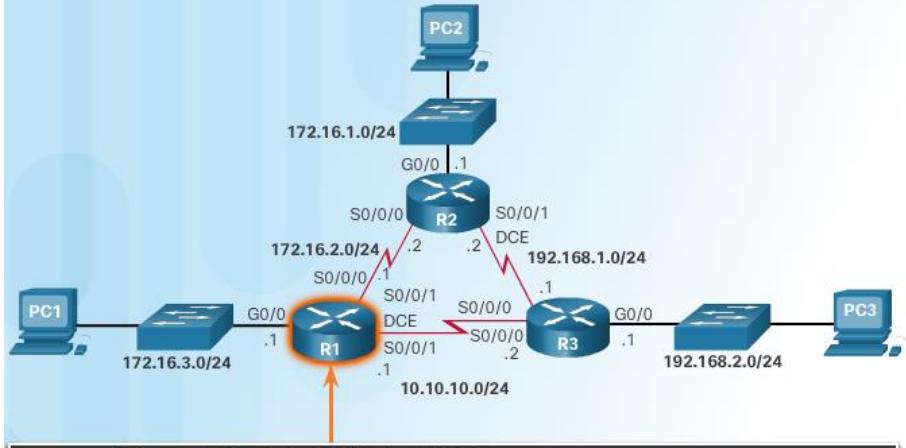

```
R1(config)# ip route 0.0.0.0 0.0.0.0 172.16.2.2
R1(config)# ip route 0.0.0.0 0.0.0.0 10.10.10.2 5
R1(config)#
```

**Preferred router from
R1 is to R2 (AD = 1)**


```
R1# show ip route static | begin Gateway
Gateway of last resort is 0.0.0.0 to network 0.0.0.0

S*   0.0.0.0/0 [1/0] via 172.16.2.2
R1#
```

Configure Floating Static Routes


Test the IPv4 Floating Static Route

Verify the Path to the R3 LAN

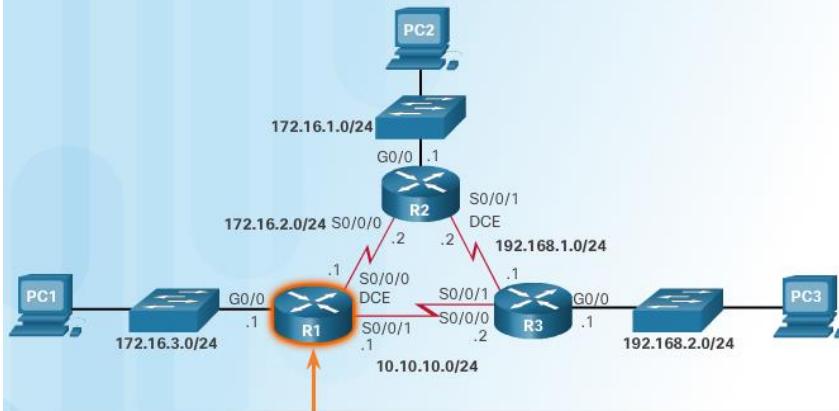

```
R1# traceroute 192.168.2.1
Type escape sequence to abort.
Tracing the route to 192.168.2.1
VRF info: (vrf in name/id, vrf out name/id)
 1 172.16.2.2 4 msec 4 msec 8 msec
 2 192.168.1.1 12 msec * 12 msec
R1#
```

Simulate a Router Failure on R2

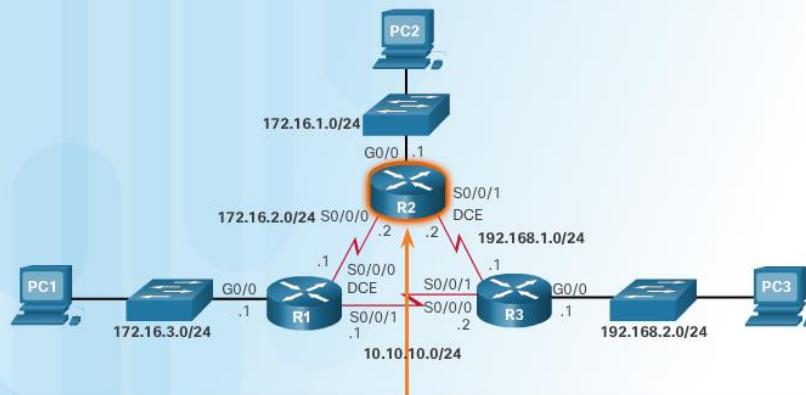


```
R2(config)# int s0/0/0
R2(config-if)# shut
*Feb 21 16:33:35.939: %LINK-5-CHANGED: Interface Serial0/0/0, changed
state to administratively down
*Feb 21 16:33:36.939: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Serial0/0/0, changed state to down
R2(config-if)# int s0/0/1
R2(config-if)# shut
R2(config-if)#
*Feb 21 16:33:42.543: %LINK-5-CHANGED: Interface Serial0/0/1, changed
```

Configure Floating Static Routes


Test the IPv4 Floating Static Route (Cont.)

Verify the Default Route on R1

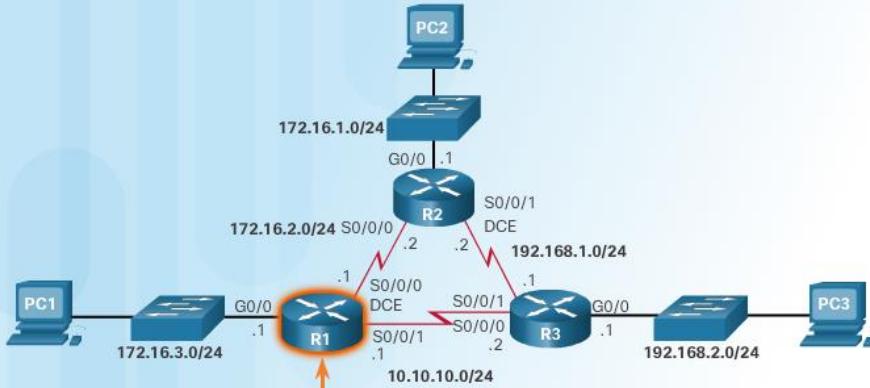

```
*Feb 21 16:35:58.435: %LINK-3-UPDOWN: Interface Serial0/0/0, changed
state to down
*Feb 21 16:35:59.435: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Serial0/0/0, changed state to down
R1#
R1# show ip route static | begin Gateway
Gateway of last resort is 0.0.0.0 to network 0.0.0.0
S*    0.0.0.0/0 [5/0] via 10.10.10.2
R1#
```

Verify the Path to the R3 LAN

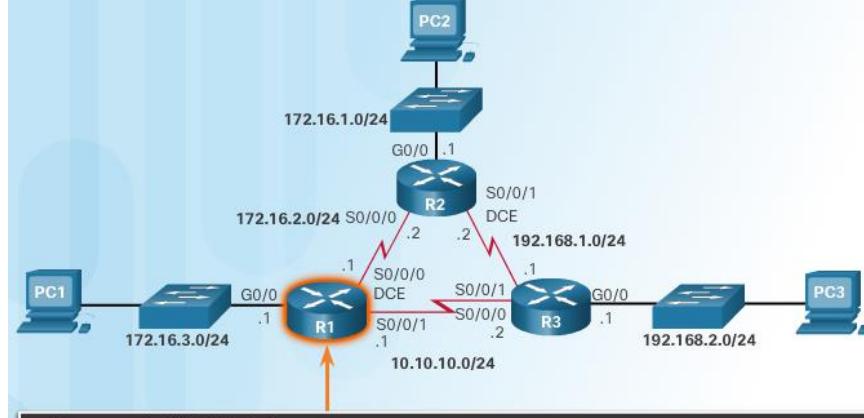


```
R1# traceroute 192.168.2.1
Type escape sequence to abort.
Tracing the route to 192.168.2.1
VRF info: (vrf in name/id, vrf out name/id)
  1 10.10.10.2 4 msec 4 msec *
R1#
```

Configure Floating Static Routes

Configure an IPv6 Floating Static Route

- Similar to IPv4 floating static routes


Configure an IPv6 Floating Static Routes to R3

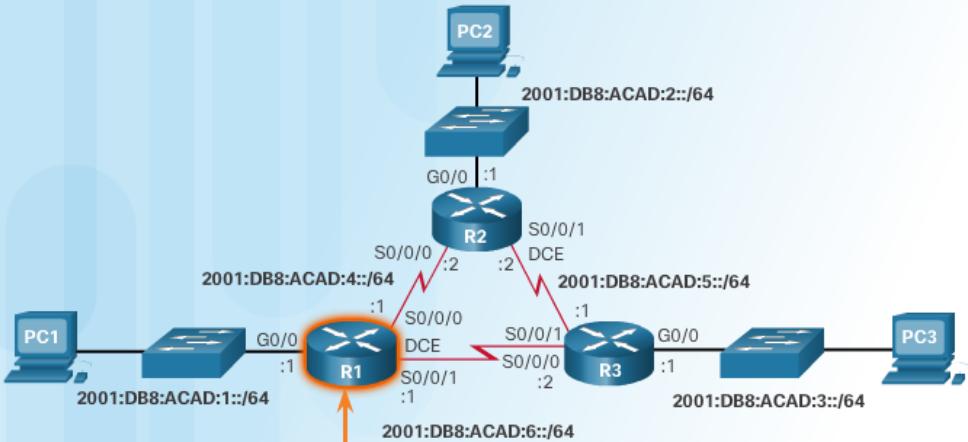

```
R1(config)# ipv6 route ::/0 2001:db8:acad:4::2
R1(config)# ipv6 route ::/0 2001:db8:acad:6::2 5
R1(config)#
```

```
R1# show run | include ipv6 route
ipv6 route ::/0 2001:DB8:ACAD:4::2
ipv6 route ::/0 2001:DB8:ACAD:6::2
R1#
```

Verify the IPv6 Floating Static Route is not in the Routing Table

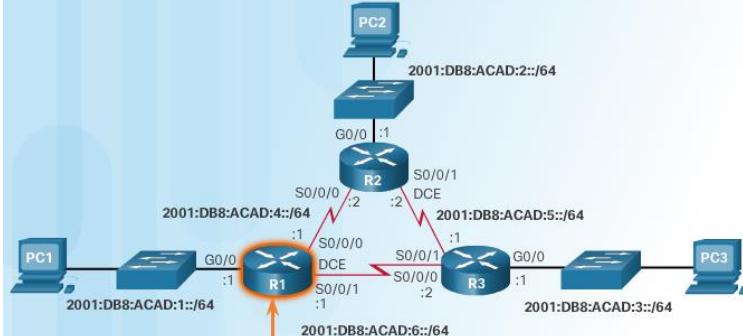

```
R1# show ipv6 route static | begin 8  :
S ::/0 [1/0]
via 2001:DB8:ACAD:4::2
R1#
```

Configure Floating Static Routes

Packet Tracer - Configuring Floating Static Routes




Cisco Networking Academy®

Mind Wide Open™

Packet Tracer - Configuring Floating Static Routes

Topology

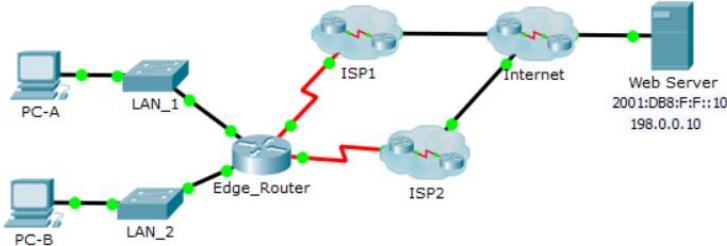

Objectives

- Part 1: Configure an IPv4 Floating Static Route
- Part 2: Test Failover to the IPv4 Floating Static Route
- Part 3: Configure and Test Failover for an IPv6 Floating Static Route

Background

In this activity, you will configure IPv4 and IPv6 floating static routes. These routes are manually configured with an administrative distance greater than that of the primary route and, therefore, would not be in the routing table until the primary route fails. You will test failover to the backup routes, and then restore connectivity to the primary route.

Part 1: Configure an IPv4 Floating Static Route



Step 1: Configure an IPv4 static default route

Configure Static Host Routes

Automatically Installed Host Routes

Host route is an IPv4 address with a 32-bit mask or IPv6 address with a 128-bit mask.

- Automatically installed when IP address is configured
- Configured as a static host route
- Allows more efficiency for packets directed to the router
- Local route marked with “L” (introduced in IOS 15)

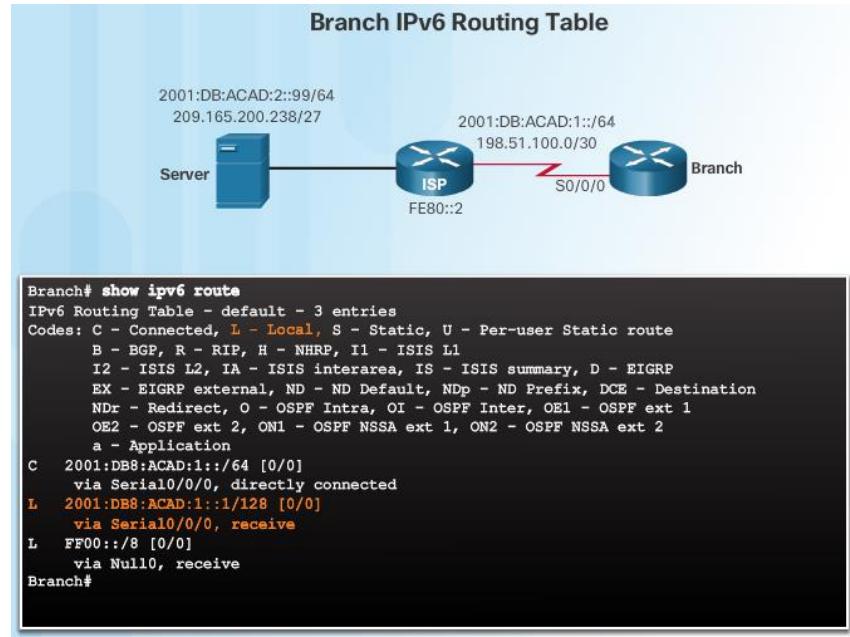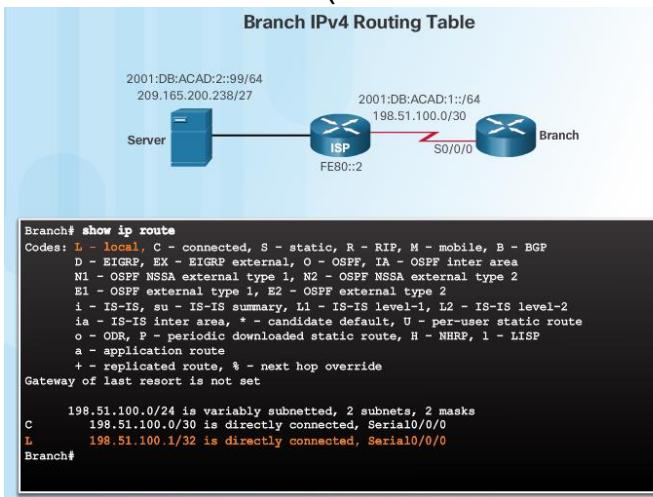

Configure Static Host Routes

Configure IPv4 and IPv6 Static Host Routes

IPv4 and IPv6 Host Route Configuration and Verification



```
Branch(config)# ip route 209.165.200.238 255.255.255.255 198.51.100.2
Branch(config)# ipv6 route 2001:db8:acad:2::99/128 2001:db8:acad:1::2
Branch(config)# end
Branch# show ip route | begin Gateway
Gateway of last resort is not set

    198.51.100.0/24 is variably subnetted, 2 subnets, 2 masks
C      198.51.100.0/30 is directly connected, Serial0/0/0
L      198.51.100.1/32 is directly connected, Serial0/0/0
        209.165.200.0/32 is subnetted, 1 subnets
S          209.165.200.238 [1/0] via 198.51.100.2
Branch# show ipv6 route

C  2001:DB8:ACAD:1::/64 [0/0]
    via Serial0/0/0, directly connected
L  2001:DB8:ACAD:1::1/128 [0/0]
    via Serial0/0/0, receive
S  2001:DB8:ACAD:2::99/128 [1/0]
    via 2001:DB8:ACAD:1::2
L  FF00::/8 [0/0]
    via Null0, receive
Branch#
```

Fully Specified IPv6 Host Route with the Next-Hop Link-Local Address



```
Branch(config)# no ipv6 route 2001:db8:acad:2::99/128 2001:db8:acad:1::2
Branch(config)# ipv6 route 2001:db8:acad:2::99/128 serial 0/0/0 fe80::2
Branch(config)# end
Branch# show ipv6 route


S  ::/0 [1/0]
    via 2001:DB8:ACAD:1::2
C  2001:DB8:ACAD:1::/64 [0/0]
    via Serial0/0/0, directly connected
L  2001:DB8:ACAD:1::1/128 [0/0]
    via Serial0/0/0, receive
S  2001:DB8:ACAD:2::99/128 [1/0]
    via FE80::2, Serial0/0/0
L  FF00::/8 [0/0]
    via Null0, receive
Branch#
```

2.3 Troubleshoot Static and Default Routes

Packet Processing with Static Routes


Static Routes and Packet Forwarding

PC1 sending packet to PC3 -
Packet arrives on G0/0

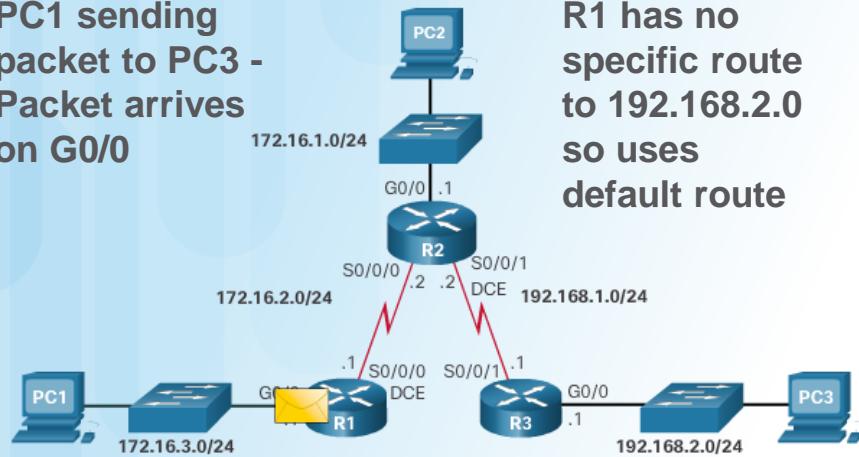

R1 has no specific route to 192.168.2.0 so uses default route


R1 encapsulates packet in new frame

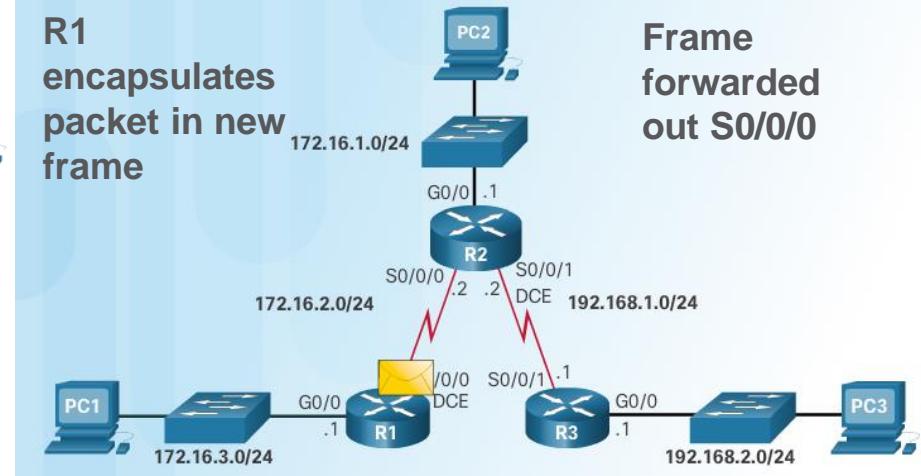

Frame forwarded out S0/0/0


Static Routes and Packet Forwarding (Cont.)

Packet arrives on S0/0/0 interface on R2

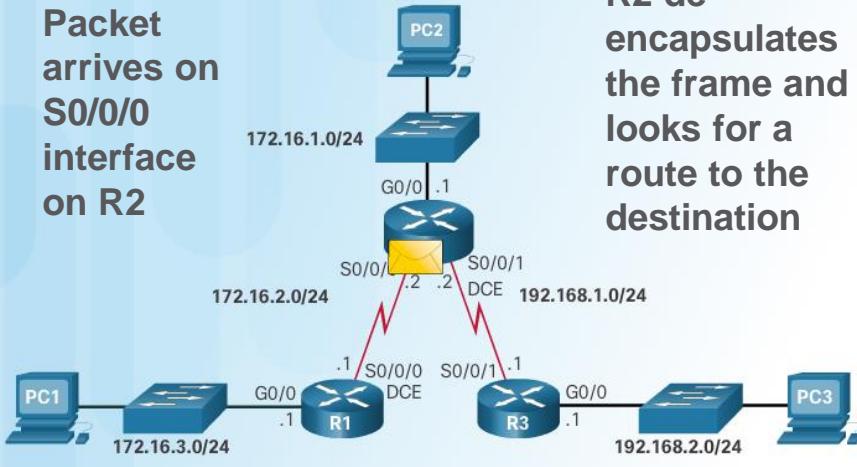

R2 de-encapsulates the frame and looks for a route to the destination


R2 has a static route to 192.168.2.0/24 out the Serial 0/0/1 interface

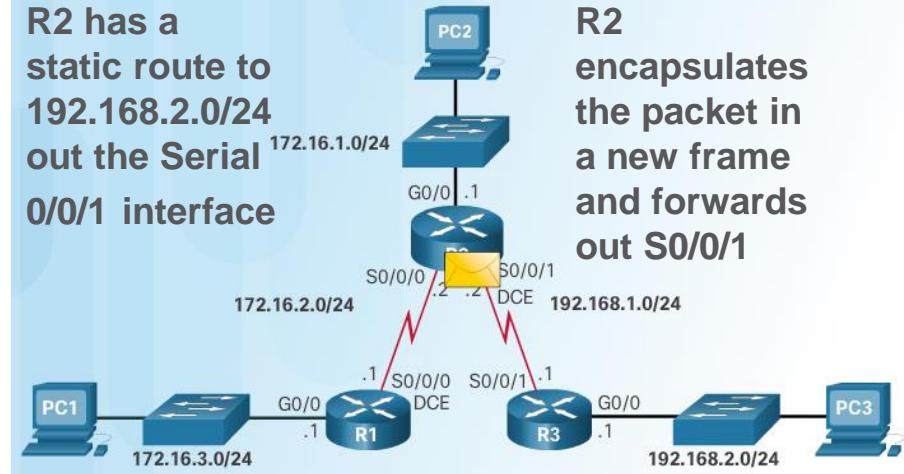

R2 encapsulates the packet in a new frame and forwards out S0/0/1

Static Routes and Packet Forwarding (Cont.)

R3 de-encapsulates the frame and sees a connected route to 192.168.2.0/24 out G0/0

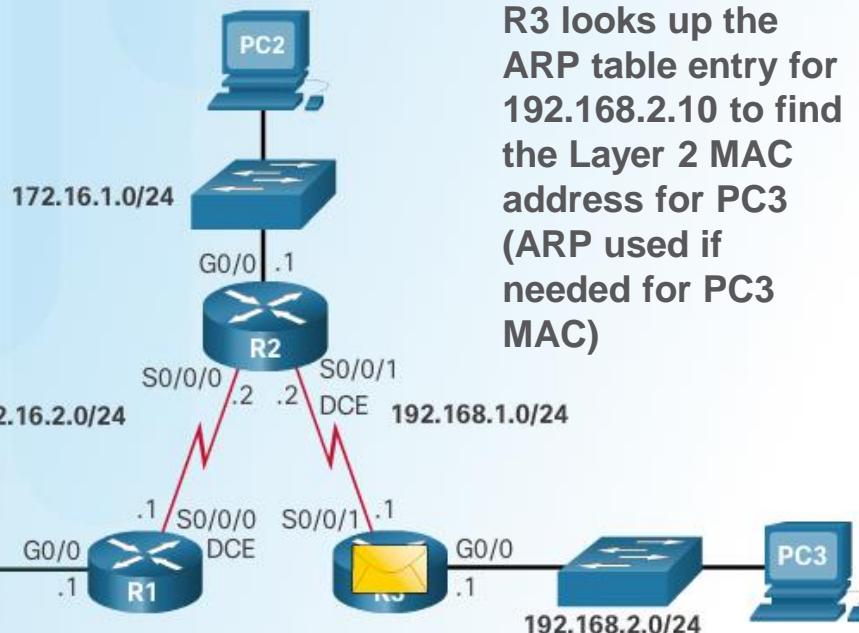


R3 looks up the ARP table entry for 192.168.2.10 to find the Layer 2 MAC address for PC3 (ARP used if needed for PC3 MAC)

- R3 encapsulates the packet in a new frame with the MAC address of the G0/0 interface as the source Layer 2 address and the MAC address of PC3 as the destination MAC address
- Frame is forwarded out of G0/0 interface and packet arrives on the NIC interface of PC3


Troubleshoot a Missing Route

- Common IOS troubleshooting commands include:
 - **ping**
 - **traceroute**
 - **show ip route**
 - **show ip interface brief**
 - **show cdp neighbors detail**

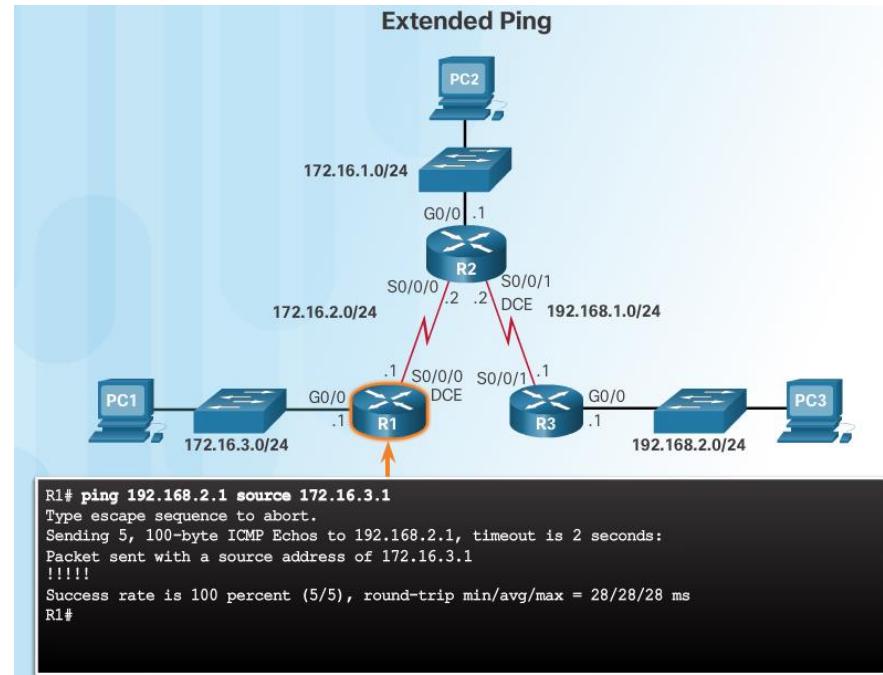

Troubleshoot IPv4 Static and Default Route Configuration

Troubleshoot a Missing Route (Cont.)

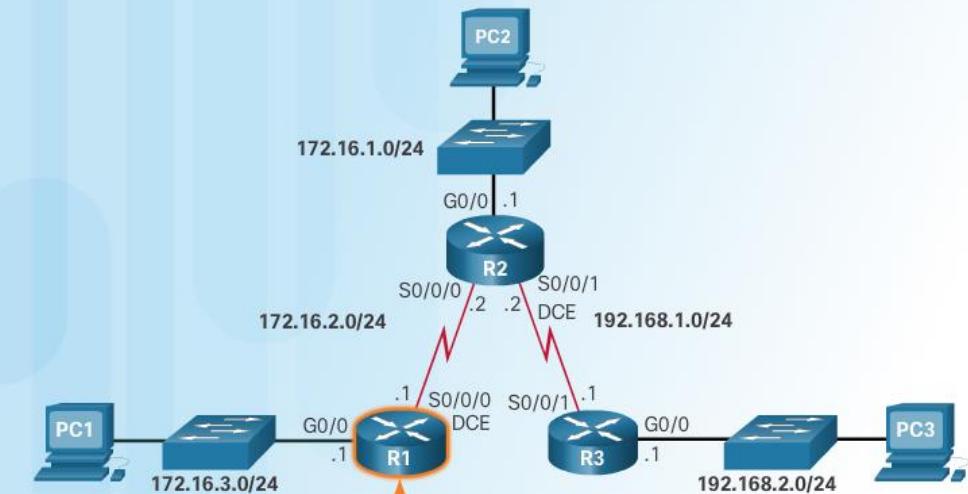

```
R1# show ip interface brief
Interface          IP-Address      OK? Method Status          Protocol
Embedded-Service-Engine0/0 unassigned    YES unset administratively down down
GigabitEthernet0/0   172.16.3.1     YES manual up           up
GigabitEthernet0/1   unassigned    YES unset administratively down down
Serial0/0/0          172.16.2.1     YES manual up           up
Serial0/0/1          unassigned    YES unset administratively down down
R1#
```

```
R1# traceroute 192.168.2.1
Type escape sequence to abort.
Tracing the route to 192.168.2.1
VRF info: (vrf in name/id, vrf out name/id)
  1  172.16.2.2 4 msec 4 msec 8 msec
  2  192.168.1.1 12 msec 12 msec *
R1#
```

```
R1# show ip route | begin Gateway
Gateway of last resort is not set

  172.16.0.0/16 is variably subnetted, 5 subnets, 2 masks
S    172.16.1.0/24 [1/0] via 172.16.2.2
C    172.16.2.0/24 is directly connected, Serial0/0/0
L    172.16.2.1/32 is directly connected, Serial0/0/0
C    172.16.3.0/24 is directly connected, GigabitEthernet0/0
L    172.16.3.1/32 is directly connected, GigabitEthernet0/0
L    172.16.3.1/32 is directly connected, GigabitEthernet0/0
S    192.168.1.0/24 [1/0] via 172.16.2.2
S    192.168.2.0/24 [1/0] via 172.16.2.2
R1#
```


```
R1# show cdp neighbors
Capability Codes: R - Router, T - Trans Bridge,
                  B - Source Route Bridge, S - Switch, H - Host,
                  I - IGMP, r - Repeater, P - Phone, D - Remote,
                  C - CVTA, M - Two-port Mac Relay

Device ID Local Intrfce Holdtime Capability Platform  Port ID
netlab-cs5 Gig 0/0      156      S I       WS-C2960-  Fas 0/1
R2         Ser 0/0/0    153      R S I     CISCO1941  Ser 0/0/0
R1#
```

Troubleshoot IPv4 Static and Default Route Configuration

Solve a Connectivity Problem

Verify Connectivity to the R3 LAN

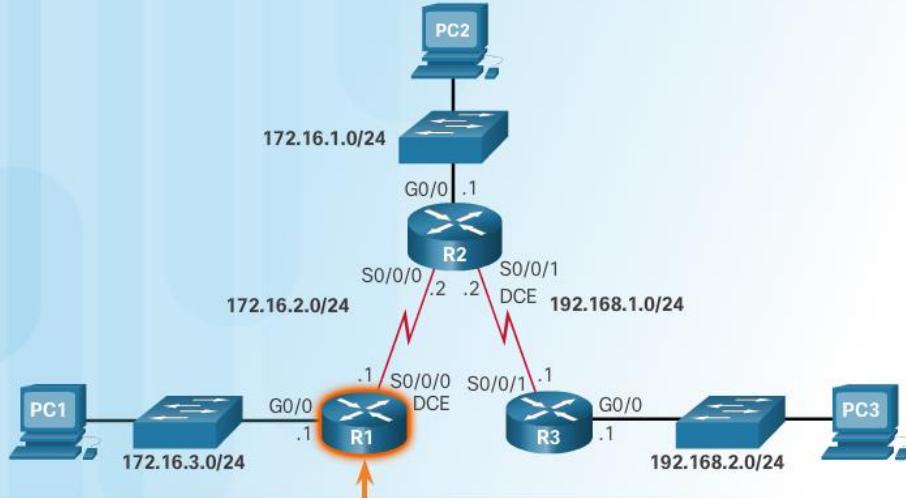


```
R1# traceroute 192.168.2.1
Type escape sequence to abort.
Tracing the route to 192.168.2.1
VRF info: (vrf in name/id, vrf out name/id)
  1 172.16.2.2 4 msec 4 msec 8 msec
  2 172.16.2.1 12 msec 12 msec 12 msec
  3 172.16.2.2 12 msec 8 msec 8 msec
  4 172.16.2.1 20 msec 16 msec 20 msec
  5 172.16.2.2 16 msec 16 msec 16 msec
  6 172.16.2.1 20 msec 20 msec 24 msec
  7 172.16.2.2 20 msec
```

A traceroute reveals that R2 forwards the traceroute back to R1. R1 returns it to R2

```
R1# ping 192.168.2.1 source g0/0
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.1, timeout is 2 seconds:
Packet sent with a source address of 172.16.3.1
.....
Success rate is 0 percent (0/5)
R1#
```

Troubleshoot IPv4 Static and Default Route Configuration

Solve a Connectivity Problem (Cont.)

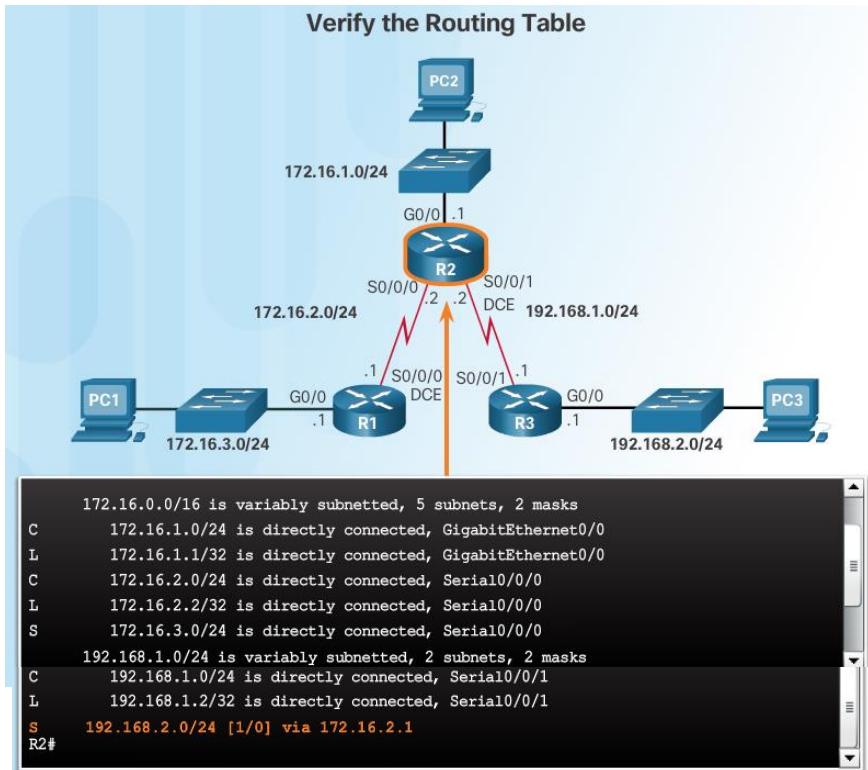

Static route to 192.168.2.0/24 has been configured using the next-hop address 172.16.2.1.

```
R2# show running-config | section ip route
ip route 172.16.3.0 255.255.255.0 172.16.2.1
ip route 192.168.2.0 255.255.255.0 172.16.2.1
R2#
R2# conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)# no ip route 192.168.2.0 255.255.255.0 172.16.2.1
R2(config)# ip route 192.168.2.0 255.255.255.0 192.168.1.1
R2(config)#
```

Incorrect route is removed and the correct route is then entered

```
R1# ping 192.168.2.1 source g0/0
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.2.1, timeout is 2 seconds:
Packet sent with a source address of 172.16.3.1
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 28/28/28 ms
R1#
```

Troubleshoot IPv4 Static and Default Route Configuration

Packet Tracer – Troubleshooting Static Routes

Cisco Networking Academy® Mind Wide Open™

Packet Tracer - Troubleshooting Static Routes

Topology

Addressing Table

	Device	Interface	IPv4 Address	Subnet Mask	Default Gateway
R1	G0/0	172.31.1.1	255.255.255.128	N/A	
	S0/0/0	172.31.1.194	255.255.255.252	N/A	
R2	G0/0	172.31.0.1	255.255.255.0	N/A	
	S0/0/0	172.31.1.193	255.255.255.252	N/A	
R3	S0/0/1	172.31.1.197	255.255.255.252	N/A	
	G0/0	172.31.1.129	255.255.255.192	N/A	
PC1	S0/0/1	172.31.1.198	255.255.255.252	N/A	
	NIC	172.31.1.126	255.255.255.128	172.31.1.1	


P.PORTO

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

68

Troubleshoot IPv4 Static and Default Route Configuration

Lab – Troubleshooting Static Routes

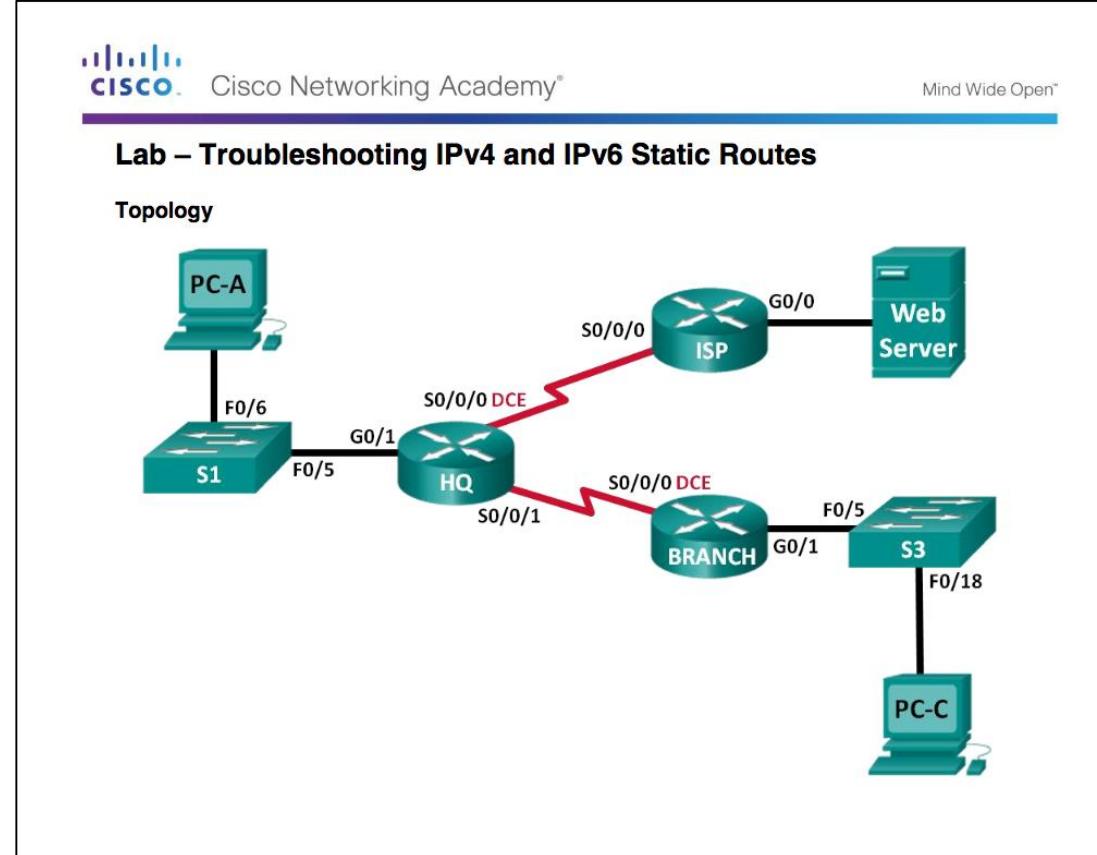

2.4 Chapter Summary

Chapter 2: Static Routing

- Explain how static routes are implemented in a small to medium-sized business network.
- Configure static routes to enable connectivity in a small to medium-sized business network.
- Troubleshoot static and default route configurations.



P.PORTO