Chapter 5: CPU Scheduling

Chapter 5: CPU Scheduling

- Basic Concepts
- Scheduling Criteria
- Scheduling Algorithms
- Thread Scheduling
- Multiple-Processor Scheduling
- Operating Systems Examples
- Algorithm Evaluation

Objectives

- To introduce CPU scheduling, which is the basis for multiprogrammed operating systems
- To describe various CPU-scheduling algorithms
- To discuss evaluation criteria for selecting a CPU-scheduling algorithm for a particular system

Basic Concepts

- Better resource utilization obtained with multiprogramming
- CPU–I/O Burst Cycle – Process execution consists of a *cycle* of CPU execution and I/O wait
- **CPU burst** distribution

Alternating Sequence of CPU and I/O Bursts

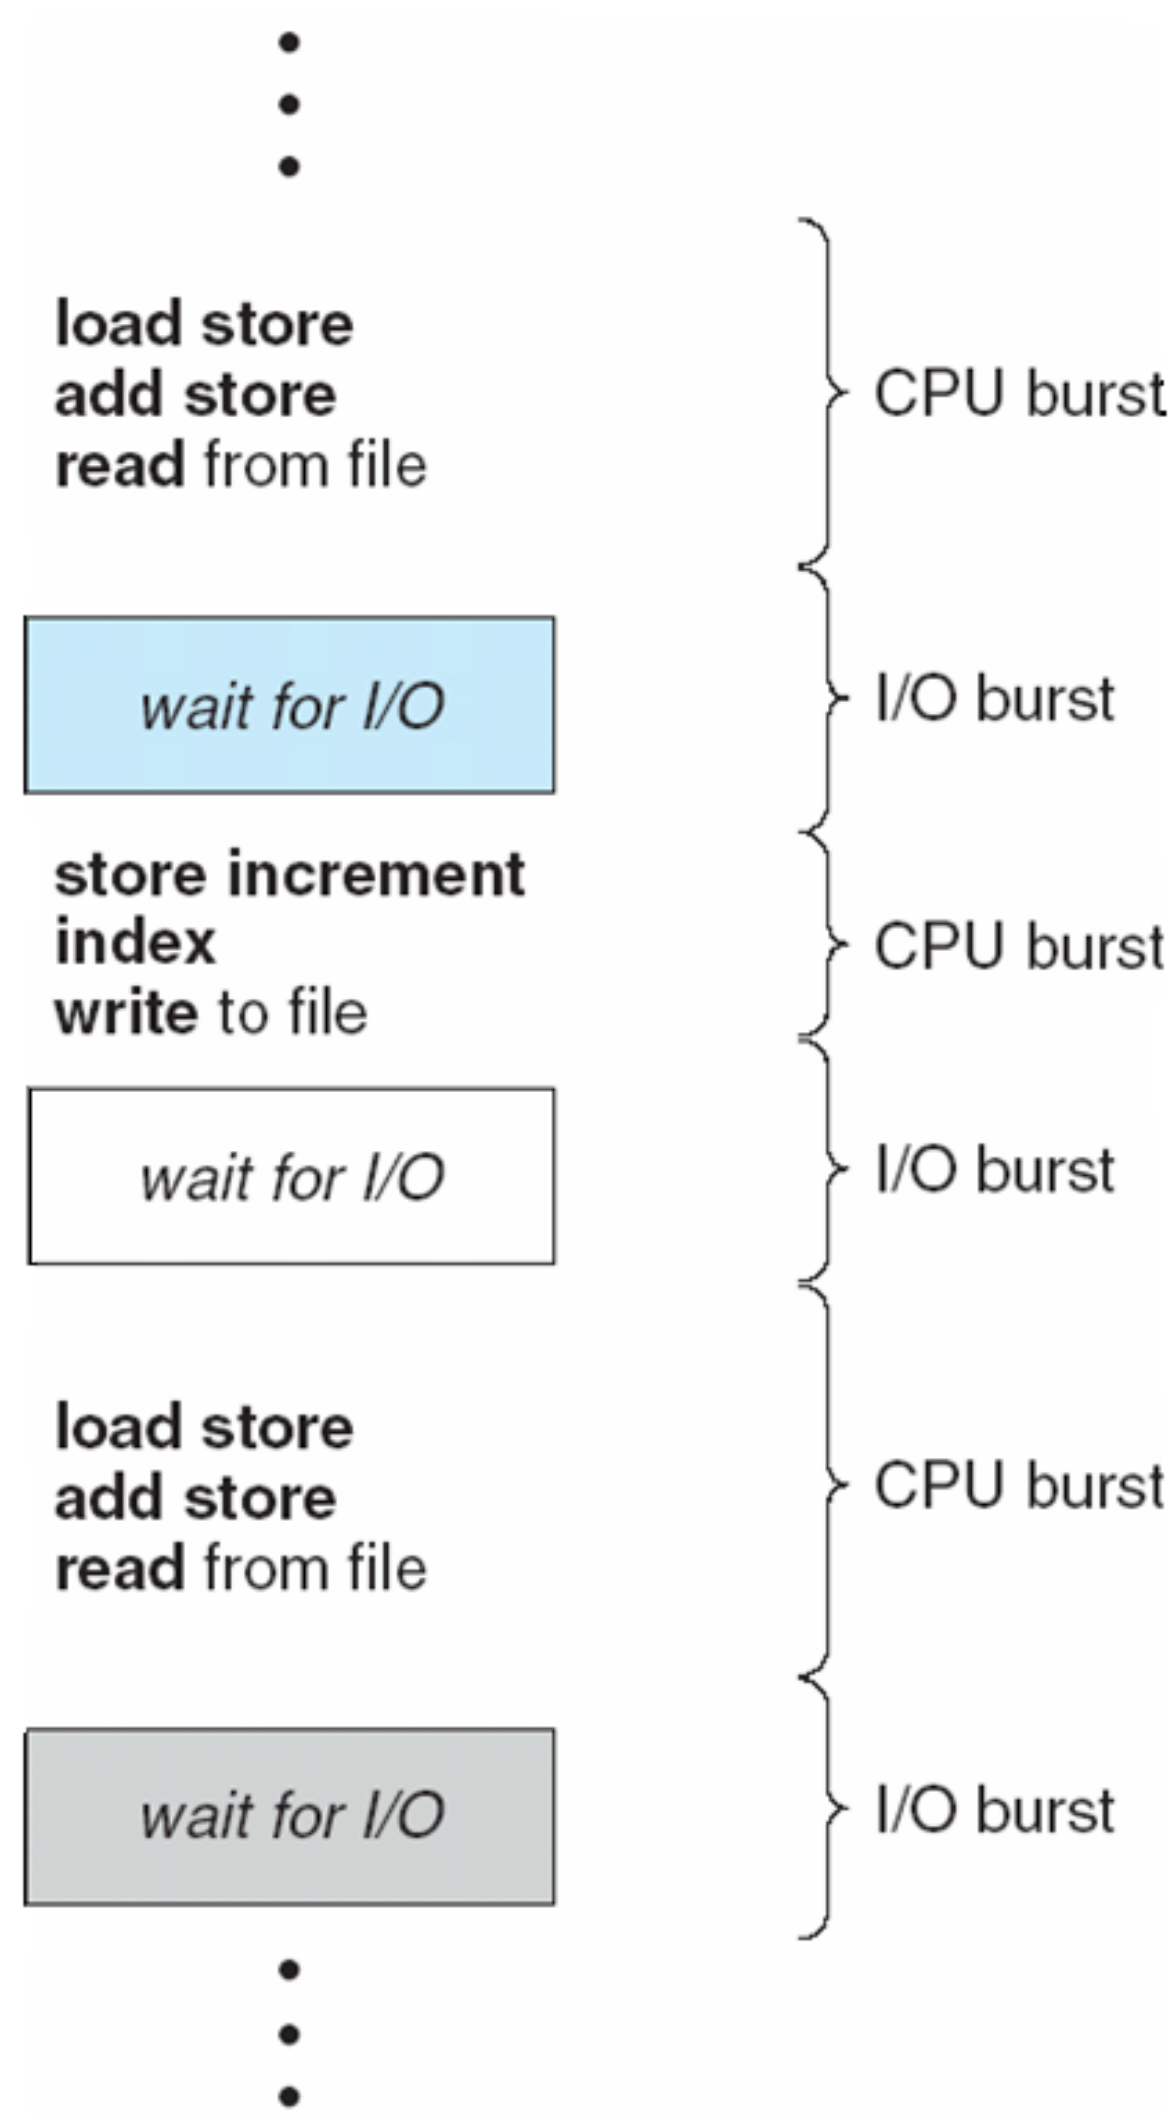

Histogram of CPU-burst Times

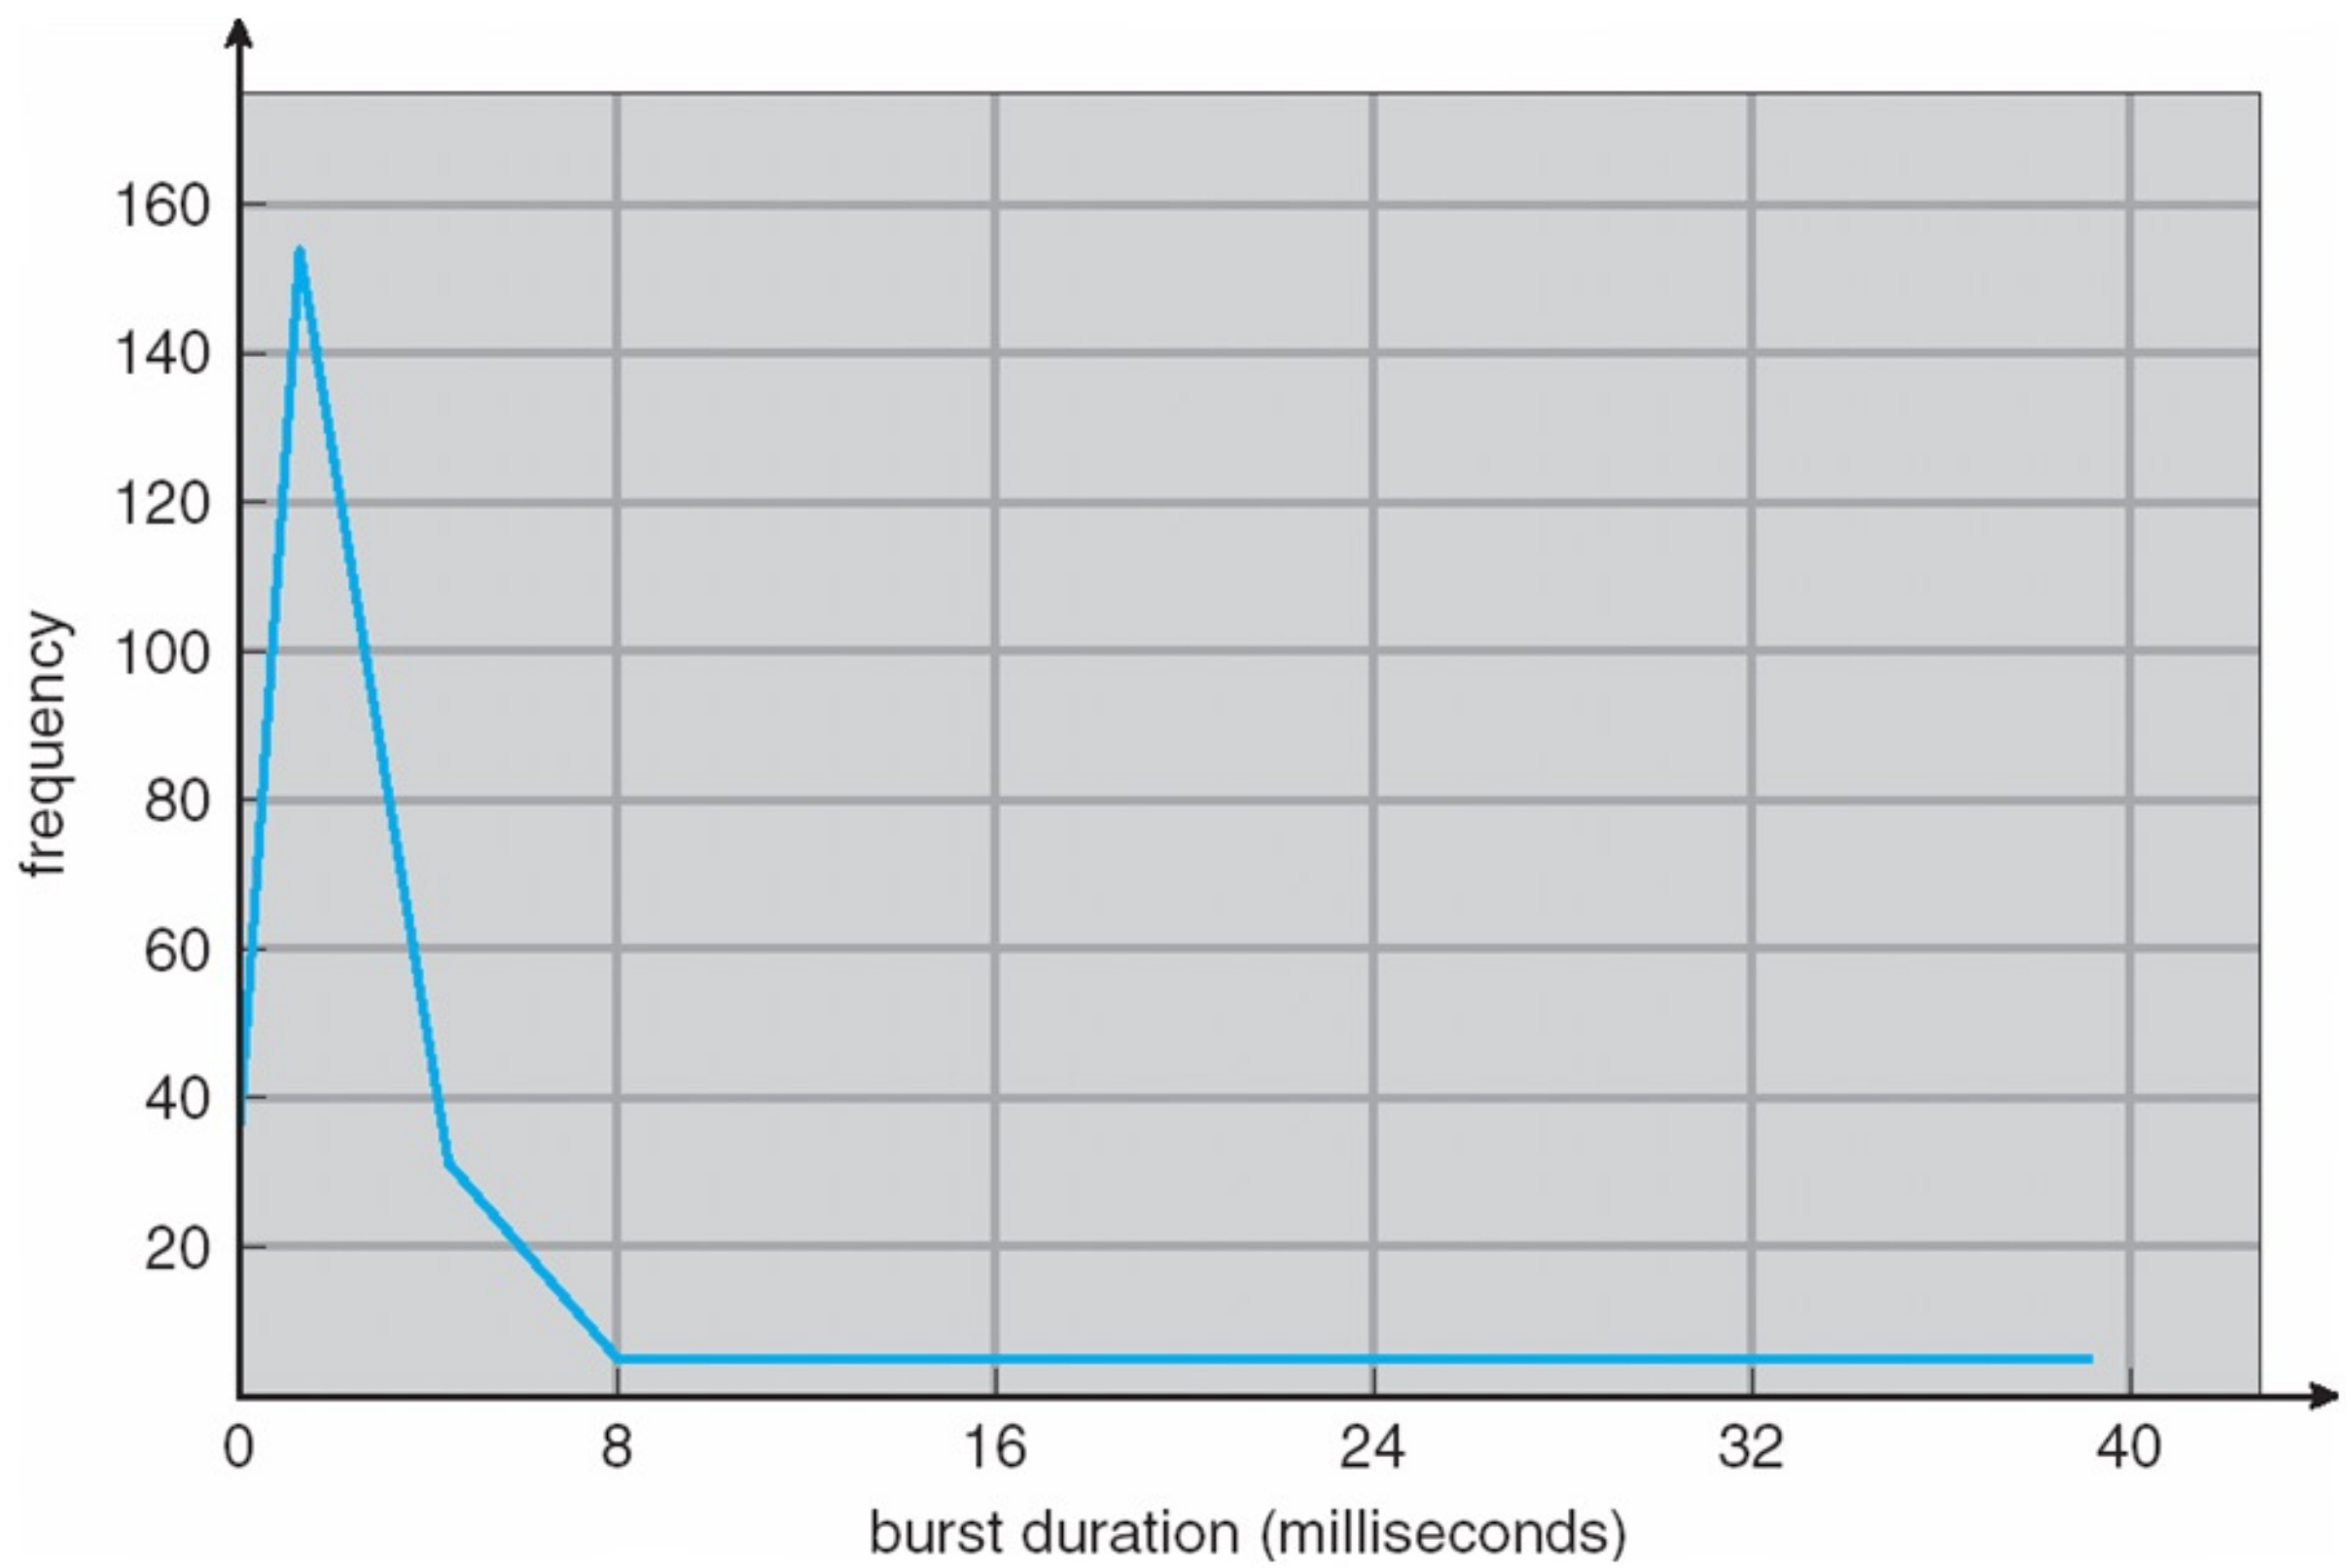

CPU Scheduler

- Selects from among the processes in memory that are ready to execute, and allocates the CPU to one of them
- CPU scheduling decisions may take place when a process:
  1. Switches from running to waiting state
  2. Switches from running to ready state
  3. Switches from waiting to ready
  4. Terminates
- Scheduling under 1 and 4 is **nonpreemptive**
- All other scheduling is **preemptive**

Dispatcher

- Dispatcher module gives control of the CPU to the process selected by the short-term scheduler; this involves:
  - switching context
  - switching to user mode
  - jumping to the proper location in the user program to restart that program

- **Dispatch latency** – time it takes for the dispatcher to stop one process and start another running

Scheduling Criteria

- **CPU utilization** – keep the CPU as busy as possible
- **Throughput** – # of processes that complete their execution per time unit
- **Turnaround time** – amount of time to execute a particular process
- **Waiting time** – amount of time a process has been waiting in the ready queue

Scheduling Algorithm Optimization Criteria

- Max CPU utilization
- Max throughput
- Min turnaround time
- Min waiting time
- Min response time

First-Come, First-Served (FCFS) Scheduling

Process	Burst Time
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in the order: P_1 , P_2 , P_3
  The Gantt Chart for the schedule is:

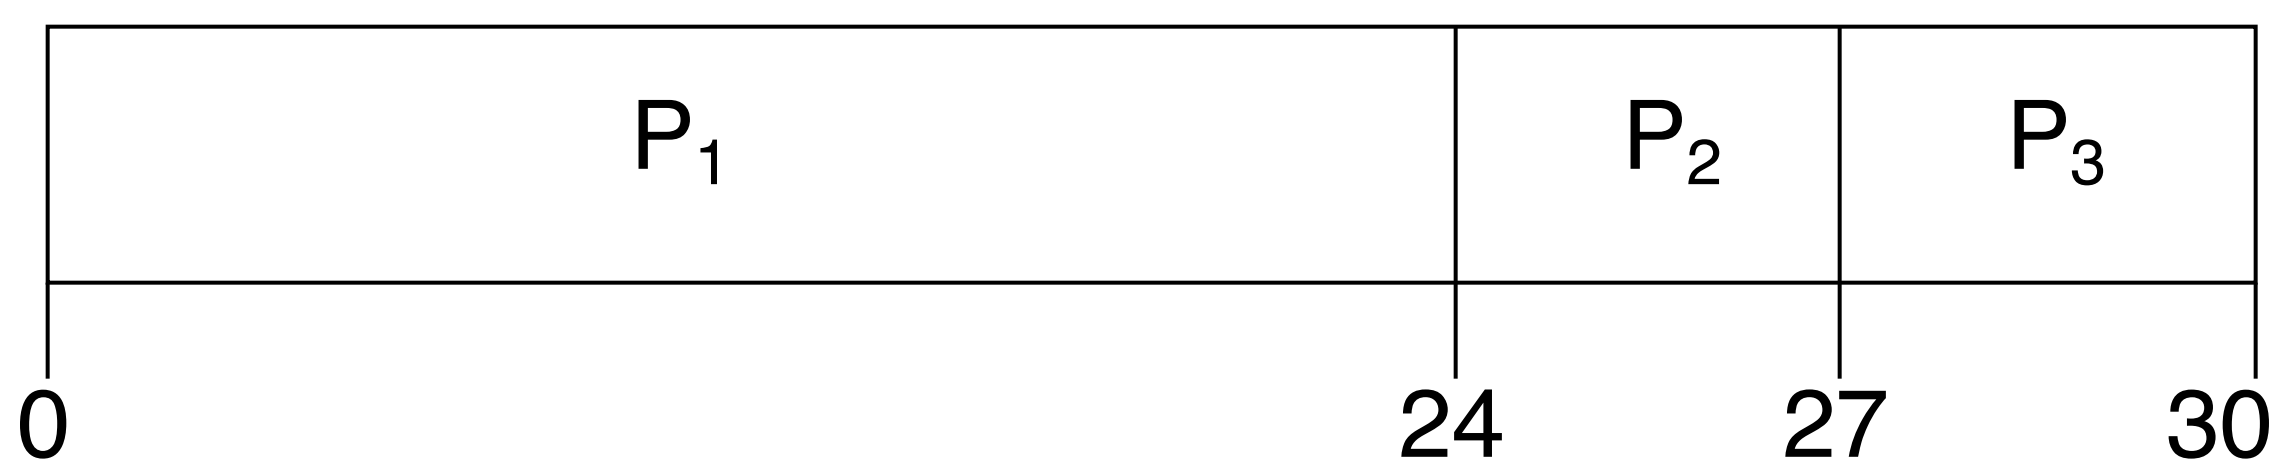

- Waiting time for $P_1 = 0$; $P_2 = 24$; $P_3 = 27$
- Average waiting time: $(0 + 24 + 27)/3 = 17$

FCFS Scheduling (Cont.)

Suppose that the processes arrive in the order:

$$P_2 , P_3 , P_1$$

- The Gantt chart for the schedule is:

- Waiting time for $P_1 = 6; P_2 = 0; P_3 = 3$
- Average waiting time: (6 + 0 + 3)/3 = 3
- Much better than previous case
- *Convoy effect* short process behind long process

Shortest-Job-First (SJF) Scheduling

- Associate with each process the length of its next CPU burst. Use these lengths to schedule the process with the shortest time.

- SJF is optimal – gives minimum average waiting time for a given set of processes
  - The difficulty is knowing the length of the next CPU request.

Example of SJF

Process	Burst Time
P_1	6
P_2	8
P_3	7
P_4	3

- SJF scheduling chart

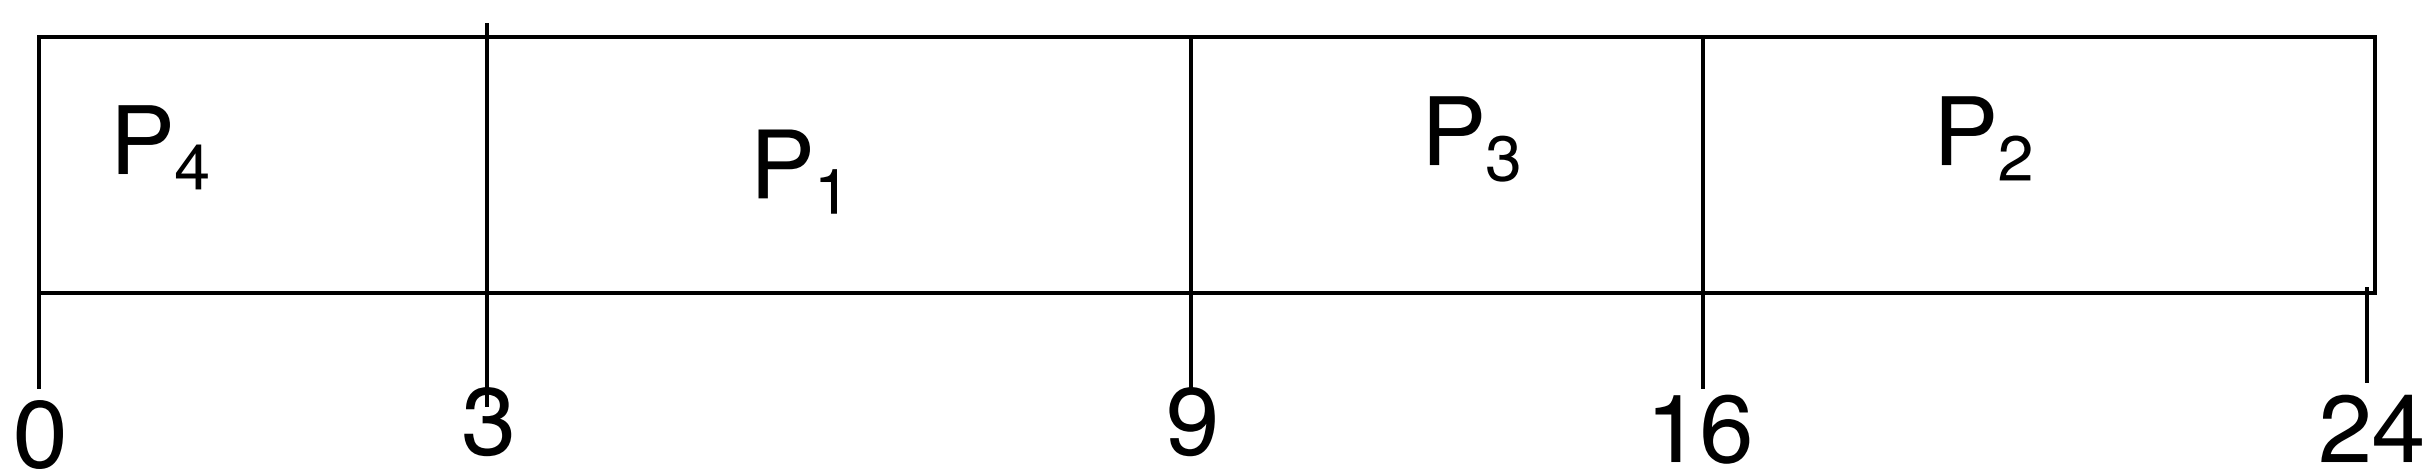

- Average waiting time = (3 + 16 + 9 + 0) / 4 = 7

Determining Length of Next CPU Burst

- Can only estimate the length
- Can be done by using the length of previous CPU bursts, using exponential averaging

1. $t_n =$ actual length of n^{th} CPU burst
2. $\tau_{n+1} =$ predicted value for the next CPU burst
3. $\alpha, 0 \leq \alpha \leq 1$
4. Define : $\tau_{n=1} = \alpha\, t_n + (1-\alpha)\tau_n.$

Prediction of the Length of the Next CPU Burst

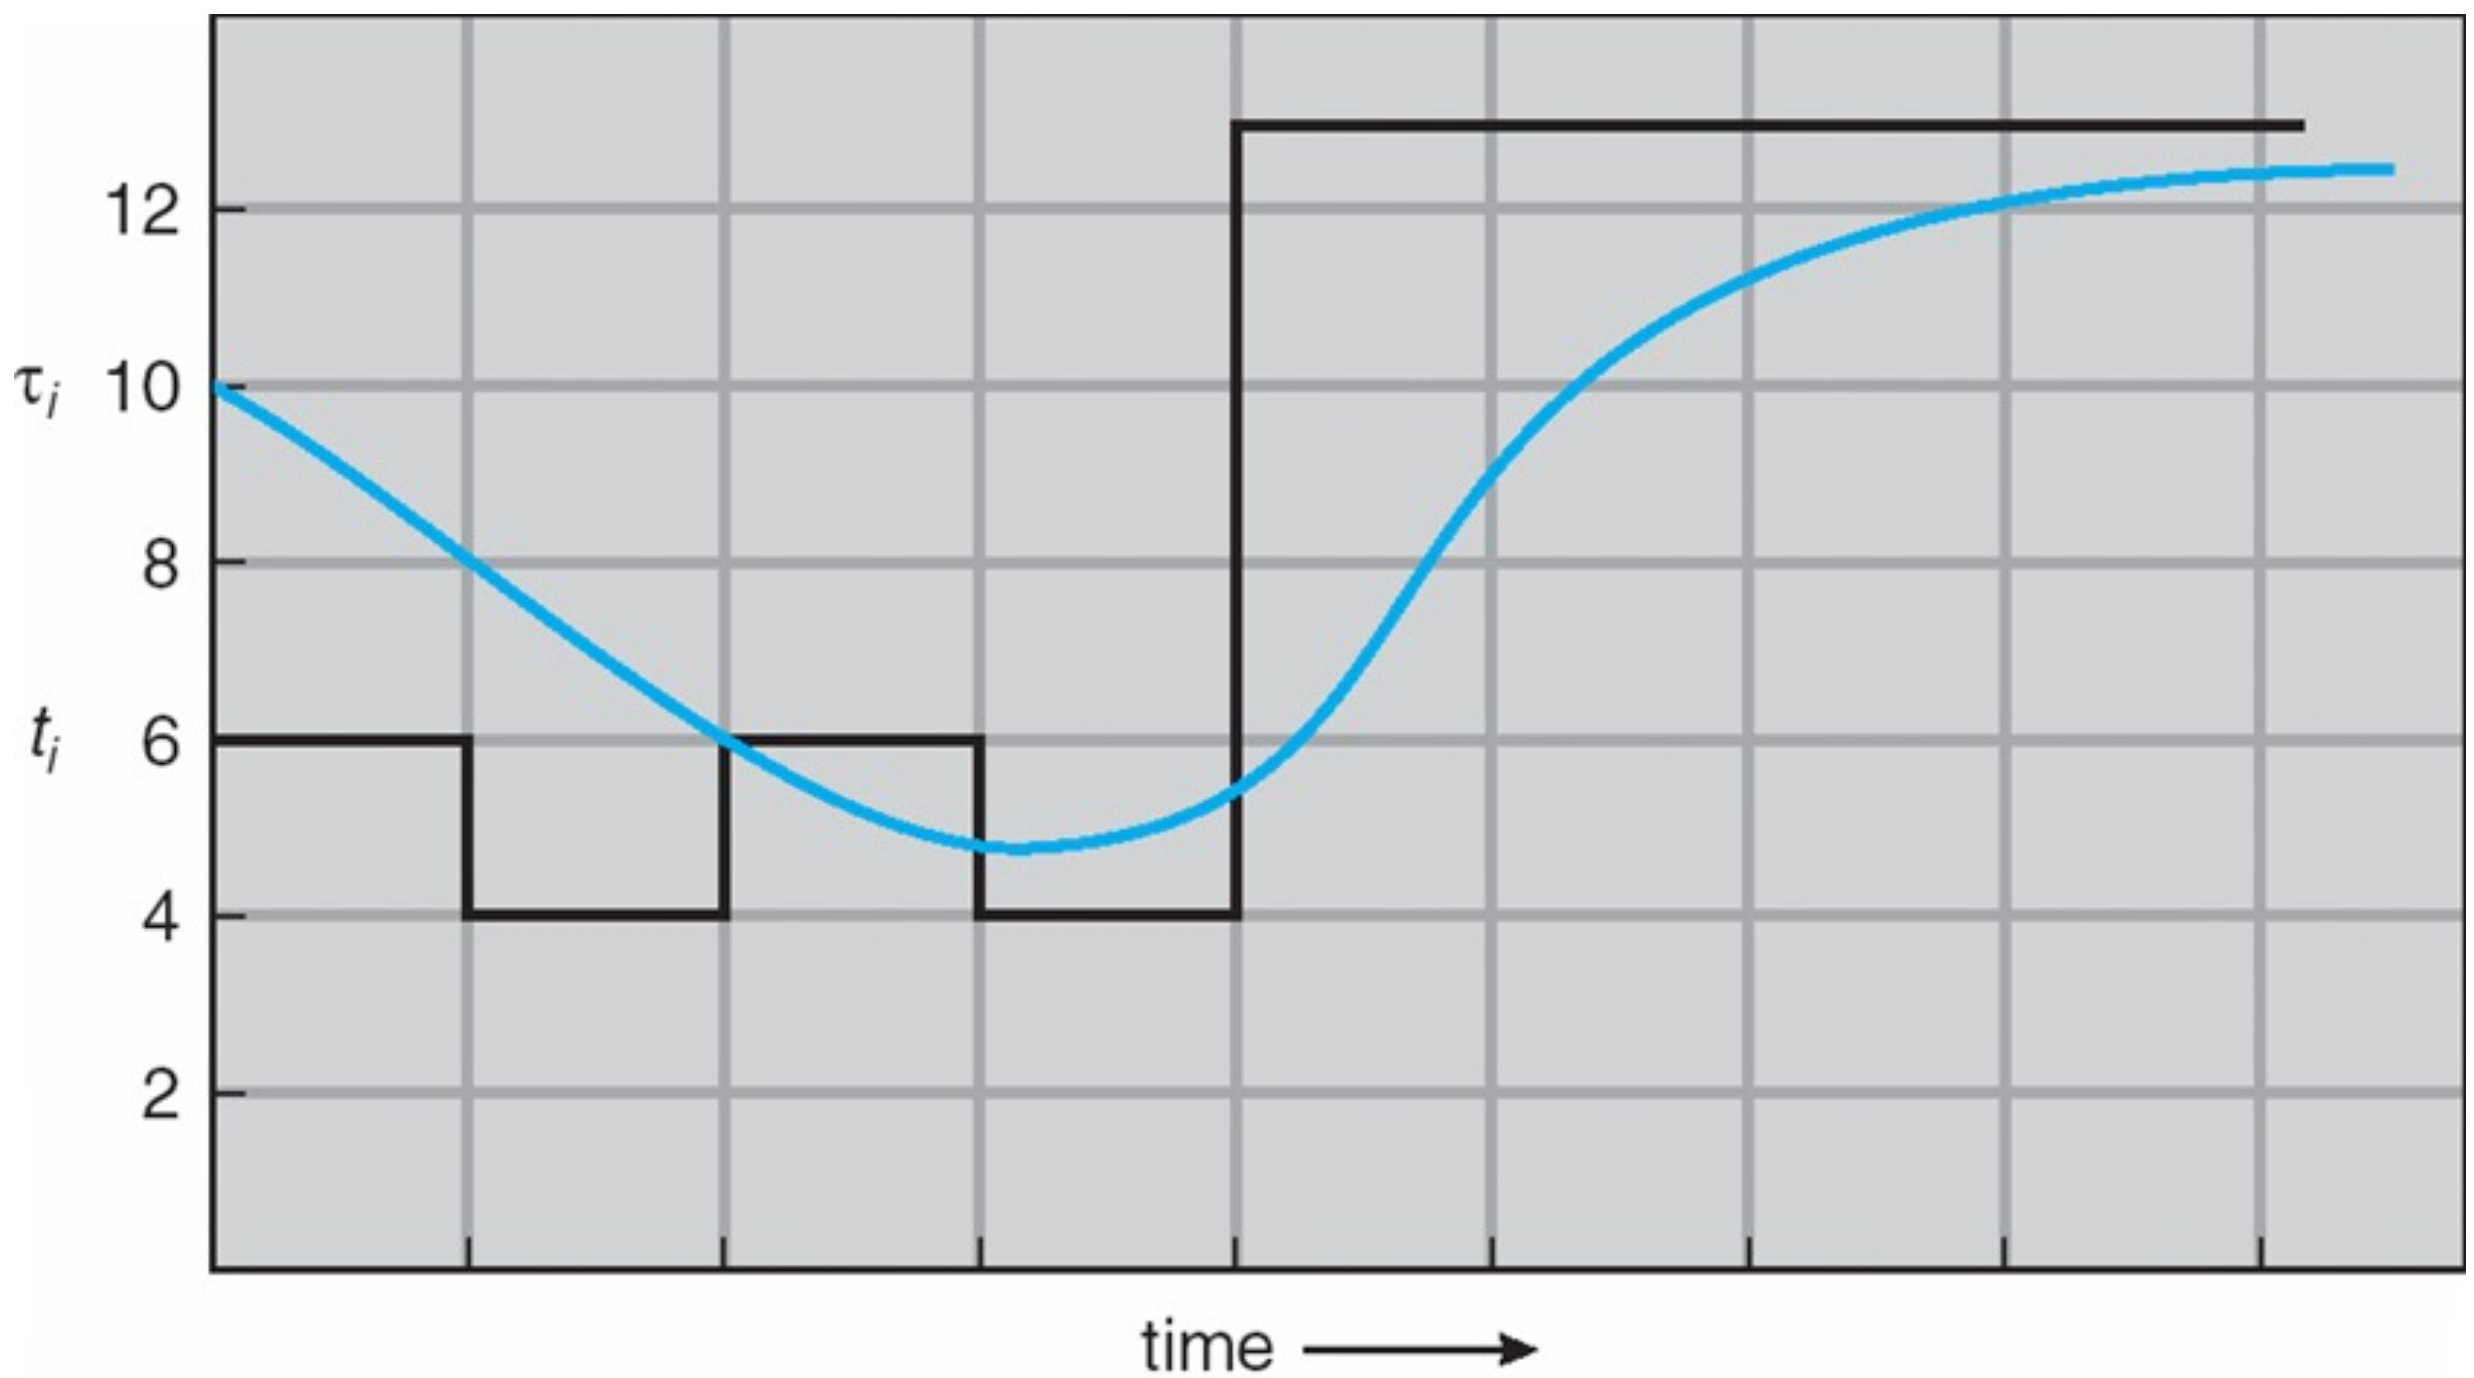

CPU burst (t_i)		6	4	6	4	13	13	13	…
"guess" (τ_i)	10	8	6	6	5	9	11	12	…

Examples of Exponential Averaging

- $\alpha = 0$
  - $\tau_{n+1} = \tau_n$
  - Recent history does not count.
- $\alpha = 1$
  - $\tau_{n+1} = \alpha\ t_n$
  - Only the actual last CPU burst counts.
- If we expand the formula, we get:

$$\tau_{n+1} = \alpha\ t_n + (1 - \alpha)\alpha\ t_n - 1 + \ldots$$
$$+ (1 - \alpha)^j \alpha\ t_{n-j} + \ldots$$
$$+ (1 - \alpha)^{n+1} \tau_0$$

- Since both α and $(1 - \alpha)$ are less than or equal to 1, each successive term has less weight than its predecessor.

Priority Scheduling

- A priority number (integer) is associated with each process
- The CPU is allocated to the process with the highest priority (smallest integer ≡ highest priority)
  - Preemptive
  - Nonpreemptive
- SJF is a priority scheduling where priority is the predicted next CPU burst time
- Problem ≡ **Starvation** – low priority processes may never execute
- Solution ≡ **Aging** – as time progresses increase the priority of the process

Round Robin (RR)

- Each process gets a small unit of CPU time (*time quantum*), usually 10-100 milliseconds. After this time has elapsed, the process is preempted and added to the end of the ready queue.
- If there are n processes in the ready queue and the time quantum is q, then each process gets $1/n$ of the CPU time in chunks of at most q time units at once. No process waits more than $(n-1)q$ time units.
- Performance
  - q large $\Rightarrow$ FIFO
  - q small $\Rightarrow$ q must be large with respect to context switch, otherwise overhead is too high

Example of RR with Time Quantum = 4

Process	Burst Time
P_1	24
P_2	3
P_3	3

- The Gantt chart is:

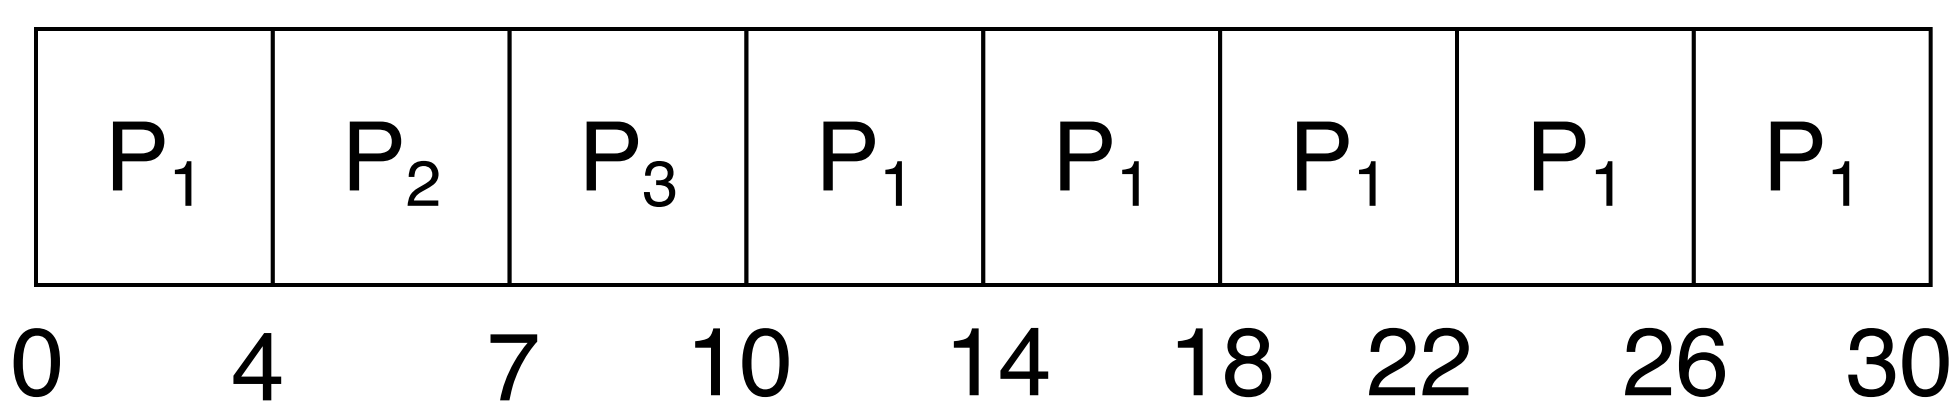

- Typically, higher average turnaround than SJF, but better *response*

Time Quantum and Context Switch Time

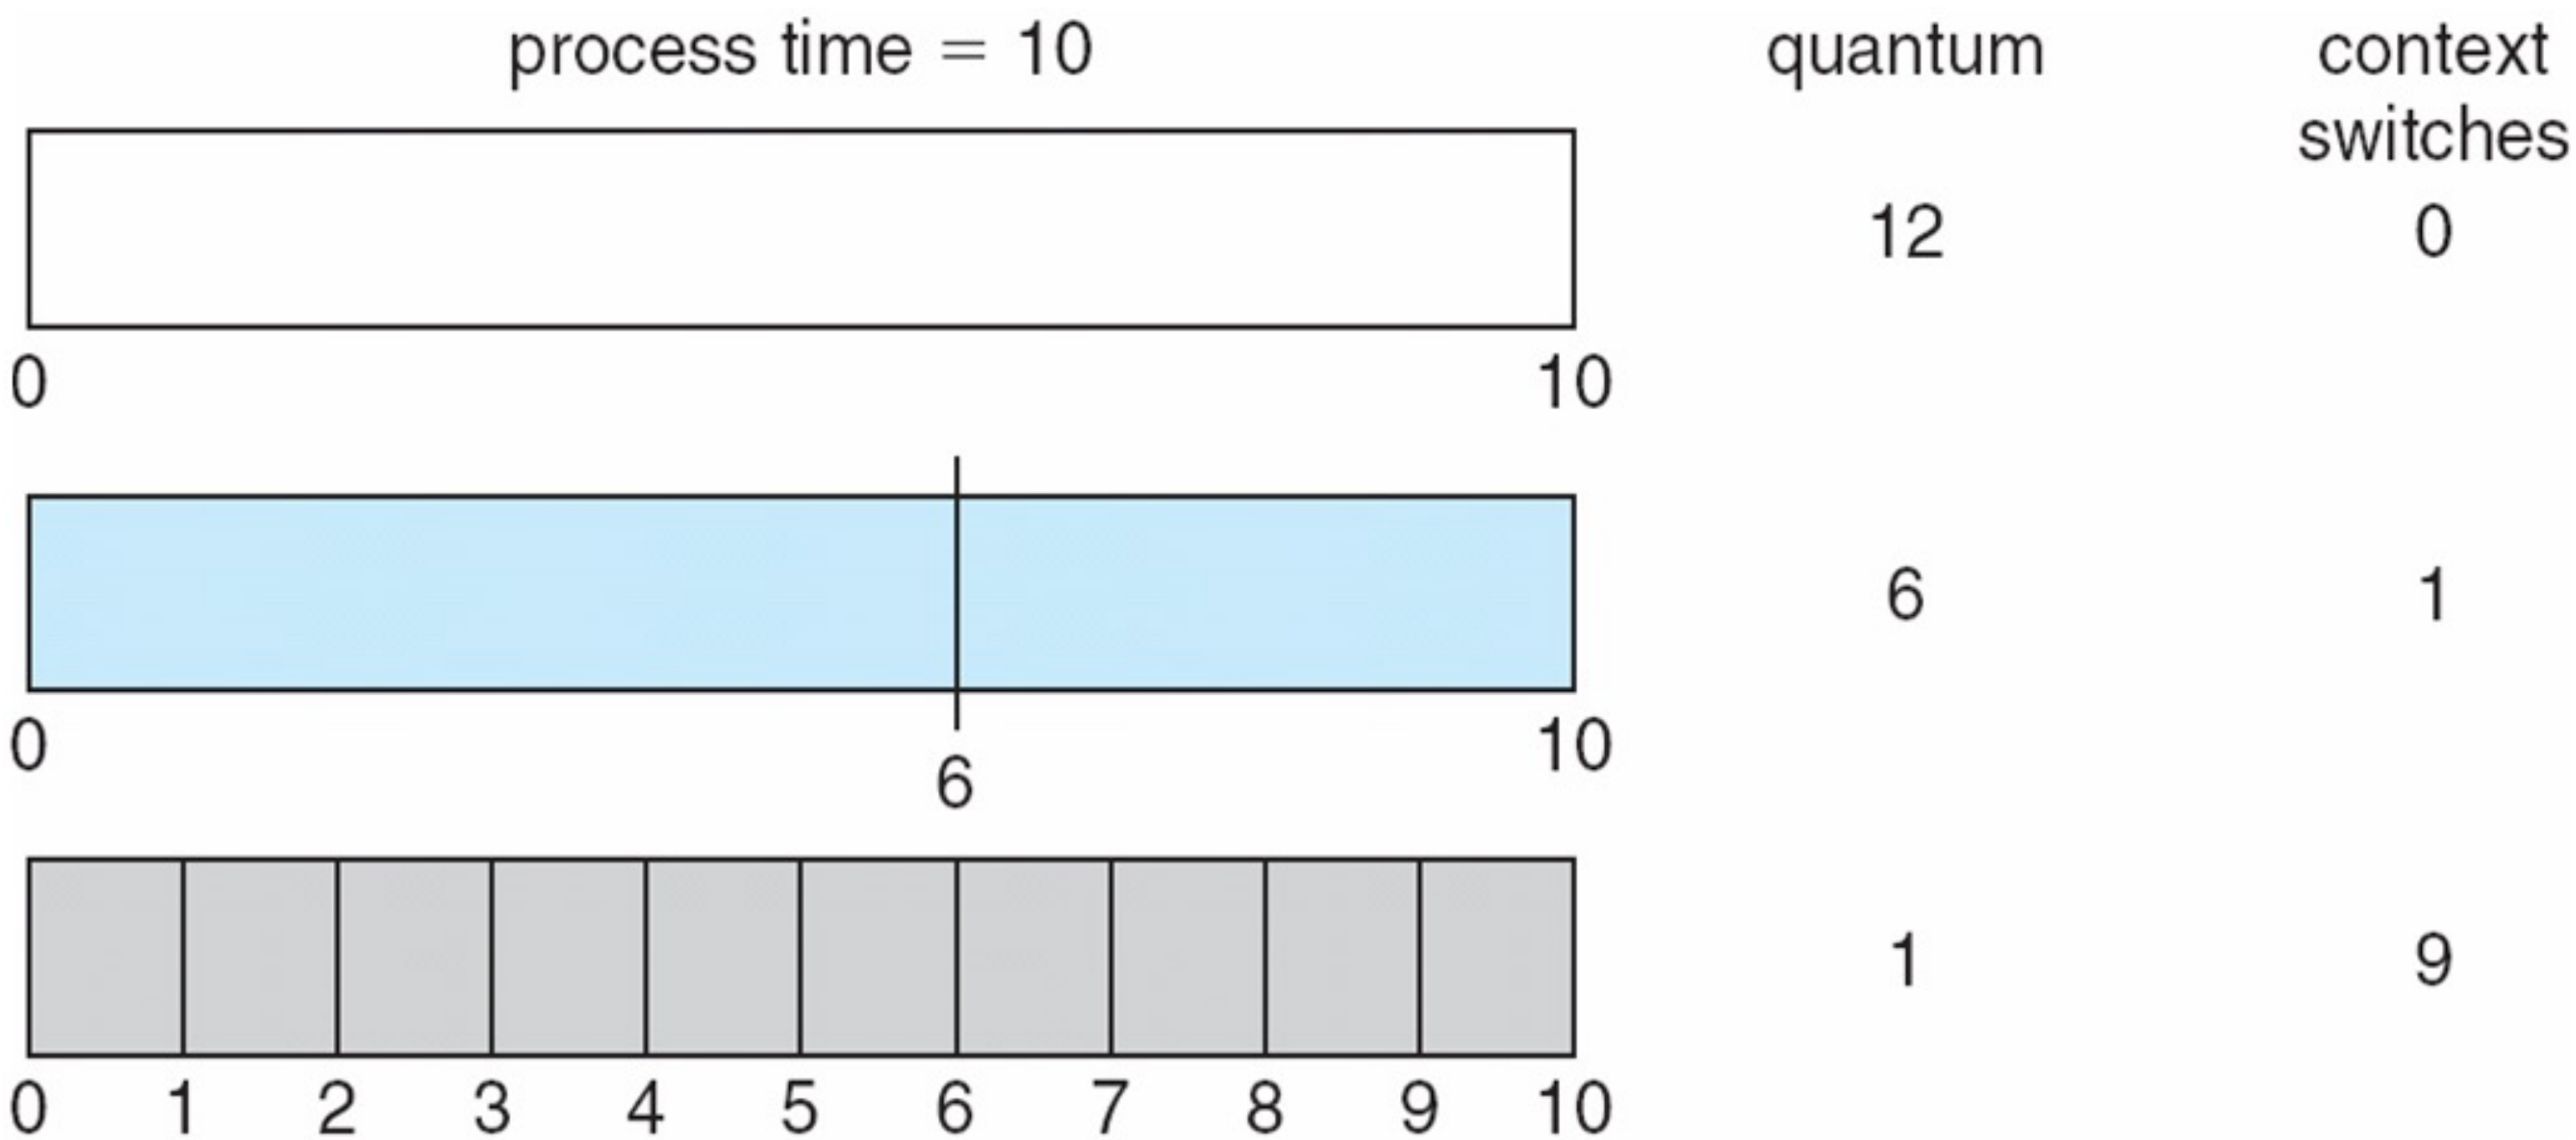

Multilevel Queue

- Ready queue is partitioned into separate queues:
  - foreground (interactive)
  - background (batch)
- Each queue has its own scheduling algorithm:
  - foreground – RR
  - background – FCFS
- Scheduling must be done between the queues:
  - Fixed priority scheduling; (i.e., serve all from foreground then from background). Possibility of starvation.
  - Time slice – each queue gets a certain amount of CPU time which it can schedule amongst its processes; i.e., 80% to foreground in RR
  - 20% to background in FCFS

Multilevel Queue Scheduling

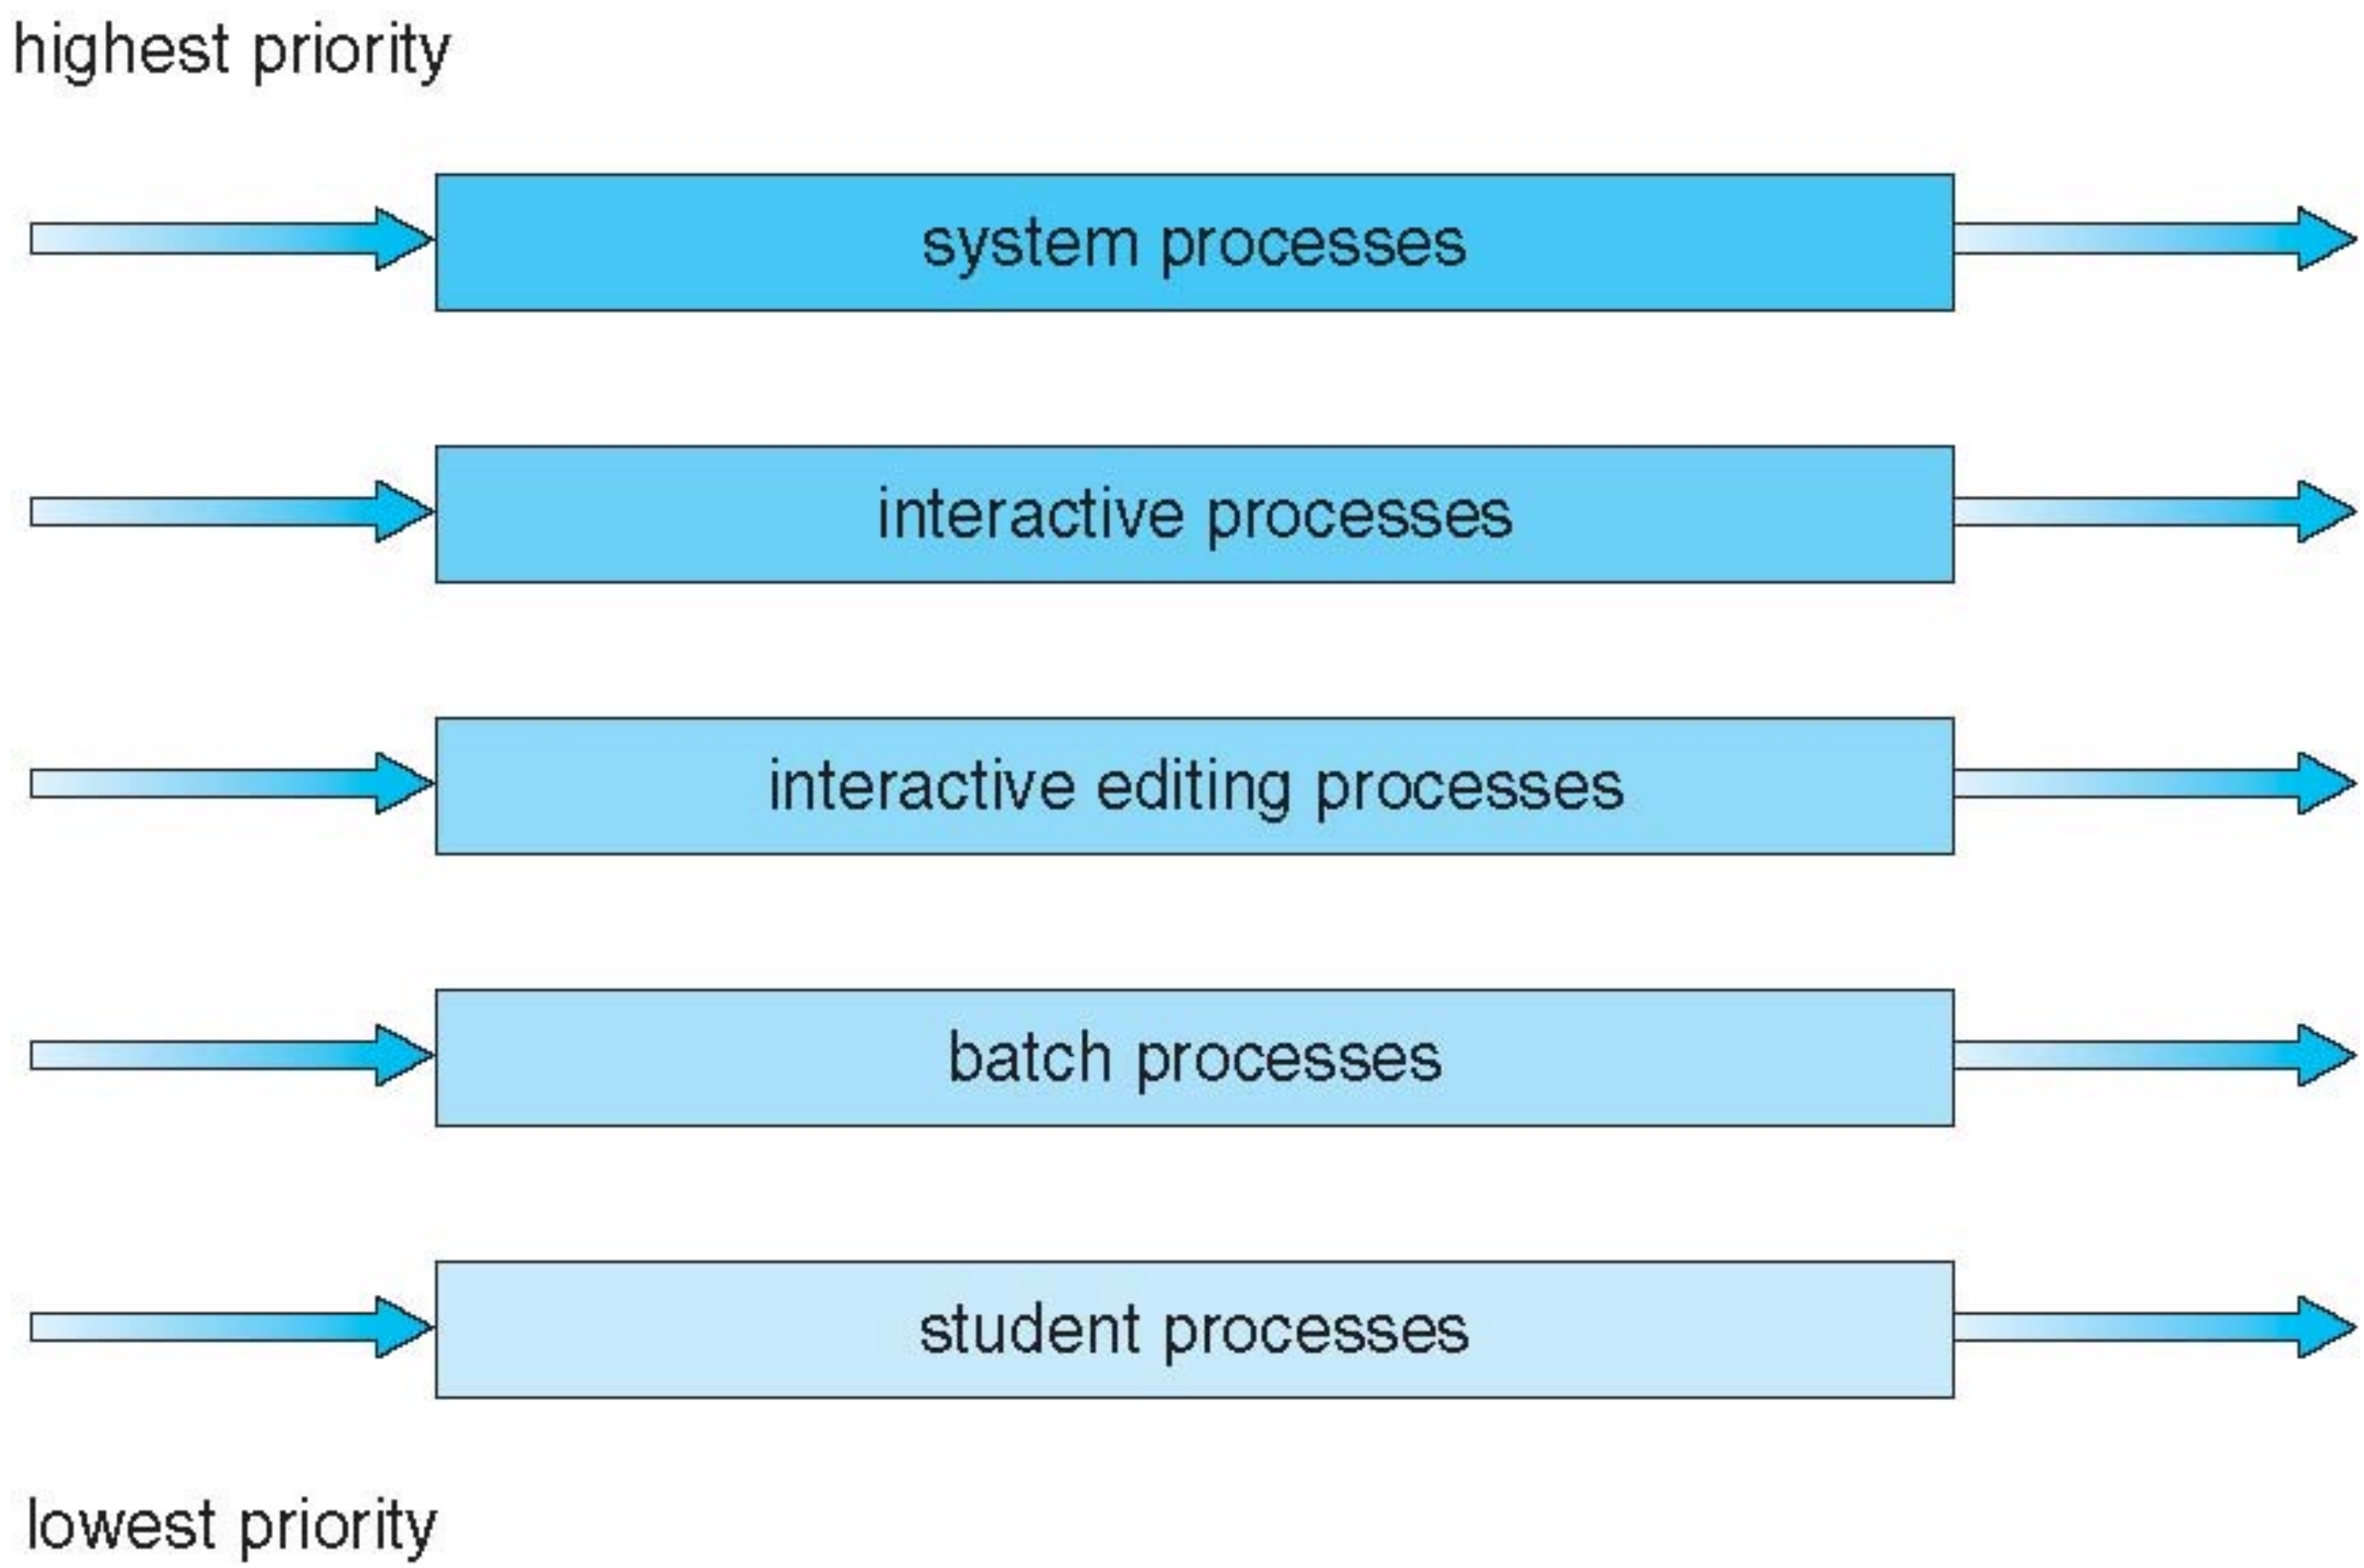

Multilevel Feedback Queue

- Several queues. One per each priority level in the system.
- A process can move between the various queues; aging can be implemented this way.

- Multilevel-feedback-queue scheduler defined by the following parameters:
  - number of queues
  - scheduling algorithms for each queue
  - method used to determine when to upgrade a process
  - method used to determine when to demote a process
  - method used to determine which queue a process will enter when that process needs service

Example of Multilevel Feedback Queue

- Three queues:
  - Q_0 – RR with time quantum 8 milliseconds
  - Q_1 – RR time quantum 16 milliseconds
  - Q_2 – FCFS

- Scheduling
  - A new job enters queue Q_0 which is served FCFS. When it gains CPU, job receives 8 milliseconds. If it does not finish in 8 milliseconds, job is moved to queue Q_1.
  - At Q_1 job is again served FCFS and receives 16 additional milliseconds. If it still does not complete, it is preempted and moved to queue Q_2.

Multilevel Feedback Queues

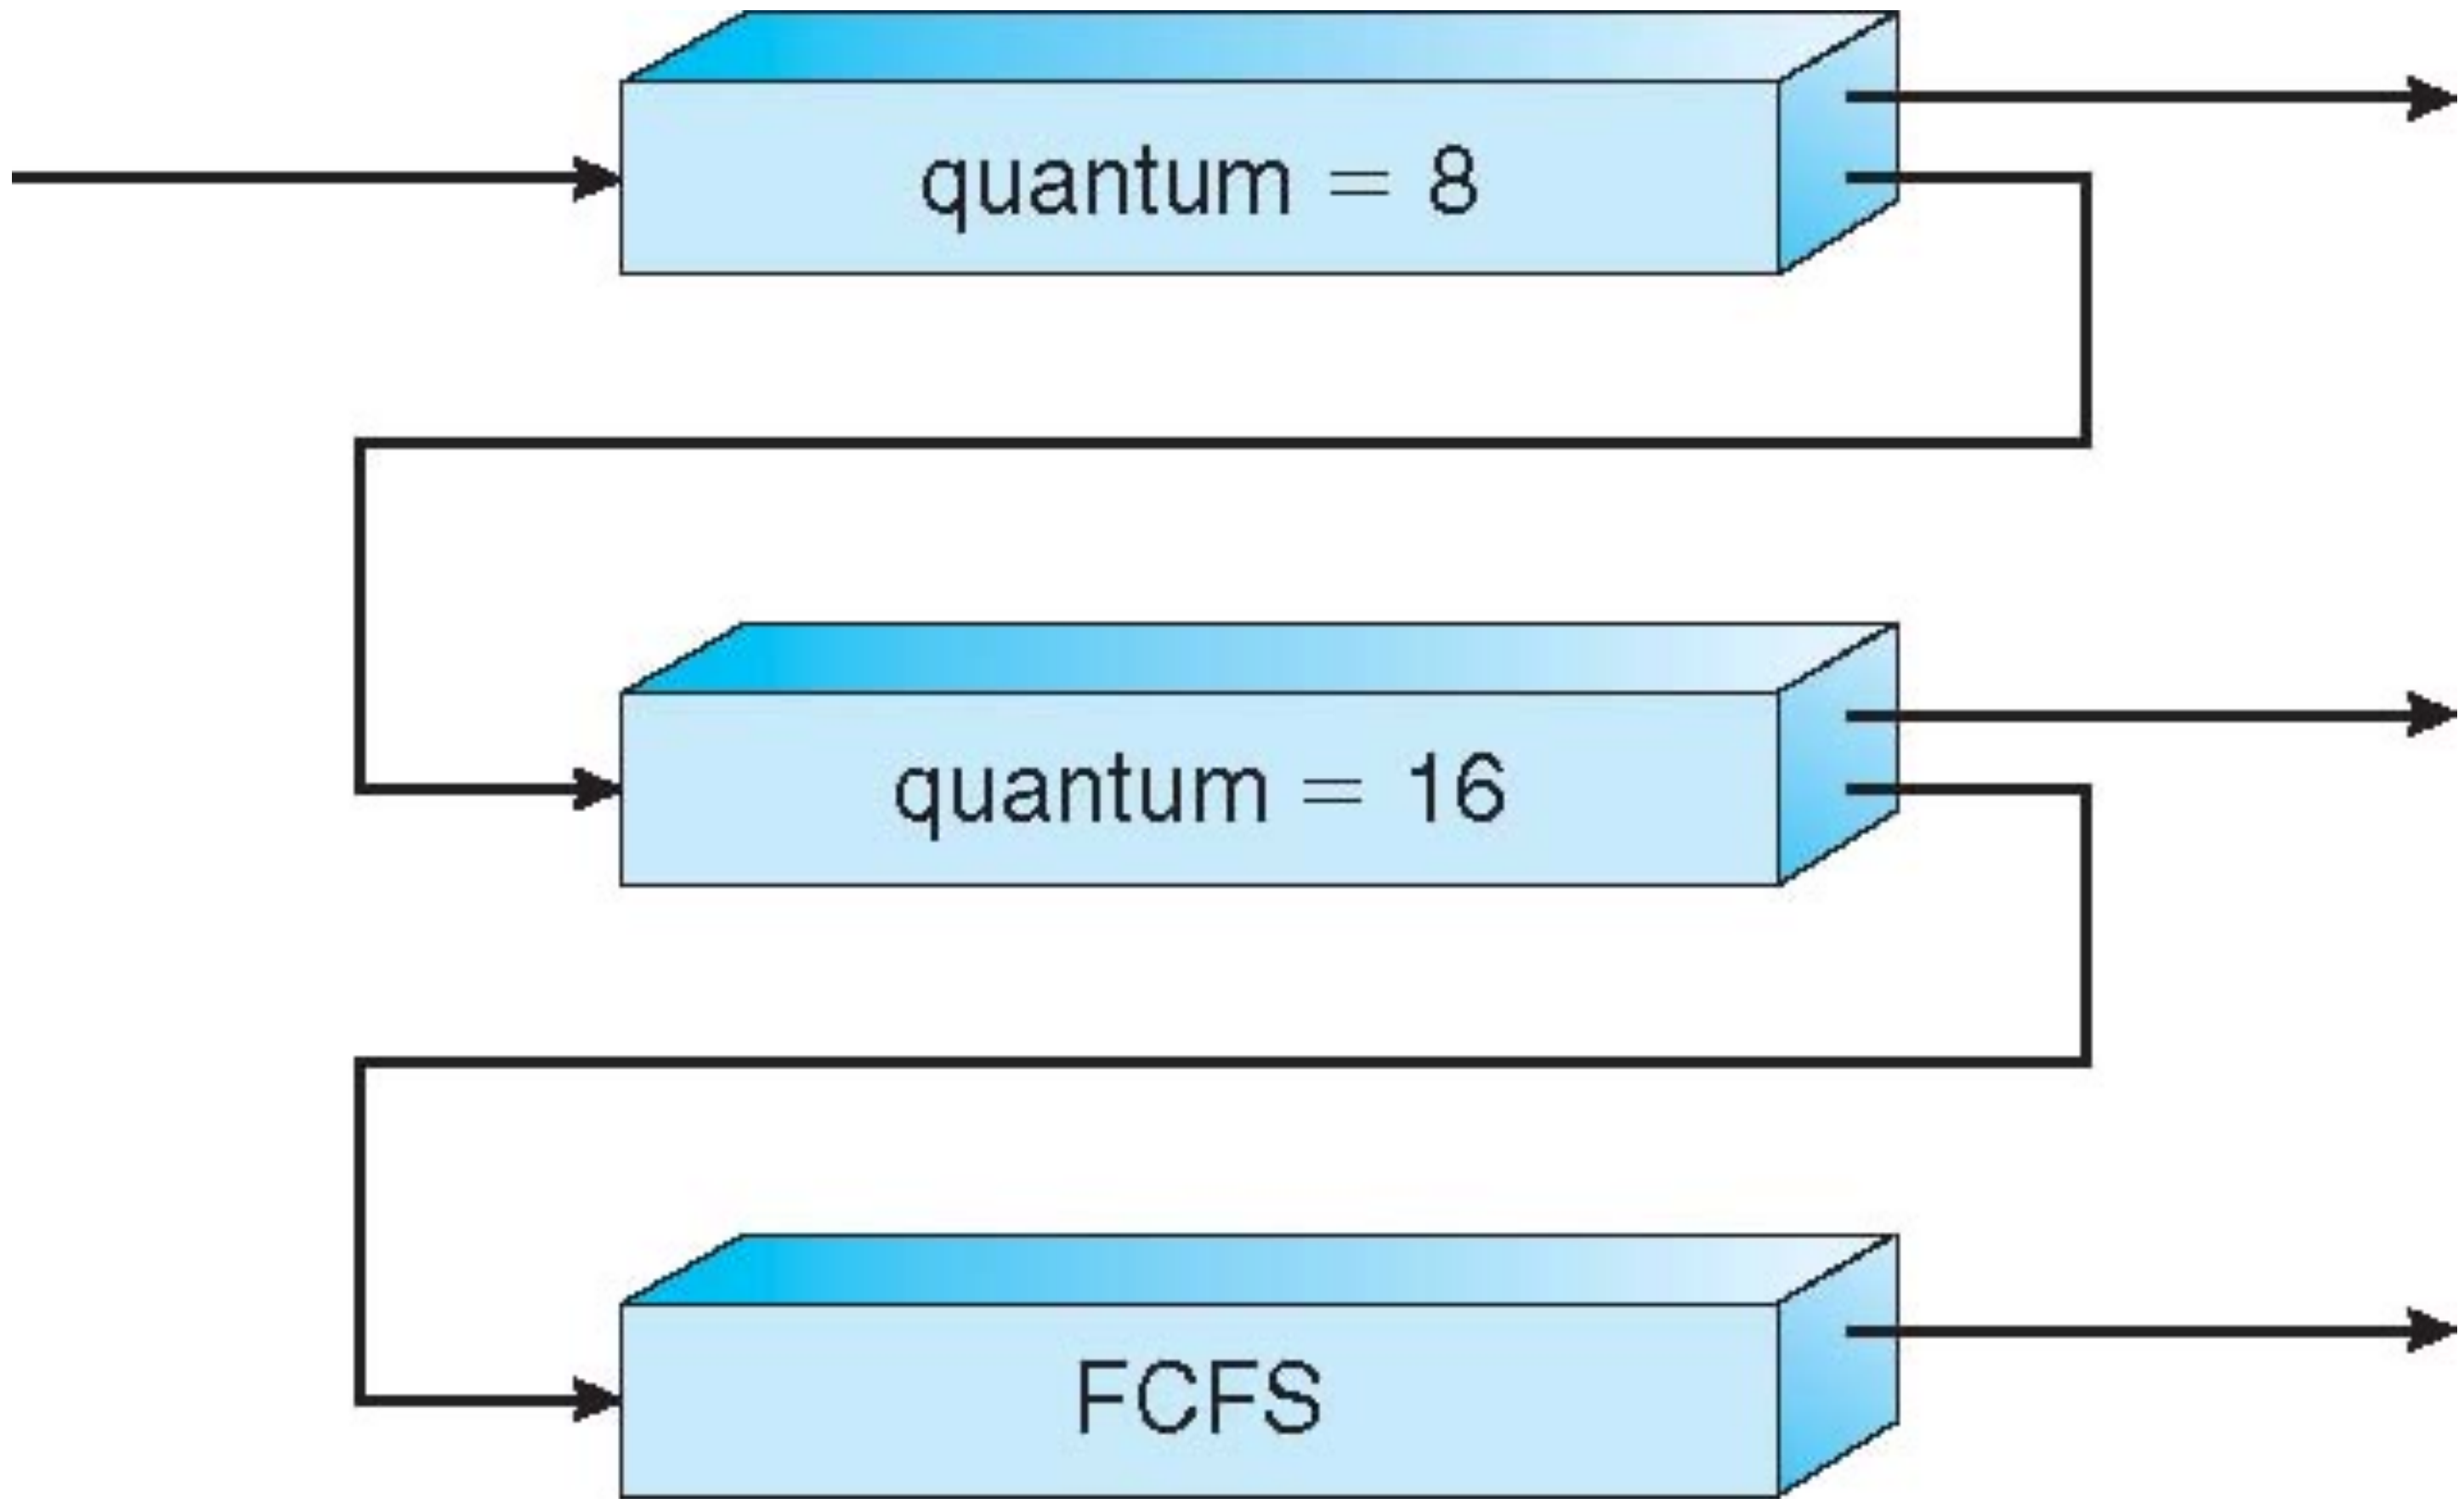

Multiple-Processor Scheduling

- CPU scheduling more complex when multiple CPUs are available
- **Homogeneous processors** within a multiprocessor
- **Asymmetric multiprocessing** – only one processor accesses the system data structures, alleviating the need for data sharing
- **Symmetric multiprocessing (SMP)** – each processor is self-scheduling, all processes in common ready queue, or each has its own private queue of ready processes
- **Processor affinity** – process has affinity for processor on which it is currently running
  - **soft affinity**
  - **hard affinity**

NUMA and CPU Scheduling

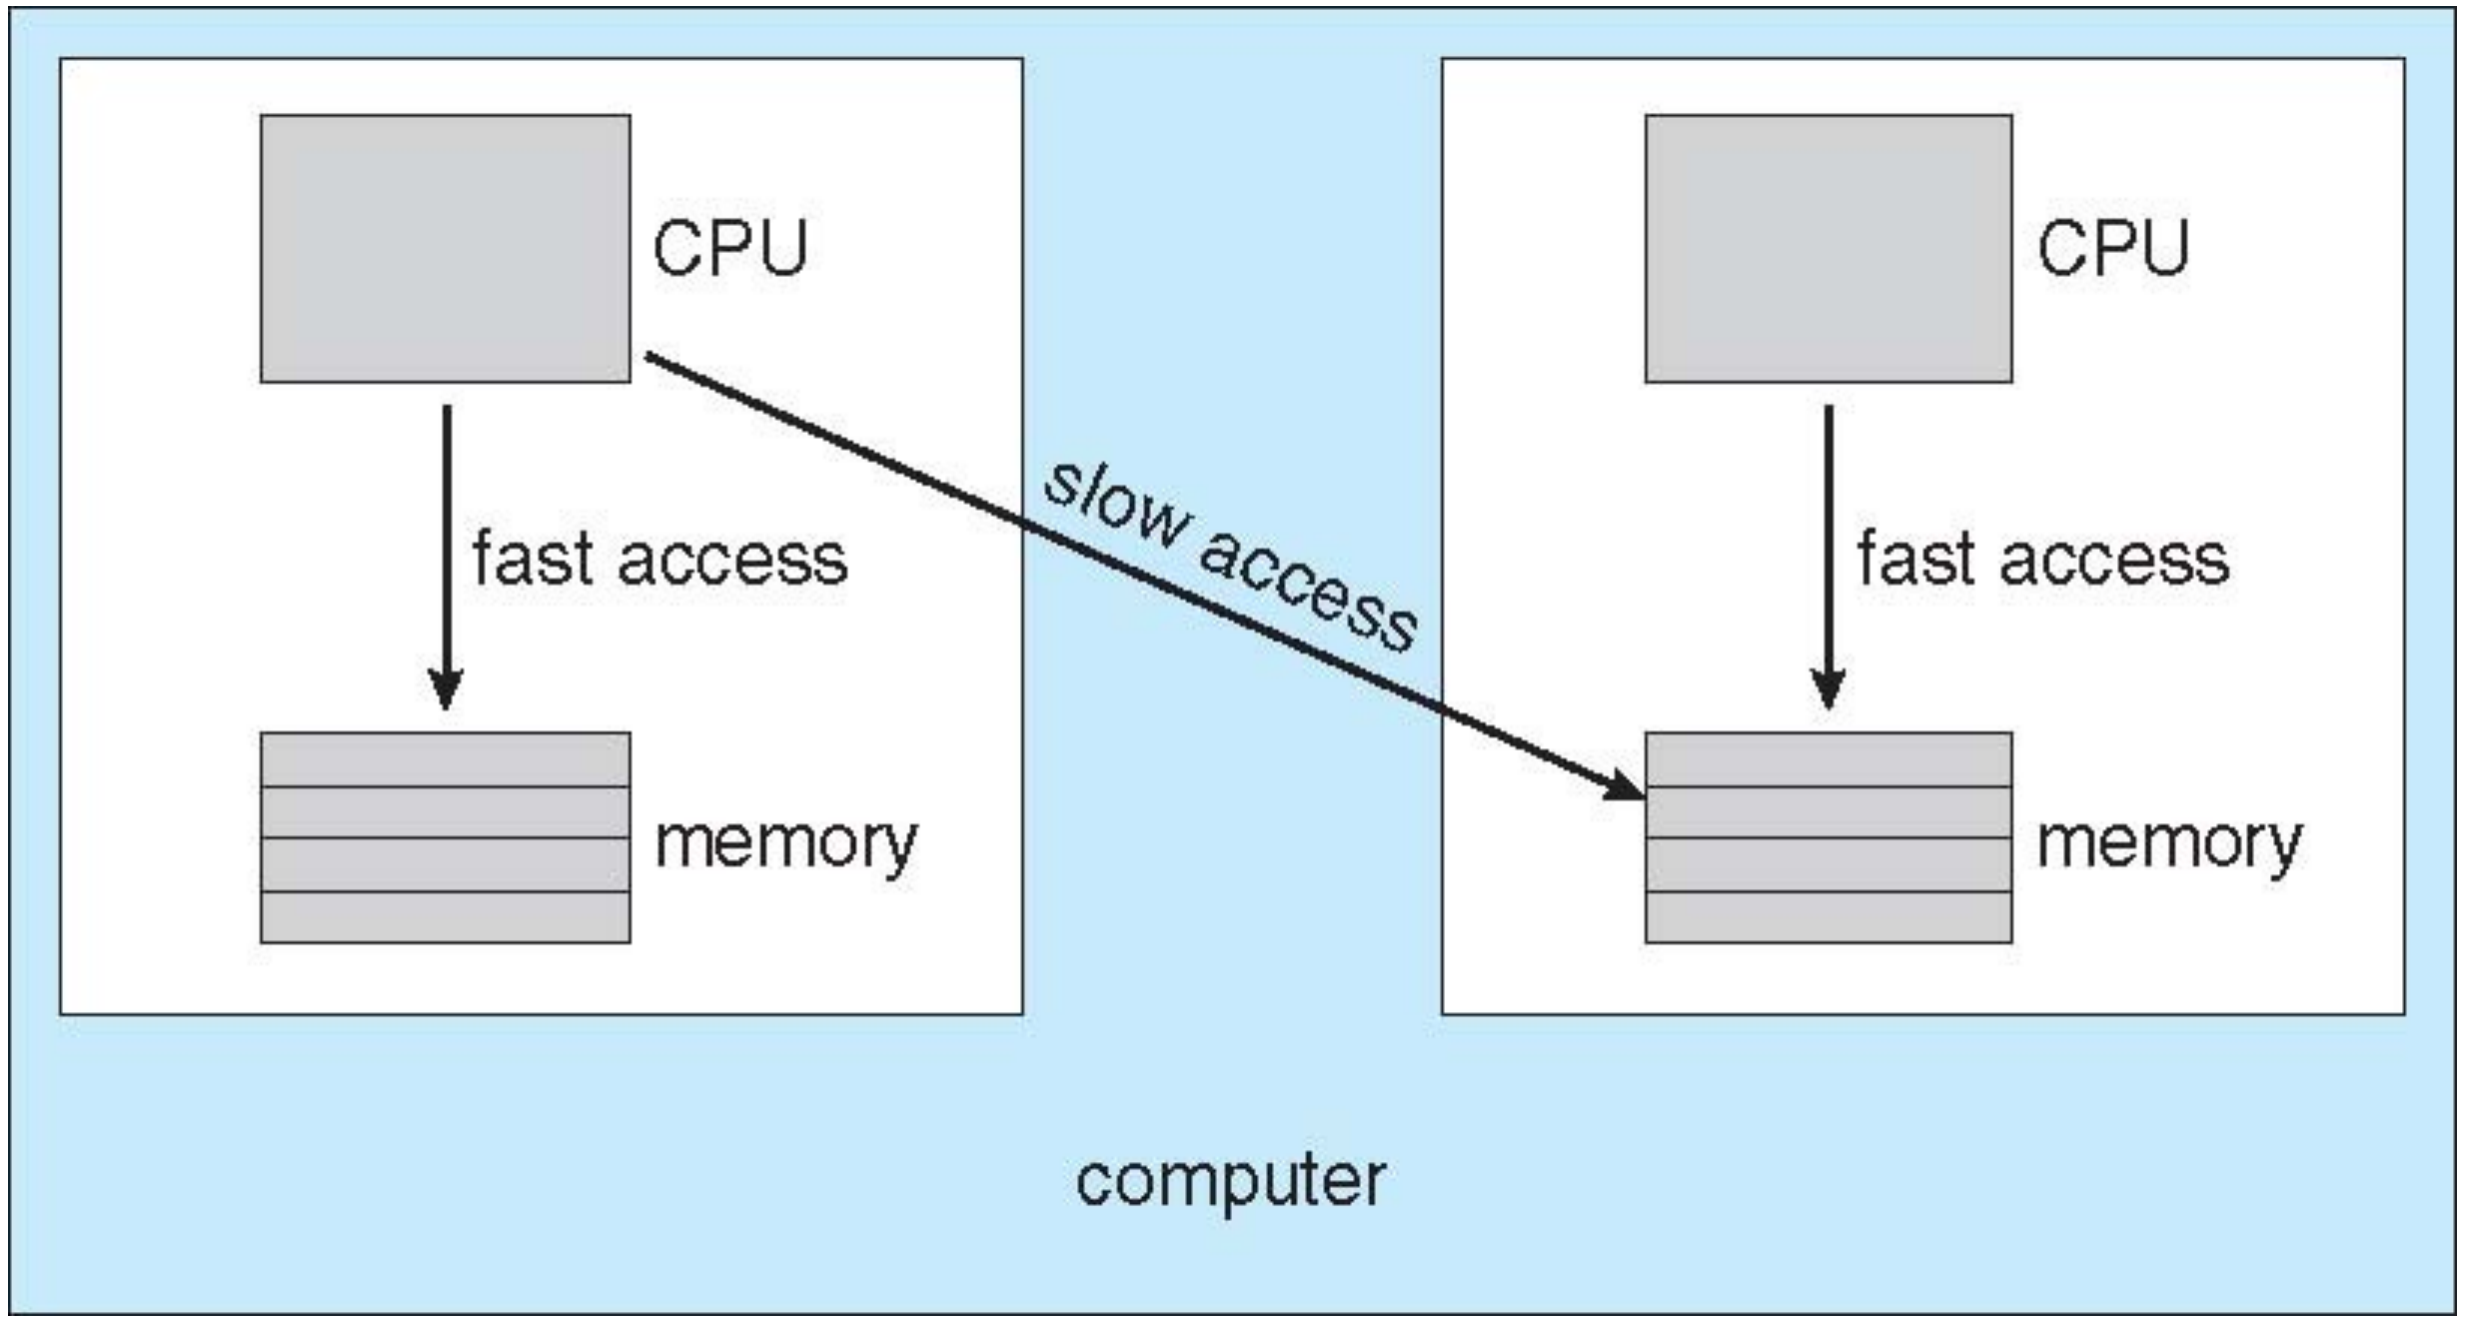

Multicore Processors

- Recent trend to place multiple processor cores on same physical chip
- Faster and consume less power
- Multiple threads per core also growing
  - Takes advantage of memory stall to make progress on another thread while memory retrieve happens

Multithreaded Multicore System