

LEGEND

- WORK AREA
- SAFETY BUFFER
- CONES

**TMP MUST BE AUTHORISED
FOR IMPLEMENTATION BY
THE RELEVANT ROAD AUTHORITY**

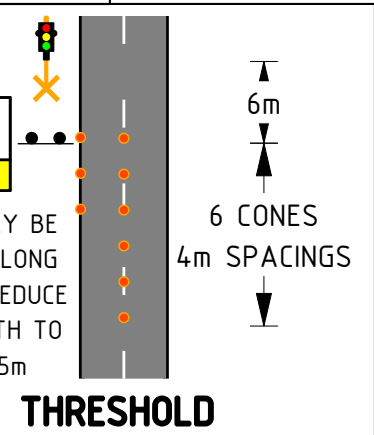


Diagram illustrating the placement of repeater signage for a 40 km/h speed limit zone with a smoke hazard.

Option 1: A rectangular sign with a yellow background, divided into three horizontal sections. The top section is black with "BURNING OFF" in yellow. The middle section is white with a red circle and "40" in black. The bottom section is yellow with "SMOKE HAZARD" in black.

OR

Option 2: A square sign with a white background and a black border, featuring a red circle with "40" in black.

1. THIS TGS IS ONLY TO BE USED AS PART OF THIS GENERIC TRAFFIC MANAGEMENT PLAN
2. ALL SIGN LOCATIONS ARE TO BE CHECKED PRIOR TO SETOUT AND POSITIONS ADJUSTED TO ALLOW FOR SPECIFIC SITE CONSTRAINTS SUCH AS VEGETATION, OTHER SIGNS, ROADSIDE FURNITURE AND SUFFICIENT SPACE ON SHOULDERS/EMERGENCY LANES.
3. THE POSITIONS OF SIGNS, LENGTH OF TAPERS OR MARKING SHALL BE:
 - a) MINIMUM 10% LESS THAN THE DISTANCES OR LENGTHS GIVEN,
 - b) MAXIMUM 25% MORE THAN THE DISTANCES OR LENGTHS GIVEN.
4. WHEN USING MMS ENSURE TWO 5mm THICK CORE FLUTE SIGNS ARE USED BACK TO BACK IN THE FRAME TO HELP PREVENT THE SIGN FROM BLOWING OUT
5. DRIVE SLOWLY CAN BE SWAPPED WITH SMOKE HAZARD, OR BURNING OFF.
6. USE OF FOLD UP SIGNS AND SWING SIGNS AND SIGNS ON ONE SIDE OF THE ROAD MAY BE ACCEPTABLE IN NARROW, VERY LOW VOLUME TRACKS <50 VPD
7. SUPERVISOR SHALL UNDERTAKE RISK ASSESSMENT TO DETERMINE APPROPRIATE TEMPORARY SPEED RESTRICTION
8. THE WORKER SYMBOLIC SIGNS SHALL BE INSTALLED ONLY WHEN ON-FOOT PERSONNEL WILL BE VISIBLE TO PASSING TRAFFIC, OTHERWISE REPLACE WITH BURNING OFF OR SMOKE HAZARD SIGN
9. ALL EXISTING SPEED ZONE SIGNAGE WITHIN THE TEMPORARY SPEED ZONE SHALL BE COVERED WITH SUITABLE OPAQUE MATERIAL FOR THE DURATION OF THE WORKS AND COVERS TO BE REMOVED ON COMPLETION OF WORKS EACH DAY UNLESS OTHERWISE NOTED.
10. MINIMUM TRAFFIC LANE WIDTH OF 3.5m IS TO BE MAINTAINED PAST THE WORKSITE AT ALL TIMES



IT IS THE RESPONSIBILITY OF THE USER OF THIS TRAFFIC GUIDANCE SCHEME TO CONFIRM THE APPROPRIATENESS OR OTHERWISE FOR THE INTENDED WORK SITE BASED ON RIGOROUS RISK ASSESSMENT AND REVIEW OF THE REQUIREMENTS OF THE AS1742.3 AND MAIN ROADS WA TRAFFIC MANAGEMENT FOR WORKS ON ROADS CoP AND THE AGTMM. ALL RESPONSIBILITY WILL REMAIN WITH THE USER TO ENSURE COMPLIANCE WITH RELEVANT STANDARDS AND THE PROVISION OF THE NECESSARY LEVEL OF PROTECTION FOR WORK PERSONNEL AND WORK SITE.

AWTM CERT. No: AUS-AWTM-24-1367-05
SIGNED: 

AWTM CERT. No: AUS-AWTM-23-2352-04
SIGNED: *[Signature]*



TABLE A	
POSTED SPEED km/h	SIGN SPACING m
DERESTRICTED	80

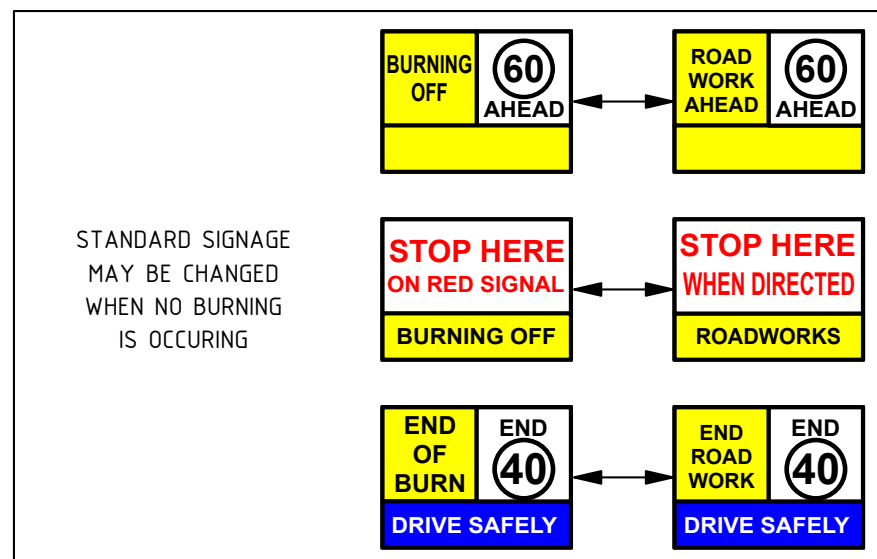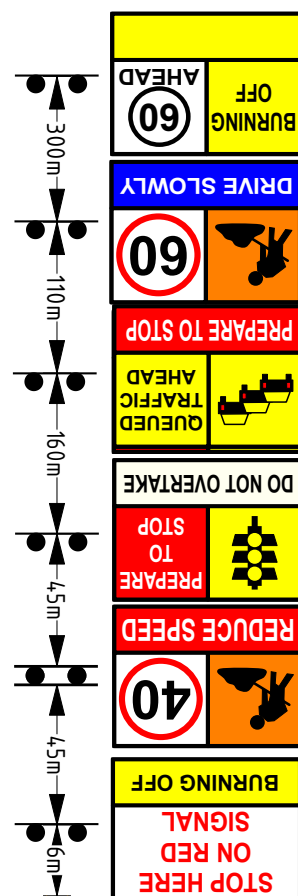

A diagram of a two-lane road with a speed limit sign (40) and a 'DRIVE SAFELY' sign.

The diagram shows a horizontal line representing a potential energy barrier. The barrier is composed of two segments: a shorter segment on the left and a longer segment on the right. A black dot representing a particle is positioned on the shorter segment of the barrier. An arrow points from the longer segment of the barrier towards the particle, indicating the direction of the potential's change over time.

BUSHFIRE RISK MITIGATION WITH TRAFFIC CONTROL DERESTRICTED ZONE WORKING WITHIN 1.2m FROM TRAFFIC		
DATE: 25/03/2026	REV No: 1	BURN-26-12

DATE: 25/03/2026

REV No: 1

BURN-26-12