Exercise Session 2

Theory

- ROS package structure
- Integration and programming
- ROS C++ client library (roscpp)
- ROS subscribers and publishers
- ROS parameter server
- RViz visualization


Exercise

In this exercise, you will create your first ROS package. The package should be able to subscribe to a laser scan message from the SMB robot and process the incoming data. This node will be the basis for the next exercises.

ROS template: https://github.com/leggedrobotics/ros_best_practices.

- 1. **OPTIONAL** (more difficult): Create the package smb_highlevel_controller from scratch. You can use the command catkin_create_pkg to create a new package with the dependencies roscpp and sensor_msgs.
- 2. **OR** (easy): Download the Zip archive containing prepared files of the package smb_highlevel_controller from the course website.
- 3. Inspect the CMakelists.txt and package.xml files. (Lecture 2 Slides 5-7)
- 4. Create a subscriber to the /scan topic. (Lecture 2 Slides 19-21)
- 5. Add a parameter file with topic name and queue size for the subscriber of the topic /scan. (Lecture 3)
- 6. Create a callback method for that subscriber which outputs the smallest distance measurement from the vector ranges in the message of the laser scanner to the

- terminal. Inspect the message type here http://docs.ros.org/en/api/sensor_msgs/html/msg/LaserScan.html
- 7. Add your launch file from Exercise 1 to this package and modify it to:
 - run the smb_highlevel_controller node.
 - load the parameter file.
- 8. Pass the argument laser_enabled from your launch file to the smb_gazebo.launch file with value true.
- 9. Show the laser scan in RViz and add RViz to your launch file. Make sure to set odom as the Fixed Frame (under Global Options) and adapt the size of the laser scapoints. You can save your current RViz configuration as the default configuration by pressing ctrl+s. (Lecture 3)
- 10. [OPTIONAL] Check the pointcloud_to_laserscan node, find out what it is doing. Which topic is it publishing on and which is it subscribing on? Visualize the 3D point cloud and the laser scan in Rviz.
- 11. [OPTIONAL] Create an additional subscriber to the 3D point cloud and print how many points it has

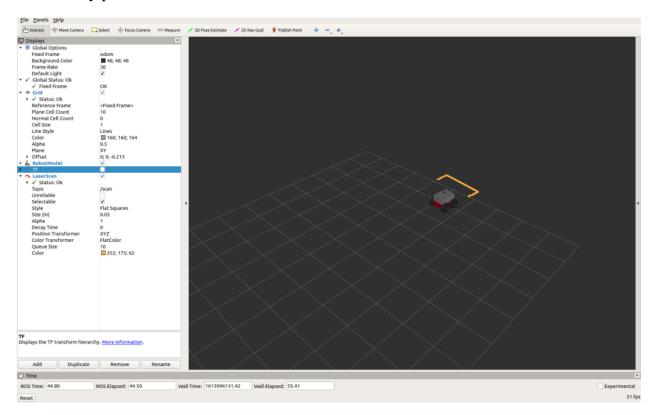

RViz visualization of a single laser scan. Multiple obstacles are placed around the robot. Note the changed "Fixed Frame" as well as "Size (m)".

Evaluation

- Start the launch file and drive around with SMB. There should be changing output from the laser scanner in the terminal.
- Check if the node is implemented as the template suggests.
- Is a parameter file used?
- Is the laser scan visualized in RViz as shown in the image?

OPTIONAL

- Correctly explain what pointcloud_to_laserscan node is doing. Is the 3D point cloud changing as the robot moves?
- Is the number of points inside the cloud shown in the terminal? Is it the callback implemented correctly?